



**JUNOS[™] Software
for E Series[™] Broadband Services Routers**

**Broadband Access
Configuration Guide**

Release 11.1.x

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Published: 2010-04-06

Juniper Networks, the Juniper Networks logo, JUNOS, NetScreen, ScreenOS, and Steel-Belted Radius are registered trademarks of Juniper Networks, Inc. in the United States and other countries. JUNOSe is a trademark of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

JUNOSe™ Software for E Series™ Broadband Services Routers Broadband Access Configuration Guide

Release 11.1.x

Copyright © 2010, Juniper Networks, Inc.

All rights reserved. Printed in USA.

Writing: Mark Barnard, Diane Florio, Bruce Gillham, Sarah Lesway-Ball, Brian Wesley Simmons, Fran Singer, Poornima Goswami, Chander Aima, Hema Priya J, Krupa Chandrashekar, Subash Babu Asokan, Sairam Venugopalan

Editing: Benjamin Mann

Illustration: Nathaniel Woodward

Cover Design: Edmonds Design

Revision History

April 2010—JUNOSe 11.1.x

The information in this document is current as of the date listed in the revision history.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. The JUNOS Software has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

READ THIS END USER LICENSE AGREEMENT ("AGREEMENT") BEFORE DOWNLOADING, INSTALLING, OR USING THE SOFTWARE. BY DOWNLOADING, INSTALLING, OR USING THE SOFTWARE OR OTHERWISE EXPRESSING YOUR AGREEMENT TO THE TERMS CONTAINED HEREIN, YOU (AS CUSTOMER OR IF YOU ARE NOT THE CUSTOMER, AS A REPRESENTATIVE/AGENT AUTHORIZED TO BIND THE CUSTOMER) CONSENT TO BE BOUND BY THIS AGREEMENT. IF YOU DO NOT OR CANNOT AGREE TO THE TERMS CONTAINED HEREIN, THEN (A) DO NOT DOWNLOAD, INSTALL, OR USE THE SOFTWARE, AND (B) YOU MAY CONTACT JUNIPER NETWORKS REGARDING LICENSE TERMS.

1. **The Parties.** The parties to this Agreement are (i) Juniper Networks, Inc. (if the Customer's principal office is located in the Americas) or Juniper Networks (Cayman) Limited (if the Customer's principal office is located outside the Americas) (such applicable entity being referred to herein as "Juniper"), and (ii) the person or organization that originally purchased from Juniper or an authorized Juniper reseller the applicable license(s) for use of the Software ("Customer") (collectively, the "Parties").

2. **The Software.** In this Agreement, "Software" means the program modules and features of the Juniper or Juniper-supplied software, for which Customer has paid the applicable license or support fees to Juniper or an authorized Juniper reseller, or which was embedded by Juniper in equipment which Customer purchased from Juniper or an authorized Juniper reseller. "Software" also includes updates, upgrades and new releases of such software. "Embedded Software" means Software which Juniper has embedded in or loaded onto the Juniper equipment and any updates, upgrades, additions or replacements which are subsequently embedded in or loaded onto the equipment.

3. **License Grant.** Subject to payment of the applicable fees and the limitations and restrictions set forth herein, Juniper grants to Customer a non-exclusive and non-transferable license, without right to sublicense, to use the Software, in executable form only, subject to the following use restrictions:

- a. Customer shall use Embedded Software solely as embedded in, and for execution on, Juniper equipment originally purchased by Customer from Juniper or an authorized Juniper reseller.
- b. Customer shall use the Software on a single hardware chassis having a single processing unit, or as many chassis or processing units for which Customer has paid the applicable license fees; provided, however, with respect to the Steel-Belted Radius or Odyssey Access Client software only, Customer shall use such Software on a single computer containing a single physical random access memory space and containing any number of processors. Use of the Steel-Belted Radius or IMS AAA software on multiple computers or virtual machines (e.g., Solaris zones) requires multiple licenses, regardless of whether such computers or virtualizations are physically contained on a single chassis.
- c. Product purchase documents, paper or electronic user documentation, and/or the particular licenses purchased by Customer may specify limits to Customer's use of the Software. Such limits may restrict use to a maximum number of seats, registered endpoints, concurrent users, sessions, calls, connections, subscribers, clusters, nodes, realms, devices, links, ports or transactions, or require the purchase of separate licenses to use particular features, functionalities, services, applications, operations, or capabilities, or provide throughput, performance, configuration, bandwidth, interface, processing, temporal, or geographical limits. In addition, such limits may restrict the use of the Software to managing certain kinds of networks or require the Software to be used only in conjunction with other specific Software. Customer's use of the Software shall be subject to all such limitations and purchase of all applicable licenses.
- d. For any trial copy of the Software, Customer's right to use the Software expires 30 days after download, installation or use of the Software. Customer may operate the Software after the 30-day trial period only if Customer pays for a license to do so. Customer may not extend or create an additional trial period by re-installing the Software after the 30-day trial period.
- e. The Global Enterprise Edition of the Steel-Belted Radius software may be used by Customer only to manage access to Customer's enterprise network. Specifically, service provider customers are expressly prohibited from using the Global Enterprise Edition of the Steel-Belted Radius software to support any commercial network access services.

The foregoing license is not transferable or assignable by Customer. No license is granted herein to any user who did not originally purchase the applicable license(s) for the Software from Juniper or an authorized Juniper reseller.

4. **Use Prohibitions.** Notwithstanding the foregoing, the license provided herein does not permit the Customer to, and Customer agrees not to and shall not: (a) modify, unbundle, reverse engineer, or create derivative works based on the Software; (b) make unauthorized copies of the Software (except as necessary for backup purposes); (c) rent, sell, transfer, or grant any rights in and to any copy of the Software, in any form, to any third party; (d) remove any proprietary notices, labels, or marks on or in any copy of the Software or any product in which the Software is embedded; (e) distribute any copy of the Software to any third party, including as may be embedded in Juniper equipment sold in the secondhand market; (f) use any 'locked' or key-restricted feature, function, service, application, operation, or capability without first purchasing the applicable license(s) and obtaining a valid key from Juniper, even if such feature, function, service, application, operation, or capability is enabled without a key; (g) distribute any key for the Software provided by Juniper to any third party; (h) use the Software in any manner that extends or is broader than the uses purchased by Customer from Juniper or an authorized Juniper reseller; (i) use Embedded Software on non-Juniper equipment; (j) use Embedded Software (or make it available for use) on Juniper equipment that the Customer did not originally purchase from Juniper or an authorized Juniper reseller; (k) disclose the results of testing or benchmarking of the Software to any third party without the prior written consent of Juniper; or (l) use the Software in any manner other than as expressly provided herein.

5. **Audit.** Customer shall maintain accurate records as necessary to verify compliance with this Agreement. Upon request by Juniper, Customer shall furnish such records to Juniper and certify its compliance with this Agreement.

6. **Confidentiality.** The Parties agree that aspects of the Software and associated documentation are the confidential property of Juniper. As such, Customer shall exercise all reasonable commercial efforts to maintain the Software and associated documentation in confidence, which at a minimum includes restricting access to the Software to Customer employees and contractors having a need to use the Software for Customer's internal business purposes.

7. **Ownership.** Juniper and Juniper's licensors, respectively, retain ownership of all right, title, and interest (including copyright) in and to the Software, associated documentation, and all copies of the Software. Nothing in this Agreement constitutes a transfer or conveyance of any right, title, or interest in the Software or associated documentation, or a sale of the Software, associated documentation, or copies of the Software.

8. **Warranty, Limitation of Liability, Disclaimer of Warranty.** The warranty applicable to the Software shall be as set forth in the warranty statement that accompanies the Software (the "Warranty Statement"). Nothing in this Agreement shall give rise to any obligation to support the Software. Support services may be purchased separately. Any such support shall be governed by a separate, written support services agreement. TO THE MAXIMUM EXTENT PERMITTED BY LAW, JUNIPER SHALL NOT BE LIABLE FOR ANY LOST PROFITS, LOSS OF DATA, OR COSTS OR PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, OR FOR ANY SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THIS AGREEMENT, THE SOFTWARE, OR ANY JUNIPER OR JUNIPER-SUPPLIED SOFTWARE. IN NO EVENT SHALL JUNIPER BE LIABLE FOR DAMAGES ARISING FROM UNAUTHORIZED OR IMPROPER USE OF ANY JUNIPER OR JUNIPER-SUPPLIED SOFTWARE, EXCEPT AS EXPRESSLY PROVIDED IN THE WARRANTY STATEMENT TO THE EXTENT PERMITTED BY LAW, JUNIPER DISCLAIMS ANY AND ALL WARRANTIES IN AND TO THE SOFTWARE (WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE), INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT DOES JUNIPER WARRANT THAT THE SOFTWARE, OR ANY EQUIPMENT OR NETWORK RUNNING THE SOFTWARE, WILL OPERATE WITHOUT ERROR OR INTERRUPTION, OR WILL BE FREE OF VULNERABILITY TO INTRUSION OR ATTACK. In no event shall Juniper's or its suppliers' or licensors' liability to Customer, whether in contract, tort (including negligence), breach of warranty, or otherwise, exceed the price paid by Customer for the Software that gave rise to the claim, or if the Software is embedded in another Juniper product, the price paid by Customer for such other product. Customer acknowledges and agrees that Juniper has set its prices and entered into this Agreement in reliance upon the disclaimers of warranty and the limitations of liability set forth herein, that the same reflect an allocation of risk between the Parties (including the risk that a contract remedy may fail of its essential purpose and cause consequential loss), and that the same form an essential basis of the bargain between the Parties.

9. **Termination.** Any breach of this Agreement or failure by Customer to pay any applicable fees due shall result in automatic termination of the license granted herein. Upon such termination, Customer shall destroy or return to Juniper all copies of the Software and related documentation in Customer's possession or control.

10. **Taxes.** All license fees payable under this agreement are exclusive of tax. Customer shall be responsible for paying Taxes arising from the purchase of the license, or importation or use of the Software. If applicable, valid exemption documentation for each taxing jurisdiction shall be provided to Juniper prior to invoicing, and Customer shall promptly notify Juniper if their exemption is revoked or modified. All payments made by Customer shall be net of any applicable withholding tax. Customer will provide reasonable assistance to Juniper in connection with such withholding taxes by promptly: providing Juniper with valid tax receipts and other required documentation showing Customer's payment of any withholding taxes; completing appropriate applications that would reduce the amount of withholding tax to be paid; and notifying and assisting Juniper in any audit or tax proceeding related to transactions hereunder. Customer shall comply with all applicable tax laws and regulations, and Customer will promptly pay or reimburse Juniper for all costs and damages related to any liability incurred by Juniper as a result of Customer's non-compliance or delay with its responsibilities herein. Customer's obligations under this Section shall survive termination or expiration of this Agreement.

11. **Export.** Customer agrees to comply with all applicable export laws and restrictions and regulations of any United States and any applicable foreign agency or authority, and not to export or re-export the Software or any direct product thereof in violation of any such restrictions, laws or regulations, or without all necessary approvals. Customer shall be liable for any such violations. The version of the Software supplied to Customer may contain encryption or other capabilities restricting Customer's ability to export the Software without an export license.

12. **Commercial Computer Software.** The Software is "commercial computer software" and is provided with restricted rights. Use, duplication, or disclosure by the United States government is subject to restrictions set forth in this Agreement and as provided in DFARS 227.7201 through 227.7202-4, FAR 12.212, FAR 27.405(b)(2), FAR 52.227-19, or FAR 52.227-14(ALT III) as applicable.

13. **Interface Information.** To the extent required by applicable law, and at Customer's written request, Juniper shall provide Customer with the interface information needed to achieve interoperability between the Software and another independently created program, on payment of applicable fee, if any. Customer shall observe strict obligations of confidentiality with respect to such information and shall use such information in compliance with any applicable terms and conditions upon which Juniper makes such information available.

14. **Third Party Software.** Any licensor of Juniper whose software is embedded in the Software and any supplier of Juniper whose products or technology are embedded in (or services are accessed by) the Software shall be a third party beneficiary with respect to this Agreement, and such licensor or vendor shall have the right to enforce this Agreement in its own name as if it were Juniper. In addition, certain third party software may be provided with the Software and is subject to the accompanying license(s), if any, of its respective owner(s). To the extent portions of the Software are distributed under and subject to open source licenses obligating Juniper to make the source code for such portions publicly available (such as the GNU General Public License ("GPL") or the GNU Library General Public License ("LGPL")), Juniper will make such source code portions (including Juniper modifications, as appropriate) available upon request for a period of up to three years from the date of distribution. Such request can be made in writing to Juniper Networks, Inc., 1194 N. Mathilda Ave., Sunnyvale, CA 94089, ATTN: General Counsel. You may obtain a copy of the GPL at <http://www.gnu.org/licenses/gpl.html>, and a copy of the LGPL at <http://www.gnu.org/licenses/lgpl.html>.

15. **Miscellaneous.** This Agreement shall be governed by the laws of the State of California without reference to its conflicts of laws principles. The provisions of the U.N. Convention for the International Sale of Goods shall not apply to this Agreement. For any disputes arising under this Agreement, the Parties hereby consent to the personal and exclusive jurisdiction of, and venue in, the state and federal courts within Santa Clara County, California. This Agreement constitutes the entire and sole agreement between Juniper and the Customer with respect to the Software, and supersedes all prior and contemporaneous

agreements relating to the Software, whether oral or written (including any inconsistent terms contained in a purchase order), except that the terms of a separate written agreement executed by an authorized Juniper representative and Customer shall govern to the extent such terms are inconsistent or conflict with terms contained herein. No modification to this Agreement nor any waiver of any rights hereunder shall be effective unless expressly assented to in writing by the party to be charged. If any portion of this Agreement is held invalid, the Parties agree that such invalidity shall not affect the validity of the remainder of this Agreement. This Agreement and associated documentation has been written in the English language, and the Parties agree that the English version will govern. (For Canada: Les parties aux présentes confirment leur volonté que cette convention de même que tous les documents y compris tout avis qui s'y rattache, soient rédigés en langue anglaise. (Translation: The parties confirm that this Agreement and all related documentation is and will be in the English language)).

Abbreviated Table of Contents

About the Documentation

xxxvii

Part 1

Managing Remote Access

Chapter 1	Configuring Remote Access	3
Chapter 2	Monitoring and Troubleshooting Remote Access	113

Part 2

Managing RADIUS and TACACS+

Chapter 3	Configuring RADIUS Attributes	171
Chapter 4	Configuring RADIUS Dynamic-Request Server	241
Chapter 5	Configuring RADIUS Relay Server	251
Chapter 6	RADIUS Attribute Descriptions	259
Chapter 7	Application Terminate Reasons	279
Chapter 8	Monitoring RADIUS	303
Chapter 9	Configuring TACACS+	317
Chapter 10	Monitoring TACACS+	329

Part 3

Managing L2TP

Chapter 11	L2TP Overview	335
Chapter 12	Configuring an L2TP LAC	343
Chapter 13	Configuring an L2TP LNS	375
Chapter 14	Configuring L2TP Dial-Out	411
Chapter 15	L2TP Disconnect Cause Codes	423
Chapter 16	Monitoring L2TP and L2TP Dial-Out	427

Part 4

Managing DHCP

Chapter 17	DHCP Overview	461
Chapter 18	DHCP Local Server Overview	469
Chapter 19	Configuring DHCP Local Server	477
Chapter 20	Configuring DHCP Relay	495
Chapter 21	Configuring the DHCP External Server Application	523
Chapter 22	Monitoring and Troubleshooting DHCP	539

Part 5	Managing the Subscriber Environment	
Chapter 23	Configuring Subscriber Management	583
Chapter 24	Monitoring Subscriber Management	599
Chapter 25	Configuring Subscriber Interfaces	603
Chapter 26	Monitoring Subscriber Interfaces	635
Part 6	Managing Subscriber Services	
Chapter 27	Configuring Service Manager	641
Chapter 28	Monitoring Service Manager	707
Part 7	Index	
	Index	735

Table of Contents

About the Documentation xxxvii

E Series and JUNOSe Documentation and Release Notes	xxxvii
Audience	xxxvii
E Series and JUNOSe Text and Syntax Conventions	xxxvii
Obtaining Documentation	xxxix
Documentation Feedback	xxxix
Requesting Technical Support	xxxix
Self-Help Online Tools and Resources	xl
Opening a Case with JTAC	xl

Part 1

Managing Remote Access

Chapter 1

Configuring Remote Access 3

Remote Access Overview	4
B-RAS Data Flow	4
Configuring IP Addresses for Remote Clients	4
AAA Overview	5
Remote Access Platform Considerations	5
B-RAS Protocol Support	5
Remote Access References	6
Before You Configure B-RAS	6
Remote Access Configuration Tasks	6
Configuring a B-RAS License	7
Mapping a User Domain Name to a Virtual Router	8
Mapping User Requests Without a Valid Domain Name	8
Mapping User Requests Without a Configured Domain Name	9
Using DNIS	9
Redirected Authentication	9
IP Hinting	10
Setting Up Domain Name and Realm Name Usage	12
Using the Realm Name as the Domain Name	12
Using Delimiters Other Than @	12
Using Either the Domain or the Realm as the Domain Name	13
Specifying the Domain Name or Realm Name Parse Direction	13
Stripping the Domain Name	14
Domain Name and Realm Name Examples	15
Specifying a Single Name for Users from a Domain	16

Configuring RADIUS Authentication and Accounting Servers	18
Server Access	18
Server Request Processing Limit	19
Authentication and Accounting Methods	19
Supporting Exchange of Extensible Authentication Protocol Messages	20
Immediate Accounting Updates	21
Duplicate and Broadcast Accounting	21
Configuring AAA Duplicate Accounting	22
Configuring AAA Broadcast Accounting	22
Overriding AAA Accounting NAS Information	22
UDP Checksums	23
Collecting Accounting Statistics	23
Configuring RADIUS AAA Servers	23
SNMP Traps and System Log Messages	36
SNMP Traps	36
System Log Messages	37
Configuring SNMP Traps	37
Configuring Local Authentication Servers	40
Creating the Local Authentication Environment	40
Creating Local User Databases	40
Adding User Entries to Local User Databases	40
Using the username Command	41
Using the aaa local username Command	41
Assigning a Local User Database to a Virtual Router	42
Enabling Local Authentication on the Virtual Router	42
Configuration Commands	43
Local Authentication Example	47
Configuring Tunnel Subscriber Authentication	50
Configuring Name Server Addresses	51
Configuration Tasks	51
DNS Primary and Secondary NMS Configuration	52
WINS Primary and Secondary NMS Configuration	53
Configuring Local Address Servers	54
Local Address Pool Ranges	54
Local Address Pool Aliases	55
Shared Local Address Pools	55
SNMP Thresholds	56
Configuring a Local Address Server	56
Configuring DHCP Features	60
Creating an IP Interface	61
Single Clients per ATM Subinterface	61
Multiple Clients per ATM Subinterface	62
Configuring AAA Profiles	63
Allowing or Denying Domain Names	64
Configuration Example	64
Using Domain Name Aliases	65
Manually Setting NAS-Port-Type Attribute	69
Service-Description Attribute	70

Using RADIUS Route-Download Server to Distribute Routes	71
Format of Downloaded Routes	71
Framed-Route (RADIUS attribute 22)	72
Cisco-AVPair (Cisco VSA 26-1)	72
How the Route-Download Server Downloads Routes	72
Configuring the Route-Download Server to Download Routes	72
Using the AAA Logical Line Identifier to Track Subscribers	76
How the Router Obtains and Uses the LLID	76
RADIUS Attributes in Preauthentication Request	77
Considerations for Using the LLID	78
Configuring the Router to Obtain the LLID for a Subscriber	79
Troubleshooting Subscriber Preauthentication	81
Using VSAs for Dynamic IP Interfaces	82
Traffic Shaping for PPP over ATM Interfaces	83
Mapping Application Terminate Reasons to RADIUS Terminate Codes	84
Configuration Example	86
Configuring Timeout	88
Limiting Active Subscribers	89
Notifying RADIUS of AAA Failure	90
Configuring Standard RADIUS IPv6 Attributes for IPv6 Neighbor Discovery	
Router Advertisements and DHCPv6 Prefix Delegation	90
Propagation of LAG Subscriber Information to AAA and RADIUS	92
Configuring the SRC Client	94
Retrieval of DSL Line Rate Information from Access Nodes Overview	102
DHCPv6 Local Address Pools for Allocation of IPv6 Prefixes Overview	103
DHCPv6 Prefix Delegation Example	105
Order of Preference in Determining the Local Address Pool for Allocating	
Prefixes	106
Order of Preference in Allocating Prefixes and Assigning DNS Addresses	
to Requesting Routers	106
Configuring the DHCPv6 Local Address Pools	107
Limitation on the Number of Prefixes Used by Clients	109
Using DHCPv6 Local Address Pools for Prefix Delegation over non-PPP Links	
Example	110

Chapter 2

Monitoring and Troubleshooting Remote Access

113

Setting Baselines for Remote Access	114
Setting a Baseline for AAA Statistics	115
Setting a Baseline for AAA Route Downloads	115
Setting a Baseline for COPS Statistics	115
Setting a Baseline for Local Address Pool Statistics	115
Setting a Baseline for RADIUS Statistics	116
Setting the Baseline for SRC Statistics	116
How to Monitor PPP Interfaces	116
Monitoring AAA Accounting Configuration	116
Monitoring AAA Accounting Default	117
Monitoring Accounting Interval	118
Monitoring Specific Virtual Router Groups	118
Monitoring the Default AAA Authentication Method List	119

Monitoring Domain and Realm Name Delimiters	119
Monitoring Mapping Between User Domains and Virtual Routers	119
Monitoring Tunnel Subscriber Authentication	121
Monitoring Routing Table Address Lookup	122
Monitoring the AAA Model	122
Monitoring IP Addresses of Primary and Secondary DNS and WINS Name Servers	122
Monitoring AAA Profile Configuration	123
Monitoring Statistics about the RADIUS Route-Download Server	124
Monitoring Routes Downloaded by the RADIUS Route-Download Server	126
Monitoring Chassis-Wide Routes Downloaded by RADIUS Route-Download Servers	127
Monitoring Authentication, Authorization, and Accounting Statistics	129
Monitoring the Number of Active Subscribers Per Port	131
Monitoring the Maximum Number of Active Subscribers Per Virtual Router	131
Monitoring Session Timeouts	131
Monitoring Interim Accounting for Users on the Virtual Router	132
Monitoring Virtual Router Groups Configured for AAA Broadcast Accounting	132
Monitoring Configuration Information for AAA Local Authentication	133
Monitoring AAA Server Attributes	134
Monitoring the COPS Layer Over SRC Connection	136
Monitoring Statistics About the COPS Layer	138
Monitoring Local Address Pool Aliases	140
Monitoring Local Address Pools	140
Monitoring Local Address Pool Statistics	142
Monitoring Shared Local Address Pools	142
Monitoring the Routing Table	143
Monitoring the B-RAS License	144
Monitoring the RADIUS Server Algorithm	144
Monitoring RADIUS Override Settings	144
Monitoring the RADIUS Rollover Configuration	145
Monitoring RADIUS Server Information	145
Monitoring RADIUS Services Statistics	147
Monitoring RADIUS SNMP Traps	151
Monitoring RADIUS Accounting for L2TP Tunnels	151
Monitoring RADIUS UDP Checksums	152
Monitoring RADIUS Server IP Addresses	152
Monitoring the RADIUS Attribute Used for IPv6 Neighbor Discovery Router Advertisements	152
Monitoring the RADIUS Attribute Used for DHCPv6 Prefix Delegation	153
Monitoring SRC Client Connection Status	153
Monitoring SRC Client Connection Statistics	155
Monitoring the SRC Client Version Number	157
Monitoring Subscriber Information	157
Monitoring Application Terminate Reason Mappings	162
Monitoring IPv6 Local Pools for DHCP Prefix Delegation By All Configured Pools	164
Monitoring IPv6 Local Pools for DHCP Prefix Delegation By Pool Name	165
Monitoring IPv6 Local Pool Statistics for DHCP Prefix Delegation	166

Part 2**Managing RADIUS and TACACS+****Chapter 3****Configuring RADIUS Attributes 171**

RADIUS Overview	171
RADIUS Services	172
RADIUS Attributes	172
RADIUS Platform Considerations	172
RADIUS References	173
Subscriber AAA Access Messages	173
Supported RADIUS IETF Attributes	174
Supported Juniper Networks VSAs	176
Subscriber AAA Accounting Messages	181
Supported RADIUS IETF Attributes	181
Supported Juniper Networks VSAs	184
Tunnel Accounting Messages	187
DSL Forum VSAs in AAA Access and Accounting Messages	188
CLI AAA Messages	190
CLI Commands Used to Modify RADIUS Attributes	191
RADIUS IETF Attributes	191
[4] NAS-IP-Address	191
[5] NAS-Port	192
[8] Framed-IP-Address	195
[9] Framed-Ip-Netmask	195
[13] Framed-Compression	196
[25] Class	197
[30] Called-Station-Id	197
[31] Calling-Station-Id	197
[32] NAS-Identifier	203
[41] Acct-Delay-Time	205
[44] Acct-Session-Id	205
[45] Acct-Authentic	206
[49] Acct-Terminate-Cause	207
[50] Acct-Multi-Session-Id	207
[51] Acct-Link-Count	207
[52] Acct-Input-Gigawords	208
[53] Output-Gigawords	208
[55] Event-Timestamp	209
[61] NAS-Port-Type	209
[64] Tunnel-Type	210
[65] Tunnel-Medium-Type	211
[66] Tunnel-Client-Endpoint	211
[67] Tunnel-Server-Endpoint	212
[68] Acct-Tunnel-Connection	212
[77] Connect-Info	212
[82] Tunnel-Assignment-Id	214
[83] Tunnel-Preference	214
[87] NAS-Port-Id	214
[90] Tunnel-Client-Auth-Id	216
[91] Tunnel-Server-Auth-Id	216

[96] Framed-Interface-Id	217
[97] Framed-Ipv6-Prefix	217
[99] Framed-Ipv6-Route	217
[100] Framed-Ipv6-Pool	218
[123] Delegated-Ipv6-Prefix	218
[188] Ascend-Num-In-Multilink	219
All Tunnel Server Attributes	220
Juniper Networks Vendor-Specific Attributes	220
[26-1] Virtual-Router	220
[26-10] Ingress-Policy-Name	221
[26-11] Egress-Policy-Name	221
[26-14] Service-Category	222
[26-15] PCR	222
[26-16] SCR	223
[26-17] MBS	223
[26-24] Pppoe-Description	224
[26-35] Acct-Input-Gigapackets	224
[26-36] Acct-Output-Gigapackets	224
[26-44] Tunnel-Interface-Id	225
[26-45] Ipv6-Virtual-Router	225
[26-46] Ipv6-Local-Interface	226
[26-47] Ipv6-Primary-DNS	226
[26-48] Ipv6-Secondary-DNS	227
[26-51] Disconnect-Cause	227
[26-53] Service-Description	228
[26-55] DHCP-Options	228
[26-56] DHCP-MAC-Address	228
[26-57] DHCP-GI-Address	229
[26-62] MLPPP-Bundle-Name	229
[26-63] Interface-Desc	230
[26-81] L2C-Information	230
[26-92] L2C-Up-Stream-Data	230
[26-93] L2C-Down-Stream-Data	231
[26-129] Ipv6-NdRa-Prefix	231
[26-141] Downstream-Calculated-Qos-Rate	232
[26-142] Upstream-Calculated-Qos-Rate	232
[26-143] Max-Clients-Per-Interface	233
[26-150] ICR-Partition-Id	234
All IPv6 Accounting Attributes	234
[26-159] DHCP-Option 82	235
ANCP-Related Juniper Networks VSAs	235
DSL Forum Vendor-Specific Attributes	237
Including or Excluding Attributes in RADIUS Messages	238
Ignoring Attributes When Receiving Access-Accept Messages	239

Chapter 4

Configuring RADIUS Dynamic-Request Server

241

RADIUS Dynamic-Request Server Overview	241
RADIUS Dynamic-Request Server Platform Considerations	242
RADIUS Dynamic-Request Server References	242

How RADIUS Dynamic-Request Server Works	243
RADIUS-Initiated Disconnect	243
Disconnect Messages	243
Message Exchange	243
Supported Error-Cause Codes (RADIUS Attribute 101)	244
Qualifications for Disconnect	244
Security/Authentication	245
Configuring RADIUS-Initiated Disconnect	245
RADIUS-Initiated Change of Authorization	245
Change-of-Authorization Messages	245
Message Exchange	246
Supported Error-Cause Codes (RADIUS Attribute 101)	246
Qualifications for Change of Authorization	247
Security/Authentication	247
Configuring RADIUS-Initiated Change of Authorization	247
RADIUS Dynamic-Request Server Commands	248
Monitoring RADIUS Dynamic-Request Servers	250

Chapter 5 Configuring RADIUS Relay Server 251

RADIUS Relay Server Overview	251
RADIUS Relay Server Platform Considerations	252
RADIUS Relay Server References	252
How RADIUS Relay Server Works	252
Authentication and Addressing	253
Accounting	253
Terminating the Wireless Subscriber's Connection	254
RADIUS Relay Server and the SRC Software	254
Using the SRC Software for Addressing	254
Using the SRC Application for Accounting	254
Configuring RADIUS Relay Server Support	255
Monitoring RADIUS Relay Server	257

Chapter 6 RADIUS Attribute Descriptions 259

RADIUS IETF Attributes	259
Juniper Networks VSAs	265
DSL Forum VSAs	276
Pass Through RADIUS Attributes	277
RADIUS Attributes References	278

Chapter 7 Application Terminate Reasons 279

AAA Terminate Reasons	279
L2TP Terminate Reasons	280
PPP Terminate Reasons	295
RADIUS Client Terminate Reasons	301

Chapter 8	Monitoring RADIUS	303
	Monitoring Override Settings of RADIUS IETF Attributes	303
	Monitoring the NAS-Port-Format RADIUS Attribute	304
	Monitoring the Calling-Station-Id RADIUS Attribute	305
	Monitoring the NAS-Identifier RADIUS Attribute	305
	Monitoring the Format of the Remote-Circuit-ID for RADIUS	306
	Monitoring the Delimiter Character in the Remote-Circuit-ID for RADIUS	306
	Monitoring the Acct-Session-Id RADIUS Attribute	306
	Monitoring the DSL-Port-Type RADIUS Attribute	307
	Monitoring the Connect-Info RADIUS Attribute	307
	Monitoring the NAS-Port-ID RADIUS Attribute	307
	Monitoring Included RADIUS Attributes	308
	Monitoring Ignored RADIUS Attributes	310
	Setting the Baseline for RADIUS Dynamic-Request Server Statistics	310
	Monitoring RADIUS Dynamic-Request Server Statistics	311
	Monitoring the Configuration of the RADIUS Dynamic-Request Server	312
	Setting a Baseline for RADIUS Relay Statistics	313
	Monitoring RADIUS Relay Server Statistics	313
	Monitoring the Configuration of the RADIUS Relay Server	315
	Monitoring the Status of RADIUS Relay UDP Checksums	316
	Monitoring the Status of ICR Partition Accounting	316
Chapter 9	Configuring TACACS+	317
	TACACS+ Overview	317
	AAA Overview	318
	Administrative Login Authentication	318
	Privilege Authentication	319
	Login Authorization	319
	Accounting	319
	TACACS+ Platform Considerations	321
	TACACS+ References	321
	Before You Configure TACACS+	322
	Configuring TACACS+ Support	322
	Configuring Authentication	322
	Configuring Accounting	323
Chapter 10	Monitoring TACACS+	329
	Setting Baseline TACACS+ Statistics	329
	Monitoring TACACS+ Statistics	329
	Monitoring TACACS+ Information	331

Part 3**Managing L2TP****Chapter 11****L2TP Overview 335**

L2TP Overview	335
L2TP Terminology	336
Implementing L2TP	337
Sequence of Events on the LAC	337
Sequence of Events on the LNS	338
Packet Fragmentation	339
L2TP Platform Considerations	340
L2TP Module Requirements	340
ERX7xx Models, ERX14xx Models, and the ERX310 Router	340
E120 Router and E320 Router	341
Sessions and Tunnels Supported	341
L2TP References	342

Chapter 12**Configuring an L2TP LAC 343**

LAC Configuration Prerequisites	343
Modifying L2TP LAC Default Settings for Managing Destinations, Tunnels, and Sessions	344
Generating UDP Checksums in Packets to L2TP Peers	345
Specifying a Destruct Timeout for L2TP Tunnels and Sessions	345
Preventing Creation of New Destinations, Tunnels, and Sessions	346
Preventing Creation of New Destinations, Tunnels, and Sessions on the Router	346
Preventing Creation of New Tunnels and Sessions at a Destination	347
Preventing Creation of New Sessions for a Tunnel	347
Specifying a Drain Timeout for a Disconnected Tunnel	347
Shutting Down Destinations, Tunnels, and Sessions	348
Closing Existing and Preventing New Destinations, Tunnels, and Sessions on the Router	348
Closing Existing and Preventing New Tunnels and Sessions for a Destination	348
Closing Existing and Preventing New Sessions in a Specific Tunnel	348
Closing a Specific Session	349
Specifying the Number of Retransmission Attempts	349
Configuring Calling Number AVP Formats	349
Calling Number AVP 22 Configuration Tasks	353
Configuring the Fallback Format	354
Disabling the Calling Number AVP	357
Mapping a User Domain Name to an L2TP Tunnel Overview	358
Mapping User Domain Names to L2TP Tunnels from Domain Map Tunnel Mode	359
Mapping User Domain Names to L2TP Tunnels from Tunnel Group Tunnel Mode	363
Configuring the RX Speed on the LAC	365

Managing the L2TP Destination Lockout Process	366
Modifying the Lockout Procedure	366
Verifying That a Locked-Out Destination Is Available	368
Configuring a Lockout Timeout	368
Unlocking a Destination that is Currently Locked Out	368
Starting an Immediate Lockout Test	369
Managing Address Changes Received from Remote Endpoints	369
Configuring LAC Tunnel Selection Parameters	370
Configuring the Failover Between Preference Levels Method	370
Configuring the Failover Within a Preference Level Method	371
Configuring the Maximum Sessions per Tunnel	372
Configuring the Weighted Load Balancing Method	372

Chapter 13

Configuring an L2TP LNS

375

LNS Configuration Prerequisites	375
Configuring an LNS	376
Creating an L2TP Destination Profile	378
Creating an L2TP Host Profile	379
Configuring the Maximum Number of LNS Sessions	380
Configuring the RADIUS Connect-Info Attribute on the LNS	380
Overriding LNS Out-of-Resource Result Codes 4 and 5	381
Overriding the Result Codes	381
Displaying the Current Override Setting	382
Selecting Service Modules for LNS Sessions Using MLPPP	382
Assigning Bundled Group Identifiers	383
Overriding All Endpoint Discriminators	384
Enabling Tunnel Switching	384
Creating Persistent Tunnels	385
Testing Tunnel Configuration	385
Managing L2TP Destinations, Tunnels, and Sessions	385
Configuring Disconnect Cause Information	386
Generating the Disconnect Cause AVP Globally	386
Generating the Disconnect Cause AVP with a Host Profile	387
Enabling RADIUS Accounting for Disconnect Cause	387
Displaying Disconnect Cause Statistics	387
Configuring the Receive Window Size	388
Configuring the Default Receive Window Size	388
Configuring the Receive Window Size on the LAC	389
Configuring the Receive Window Size on the LNS	390
Configuring Peer Resynchronization	391
Configuring Peer Resynchronization for L2TP Host Profiles and AAA Domain Map Tunnels	392
Configuring the Global L2TP Peer Resynchronization Method	393
Using RADIUS to Configure Peer Resynchronization	394
Configuring L2TP Tunnel Switch Profiles	394
Applying the L2TP Tunnel Switch Profile	394
Configuration Guidelines	395
Configuring L2TP AVPs for Relay	395

Configuration Tasks	396
Enabling Tunnel Switching on the Router	396
Configuring L2TP Tunnel Switch Profiles	396
Applying L2TP Tunnel Switch Profiles by Using AAA Domain Maps	397
Applying L2TP Tunnel Switch Profiles by Using AAA Tunnel Groups	398
Applying Default L2TP Tunnel Switch Profiles	399
Applying L2TP Tunnel Switch Profiles by Using RADIUS	399
Configuring the Transmit Connect Speed Calculation Method	400
Transmit Connect Speed Calculation Methods	401
Static Layer 2	401
Dynamic Layer 2	402
QoS	402
Actual	402
Transmit Connect Speed Calculation Examples	402
Example 1: L2TP Session over ATM 1483 Interface	402
Example 2: L2TP Session over Ethernet VLAN Interface	403
Transmit Connect Speed Reporting Considerations	404
Session Termination for Dynamic Speed Timeout	404
Advisory Speed Precedence for VLANs over Bridged Ethernet	404
Using AAA Domain Maps to Configure the Transmit Connect Speed Calculation Method	404
Using AAA Tunnel Groups to Configure the Transmit Connect Speed Calculation Method	405
Using AAA Default Tunnel Parameters to Configure the Transmit Connect Speed Calculation Method	406
Using RADIUS to Configure the Transmit Connect Speed Calculation Method	407
PPP Accounting Statistics	408

Chapter 14

Configuring L2TP Dial-Out 411

L2TP Dial-Out Overview	411
Terms	412
Network Model for Dial-Out	412
Dial-Out Process	413
Dial-Out Operational States	413
Chassis	413
Virtual Router	414
Targets	414
Sessions	415
Outgoing Call Setup Details	416
Access-Request Message	416
Access-Accept Message	417
Outgoing Call	417
Mutual Authentication	418
Route Installation	418
L2TP Dial-Out Platform Considerations	418
L2TP Dial-Out References	418

Before You Configure L2TP Dial-Out	419
Configuring L2TP Dial-Out	419
Monitoring L2TP Dial-Out	421

Chapter 15 **L2TP Disconnect Cause Codes** **423**

L2TP Disconnect Cause Codes	423
-----------------------------------	-----

Chapter 16 **Monitoring L2TP and L2TP Dial-Out** **427**

Monitoring the Mapping for User Domains and Virtual Routers with AAA	428
Monitoring Configured Tunnel Groups with AAA	430
Monitoring Configuration of Tunnel Parameters with AAA	432
Monitoring Global Configuration Status on E Series Routers	433
Monitoring Detailed Configuration Information for Specified Destinations	435
Monitoring Locked Out Destinations	437
Monitoring Configured Destination Profiles or Host Profiles	437
Monitoring Configured and Operational Status of all Destinations	440
Monitoring Statistics on the Cause of a Session Disconnection	441
Monitoring Detailed Configuration Information about Specified Sessions	442
Monitoring Configured and Operational Summary Status	443
Monitoring Configured Switch Profiles on Router	444
Monitoring Detailed Configuration Information about Specified Tunnels	445
Monitoring Configured and Operational Status of All Tunnels	448
Monitoring Chassis-wide Configuration for L2TP Dial-out	448
Monitoring Status of Dial-out Sessions	453
Monitoring Dial-out Targets within the Current VR Context	454
Monitoring Operational Status within the Current VR Context	456

Part 4 **Managing DHCP**

Chapter 17 **DHCP Overview** **461**

DHCP Overview Information	461
Session and Resource Control Software	462
DHCP Platform Considerations	462
DHCP References	463
Configuring the DHCP Access Model	463
Configuring DHCP Proxy Clients	464
Logging DHCP Packet Information	465
Viewing and Deleting DHCP Client Bindings	466

Chapter 18	DHCP Local Server Overview	469
	Embedded DHCP Local Server Overview	469
	DHCP Local Server and Client Configuration	469
	Equal-Access Mode Overview	470
	Local Pool Selection and Address Allocation	470
	The Connection Process	471
	Standalone Mode Overview	472
	Local Pool Selection and Address Allocation	472
	Server Management Table	474
	DHCP Local Server Prerequisites	474
	DHCP Local Server Configuration Tasks	475
 Chapter 19	 Configuring DHCP Local Server	 477
	Configuring the DHCP Local Server	477
	Basic Configuration of DHCP Local Server	477
	Limiting the Number of IP Addresses Supplied by DHCP Local Server	479
	Excluding IP Addresses from Address Pools	479
	Configuring DHCP Local Server to Support Creation of Dynamic Subscriber Interfaces	480
	Differentiating Between Clients with the Same Client ID or Hardware Address	480
	Logging Out DHCP Local Server Subscribers	481
	Clearing an IP DHCP Local Server Binding	482
	Using SNMP Traps to Monitor DHCP Local Server Events	482
	Using DHCP Local Server Event Logs	483
	Configuring DHCP Local Address Pools	484
	Basic Configuration of DHCP Local Address Pools	484
	Linking Local Address Pools	486
	Setting Grace Periods for Address Leases	486
	Configuring AAA Authentication for DHCP Local Server Standalone Mode	487
	Configuring the DHCPv6 Local Server	489
	Deleting DHCPv6 Client Bindings	491
	Configuring the Router to Work with the SRC Software	492
 Chapter 20	 Configuring DHCP Relay	 495
	Configuring DHCP Relay and BOOTP Relay	495
	Enabling DHCP Relay	496
	Removing Access Routes from Routing Tables and NVS	496
	Treating All Packets as Originating at Trusted Sources	497
	Assigning the Giaddr to Source IP Address	497
	Protecting Against Spoofed Giaddr and Relay Agent Option Values	497

Using the Broadcast Flag Setting to Control Transmission of DHCP Reply Packets	498
Interaction with Layer 2 Unicast Transmission Method	499
Preventing DHCP Relay from Installing Host Routes by Default	500
Configuration Example—Preventing Installation of Host Routes	500
Including Relay Agent Option Values in the PPPoE Remote Circuit ID	501
Using the Giaddr to Identify the Primary Interface for Dynamic Subscriber Interfaces	502
Configuring Layer 2 Unicast Transmission Method for Reply Packets to DHCP Clients	502
Using Option 60 Strings to Forward Client Traffic to Specific DHCP Servers	503
Configuration Example—Using DHCP Relay Option 60 to Specify Traffic Forwarding	505
Relaying DHCP Packets That Originate from a Cable Modem	506
Configuring Relay Agent Option 82 Information	506
Preventing Option 82 Information from Being Stripped from Trusted Client Packets	507
Configuring Relay Agent Information Option (Option 82) Suboption Values	507
Format of the JUNOS Data Field in the Vendor-Specific Suboption for Option 82	509
Using the set dhcp relay agent sub-option Command to Enable Option 82 Suboption Support	511
Configuration Example—Using DHCP Relay Option 82 to Pass IEEE 802.1p Values to DHCP Servers	513
Using the set dhcp relay agent Command to Enable Option 82 Suboption Support	516
Configuring DHCP Relay Proxy	518
Enabling DHCP Relay Proxy	519
Use the First Offer from a DHCP Server	519
Set a Timeout for DHCP Client Renewal Messages	519
Managing Host Routes	519
Selecting the DHCP Server Response	520
Behavior for Bound Clients and Address Renewals	520

Chapter 21

Configuring the DHCP External Server Application 523

DHCP External Server Overview	523
Preservation of Dynamic Subscriber Interfaces with DHCP External Server Overview	525
DHCP External Server Identification of Clients with Duplicate MAC Addresses Overview	526
Configuration Guidelines for Using Duplicate MAC Mode	527
Restrictions for Using Duplicate MAC Mode to Manage Clients	527
DHCP External Server Configuration Requirements	528
Enabling and Disabling the DHCP External Server Application	528
Monitoring DHCP Traffic Between Remote Clients and DHCP Servers	529
Synchronizing the DHCP External Application and the Router	529

Configuring Interoperation with Ethernet DSLAMs	529
Configuring the DHCP External Server to Support the Creation of Dynamic Subscriber Interfaces	530
Configuring DHCP External Server to Control Preservation of Dynamic Subscriber Interfaces	532
Configuring Dynamic Subscriber Interfaces for Interoperation with DHCP Relay and DHCP Relay Proxy	533
Deleting Clients from a Virtual Router's DHCP Binding Table	534
Configuring DHCP External Server to Uniquely Identify Clients with Duplicate MAC Addresses	536
Configuring DHCP External Server to Re-Authenticate Auto-Detected Dynamic Subscriber Interfaces	537

Chapter 22

Monitoring and Troubleshooting DHCP 539

Setting Baselines for DHCP Statistics	540
Setting a Baseline for DHCP Relay and Relay Proxy	540
Setting a Baseline for DHCP Proxy Server Statistics	540
Setting a Baseline for DHCP External Server Statistics	541
Setting a Baseline for DHCP Local Server Statistics	541
Monitoring Addresses Excluded from DHCP Local Server Use	541
Monitoring DHCP Bindings	542
Monitoring DHCP Binding Information	543
Monitoring DHCP Binding Count Information	546
Monitoring DHCP Binding Host Information	548
Monitoring DHCP Bindings (Displaying IP Address-to-MAC Address Bindings)	550
Monitoring DHCP Bindings (Displaying DHCP Bindings Based on Binding ID)	551
Monitoring DHCP Bindings (Local Server Binding Information)	552
Monitoring DHCP External Server Configuration Information	553
Monitoring DHCP External Server Statistics	554
Monitoring DHCP External Server Duplicate MAC Address Setting	555
Monitoring DHCP Local Address Pools	556
Monitoring DHCP Local Server Authentication Information	558
Monitoring DHCP Local Server Configuration	559
Monitoring DHCP Local Server Leases	560
Monitoring DHCP Local Server Statistics	561
Monitoring DHCP Option 60 Information	564
Monitoring DHCP Packet Capture Settings	565
Monitoring DHCP Relay Configuration Information	566
Monitoring DHCP Relay Proxy Statistics	567
Monitoring DHCP Relay Statistics	569
Monitoring DHCP Server and DHCP Relay Agent Statistics	571
Monitoring DHCP Server and Proxy Client Information	572
Monitoring DHCPv6 Local Server Binding Information	573
Monitoring DHCPv6 Local Server DNS Search Lists	574
Monitoring DHCPv6 Local Server DNS Servers	575
Monitoring DHCPv6 Local Server Prefix Lifetime	575
Monitoring DHCPv6 Local Server Statistics	576

Monitoring Duplicate MAC Addresses Use By DHCP Local Server Clients	577
Monitoring the Maximum Number of Available Leases	578
Monitoring Static IP Address and MAC Address Pairs Supplied by DHCP Local Server	579
Monitoring Status of DHCP Applications	580

Part 5

Managing the Subscriber Environment

Chapter 23	Configuring Subscriber Management	583
	Subscriber Management Overview	583
	Subscriber Management Platform Considerations	584
	Subscriber Management Attributes	584
	Dynamic IP Subscriber Interfaces	584
	Subscriber Management Procedure	585
	Configuring Subscriber Management with an External DHCP Server	586
	Subscriber Management Commands	587
	Subscriber Management Configuration Examples	595
	Username with ATM Circuit Identifier and No Circuit Type	595
	Username with VLAN Circuit Identifier and Circuit Type	596
	Username with MAC Address	596
Chapter 24	Monitoring Subscriber Management	599
	Monitoring IP Service Profiles	599
	Monitoring Active IP Subscribers Created by Subscriber Management	600
Chapter 25	Configuring Subscriber Interfaces	603
	Subscriber Interfaces Overview	603
	Dynamic Interfaces and Dynamic Subscriber Interfaces	604
	Relationship to Shared IP Interfaces	605
	Relationship to Primary IP Interfaces	606
	Ethernet Interfaces and VLANs	606
	Moving Interfaces	607
	Preventing IP Spoofing	607
	Routing Protocols	607
	Policies and QoS	607
	Applications	607
	Directing Traffic Toward Special Local Content	608
	Differentiating Traffic for VPNs	609
	Subscriber Interfaces Platform Considerations	609
	Interface Specifiers	610
	Subscriber Interfaces References	610

Dynamic Creation of Subscriber Interfaces	610
DHCP Servers	611
DHCP Local Server and Address Allocation	611
DHCP External Server and Address Allocation	611
DHCP Relay Configuration	612
Supported Configurations	612
Packet Detection	612
Designating Traffic for the Primary IP Interface	613
Using Framed Routes	613
Inheritance of MAC Address Validation State for Dynamic Subscriber Interfaces	613
How MAC Address Validation State Inheritance Works	614
Configuration of MAC Address Validation State Inheritance	614
Verification of MAC Address Validation State Inheritance	615
Configuring Static Subscriber Interfaces	615
Using a Destination Address to Demultiplex Traffic	616
Using a Source Address to Demultiplex Traffic	617
Configuring Dynamic Subscriber Interfaces	622
Configuring Dynamic Subscriber Interfaces over Ethernet	622
Configuring Dynamic Subscriber Interfaces over VLANs	623
Configuring Dynamic Subscriber Interfaces over Bridged Ethernet	624
Configuring Dynamic Subscriber Interfaces over GRE Tunnels	625
Dynamic Subscriber Interface Configuration Example	626

Chapter 26**Monitoring Subscriber Interfaces****635**

Monitoring Subscriber Interfaces Overview	635
Monitoring Subscriber Interfaces	635
Monitoring Active IP Subscribers Created by Subscriber Management	636

Part 6**Managing Subscriber Services****Chapter 27****Configuring Service Manager****641**

Service Manager Overview	641
Service Manager Terms and Acronyms	642
Service Manager Platform Considerations	643
Service Manager References	643
Service Manager Configuration Tasks	643
Service Definitions	645
Creating Service Definitions	646
Managing Your Service Definitions	649
Referencing Policies in Service Definitions	650

Referencing QoS Configurations in Service Definitions	651
Specifying QoS Profiles in a Service Definition	651
Configuring a QoS Profile for Service Manager	651
Specifying QoS Profiles in a Service Definition	652
Specifying QoS Parameter Instances in a Service Definition	652
Creating a Parameter Instance in a Profile	652
Specifying QoS Parameter Instances in a Service Definition	653
Modifying QoS Configurations with Service Manager	654
Modifying Parameter Instances	654
Modifying QoS Configurations in a Single Service Manager	
Event	656
Modifying QoS Configurations Using Other Sources	656
Removing QoS Configurations Referenced by Service Manager	658
QoS for Service Manager Considerations	658
RADIUS or Service Manager	659
Interoperability with Other Service Components	659
QoS Statistics	659
Ranges	659
Configuring the Service Manager License	659
Managing and Activating Service Sessions	660
Using RADIUS to Manage Subscriber Service Sessions	660
Using RADIUS to Activate Subscriber Service Sessions	661
Service Manager RADIUS Attributes	662
Using Tags with RADIUS Attributes	664
Using RADIUS to Deactivate Service Sessions	665
Setting Thresholds	665
Using the Deactivate-Service Attribute	666
Using Mutex Groups to Activate and Deactivate Subscriber Services	667
Activating and Deactivating Multiple Services	667
Configuring a Mutex Service	668
Combined and Independent IPv4 and IPv6 Services in a Dual Stack	
Overview	669
Activation and Deactivation of IPv4 and IPv6 Services in a Dual Stack	670
Independent IPv4 and IPv6 Services in a Dual Stack	670
Combined IPv4 and IPv6 Service in a Dual Stack	671
Performance Impact on the Router and Compatibility with Previous	
Releases for an IPv4 and IPv6 Dual Stack	671
Configuring RADIUS Accounting for Service Manager	672
Configuring Service Interim Accounting	673
Service Interim Accounting for IPv4 and IPv6 Services in a Dual Stack	
Overview	676
Using the CLI to Manage Subscriber Service Sessions	677
Using the CLI to Activate Subscriber Service Sessions	677
Preprovisioning Services	680
Using Service Session Profiles	680
Using the CLI to Deactivate Subscriber Service Sessions	683
Gracefully Deactivating Subscriber Service Sessions	684
Forcing Immediate Deactivation of Subscriber Service Sessions	684
Using Service Session Profiles to Deactivate Service Sessions	685

Configuring Service Manager Statistics	686
Setting Up the Service Definition File for Statistics Collection	686
Enabling Statistics Collection with RADIUS	687
Enabling Statistics Collection with the CLI	688
External Parent Group Statistics Collection Setup	689
Service Manager Performance Considerations	690
Service Definition Examples	690
Tiered Service Example	690
Video-on-Demand Service Definition Example	691
Voice-over-IP Service Definition Example	692
Guided Entrance Service Example	693
Guided Entrance Service Definition Example	694
Using CoA Messages with Guided Entrance Services	695
Configuring the HTTP Local Server to Support Guided Entrance	696
Combined IPv4 and IPv6 Service in a Dual Stack Example	702

Chapter 28

Monitoring Service Manager 707

Setting a Baseline for HTTP Local Server Statistics	707
Monitoring the Connections to the HTTP Local Server	708
Monitoring the Configuration of the HTTP Local Server	708
Monitoring Statistics for Connections to the HTTP Local Server	709
Monitoring Profiles for the HTTP Local Server	710
Monitoring the Default Interval for Interim Accounting of Services	711
Monitoring the Status of the Service Manager License	712
Monitoring Profiles for Service Manager	712
Monitoring IPv4 and IPv6 Interfaces for Service Manager	713
Monitoring Service Definitions	723
Monitoring Service Session Profiles	724
Monitoring Active Owner Sessions with Service Manager	725
Monitoring Active Subscriber Sessions with Service Manager	727
Monitoring the Number of Active Subscriber and Service Sessions with Service Manager	730

Part 7

Index

Index	735
-------------	-----

List of Figures

Part 1	Managing Remote Access	
Chapter 1	Configuring Remote Access	3
	Figure 1: Local Address Pool Hierarchy	54
	Figure 2: Shared Local Address Pools	55
	Figure 3: Single PPP Clients per ATM Subinterface	61
	Figure 4: Multiple PPP Clients per ATM Subinterface	62
Part 2	Managing RADIUS and TACACS+	
Chapter 4	Configuring RADIUS Dynamic-Request Server	241
	Figure 5: Sample Remote Access Network Using RADIUS	242
Chapter 5	Configuring RADIUS Relay Server	251
	Figure 6: RADIUS Relay Server	252
Part 3	Managing L2TP	
Chapter 11	L2TP Overview	335
	Figure 7: Using the E Series Router as an LAC	336
	Figure 8: Using the E Series Router as an LNS	336
Chapter 12	Configuring an L2TP LAC	343
	Figure 9: Lockout States	367
Chapter 14	Configuring L2TP Dial-Out	411
	Figure 10: Network Model for Dial-Out	412
Part 4	Managing DHCP	
Chapter 18	DHCP Local Server Overview	469
	Figure 11: Non-PPP Equal Access via the Router	472
Chapter 19	Configuring DHCP Local Server	477
	Figure 12: Non-PPP Equal-Access Configuration Example	493
Chapter 20	Configuring DHCP Relay	495
	Figure 13: Passing 802.1p Values to the DHCP Server	514
Chapter 21	Configuring the DHCP External Server Application	523
	Figure 14: DHCP External Server	524
Part 5	Managing the Subscriber Environment	
Chapter 23	Configuring Subscriber Management	583

	Figure 15: DHCP External Server	585
Chapter 25	Configuring Subscriber Interfaces	603
	Figure 16: Example of a Dynamic Interface Stack	604
	Figure 17: Example of a Dynamic Subscriber Interface	605
	Figure 18: Subscriber Interfaces over Ethernet	606
	Figure 19: Subscriber Interfaces in a Cable Modem Network	608
	Figure 20: Associating Subnets with a VPN Using Subscriber Interfaces	609
	Figure 21: IP over Ethernet Dynamic Subscriber Interface Configuration	612
	Figure 22: Subscriber Interfaces Using a Destination Address to Demultiplex Traffic	616
	Figure 23: Subscriber Interfaces Using a Source Address to Demultiplex Traffic	618
	Figure 24: IP over Ethernet Dynamic Subscriber Interface Configuration	623
	Figure 25: IP over VLAN over Ethernet Dynamic Subscriber Interface Configuration	624
	Figure 26: IP over Bridged Ethernet over ATM Dynamic Subscriber Interface Configuration	625
	Figure 27: GRE Tunnel Dynamic Subscriber Interface Configuration	626
 Part 6	 Managing Subscriber Services	
Chapter 27	Configuring Service Manager	641
	Figure 28: Service Manager Configuration Flowchart	645
	Figure 29: Sample Service Definition Macro File	648
	Figure 30: QoS Configuration Dependency Chain	658
	Figure 31: Comparing RADIUS Login and RADIUS CoA Methods	661
	Figure 32: Guided Entrance	694
	Figure 33: Input Traffic Flow with Rate-Limit Profile on an External Parent Group for a Combined IPv4/IPv6 Service	702
	Figure 34: Output Traffic Flow with Rate-Limit Profile on an External Parent Group for a Combined IPv4/IPv6 Service	702

List of Tables

About the Documentation	xxxvii
Table 1: Notice Icons	xxxviii
Table 2: Text and Syntax Conventions	xxxviii

Part 1

Managing Remote Access

Chapter 1	Configuring Remote Access	3
	Table 3: Username and Domain Name Examples	16
	Table 4: Local UDP Port Ranges by RADIUS Request Type	19
	Table 5: RADIUS IETF Attributes in Preauthentication Request	78
	Table 6: VSAs That Apply to Dynamic IP Interfaces	82
	Table 7: Traffic-Shaping VSAs That Apply to Dynamic IP Interfaces	83
	Table 8: Supported RADIUS Acct-Terminate-Cause Codes	84
	Table 9: RADIUS Attributes Specifying LAG Interface	93
	Table 10: SRC Client and COPS Terminology	94
Chapter 2	Monitoring and Troubleshooting Remote Access	113
	Table 11: show aaa accounting Output Fields	117
	Table 12: show aaa accounting vr-group Output Fields	118
	Table 13: show aaa domain-map Output Fields	120
	Table 14: show aaa profile Output Fields	123
	Table 15: show aaa route-download Output Fields	124
	Table 16: show aaa route-download routes Output Fields	126
	Table 17: show aaa route-download routes global Output Fields	128
	Table 18: show aaa statistics Output Fields	130
	Table 19: show configuration category aaa global-attributes Output Fields	133
	Table 20: show configuration category aaa local-authentication Output Fields	134
	Table 21: show configuration category aaa server-attributes include-defaults Output Fields	135
	Table 22: show cops info Output Fields	137
	Table 23: show cops statistics Output Fields	139
	Table 24: show ip local alias Output Fields	140
	Table 25: show ip local pool Output Fields	141
	Table 26: show ip local shared-pool Output Fields	143
	Table 27: show radius override Output Fields	144
	Table 28: show radius servers Output Fields	146
	Table 29: show radius statistics Output Fields	149
	Table 30: show ssc info Output Fields	154
	Table 31: show ssc statistics Output Fields	156
	Table 32: show subscribers Output Fields	161
	Table 33: show terminate-code Output Fields	164

Table 34: show ipv6 local pool Output Fields	164
Table 35: show ipv6 local pool poolName Output Fields	165
Table 36: show ipv6 local pool statistics Output Fields	167

Part 2

Managing RADIUS and TACACS+

Chapter 3	Configuring RADIUS Attributes	171
	Table 37: AAA Access Message RADIUS IETF Attributes Supported	174
	Table 38: AAA Access Message Juniper Networks (Vendor ID 4874) VSAs Supported	176
	Table 39: AAA Accounting Message RADIUS IETF Attributes Supported	182
	Table 40: AAA Accounting Message Juniper Network (Vendor ID 4874) VSAs Supported	185
	Table 41: AAA Accounting Tunnel Message RADIUS Attributes Supported	187
	Table 42: DSL Forum (Vendor ID 3561) VSAs Supported in AAA Access and Accounting Messages	189
	Table 43: CLI AAA Access Message RADIUS Attributes Supported	190
	Table 44: ANCP (L2C)-Related Keywords for radius include Command	236
Chapter 4	Configuring RADIUS Dynamic-Request Server	241
	Table 45: Error-Cause Codes (RADIUS Attribute 101)	244
	Table 46: Error-Cause Codes (RADIUS Attribute 101)	246
Chapter 5	Configuring RADIUS Relay Server	251
	Table 47: Required RADIUS Access-Request Attributes	253
	Table 48: Required RADIUS Accounting Attributes	254
Chapter 6	RADIUS Attribute Descriptions	259
	Table 49: RADIUS IETF Attributes Supported by JUNOS Software	259
	Table 50: Juniper Networks (Vendor ID 4874) VSA Formats	265
	Table 51: JUNOS Software DSL Forum (Vendor ID 3561) VSA Formats	276
	Table 52: RADIUS Attribute Passed Through by JUNOS Software	278
Chapter 7	Application Terminate Reasons	279
	Table 53: Default AAA Mappings	279
	Table 54: Default L2TP Mappings	280
	Table 55: Default PPP Mappings	295
	Table 56: Default RADIUS Client Mappings	301
Chapter 8	Monitoring RADIUS	303
	Table 57: show radius override Output Fields	304
	Table 58: show radius attributes-included Output Fields	309
	Table 59: show radius dynamic-request statistics Output Fields	311
	Table 60: show radius dynamic-request servers Output Fields	312
	Table 61: show radius relay statistics Output Fields	314
	Table 62: show radius relay servers Output Fields	315
	Table 63: show radius relay udp-checksum Output Fields	316
Chapter 9	Configuring TACACS+	317
	Table 64: TACACS-Related Terms	318
	Table 65: TACACS+ Accounting Information	320
Chapter 10	Monitoring TACACS+	329
	Table 66: show statistics tacacs Output Fields	330

Table 67: show tacacs Output Fields	331
---	-----

Part 3

Managing L2TP

Chapter 11	L2TP Overview	335
	Table 68: L2TP Terms	336
Chapter 13	Configuring an L2TP LNS	375
	Table 69: L2TP-Resynch-Method RADIUS Attribute	394
	Table 70: Transmit Connect Speeds for L2TP over ATM 1483 Example	403
	Table 71: Transmit Connect Speeds for L2TP over Ethernet Example	403
	Table 72: Tunnel-Tx-Speed-Method RADIUS Attribute	408
Chapter 14	Configuring L2TP Dial-Out	411
	Table 73: L2TP Dial-Out Terms	412
	Table 74: Chassis Operational States	414
	Table 75: Virtual Router Operational States	414
	Table 76: Target Operational States	414
	Table 77: Session Operational States	415
	Table 78: Additions to RADIUS Attributes in Access-Accept Messages	417
Chapter 15	L2TP Disconnect Cause Codes	423
	Table 79: PPP Disconnect Cause Codes	423
Chapter 16	Monitoring L2TP and L2TP Dial-Out	427
	Table 80: show aaa domain-map Output Fields	428
	Table 81: show aaa tunnel-group Output Fields	430
	Table 82: show aaa tunnel-parameters Output Fields	432
	Table 83: show l2tp Output Fields	434
	Table 84: show l2tp destination Output Fields	436
	Table 85: show l2tp destination lockout Output Fields	437
	Table 86: show l2tp destination profile Output Fields	439
	Table 87: show l2tp destination summary Output Fields	440
	Table 88: show l2tp received-disconnect-cause-summary Output Fields	441
	Table 89: show l2tp session Output Fields	442
	Table 90: show l2tp session summary Output Fields	444
	Table 91: show l2tp switch-profile Output Fields	444
	Table 92: show l2tp tunnel Output Fields	446
	Table 93: show l2tp tunnel summary Output Fields	448
	Table 94: show l2tp dial-out Output Fields	450
	Table 95: show l2tp dial-out session Output Fields	454
	Table 96: show l2tp dial-out target Output Fields	455
	Table 97: show l2tp dial-out virtual-router Output Fields	457

Part 4

Managing DHCP

Chapter 18	DHCP Local Server Overview	469
	Table 98: Local Pool Selection in Equal-Access Mode	471
	Table 99: Local Pool Selection in Standalone Mode Without AAA Authentication	473
	Table 100: Local Pool Selection in Standalone Mode with AAA Authentication	473
Chapter 20	Configuring DHCP Relay	495

	Table 101: Router Configuration and Transmission of DHCP Reply Packets	499
	Table 102: Effect of Commands on Option 82 Suboption Settings	509
Chapter 22	Monitoring and Troubleshooting DHCP	539
	Table 103: show ip dhcp-local excluded Output Fields	542
	Table 104: show dhcp binding Output Fields	545
	Table 105: show dhcp count Output Fields	547
	Table 106: show dhcp host Output Fields	549
	Table 107: show ip dhcp-external binding Output Fields	551
	Table 108: show ip dhcp-external binding-id	552
	Table 109: show ip dhcp-local binding Output Fields	553
	Table 110: show ip dhcp-external configuration Output Fields	553
	Table 111: show ip dhcp-external statistics Output Fields	554
	Table 112: show dhcp-external Output Fields	555
	Table 113: show ip dhcp-local pool Output Fields	557
	Table 114: show ip dhcp-local auth Output Fields	558
	Table 115: show ip dhcp-local Output Fields	559
	Table 116: show ip dhcp-local leases Output Fields	561
	Table 117: show ip dhcp-local statistics output fields.	562
	Table 118: show dhcp vendor-option Output Fields	565
	Table 119: show ip dhcp-capture Output Fields	565
	Table 120: show dhcp relay Output Fields	566
	Table 121: show dhcp relay proxy statistics Output Fields	568
	Table 122: show dhcp relay statistics Output Fields	570
	Table 123: show dhcp server statistics Output Fields	572
	Table 124: show dhcp server Output Fields	573
	Table 125: show ipv6 dhcpv6-local binding Output Fields	574
	Table 126: show ipv6 dhcpv6-local dns-domain-searchlist Output Fields	574
	Table 127: show ipv6 dhcpv6-local dns-servers Output Fields	575
	Table 128: show ipv6 dhcpv6-local prefix-lifetime Output Fields	575
	Table 129: show ipv6 dhcpv6-local statistics Output Fields	576
	Table 130: show ip dhcp-local duplicate-clients Output Fields	577
	Table 131: show ip dhcp-local limits Output Fields	578
	Table 132: show ip dhcp-local reserved Output Fields	579
	Table 133: show dhcp summary Output Fields	580
 Part 5	 Managing the Subscriber Environment	
Chapter 24	Monitoring Subscriber Management	599
	Table 134: show ip service-profile Output Fields	599
	Table 135: show ip-subscriber Output Fields	601
Chapter 26	Monitoring Subscriber Interfaces	635
	Table 136: show ip demux interface Output Fields	635
	Table 137: show ip-subscriber Output Fields	637
 Part 6	 Managing Subscriber Services	
Chapter 27	Configuring Service Manager	641
	Table 138: Service Manager Terms and Acronyms	642
	Table 139: JUNOS Objects Tracked by Service Manager	646

	Table 140: Sample Modifications Using the Add and Initial-Value Keywords	655
	Table 141: Sample Modifications Using Parameter Instances	655
	Table 142: Configuration Within a Single Service Manager Event	656
	Table 143: Modifying QoS Configurations with Other Sources	657
	Table 144: Service Manager RADIUS Attributes	663
	Table 145: Sample RADIUS Access-Accept Packet	664
	Table 146: Using Tags	665
	Table 147: Service Manager RADIUS Accounting Attributes	673
	Table 148: Determining the Service Interim Accounting Interval	674
	Table 149: Sample Acct-Start Message for a Service Session	674
	Table 150: RADIUS-Enabled Statistics	687
	Table 151: Deactivating a Guided Entrance Service	696
Chapter 28	Monitoring Service Manager	707
	Table 152: show ip http scalar Output Fields	708
	Table 153: show ip http server Output Fields	709
	Table 154: show ip http statistics Output Fields	710
	Table 155: show profile Output Fields	711
	Table 156: show aaa service accounting interval Output Fields	711
	Table 157: show license service-management Output Fields	712
	Table 158: show profile Output Fields	713
	Table 159: show ip interface Output Fields	715
	Table 160: show ipv6 interface Output Fields	718
	Table 161: show service-management service-definition Output Fields	723
	Table 162: show service-management service-session-profile Output Fields	725
	Table 163: show service-management owner-session Output Fields	726
	Table 164: show service-management subscriber-session Output Fields	729
	Table 165: show service-management summary Output Fields	731

About the Documentation

- E Series and JUNOS^e Documentation and Release Notes on page xxxvii
- Audience on page xxxvii
- E Series and JUNOS^e Text and Syntax Conventions on page xxxvii
- Obtaining Documentation on page xxxix
- Documentation Feedback on page xxxix
- Requesting Technical Support on page xxxix

E Series and JUNOS^e Documentation and Release Notes

For a list of related JUNOS^e documentation, see <http://www.juniper.net/techpubs/software/index.html>.

If the information in the latest release notes differs from the information in the documentation, follow the *JUNOS^e Release Notes*.

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

Audience

This guide is intended for experienced system and network specialists working with Juniper Networks E Series Broadband Services Routers in an Internet access environment.

E Series and JUNOS^e Text and Syntax Conventions

Table 1 on page xxxviii defines notice icons used in this documentation.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page xxxviii defines text and syntax conventions that we use throughout the E Series and JUNOS documentation.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents commands and keywords in text.	<ul style="list-style-type: none"> Issue the clock source command. Specify the keyword exp-msg.
Bold text like this	Represents text that the user must type.	host1(config)# traffic class low-loss1
Fixed-width text like this	Represents information as displayed on your terminal's screen.	<pre>host1#show ip ospf 2 Routing Process OSPF 2 with Router ID 5.5.0.250 Router is an Area Border Router (ABR)</pre>
<i>Italic text like this</i>	<ul style="list-style-type: none"> Emphasizes words. Identifies variables. Identifies chapter, appendix, and book names. 	<ul style="list-style-type: none"> There are two levels of access: <i>user</i> and <i>privileged</i>. <i>clusterId</i>, <i>ipAddress</i>. <i>Appendix A, System Specifications</i>
Plus sign (+) linking key names	Indicates that you must press two or more keys simultaneously.	Press Ctrl + b.
Syntax Conventions in the Command Reference Guide		
Plain text like this	Represents keywords.	terminal length
<i>Italic text like this</i>	Represents variables.	<i>mask</i> , <i>accessListName</i>
(pipe symbol)	Represents a choice to select one keyword or variable to the left or to the right of this symbol. (The keyword or variable can be either optional or required.)	diagnostic line

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
[] (brackets)	Represent optional keywords or variables.	[internal external]
[]* (brackets and asterisk)	Represent optional keywords or variables that can be entered more than once.	[level1 level2 l1]*
{ } (braces)	Represent required keywords or variables.	{ permit deny } { in out } { <i>clusterId</i> <i>ipAddress</i> }

Obtaining Documentation

To obtain the most current version of all Juniper Networks technical documentation, see the Technical Documentation page on the Juniper Networks Web site at <http://www.juniper.net/>.

To download complete sets of technical documentation to create your own documentation CD-ROMs or DVD-ROMs, see the Offline Documentation page at

<http://www.juniper.net/techpubs/resources/cdrom.html>

Copies of the Management Information Bases (MIBs) for a particular software release are available for download in the software image bundle from the Juniper Networks Web site at <http://www.juniper.net/>.

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation to better meet your needs. Send your comments to techpubs-comments@juniper.net, or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the JTAC User Guide located at <http://www.juniper.net/customers/support/downloads/7100059-EN.pdf>.

- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/> .
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://www.juniper.net/alerts/>
- Join and participate in the Juniper Networks Community Forum: <http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/> .
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see http://www.juniper.net/support/requesting_support.html .

Part 1

Managing Remote Access

- Configuring Remote Access on page 3
- Monitoring and Troubleshooting Remote Access on page 113

Chapter 1

Configuring Remote Access

This chapter describes how to configure remote access to an Juniper Networks E Series Broadband Services Router. This chapter discusses the following topics:

- Remote Access Overview on page 4
- Remote Access Platform Considerations on page 5
- Remote Access References on page 6
- Before You Configure B-RAS on page 6
- Remote Access Configuration Tasks on page 6
- Configuring a B-RAS License on page 7
- Mapping a User Domain Name to a Virtual Router on page 8
- Setting Up Domain Name and Realm Name Usage on page 12
- Specifying a Single Name for Users from a Domain on page 16
- Configuring RADIUS Authentication and Accounting Servers on page 18
- Configuring Local Authentication Servers on page 40
- Configuring Tunnel Subscriber Authentication on page 50
- Configuring Name Server Addresses on page 51
- Configuring Local Address Servers on page 54
- Configuring DHCP Features on page 60
- Creating an IP Interface on page 61
- Configuring AAA Profiles on page 63
- Using RADIUS Route-Download Server to Distribute Routes on page 71
- Using the AAA Logical Line Identifier to Track Subscribers on page 76
- Using VSAs for Dynamic IP Interfaces on page 82
- Mapping Application Terminate Reasons to RADIUS Terminate Codes on page 84
- Configuring Timeout on page 88
- Limiting Active Subscribers on page 89
- Notifying RADIUS of AAA Failure on page 90
- Configuring Standard RADIUS IPv6 Attributes for IPv6 Neighbor Discovery Router Advertisements and DHCPv6 Prefix Delegation on page 90
- Propagation of LAG Subscriber Information to AAA and RADIUS on page 92

- Configuring the SRC Client on page 94
- Retrieval of DSL Line Rate Information from Access Nodes Overview on page 102
- DHCPv6 Local Address Pools for Allocation of IPv6 Prefixes Overview on page 103
- Configuring the DHCPv6 Local Address Pools on page 107
- Using DHCPv6 Local Address Pools for Prefix Delegation over non-PPP Links Example on page 110

Remote Access Overview

Broadband Remote Access Server (B-RAS) is an application running on your router that:

- Aggregates the output from digital subscriber line access multiplexers (DSLAMs)
- Provides user Point-to-Point Protocol (PPP) sessions or IP-over-Asynchronous Transfer Mode (ATM) sessions
- Enforces quality of service (QoS) policies
- Routes traffic into an Internet service provider's (ISP's) backbone network

A DSLAM collects data traffic from multiple subscribers into a centralized point so that it can be uploaded to the router over an ATM connection via a DS3, OC3, E3, or OC12 link.

The router provides the logical termination for PPP sessions, as well as the interface to authentication and accounting systems.

B-RAS Data Flow

The router performs several tasks for a digital subscriber line (DSL) PPP user to establish a PPP connection. This is an example of the way B-RAS data might flow:

1. Authenticate the subscriber using RADIUS authentication.
2. Assign an IP address to the PPP/IP session via RADIUS, local address pools, or Dynamic Host Configuration Protocol (DHCP).
3. Terminate the PPP encapsulation or tunnel a PPP session.
4. Provide user accounting via RADIUS.



NOTE: For information about configuring RADIUS attributes see “Configuring RADIUS Attributes” on page 171.

Configuring IP Addresses for Remote Clients

A remote client can obtain an IP address from one of the following:

- RADIUS server
- Local address server
- DHCP proxy client and server
- DHCP relay agent (Bridged IP only)
- DHCP local server
- DHCP external server

For information about configuring DHCP support on the E Series router, see “DHCP Overview” on page 461.

For information about how to configure a RADIUS server, see your RADIUS server documentation.

AAA Overview

Collectively, authentication, authorization, and accounting are referred to as AAA. Each has an important but separate function.

- Authentication—Determines who the user is, then determines whether that user should be granted access to the network. The primary purpose is to prevent intruders from networks. It uses a database of users and passwords.
- Authorization—Determines what the user is allowed to do by giving network managers the ability to limit network services to different users.
- Accounting—Tracks what the user did and when they did it. You can use accounting for an audit trail or for billing for connection time or resources used.

Central management of AAA means the information is in a single, centralized, secure database, which is much easier to administer than information distributed across numerous devices.

Remote Access Platform Considerations

B-RAS services are supported on all E Series routers.

For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the Juniper Networks E120 and E320 Broadband Services Routers.

B-RAS Protocol Support

The E Series router supports the following protocols for B-RAS services:

- PPP
- PPP over Ethernet (PPPoE)

- Bridged Ethernet
- Layer 2 Tunneling Protocol (L2TP), both L2TP access concentrator (LAC) and L2TP network server (LNS)

Remote Access References

For more information about the topics covered in this chapter, see the following documents:

- RFC 2748—The COPS (Common Open Policy Service) Protocol (January 2000)
- RFC 2865—Remote Authentication Dial In User Service (RADIUS) (June 2000)
- RFC 3084—COPS Usage for Policy Provisioning (COPS-PR) (March 2001)
- RFC 3159—Structure of Policy Provisioning Information (SPPI) (August 2001)
- RFC 3198—Terminology for Policy-Based Management (November 2001)
- RFC 3317—Differentiated Services Quality of Service Policy Information Base (DIFFSERV-PIB)
- RFC 3318—Framework Policy Information Base (March 2003)

JUNOS Release Notes, Appendix A, System Maximums—Refer to the Release Notes corresponding to your software release for information about the number of concurrent RADIUS requests that the router supports for authentication and accounting servers.

Before You Configure B-RAS

Before you begin to configure B-RAS, you need to collect the following information for the RADIUS authentication and accounting servers:

- IP addresses
- User Datagram Protocol (UDP) port numbers
- Secret keys

Remote Access Configuration Tasks

Each configuration task is presented in a separate section in this chapter. Most of the B-RAS configuration tasks are optional.

To configure B-RAS, perform the following tasks:

1. Configure a B-RAS license.
2. (Optional) Map a user domain name to a virtual router. By default, all requests go through a default router.
3. (Optional) Set up domain name and realm name usage.
4. (Optional) Specify a single name for users from a domain.

5. Configure an authentication server on the router.
6. (Optional) Configure UDP checksums.
7. (Optional) Configure an accounting server on the router.
8. (Optional) Configure Domain Name System (DNS) and Windows Internet Name Service (WINS) name server addresses.
9. (Optional) Configure a local address pool for remote clients.
10. (Optional) Configure one or more DHCP servers.
11. Create a PPP interface on which the router can dynamically create an IP interface.
12. (Optional) Configure AAA profiles.
13. (Optional) Use vendor-specific attributes (VSAs) for Dynamic Interfaces.
14. (Optional) Set idle or session timeout.
15. (Optional) Limit the number of active subscribers on a virtual router (VR) or port.
16. (Optional) Set up the router to notify RADIUS when a user fails AAA.
17. (Optional) Configure a RADIUS download server on the router.
18. (Optional) Configure the Session and Resource Control (SRC) client (formerly the SDX client).
19. (Optional) Set baselines for AAA statistics or RADIUS authentication and accounting statistics.

Configuring a B-RAS License

From Global Configuration mode, configure a B-RAS license:

```
host1(config)#license b-ras k3n91s6gtj
```

B-RAS licenses are available in various sizes to enable subscriber access for up to one of the following maximum number of simultaneous active IP, LAC, and bridged Ethernet interfaces:

- 4000
- 8000
- 16,000
- 32,000
- 48,000



NOTE: To use a B-RAS license for 16,000 or more interfaces, each of your SRP modules must have 1 gigabyte (GB) of memory.

license b-ras

- Use to specify the B-RAS license.
- The license is a unique string of up to 15 alphanumeric characters.



NOTE: Acquire the license from Juniper Networks Customer Service or your Juniper Networks sales representative.

- You can purchase licenses that allow up to 2,000, 4,000, 8,000, 16,000, 32,000, or 48,000 simultaneous active IP, LAC, and bridged Ethernet interfaces.

- Example

```
host1(config)#license b-ras jwmR4k8D
```

- Use the **no** version to disable the license.
- See license b-ras

Mapping a User Domain Name to a Virtual Router

You can configure RADIUS authentication, accounting, and local address pools for a specific virtual router and then map a user domain to that virtual router.

The router keeps track of the mapping between domain names and virtual-routers. Use the **aaa domain-map** command to map a user domain to a virtual router.



NOTE: This domain name is not the NT domain sometimes found on the Dialup Networking dialog box.

When the router is configured to require authentication of a PPP user, the router checks for the appropriate user domain-name-to-virtual-router mapping. If it finds a match, the router sends a RADIUS authentication request to the RADIUS server configured for the specific virtual router.

Mapping User Requests Without a Valid Domain Name

You can create a mapping between a domain name called **default** and a specific virtual router so that the router can map user names that contain a domain name that does not have an explicit map.

If a user request is submitted with a domain name for which the router cannot find a match, the router looks for a mapping between the domain name **default** and a virtual router. If a match is found, the user's request is processed according to the RADIUS server configured for the named virtual router. If no entry is found that maps **default** to a specific virtual router, the router sends the request to the RADIUS server configured on the default virtual router.

Mapping User Requests Without a Configured Domain Name

You can map a domain name called **none** to a specific virtual router so that the router can map user names that do not contain a domain name.

If a user request is submitted without a domain name, the router looks for a mapping between the domain name **none** and a virtual router. If a match is found, the user's request is processed according to the RADIUS server configured for the named virtual router. If the router does not find the domain name **none**, it checks for the domain name **default**. If no matching entries are found, the router sends the request to the server configured on the default virtual router.

Using DNIS

The E Series router supports dialed number identification service (DNIS). With DNIS, if users have a called number associated with them, the router searches the domain map for the called number. If it finds a match, the router uses the matching domain map entry information to authenticate the user. If the router does not find a match, it searches the domain map using normal processing.



NOTE: For DNIS to work, the router must be acting as the LNS. Also, the phone number configured in the **aaa domain-map** command must be an exact match to the value passed by L2TP in the called number AVP (AVP 21).

For example, as specified in the following sequence, a user calling 9785551212 would be terminated in vrouter_88, while a user calling 8005554433 is terminated in vrouter_100.

```
host1(config)#aaa domain-map 9785551212 vrouter_88
host1(config)#aaa domain-map 8005554433 vrouter_100
```

Redirected Authentication

Redirected authentication provides a way to offload AAA activity on the router, by providing the domain-mapping-like feature remotely on the RADIUS server. Redirected authentication works as follows:

1. The router sends an authentication request (in the form of a RADIUS access-request message) to the RADIUS server that is configured in the default VR.
2. The RADIUS server determines the user's AAA VR context and returns this information in a RADIUS response message to the router.
3. The router then behaves in similar fashion as if it had received the VR context from the local domain map.

To maintain local control, the only VR allowed to redirect authentication is the default VR. Also, to prevent loopbacks, the redirection may occur only once to a non-default VR.

To maintain flexibility, the redirection response may include idle time or session attributes that are considered as default unless the redirected authentication server overrides them. For example, if the RADIUS server returns the VR context along with an idle timeout attribute with the value set to 20 minutes, the router uses this idle timeout value unless the RADIUS server configured in the VR context returns a different value.

Since the router supports the RADIUS User-Name attribute [1] in the RADIUS response message, the default VR RADIUS server may override the user's name (this can be a stripped name or an entirely different name). Overriding is useful for the case when the user enters a login name containing a domain name that is significant only to the RADIUS server in the default VR.

IP Hinting

You can allocate an address before authentication of PPP sessions. This address is included in the Access-Request sent to the authentication server as an IP address hint.

aaa domain-map

- Use to map a user domain name to a virtual router or a loopback interface.
- When you specify only the domain name, the command sets the mode to Domain Map Configuration.
- Example

```
host1(config)#aaa domain-map juniper.net vrouter_1
host1(config)#aaa domain-map none vrouter_all_purpose
host1(config)#aaa domain-map default vrouter_all_purpose
host1(config)#aaa domain-map 8005558934 vrouter_78
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#
```

- Use the **no** version to delete the map entry.
- See aaa domain-map

ip-hint

- Use to preallocate an IP address for the remote B-RAS user before authenticating the remote user.
- The address is passed as a *hint* in the authentication request.
- Example

```
host1(config-domain-map)#ip-hint enable
```

- Use the **no** version to disable the feature.
- See ip-hint

ipv6-local-interface

- Use to map a user domain name to an IP version 6 (IPv6) loopback interface.
- The local interface identifies the interface information to use on the local (E Series) side of the subscriber's interface.

- Example

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#ipv6-local-interface 2001:db8::8000
```

- Use the **no** version to delete the entry.
- See ipv6-local-interface

ipv6-router-name

- Use to map a user domain name to an IPv6 virtual router in Domain Map Configuration mode.

- Example

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#ipv6-router-name vroutv6
```

- Use the **no** version to delete the entry.
- See ipv6-router-name

local-interface

- Use to map a user domain name to a loopback interface.
- The local interface identifies the interface information to use on the local (E Series) side of the subscriber's interface.

- Example

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#local-interface 10.10.5.30
```

- Use the **no** version to delete the entry.
- See local-interface

router-name

- Use to map a user domain name to a virtual router.

- Example

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#router-name vrout
```

- Use the **no** version to delete the entry.
- See router-name.

Setting Up Domain Name and Realm Name Usage

To provide flexibility in how the router handles different types of usernames, the software lets you specify the part of a username to use as the domain name, how the domain name is designated, and how the router parses names. It also allows you to set whether or not the router strips the domain name from the username before it sends the username to the RADIUS server.

By default, the router parses usernames as follows:

realmName/personalName@domainName

The string to the left of the forward slash (/) is the realm name, and the string to the right of the at-symbol (@) is the domain name. For example, in the username juniper/jill@abc.com, juniper is the realm name and abc.com is the domain name.

The router allows you to:

- Use the realm name as the domain name.
- Use delimiters other than / to designate the realm name.
- Use delimiters other than @ to designate the domain name.
- Use either the domain or the realm as the domain name when the username contains both a realm and domain name.
- Change the direction in which the router searches for the domain name or the realm name.

To provide these features, the router allows you to specify delimiters for the domain name and realm name. You can use up to eight one-character delimiters each for domain and realm names. The router also lets you specify how it parses usernames to determine which part of a username to use as the domain name.

Using the Realm Name as the Domain Name

Typically, a realm appears before the user field and is separated with the / character; for example, usEast/jill@abc.com. To use the realm name usEast rather than abc.com as the domain name, set the realm name delimiter to /. For example:

```
host1(config)#aaa delimiter realmName /
```

This command causes the router to use the string to the left of the / as the domain name. If the realm name delimiter is null (the default), the router will not search for the realm name.

Using Delimiters Other Than @

You can set up the router to recognize delimiters other than @ to designate the domain name. Suppose there are two users: bob@abc.com and pete!xyz.com, and you want to use both of their domain names. In this case you would set the domain name delimiter to @ and !. For example:

```
host1(config)#aaa delimiter domainName @!
```

Using Either the Domain or the Realm as the Domain Name

If the username contains both a realm name and a domain name delimiter, you can use either the domain name or the realm name as the domain name. As previously mentioned, the router treats usernames with multiple delimiters as though the realm name is to the left of the realm delimiter and the domain name is to the right of the domain delimiter.

If you set the parse order to:

- **domain-first**—The router searches for a domain name first. For example, for username `usEast/lori@abc.com`, the domain name is `abc.com`.
- **realm-first**—The router searches for a realm name first and uses the realm name as the user's domain name. For username `usEast/lori@abc.com`, the domain is `usEast`.

For example, if you set the delimiter for the realm name to `/` and set the delimiter for the domain name to `@`, the router parses the realm first by default. The username `usEast/lori@abc.com` results in a domain name of `usEast`. To cause the parsing to return `abc.com` as the domain, enter the **aaa parse-order domain-first** command.

Specifying the Domain Name or Realm Name Parse Direction

You can specify the direction—either left to right or right to left—in which the router performs the parsing operation when identifying the realm name or domain name. This feature is particularly useful if the username contains nested realm or domain names. For example, for a username of `userjohn@abc.com@xyz.com`, you can identify the domain as either `abc.com@xyz.com` or as `xyz.com`, depending on the parse direction that you specify.

You use either the **left-to-right** or **right-to-left** keywords with one of the following keywords to specify the type of search and parsing that the router performs:

- **domainName**—The router searches for the next domain delimiter value in the direction specified. When it reaches a delimiter, the router uses anything to the right of the delimiter as the domain name. Domain parsing is from right to left by default.
- **realmName**—The router searches for the next realm delimiter value in the direction specified. When it reaches a delimiter, the router uses anything to the left of the delimiter as the realm name. Realm parsing is from left to right by default.
- **Example**

```
host1(config)#aaa parse-direction domainName left-to-right
```

Stripping the Domain Name

The router provides feature that strips the domain name from the username before it sends the name to the RADIUS server in an Access-Request message. You can enable or disable this feature using the **strip-domain** command.

By default, the domain name is the text after the last **@** character. However, if you changed the domain name parsing using the **aaa delimiter**, **aaa parse-order**, or **aaa parse direction** commands, the router strips the domain name and delimiter that result from the parsing.

aaa delimiter

- Use to configure delimiters for the domain and realm names. Specify one of the following keywords:
 - **domainName**—Configures domain name delimiters. The default domain name delimiter is **@**.
 - **realmName**—Configures realm name delimiters. The default realm name delimiter is NULL (no character). In this case, realm parsing is disabled (having no delimiter disables realm parsing).
- You can specify up to eight delimiters each for domain name and realm name.
- Example

```
host1(config)#aaa delimiter domainName @*/
```

- Use the **no** version to return to the default.
- See **aaa delimiter**

aaa parse-direction

- Use to specify the direction the router uses to parse the username for the domain or realm name.
 - **domainName**—Specifies that the domain name is parsed. The router performs domain parsing from right to left by default.
 - **realmName**—Specifies that the realm name is parsed. The router performs realm parsing from left to right by default.
 - **left-to-right**—Router searches from the left-most character. When the router reaches a realm delimiter, it uses anything to the left of the delimiter as the domain. When the router reaches a domain delimiter, it uses anything to the right of the delimiter as the domain.
 - **right-to-left**—Router searches from the right-most character. When the router reaches a realm delimiter, it uses anything to the left of the delimiter as the domain. When the router reaches a domain delimiter, it uses anything to the right of the delimiter as the domain.
- Example

```
host1(config)#aaa parse-direction domainName left-to-right
```

- Use the **no** version to return to the default: right-to-left parsing for domain names and left-to-right parsing for realm names.
- See `aaa parse-direction`

aaa parse-order

- Use to specify which part of a username the router uses as the domain name. If a user's name contains both a realm name and a domain name, you can configure the router to use either name as the domain name.
 - **domain-first**—Router searches for a domain name first. When the router reaches a domain delimiter, it uses anything to the right of the delimiter as the domain name. For example, if the username is `usEast/lori@abc.com`, the domain name is `abc.com`. If the router does not find a domain name, it then searches for a realm name if the realm delimiter is specified.
 - **realm-first**—Router searches for a realm name first. When the router reaches a realm delimiter, it uses anything to the left of the delimiter as the domain. For example, if the username is `usEast/lori@abc.com`, the domain name is `usEast`. If no realm name is found, the router searches for a domain name.
- Example


```
host1(config)#aaa parse-order domain-first
```
- Use the **no** version to return to the default, realm first.
- See `aaa parse-order`

strip-domain

- Use to strip the domain name from the username before sending an access-request message to the RADIUS server.
- By default, the domain name is the text after the last `@` character. However, if you change the domain name parsing by using the **aaa delimiter**, **aaa parse-order**, or **parse-direction** command, the router strips the domain name and delimiter that result from the parsing.
- To stop stripping the username, use the **disable** keyword.
- Example


```
host1(config)#aaa domain-map xyz.com
host1(config-domain-map)#strip-domain enable
```
- Use the **no** version to return to the default, disabled.
- See `strip-domain`

Domain Name and Realm Name Examples

This section provides examples of possible domain or realm name results that you might obtain, depending on the commands and options you specify. This example uses the following username:

username: usEast/userjohn@abc.com@xyz.com

The router is configured with the following commands:

```
host1(config)#aaa delimiter domainName @!
host1(config)#aaa delimiter realmName /
```

Table 3 on page 16 shows the username and domain name that result from the parsing action of the various commands.

Table 3: Username and Domain Name Examples

Command	Resulting Username	Resulting Domain Name
aaa parse-order realm-first	userjohn@abc.com@xyz.com	usEast
aaa parse-order domain-first	userjohn@abc.com	xyz.com
aaa parse-direction domainName right-to-left	userjohn@abc.com	xyz.com
aaa parse-direction domainName left-to-right	userjohn	abc.com@xyz.com
aaa parse-direction realmName right-to-left	userjohn@abc.com@xyz.com	usEast
aaa parse-direction realmName left-to-right	userjohn@abc.com@xyz.com	usEast

Specifying a Single Name for Users from a Domain

Assigning a single username and a single password for all users associated with a domain provides better compatibility with some RADIUS servers. You can use this feature for domains that require the router to tunnel, but not terminate, PPP sessions.

When users request a PPP session, they specify usernames and passwords. During the negotiations for the PPP session, the router authenticates legitimate users.



NOTE: This feature works only for users authenticated by Password Authentication Protocol (PAP) and not by Challenge Handshake Authentication Protocol (CHAP).

If you configure this feature, the router substitutes the specified username and password for all authenticated usernames and passwords associated with that domain.

There are two options for this feature. The router can:

- Substitute the domain name for each username and one new password for each existing password.

For example, if the domain name is xyz.com and you specify the password xyz_domain, the router associates the username xyz.com and the password xyz_domain with all users from xyz.com.

- Substitute one new username for each username and one new password for each existing password.

For example, if the domain name is xyz.com and you specify the username xyz_group and the password xyz_domain, the router associates these identifiers with all users from xyz.com.

To use a single username and a single password for all users from a domain:

1. Access Domain Map Configuration mode using the **aaa domain-map** command.
2. Specify the new username and password using the **override-user** command.

aaa domain-map

- Use to map a domain name to a virtual router or to access Domain Map Configuration mode.
- Example

```
host1(config)#aaa domain-map xyz.com
host1(config-domain-map)#
```

- Use the **no** version to delete the map entry.
- See aaa domain-map

override-user

- Use to specify a single username and single password for all users from a domain in place of the values received from the remote client.
- Use only for domains that require the router to tunnel and not terminate PPP sessions.
- If you specify a password only, the router substitutes the domain name for the username and associates the new password with the user. If you specify a password only and you have configured the domain name *none* with the aaa domain-map command, the router rejects any users without domain names.
- If you specify a name and password, the router associates both the new name and password with the user.
- Example

```
host1(config-domain-map)#override-user name boston password abc
```

- Use the **no** version to revert to the original username.
- See override-user

Configuring RADIUS Authentication and Accounting Servers

The number of RADIUS servers you can configure depends on available memory.

The order in which you configure servers determines the order in which the router contacts those servers on behalf of clients.

Initially, a RADIUS client sends a request to a RADIUS authentication or accounting server. The RADIUS server uses the configured IP address, the UDP port number, and the secret key to make the connection. The RADIUS client waits for a response for a configurable timeout period and then retransmits the request. The RADIUS client retransmits the request for a user-configurable retry limit.

- If there is no response from the primary RADIUS server, the RADIUS client submits the request to the secondary RADIUS server using the timeout period and retry limit configured for the secondary RADIUS server.
- If the connection attempt fails for the secondary RADIUS server, the router submits the request to the tertiary server and so on until it either is granted access on behalf of the client or there are no more configured servers.
- If another authentication server is not configured, the router attempts the next method in the method list; for accounting server requests, the information is dropped.

For example, suppose that you have configured the following authentication servers: Auth1, Auth2, Auth3, Auth4, and Auth5. Your router attempts to send an authentication request to Auth1. If Auth1 is unavailable, the router submits the request to Auth2, then Auth3, and so on until an available server is found. If Auth5, the last configured authentication server, is not available, the router attempts the next method in the methods list. If the only method configured is RADIUS, then the router notifies the client that the request has been denied.

Server Access

The router offers two options by which servers are accessed:

- Direct—The first authentication or accounting server that you configure is treated as the primary authentication or accounting server, the next server configured is the secondary, and so on.
- Round-robin—The first configured server is treated as a primary for the first request, the second server configured as primary for the second request, and so on. When the router reaches the end of the list of servers, it starts again at the top of the list until it comes full cycle through the list.

Use the **radius algorithm** command to specify the server access method.

When you configure the first RADIUS accounting server, a RADIUS Acct-On message is sent. When you delete the last accounting server, a RADIUS Acct-Off message is sent.

Server Request Processing Limit

You can configure RADIUS authentication servers and accounting servers to use different UDP ports on the router. This enables the same IP address to be used for both an authentication server and an accounting server. However, you cannot use the same IP address for multiple authentication servers or for multiple accounting servers.



NOTE: For information about the number of concurrent RADIUS requests that the router supports for authentication and accounting servers, see *JUNOS Release Notes, Appendix A, System Maximums*.

The E Series router listens to a range of UDP source (or local) ports for RADIUS responses. Each UDP source port supports a maximum of 255 RADIUS requests. When the 255 per-port limit is reached, the router opens the next source port. When the **max-sessions** command limit is reached, the router submits the request to the next configured server.

Table 4 on page 19 lists the range of UDP ports the router uses for each type of RADIUS request.

Table 4: Local UDP Port Ranges by RADIUS Request Type

RADIUS Request Type	ERX310, ERX710, ERX1410, and E120 Broadband Services Routers	ERX1440 and E320 Broadband Services Routers
RADIUS authentication	50000–50124	50000–50124
RADIUS accounting	50125–50249	50125–50499
RADIUS preauthentication	50250–50374	50500–50624
RADIUS route-download	50375–50500	50625–50749

Authentication and Accounting Methods

When you configure AAA authentication and accounting services for your B-RAS environment, one important task is to specify the authentication and accounting method used. The JUNOS software gives you the flexibility to configure authentication or accounting methods based on the type of subscriber. This feature allows you to enable RADIUS authentication for some subscribers, while disabling authentication completely for other subscribers. Similarly, you can enable RADIUS accounting for some subscribers, but no accounting for others. For example, you might use RADIUS authentication for ATM 1483 subscribers, while granting IP subscriber management interfaces access without authentication (using the **none** keyword).

You can specify the authentication or accounting method you want to use, or you can specify multiple methods in the order in which you want them used. For example,

if you specify the **radius** keyword followed by the **none** keyword when configuring authentication, AAA initially attempts to use RADIUS authentication. If no RADIUS servers are available, AAA uses no authentication. The JUNOS software currently supports **radius** and **none** as accounting methods and **radius**, **none**, and **local** as authentication methods. See “Configuring Local Authentication Servers” on page 40 for information about local authentication.

You can configure authentication and accounting methods based on the following types of subscribers:

- ATM 1483
- Tunnels (for example, L2TP tunnels)
- PPP
- RADIUS relay server
- IP subscriber management interfaces



NOTE: IP subscriber management interfaces are static or dynamic interfaces that are created or managed by the JUNOS software’s subscriber management feature.

Supporting Exchange of Extensible Authentication Protocol Messages

Extensible Authentication Protocol (EAP) is a protocol that supports multiple methods for authenticating a peer before allowing network layer protocols to transmit over the link. JUNOS software supports the exchange of EAP messages between JUNOS applications, such as PPP, and an external RADIUS authentication server.

The JUNOS software’s AAA service accepts and passes EAP messages between the JUNOS application and the router’s internal RADIUS authentication server. The internal RADIUS authentication server, which is a RADIUS client, provides EAP pass-through—the RADIUS client accepts the EAP messages from AAA, and sends the messages to the external RADIUS server for authentication. The RADIUS client then passes the response from the external RADIUS authentication server back to the AAA service, which then sends a response to the JUNOS application. The AAA service and the internal RADIUS authentication service do not process EAP information—both simply act as pass-through devices for the EAP message.

The router’s local authentication server and TACACS+ authentication servers do not support the exchange of EAP messages. These type of servers deny access if they receive an authentication request from AAA that includes an EAP message. EAP messages do not affect the **none** authentication configuration, which always grants access.

The local RADIUS authentication server uses the following RADIUS attributes when exchanging EAP messages with the external RADIUS authentication server:

- Framed-MTU (attribute 12)—Used if AAA passes an MTU value to the internal RADIUS client
- State (attribute 24)—Used in Challenge-Response messages from the external server and returned to the external server on the subsequent Access-Request
- Session-Timeout (attribute 27)—Used in Challenge-Response messages from the external server
- EAP-Message (attribute 79)—Used to fragment EAP strings into 253-byte fragments (the RADIUS limit)
- Message-Authenticator (attribute 80)—Used to authenticate messages that include an EAP-Message attribute

For additional information on configuring PPP to use EAP authentication, see *JUNOS Link Layer Configuration Guide*.

Immediate Accounting Updates

You can use the **aaa accounting immediate-update** command to configure immediate accounting updates on a per-VR basis. If you enable this feature, the E Series router sends an Acct-Update message to the accounting server immediately on receipt of a response (ACK or timeout) to the Acct-Start message.

This feature is disabled by default. Use the **enable** keyword to enable immediate updates and the **disable** keyword to halt them.

The accounting update contains 0 (zero) values for the input/output octets/packets and 0 (zero) for uptime. If you have enabled duplicate or broadcast accounting, the accounting update goes to both the primary virtual router context and the duplicate or broadcast virtual router context.

Duplicate and Broadcast Accounting

Normally, the JUNOS software sends subscriber-related AAA accounting information to the virtual router that authenticates the subscriber. If an operational virtual router is configured that is different from the authentication router, it also receives the accounting information. You can optionally configure duplicate or broadcast AAA accounting, which sends the accounting information to additional virtual routers simultaneously. The accounting information continues to be sent to the authenticating virtual router, but not to the operational virtual router.

Both the duplicate and broadcast accounting features are supported on a per-virtual router context, and enable you to specify particular accounting servers that you want to receive the accounting information.

For example, you might use broadcast accounting to send accounting information to a group of your private accounting servers. Or you might use duplicate accounting to send the accounting information to a customer's accounting server.

- Duplicate accounting—Sends the accounting information to a particular virtual router

- Broadcast accounting—Sends the accounting information to a group of virtual routers. An accounting virtual router group can contain up to four virtual routers and the E Series router supports a maximum of 100 virtual router groups. The accounting information continues to be sent to the duplicate accounting virtual router, if one is configured.

Configuring AAA Duplicate Accounting

To configure and enable duplicate accounting on a virtual router, you use the **aaa accounting duplication** command with the name of the accounting server that will receive the information. For example, to enable duplicate accounting for the default virtual router:

```
host1(config)#aaa accounting duplication xyzCompanyServer
```

Configuring AAA Broadcast Accounting

To configure and enable broadcast accounting on a virtual router:

1. Create the virtual router group and enter VR Group Configuration mode:

```
host1(config)#aaa accounting vr-group groupXyzCompany
host1(vr-group-config)#
```

2. Add up to four virtual routers to the group. The accounting information will be sent to all virtual routers in the group.

```
host1(vr-group-config)#aaa virtual-router 1 vrXyz1
host1(vr-group-config)#aaa virtual-router 2 vrXyz2
host1(vr-group-config)#aaa virtual-router 3 vrXyz3
host1(vr-group-config)#exit
host1(config)#
```

3. Enable broadcast accounting. Enter the correct virtual router context, and specify the virtual router group whose virtual routers will receive the accounting information.

```
host1(config)#virtual-router opVr100
host1:opVr100(config)#aaa accounting broadcast groupXyzCompany
```

Overriding AAA Accounting NAS Information

AAA accounting packets normally include two RADIUS attributes—NAS-IP-Address [4] and NAS-Identifier [32]—of the virtual router that generates the accounting information. You can override the default configuration and specify that accounting packets from particular broadcast virtual routers instead include the NAS-IP-Address and NAS-Identifier attributes of the authenticating virtual router.

To override the normal AAA accounting NAS information, access the correct virtual router context, and use the **radius override nas-info** command. For example:

```
host1(config)#virtual-router vrXyz1
host1:vrXyz1(config)#radius override nas-info
```

```

host1:vrXyz1(config)#virtual-router vrXyz2
host1:vrXyz2(config)#radius override nas-info
host1:vrXyz3(config)#exit
host1(config)#

```

UDP Checksums

Each virtual router on which you configure B-RAS is enabled to perform UDP checksums by default. You can disable and reenabling UDP checksums.

Collecting Accounting Statistics

You can use the **aaa accounting statistics** command to specify how the AAA server collects statistics on the sessions it manages. Use the **volume-time** keyword to specify that AAA notifies applications to collect a full set of statistics from each of their connections. Use the **time** keyword to specify that only the uptime status is collected for each connection. Collecting only uptime information reduces the amount of data sent to AAA and is a more efficient use of system resources for customers that do not need a full set of statistics. The router collects a full set of statistics by default.

Configuring RADIUS AAA Servers

The number of RADIUS servers you can configure depends on available memory. The router has an embedded RADIUS client for authentication and accounting.



NOTE: You can configure B-RAS with RADIUS accounting, but without RADIUS authentication. In this configuration, the username and password on the remote end are not authenticated and can be set to any value.

You must assign an IP address to a RADIUS authentication or accounting server to configure it.

If you do not configure a primary authentication or accounting server, all authentication and accounting requests will fail. You can configure other servers as backup in the event that the primary server cannot be reached. Configure each server individually.

To configure an authentication or accounting RADIUS server:

1. Specify the authentication or accounting server address.

```

host1(config)#radius authentication server 10.10.10.1
host1(config-radius)#
or
host1(config)#radius accounting server 10.10.10.6
host1(config-radius)#

```

2. (Optional) Specify a UDP port for RADIUS authentication or accounting server requests.

```

host1(config-radius)#udp-port 1645

```

3. Specify an authentication or accounting server secret.

```
host1(config-radius)#key gismo
```

4. (Optional) Specify the number of retries the router makes to an authentication or accounting server before it attempts to contact another server.

```
host1(config-radius)#retransmit 2
```

5. (Optional) Specify the number of seconds between retries.

```
host1(config-radius)#timeout 5
```

6. (Optional) Specify the maximum number of outstanding requests.

```
host1(config-radius)#max-sessions 100
```

7. (Optional) Specify the amount of time to remove a server from the available list when a timeout occurs.

```
host1(config-radius)#deadtime 10
```

8. (Optional) In Global Configuration mode, specify whether the E Series router should move on to the next RADIUS server when the router receives an Access-Reject message for the user it is authenticating.

```
host1(config)#radius rollover-on-reject enable
```

9. (Optional) Enable duplicate address checking.

```
host1(config)aaa duplicate-address-check enable
```

10. (Optional) Specify that duplicate accounting records be sent to the accounting server for a virtual router.

```
host1(config)#aaa accounting duplication routerBoston
```

11. (Optional) Enter the correct virtual router context, and specify the virtual router group to which broadcast accounting records are sent.

```
host1(config)#virtual-router vrSouth25
host1:vrSouth25(config)#aaa accounting broadcast westVrGroup38
host1:vrSouth25(config)#exit
```

12. (Optional) Specify that immediate accounting updates be sent to the accounting server when a response is received to an Acct-Start message.

```
host1(config)#aaa accounting immediate-update
```

13. (Optional) Specify whether the router collects all statistics or only the uptime status.

```
host1(config)#aaa accounting time
```

14. (Optional) Specify that tunnel accounting be enabled or disabled.

```
host1(config)#radius tunnel-accounting enable
```


15. (Optional) Specify the default authentication and accounting methods for the subscribers.

```
host1(config)#aaa authentication ppp default radius none
```

16. (Optional) Disable UDP checksums on virtual routers you configure for B-RAS.

```
host1:(config)#virtual-router boston
host1:boston(config)#radius udp-checksum disable
```

aaa accounting broadcast

- Use to enable AAA broadcast accounting on a virtual router. Specifies that accounting records be sent to the accounting servers on the virtual routers in the named virtual router group.
- A virtual router group can be used in any virtual router context, not just the context in which it is created.
- Example

```
host1(config)#virtual-router vrSouth25
host1:vrSouth25(config)#aaa accounting broadcast westVrGroup38
host1:vrSouth25(config)#exit
```

- Use the **no** version to disable the AAA broadcast accounting.
- See `aaa accounting broadcast`

aaa accounting default

- Use to specify the accounting method used for a particular type of subscriber.
- Specify one of the following types of subscribers:
 - **atm1483**; this keyword is not supported
 - **tunnel**
 - **ppp**
 - **radius-relay**
 - **ipsec**
 - **ip** (IP subscriber management interfaces)



NOTE: IP subscriber management interfaces are static or dynamic interfaces that are created or managed by the JUNOS software's subscriber management feature.

Although the **atm1483** keyword is available in the CLI for this command, that subscriber type is not supported. The router does not support accounting for ATM 1483 subscribers.

- Specify one of the following types of accounting methods:

- **radius**—RADIUS accounting for the specified subscribers.
- **none**—No accounting is done for the specified subscribers.
- **radius none**—Multiple types of accounting; used in the order specified. For example, **radius none** specifies that RADIUS accounting is initially used; however, if RADIUS servers are not available, no accounting is done.
- Example


```
host1(config)#aaa accounting ppp default radius
```
- Use the **no** version to set the accounting protocol to the default, **radius**.
- See aaa accounting default

aaa accounting duplication

- Use to enable AAA duplicate accounting on a virtual router. Specifies that duplicate accounting records be sent to the accounting server on another virtual router.
- Example


```
host1(config)#aaa accounting duplication routerBoston
```
- Use the **no** version to disable the feature.
- See aaa accounting duplication

aaa accounting immediate-update

- Use to send an accounting update to the accounting server immediately on receipt of a response for an Acct-Start message.
- Use the **enable** keyword to enable immediate updates. Use the **disable** keyword to disable immediate updates. Immediate updates are disabled by default.
- Example


```
host1(config)#aaa accounting immediate-update enable
```
- Use the **no** version to restore the default condition, disabling immediate updates.
- See aaa accounting immediate-update

aaa accounting interval

- Use to specify the default interval between updates for user and service interim accounting.



NOTE: This command is deprecated and might be removed completely in a future release. Use the **aaa user accounting interval** command to specify the default interval for user accounting. Use the **aaa service accounting interval** command to specify the default interim accounting interval used for services created by the Service Manager application. See “Configuring Service Manager” on page 641.

- Select an interval in the range 10–1440 minutes. The default is 0, which means that the feature is disabled.

- Example

```
host1(config)#aaa accounting interval 60
```

- Use the **no** version to turn off interim accounting for both users and services.
- See `aaa accounting interval`

aaa accounting statistics

- Use to specify how the AAA server collects statistics on the sessions it manages.
- Use the **volume-time** keyword to collect all statistics for the sessions.
- Use the **time** keyword to collect only the uptime status of the sessions. Collecting only uptime information is more efficient because less data is sent to AAA.
- Example

```
host1(config)#aaa accounting statistics time
```

- Use the **no** version to restore the default, in which all statistics are collected.
- See `aaa accounting statistics`

aaa accounting vr-group

- Use to create an accounting virtual router group and enter VR Group Configuration mode. Virtual routing groups are used for AAA broadcast accounting.
- A virtual router group can have up to four virtual routers. The accounting servers of the virtual routers in the group receive broadcast accounting records that are forwarded to the group.
- The E Series router supports a maximum of 100 virtual router groups.
- When creating a virtual router group, you must add at least one virtual router to the group; otherwise, the group is not created.
- A virtual router group can be used in any virtual router context, not just the context in which it is created.
- Example

```
host1(config)#aaa accounting vr-group westVrGroup38
host1(config-vr-group)#
```

- Use the **no** version to delete the accounting virtual router group.
- See `aaa accounting vr-group`

aaa authentication default

- Use to specify the authentication method used for a particular type of subscriber.
- Specify one of the following types of subscribers:
 - **atm1483**
 - **tunnel**
 - **ppp**
 - **radius-relay**
 - **ipsec**
 - **ip** (IP subscriber management interfaces)



NOTE: IP subscriber management interfaces are static or dynamic interfaces that are created or managed by the JUNOS software's subscriber management feature.

- Specify one of the following types of accounting methods:
 - **radius**—RADIUS authentication for the specified subscribers.
 - **none**—Grants the specified subscribers access without authentication.
 - **radius none**—Multiple types of authentication; used in the order specified. For example, **radius none** specifies that RADIUS authentication is initially used; however, if RADIUS servers are not available, users are granted access without authentication.
- Example


```
host1(config)#aaa authentication ip default radius
```
- Use the **no** version to set the authentication protocol to the default, **radius**.
- See `aaa authentication default`

aaa duplicate-address-check

- Use to enable or disable routing table address lookup or duplicate address check. By default, this command is enabled.
- The router checks the routing table for returned addresses for PPP users. If the address existed, then the user was denied access.
- You can disable this routing table address lookup or duplicate address check with the **aaa duplicate-address-check** command.
- Example

```
host1(config)#aaa duplicate-address-check enable
```

- There is no **no** version.
- See aaa duplicate-address-check

aaa user accounting interval

- Use to specify the default interval between user accounting updates. The router uses the default interval when no value is specified in the RADIUS Acct-Interim-Interval attribute (RADIUS attribute 85).
- This command and the **aaa service accounting interval** command replace the **aaa accounting interval** command, which is deprecated and might be removed in a future release. For information about setting the default interim accounting interval for services, see “Configuring Service Manager” on page 641.
- The default interval is applied on a virtual router basis—this setting is used for all users who attach to the corresponding virtual router.
- Specify the user accounting interval in the range 10–1440 minutes. The default setting is 0, which disables the feature.
- Example

```
host1(config)#aaa user accounting interval 20
```

- Use the **no** version to reset the accounting interval to 0, which turns off interim user accounting when no value is specified in the RADIUS Acct-Interim-Interval attribute.
- See aaa user accounting interval

aaa virtual-router

- Use to add virtual routers to a virtual router group. During AAA broadcast accounting, accounting records are sent to the accounting servers on the virtual routers in the named virtual router group.
- You can add up to four virtual routers to a virtual router group. Use the *indexInteger* parameter to specify the order (1–4) in which the virtual routers receive the accounting information. The *indexInteger* is used with the **no** version to delete a specific virtual router from a group (see Example 2).
- A virtual router name consists of 1–32 alphanumeric characters.
- The virtual router names in the group must be unique. An error message appears if you enter a duplicate name.
- Example 1

```
host1(config)#aaa accounting vr-group westVrGroup38
host1(config-vr-group)#aaa virtual-router 1 vrWestA
host1(config-vr-group)#aaa virtual-router 2 vrWestB
host1(config-vr-group)#aaa virtual-router 4 vrSouth1
```

- Example 2

```
host1(config-vr-group)#no aaa virtual-router 2
```

- Use the **no** version of the command with the *indexInteger* parameter to delete a specific virtual router from a group. If all virtual routers in a group are deleted, the group is also deleted; a group must contain at least one virtual router.
- See `aaa virtual-router`

deadtime

- Use to configure the amount of time (0–1440 minutes) that a server is marked as unavailable if a request times out for the configured retry count.
- If a server fails to answer a request, the router marks it *unavailable*. The router does not send requests to the server until the router receives a response from the server or until the configured time is reached, whichever occurs first.
- If all servers fail to answer a request, then instead of marking all servers as unavailable, all servers are marked as available.
- To turn off the deadtime mechanism, specify a value of 0.
- Example

```
host1(config)#radius authentication server 10.10.0.1
host1(config-radius)#deadtime 10
```

- Use the **no** version to set the time to the default value, 0
- See `deadtime`

key

- Use to configure secrets on the primary, secondary, and tertiary authentication servers.
- The authentication or accounting server secret is a text string used by RADIUS to encrypt the client and server *authenticator* field during exchanges between the router and a RADIUS authentication server. The router encrypts PPP PAP passwords using this text string.
- The default is no server secret.
- Example

```
host1(config)#radius authentication server 10.10.8.1
host1(config-radius)#key gismo
```

- Use the **no** version to remove the secret.



NOTE: Authentication fails if no key is specified for the authentication server.

- See `key`

logout subscribers

- Use to issue an administrative reset to the user's connection to disconnect the user.
- From Privileged Exec mode, you can log out **all** subscribers, or log out subscribers by **username**, **domain**, **virtual-router**, **port**, or **icr-partition**.
- This command applies to PPP users, as well as to non-PPP DHCP users.
- Example

```
host1#logout subscribers username bmurphy
```

- There is no **no** version.
- See logout subscribers

max-sessions

- Use to configure the number of outstanding requests supported by an authentication or accounting server.
- If the request limit is reached, the router sends the request to the next server.



NOTE: For information about the number of concurrent RADIUS requests that the router supports for authentication and accounting servers, see *JUNOS Release Notes, Appendix A, System Maximums*.

- The same IP address can be used for both an authentication and accounting server (but not for multiple servers of the same type). The router uses different UDP ports for authentication servers and accounting servers.
- For each multiple of 255 requests (the RADIUS protocol limit), the router opens a new UDP source (or local) port on the server to send and receive RADIUS requests and responses.
- Example

```
host1(config)#radius authentication server 10.10.0.1
host1(config-radius)#max-sessions 100
```

- Use the **no** version to restore the default value, 255.
- See max-sessions.

no radius client

- Use to remove all RADIUS servers for the virtual router context and to delete the E Series RADIUS client for the virtual router context.
- Example

```
host1:boston(config)#no radius client
```

- There is no affirmative version of this command; there is only a **no** version.
- See no radius client

radius accounting server

- Use to specify the IP address of **authentication** and **accounting** servers.
- Example

```
host1(config)#radius authentication server 10.10.10.1
host1(config-radius)exit
host1(config)#radius authentication server 10.10.10.2
host1(config-radius)exit
host1(config)#radius authentication server 10.10.10.3
host1(config-radius)exit
host1(config)#radius accounting server 10.10.10.20
host1(config-radius)exit
host1(config)#radius accounting server 10.10.10.30
```

- Use the **no** version to delete the instance of the RADIUS server.
- See radius accounting server

radius algorithm

- Use to specify the algorithm—either **direct** or **round-robin**—that the E Series RADIUS client uses to contact the RADIUS server.
- The algorithm that you choose impacts the display status of a RADIUS server. For information on the effect of the algorithm configuration on the display of the **show radius servers** command, see “Monitoring RADIUS Server Information” on page 145
- Example

```
host1(config)#radius algorithm round-robin
```

- Use the **no** version to set the algorithm to the default, **direct**.
- See radius algorithm

radius override nas-info

- Use to configure the RADIUS client to include the NAS-IP-Address [4] and NAS-Identifier [32] RADIUS attributes of the authenticating virtual router in accounting packets when the client performs AAA broadcast accounting. Normally, the accounting packets include the NAS-IP-Address and NAS-Identifier of the virtual router that generated the accounting information.
- This override operation is a per-virtual router specification; use this command in the correct virtual router context.
- This command is ignored if the authenticating virtual router does not have a configured RADIUS server.
- Example

```
host1(config)#virtual-router vrXyz1
host1:vrXyz1(config)#radius override nas-info
host1:vrXyz1(config)#exit
```


- Use the **no** version to restore inclusion of the NAS-IP-Address [4] and NAS-Identifier [32] RADIUS attributes of the virtual router that requested the accounting information.
- See radius override nas-info

radius rollover-on-reject

- Use to specify whether the router rolls over to the next RADIUS server when the router receives an Access-Reject message for the user it is authenticating.
- Example


```
host1(config)#radius rollover-on-reject enable
```
- Use the **no** version to set the default of disable.
- See radius rollover-on-reject

radius tunnel-accounting

- Use to specify that tunnel accounting be enabled or disabled.
- This command turns on accounting messages: Tunnel-Start, Tunnel-Stop, Tunnel-Reject, Tunnel-Link-Start, Tunnel-Link-Stop, and Tunnel-Link-Reject, as described in RFC 2867.
- Your router supports tunnel accounting for the L2TP LAC and LNS.
- Example


```
host1(config)#radius tunnel-accounting enable
```
- Use the **no** version to set the default, disabled.
- See radius tunnel-accounting

radius udp-checksum

- Use to disable UDP checksums on virtual routers you configure for B-RAS.
- Issue this command in the context of the appropriate virtual router.
- Example


```
host1(config)#virtual router boston
host1:boston(config)#radius udp-checksum disable
```
- Use the **no** version to reenable UDP checksums on virtual routers you configure for B-RAS.
- See radius udp-checksum

radius update-source-addr

- Use to specify an alternate source IP address for the router to use rather than the default router ID.
- Example

```
host1(config)#radius update-source-addr 192.168.40.23
```

- Use the **no** version to delete the parameter so that the router uses the router ID.
- See radius update-source-addr

retransmit

- Use to set the maximum number of times (0–100) that the router retransmits a RADIUS packet to an authentication or accounting server.
- If there is no response from the primary RADIUS authentication or accounting server in the specified number of retries, the client sends the request to the secondary server. If there is no response from the secondary server, the router sends the request to the tertiary server, and so on.
- Example

```
host1(config)#radius authentication server 10.10.8.1
host1(config-radius)#retransmit 2
```

- Use the **no** version to set the value to the default, 3 retransmits.
- See retransmit

test aaa

- Use to verify RADIUS authentication and accounting and IP address assignment setup.
- You must specify either a PPP or Multilink PPP (MLPPP) user. PPP indicates a regular PPP user. MLPPP simulates Multilink PPP so that if multiple test commands are issued, all test users are bound by the same address.
- The command uses a username and password and attempts to authenticate a user, get an address assignment, and issue a start accounting request.
- Optionally, you can specify the virtual router context in which to authenticate the user.
- The command pauses for several seconds, then terminates the session by issuing a stop accounting request and an address release.
- Example

```
host1#test aaa ppp jsmith mypassword virtual-router charlie2
```



NOTE: Specifying the password to associate with the username is optional. Specifying a virtual router is optional.

- There is no **no** version.
- See test aaa

timeout

- Use to set the number of seconds (1–1000) before the router retransmits a RADIUS packet to an authentication or accounting server.
- If the interval is reached and there is no response from the primary RADIUS authentication or accounting server, the router attempts another retry. When the retry limit is reached, the client sends the request to the secondary server. When the retry limit for the secondary server is reached, the router attempts to reach the tertiary server, and so on.



NOTE: After the fourth retransmission, the configured timeout value is ignored, and the router uses a backoff algorithm that increases the timeout between each succeeding transmission. The router used the backoff algorithm only for subscriber AAA accounting messages except for Acct-On messages.

The backoff algorithm is:

$$\text{timeout} = 2^{\text{retry-count}} + (\text{random}() \text{ modulo } 2^{\text{retry-count}})$$

g013623

- Example

```
host1(config)#radius authentication server 10.10.0.1
host1(config-radius)#timeout 5
```

- Use the **no** version to restore the default value, 3 seconds.



NOTE: When a RADIUS server times out or when it has no available RADIUS identifier values, the router removes the RADIUS server from the list of available servers for a period of time. The router restores all configured servers to the list if it is about to remove the last server. Restoring the servers avoids having an empty server list.

- See timeout

udp-port

- Use to configure the UDP port on the router where the RADIUS authentication, accounting, preauthentication, and route-download servers reside. The router uses this port to communicate with the RADIUS authentication servers.
- Specify a port number in the range 0–65536. For authentication, preauthentication, or route-download servers, the default UDP port is 1812. For accounting servers, the default is 1813.
- For an accounting server, specify a port number in the range 0–65536. The default is 1813.
- Example

```
host1(config)#radius authentication server 10.10.9.1
host1(config-radius)#udp-port 1645
```

- Use the **no** version to set the port number to the default value.
- See `udp-port`

SNMP Traps and System Log Messages

The router can send Simple Network Management Protocol (SNMP) traps to alert network managers when:

- A RADIUS server fails to respond to a request.
- A RADIUS server that previously failed to respond to a request (and was consequently removed from the list of active servers) returns to active service.

Returning to active service means that the E Series RADIUS client receives a valid response to an outstanding RADIUS request after the server is marked unavailable.

- All RADIUS servers within a VR context fail to respond to a request.

The router also generates system log messages when RADIUS servers fail to respond or when they return to active service; no configuration is required for system log messages.

SNMP Traps

The router generates SNMP traps and system log messages as follows:

- If the first RADIUS server fails to respond to the RADIUS request, the E Series RADIUS client issues a system log message and, if configured, an SNMP trap indicating that the RADIUS server timed out. The E Series RADIUS client will not issue another system log message or SNMP trap regarding this RADIUS server until the deadline expires, if configured, or for 3 minutes if deadline is not configured.
- The E Series RADIUS client then sends the RADIUS request to the second configured RADIUS server. If the second RADIUS server fails to respond to the RADIUS request, the E Series RADIUS client again issues a system log message and, if configured, an SNMP trap indicating that the RADIUS server timed out.
- This process continues until either the E Series RADIUS client receives a valid response from a RADIUS server or the list of configured RADIUS servers is exhausted. If the list of RADIUS servers is exhausted, the E Series RADIUS client issues a system log message and, if configured, an SNMP trap indicating that all RADIUS servers have timed out.

If the E Series RADIUS client receives a RADIUS response from a “dead” RADIUS server during the deadline period, the RADIUS server is restored to active status.

If the router receives a valid RADIUS response to an outstanding RADIUS request, the E Series client issues a system log message and, if configured, an SNMP trap indicating that the RADIUS server is now available.

System Log Messages

You do not need to configure system log messages. The router automatically sends them when individual servers do not respond to RADIUS requests and when all servers on a VR fail to respond to requests. The following are the formats of the warning level system log messages:

```
RADIUS [ authentication | accounting ] server serverAddress unavailable in VR
virtualRouterName [; trying nextServerAddress]
RADIUS no [ authentication | accounting ] servers responding in VR virtualRouterName
RADIUS [ authentication | accounting ] server serverAddress available in VR
virtualRouterName
```

Configuring SNMP Traps

This section describes how to configure the router to send traps to SNMP when RADIUS servers fail to respond to messages, and how to configure SNMP to receive the traps.

To set up the router to send traps:

1. (Optional) Enable SNMP traps when a particular RADIUS authentication server fails to respond to Access-Request messages.

```
host1(config)#radius trap auth-server-not-responding enable
```

2. (Optional) Enable SNMP traps when all of the configured RADIUS authentication servers on a VR fail to respond to Access-Request messages.

```
host1(config)#radius trap no-auth-server-responding enable
```

3. (Optional) Enable SNMP traps when a RADIUS authentication server returns to active service.

```
host1(config)#radius trap auth-server-responding enable
```

4. (Optional) Enable SNMP traps when a RADIUS accounting server fails to respond to a RADIUS accounting request.

```
host1(config)#radius trap acct-server-not-responding enable
```

5. (Optional) Enable SNMP traps when all of the RADIUS accounting servers on a VR fail to respond to a RADIUS accounting request.

```
host1(config)#radius trap no-acct-server-responding enable
```

6. (Optional) Enable SNMP traps when a RADIUS accounting server returns to active service.

```
host1(config)#radius trap acct-server-responding enable
```

To set up SNMP to receive RADIUS traps:

1. Set up the appropriate SNMP community strings.

```

host1(config)#snmp-server community admin view everything rw
host1(config)#snmp-server community private view user rw
host1(config)#snmp-server community public view everything ro

```

2. Specify the interface whose IP address is the source address for SNMP traps.

```

host1(config)#snmp-server trap-source fastEthernet 0/0

```

3. Configure the host that should receive the SNMP traps.

```

host1(config)#snmp-server host 10.10.132.93 version 2c 3 udp-port 162 radius

```

4. Enable the SNMP router agent to receive and forward RADIUS traps.

```

host1(config)#snmp-server enable traps radius

```

5. Enable the SNMP on the router.

```

host1(config)#snmp-server

```



NOTE: For more information about these SNMP commands, see *JUNOS System Basics Configuration Guide*.

radius trap acct-server-not-responding

- Use to enable or disable SNMP traps when a particular RADIUS accounting server fails to respond to a RADIUS accounting request.
- The associated SNMP object is rsRadiusClientTrapOnAcctServerUnavailable.
- Example

```

host1(config)#radius trap acct-server-not-responding enable

```

- Use the **no** version to return to the default setting, disable.
- See radius trap acct-server-not-responding

radius trap acct-server-responding

- Use to enable or disable SNMP traps when a RADIUS accounting server returns to service after being marked as unavailable.
- The associated SNMP object is rsRadiusClientTrapOnAcctServerAvailable.
- This command affects only the current VR context.
- Example

```

host1(config)#radius trap acct-server-responding enable

```

- Use the **no** version to restore the default, disable.
- See radius trap acct-server-responding

radius trap auth-server-not-responding

- Use to enable or disable SNMP traps when a RADIUS authentication server fails to respond to a RADIUS Access-Request message.
- The associated SNMP object is rsRadiusClientTrapOnAuthServerUnavailable.
- Example


```
host1(config)#radius trap auth-server-not-responding enable
```
- Use the **no** version to return to the default setting, disabled.
- See radius trap auth-server-not-responding

radius trap auth-server-responding

- Use to enable RADIUS to send SNMP traps when a RADIUS authentication server returns to service after being marked as unavailable.
- The associated SNMP object is rsRadiusClientTrapOnAuthServerAvailable.
- This command affects only the current VR context.
- Example


```
host1(config)#radius trap auth-server-responding enable
```
- Use the **no** version to restore the default setting, disabled.
- See radius trap auth-server-responding

radius trap no-acct-server-responding

- Use to enable or disable SNMP traps when all of the configured RADIUS accounting servers per VR fail to respond to a RADIUS accounting request.
- The associated SNMP object is rsRadiusClientTrapOnNoAcctServerAvailable.
- Example


```
host1(config)#radius trap no-acct-server-responding enable
```
- Use the **no** version to return to the default setting, disabled.
- See radius trap no-acct-server-responding

radius trap no-auth-server-responding

- Use to enable or disable SNMP traps when all of the configured RADIUS authentication servers per VR fail to respond to a RADIUS Access-Request message.
- The associated SNMP object is rsRadiusClientTrapOnNoAuthServerAvailable.
- Example


```
host1(config)#radius trap no-auth-server-responding enable
```
- Use the **no** version to return to the default setting, disabled.
- See radius trap no-auth-server-responding

Configuring Local Authentication Servers

The AAA local authentication server enables the E Series router to provide local PAP and CHAP user authentication for subscribers. The router also provides limited authorization, using the IP address, IP address pool, and operational virtual router parameters. When a subscriber logs on to the E Series router that is using local authentication, the subscriber is authenticated against user entries in a local user database; the optional parameters are assigned to subscribers after the subscriber is authenticated.

Creating the Local Authentication Environment

To create your local authentication environment:

1. Create local user databases—Create the default database or a named database.
2. Add entries to local user databases—Add user entries to the database. A database can contain information for multiple users.
3. Assign a local user database to the virtual router—Specify the database that the virtual router will use to authenticate subscribers.
4. Enable local authentication on the virtual router—Specify the **local** method as an AAA authentication method used by the virtual router.

Creating Local User Databases

When a subscriber connects to an E Series router that is using local authentication, the local authentication server uses the entries in the local user database selected by the virtual router to authenticate the subscriber.

A local authentication server can have multiple local user databases, and each database can have entries for multiple subscribers. The default local user database, if it exists, is used for local authentication by default. The E Series router supports a maximum of 100 user entries. A maximum of 100 databases can be configured.

To create a local user database, use the **aaa local database** command and the name of the database; use the name **default** to create the default local user database:

```
host1(config)#aaa local database westLocal40
```

Adding User Entries to Local User Databases

The local authentication server uses the information in a local user database to authenticate a subscriber. A local user database can contain information for multiple users.

The E Series router provides two commands for adding entries to local user databases: the **username** command and the **aaa local username** command. You can specify the following parameters:

- Username—Name associated with the subscriber.
- Passwords and secrets—Single words that can be encrypted or unencrypted. Passwords use two-way encryption, and secrets use one-way encryption. Both passwords and secrets can be used with PAP authentication; however, only passwords can be used with CHAP authentication.
- IP address—The IP address to assign to the subscriber (**aaa local username** command only).
- IP address pool—The IP address pool used to assign the subscriber's IP address (**aaa local username** command only).
- Operational virtual router—The virtual router to which the subscriber is assigned. This parameter is applicable only if the subscriber is authenticated by the default virtual router (**aaa local username** command only).

Using the username Command

The **username** command is similar to the command used by some third-party vendors. The command can be used to add entries in the default local user database; it is not supported for named local user databases. The IP address, IP address pool, and operational virtual router parameters are not supported in the **username** command. However, after the user is added to the default local user database, you can use the **aaa local username** command with a database name **default** to enter Local User Configuration mode and add the additional parameters.



NOTE: If the default local user database does not exist, the **username** command creates this database and adds the user entry to the database.

To add a subscriber and password or secret to the default local user database, complete the following step:

```
host1(config)#username rockyB password rockyPassword
```

Using the aaa local username Command

To enter Local User Configuration mode and add user entries to a local user database, use the following commands:

1. Specify the subscriber's username and the database you want to use. Use the database name **default** to specify the default local user database. This command also puts the router into Local User Configuration mode.

```
host1(config)# aaa local username cksmith database westLocal40
host1(config-local-user)#
```



NOTE: You can use the **aaa local username** command to add or modify user entries to a default database that was created by the **username** command.

2. (Optional) Specify the type of encryption algorithm and the password or secret that the subscriber must use to connect to the router. A subscriber can be assigned either a password or a secret, but not both. For example:

```
host1(config-local-user)#password 8 iTtakes2%
```

3. (Optional) Specify the IP address to assign to the subscriber.

```
host1(config-local-user)#ip-address 192.168.101.19
```

4. (Optional) Specify the IP address pool used to assign the subscriber's IP address.

```
host1(config-local-user)#ip-address-pool svPool2
```

5. (Optional) Assign the subscriber to an operational virtual router. This parameter is applicable only if the subscriber is authenticated in the default virtual router.

```
host1(config-local-user)#operational-virtual-router boston2
```

Assigning a Local User Database to a Virtual Router

Use the procedure in this section to assign a local user database to a virtual router. The virtual router uses the database for local authentication when the subscriber connects to the E Series router. Use the following commands in Global Configuration mode:



NOTE: If you do not specify a local user database, the virtual router selects the default database by default. This applies to all virtual routers.

1. Specify the virtual router name.

```
host1(config)# virtual-router cleveland
```

2. Specify the database to use for authentication on this virtual router.

```
host1:cleveland(config)# aaa local select database westLocal40
```

Enabling Local Authentication on the Virtual Router

On the E Series router, RADIUS is the default AAA authentication method for PPP subscribers. Use the commands in this section to specify that the local authentication method is used.

To enable local authentication on the default router, use the following command:

```
host1(config)# aaa authentication ppp default local
```

To enable local authentication on a specific virtual router, first select the virtual router:

```
host1(config)# virtual-router cleveland
host1:cleveland(config)# aaa authentication ppp default local
```

Configuration Commands

Use the following commands to configure the local authentication server.

aaa authentication default

- Use to specify that the local authentication method is used to authenticate PPP subscribers on the default virtual router or on the selected virtual router.



NOTE: You can specify multiple authentication methods; for example, **aaa authentication ppp default local radius**. If, during local authentication, the matching user entry is not found in a populated database or if it is found and rejected, the authentication procedure terminates. However, if the specified local user database is empty or if it does not exist, the authentication process uses the next authentication method specified (RADIUS in this case).

- Example

```
host1(config)#aaa authentication ppp default local radius
```

- Use the **no** version to restore the default authentication method of **radius**.
- See aaa authentication default

aaa local database

- Use to create a local user database.
- Use the database name **default** to specify the default local user database, or enter a name for the specific local user database.
- Example

```
host1(config)#aaa local database westLocal40
```

- Use the **no** version to delete the specified database and all entries in the database.
- See aaa local database

aaa local select database

- Use to assign the local user database that the virtual router uses for local authentication.
- Example

```
host1(config)#virtual-router cleveland
host1:cleveland(config)#aaa local select database westLocal40
```

- Use the **no** version to restore the default setting, which uses the default local user database for local authentication.
- See aaa local select database

aaa local username

- Use to configure a user entry in the specified local user database and to enter Local User Configuration mode.
- The username must be unique within a particular database; however, the same username can be used in different databases.
- Use the database name **default** to configure the username in the default local user database.



NOTE: The router supports usernames up to 64 characters long; however, PAP and CHAP support is limited to 31-character usernames.

- Example

```
host1(config)#aaa local username cksmith database westLocal40
```

- Use the **no** version to delete the user entry from the specified local user database. Use the database name **default** to delete the user entry from the default local user database.
- See aaa local username

ip address

- Use to specify the IP address parameter for a user entry in the local user database. The address is negotiated with the subscriber after the subscriber is authenticated.
- Example

```
host1(config-local-user)#ip-address 192.168.42.6
```

- Use the **no** version to delete the IP address parameter from the user entry in the local user database.
- See ip address

ip address-pool

- Use to specify the IP address pool parameter for a user entry in the local user database. The address pool is used to assign an IP address to the subscriber; the address is negotiated with the subscriber after the subscriber is authenticated.
- Example

```
host1(config-local-user)#ip-address-pool svPool2
```

- Use the **no** version to delete the IP address pool parameter from the user entry in the local user database.
- See ip address-pool

operational-virtual-router

- Use to specify the virtual router parameter for a user entry in the local user database. The subscriber is assigned to the operational virtual router only if the default virtual router performs the authentication.
- If authentication is performed by a non-default virtual router, then the subscriber is assigned to the same virtual router that performs authentication, regardless of this parameter setting.
- Example

```
host1(config-local-user)#operational-virtual-router boston2
```

- Use the **no** version to delete the operational virtual router parameter from the user entry in the local user database.
- See operational-virtual-router

password

- Use to add a password to a user entry in the local user database. The password is used to authenticate a subscriber, and is encrypted by means of a two-way encryption algorithm.



NOTE: CHAP authentication requires that passwords and secrets be stored in clear text or use two-way encryption. Two-way encryption is not supported for the **secret** command. Therefore, use the **password** command if you want to enable encryption for subscribers that use CHAP authentication.

- The new password replaces any current password or secret.
- Specify one of the following encryption algorithms, followed by the password:
 - 0—An unencrypted password; this is the default
 - 8—A two-way encrypted password
- Example

```
host1(config-local-user)#password 0 myPassword
```

- Use the **no** version to delete the password or secret from the user entry in the local user database.
- See password

secret

- Use to add a secret to a user entry in the local user database. The secret is used to authenticate a subscriber, and is encrypted by means of the Message Digest 5 (MD5) encryption algorithm.



NOTE: CHAP authentication requires that passwords and secrets be stored in clear text or use two-way encryption. Two-way encryption is not supported for the **secret** command. Therefore, use the **password** command if you want to enable encryption for subscribers that use CHAP authentication.

- The new secret replaces any current password or secret.
- Specify one of the following encryption algorithms, followed by the secret:
 - 0—An unencrypted secret; this is the default
 - 5—An MD5-encrypted secret

- Example

```
host1(config-local-user)#secret 5 Q3&t9REwk45jxSM#fj$z
```

- Use the **no** version to delete the secret or password from the user entry in the local user database.
- See secret

user-name

- Use to configure a user entry and optional password or secret in the default local user database. This command creates the database if it does not already exist.
- Optionally, specify a password or secret that is assigned to the user in the default local user database, or specify that no password is required for the particular username.
 - Specify one of the following encryption algorithms, followed by the password:
 - 0—An unencrypted password; this is the default
 - 8—A two-way encrypted password
 - Specify one of the following encryption algorithms, followed by the secret:
 - 0—An unencrypted secret; this is the default
 - 5—An MD5-encrypted secret
 - Use the **nopassword** keyword to remove the password or secret



NOTE: CHAP authentication requires that passwords and secrets be stored in clear text or use two-way encryption. Two-way encryption is not supported for the **secret** command. Therefore, use the **password** command if you want to enable encryption for subscribers that use CHAP authentication.

- Example

```
host1(config-local-user)#username cksmith secret 5 Q3&t9REwk45jxSM#fj$z
```

- Use the **no** version to delete the username entry from the default local user database.
- See user-name

Local Authentication Example

This example creates a sample local authentication environment. The steps in this example:

1. Create a named local user database (**westfordLocal40**).
2. Configure the database **westfordLocal40**.
 - Add users **btjones** and **maryrdavis** and their attributes to the database.
3. Create the default local database using the optional **username** command.
 - Add optional subscriber parameters for user **cksmith** to the default database.
4. Assign the default local user database to virtual router **cleveland**; assign database **westfordLocal40** to the default virtual router and to virtual router **chicago**.
5. Enable AAA authentication methods **local** and **none** on all virtual routers.
6. Use the **show** commands to display information for the local authentication environment (various **show** command displays are listed after the example).

Example 1 This example shows the commands you use to create the AAA local authentication environment.

```
host1(config)#aaa local database westfordLocal40
host1(config)#aaa local username btjones database westfordLocal40
host1(config-local-user)#secret 38schillCy
host1(config-local-user)#ip-address-pool addressPoolA
host1(config-local-user)#operational-virtual-router boston2
host1(config-local-user)#exit
host1(config)#aaa local username maryrdavis database westfordLocal40
host1(config-local-user)#secret 0 dav1sSecret99
host1(config-local-user)#ip-address 192.168.20.106
host1(config-local-user)#operational-virtual-router boston1
host1(config-local-user)#exit
host1(config)#username cksmith password 0 yourPassword1
host1(config)#aaa local username cksmith database default
host1(config-local-user)#ip-address-pool addressPoolA
host1(config-local-user)#operational-virtual-router boston2
host1(config-local-user)#exit
host1(config)#virtual-router cleveland
host1(config)#aaa local select database default
host1(config)#virtual-router default
host1(config)#aaa local select database westfordLocal40
host1(config)#virtual-router chicago
host1(config)#aaa local select database westfordLocal40
host1(config)#virtual-router default
```

```
host1(config)#aaa authentication ppp default local none
```

Example 2 This example verifies that local authentication is configured on the router.

```
host1#show aaa authentication ppp default
local none
```

Example 3 This example uses the **show configuration category aaa local-authentication** command with the **databases** keyword to show the local user databases that are configured on the router.

```
host1# show configuration category aaa local-authentication databases
! Configuration script being generated on TUE NOV 09 2004 12:50:18 UTC
! Juniper Edge Routing Switch ERX-1400
! Version: 6.1.0 (November 8, 2004 18:31)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
! The category displayed is: aaa local-authentication databases
!
hostname host1
aaa new-model
aaa local database default
aaa local database westfordLocal40
```

Example 4 This example uses the **local-authentication users** keywords to show the configured users and their parameters. The password for **username cksmith** is displayed unencrypted because the default setting of disabled or no for the **service password-encryption** command is used for the example. Secrets are always displayed encrypted.

```
host1# show configuration category aaa local-authentication users
! Configuration script being generated on THU NOV 11 2004 13:40:41 UTC
! Juniper Edge Routing Switch ERX-1400
! Version: 6.1.0 (November 10, 2004 21:15)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
! The category displayed is: aaa local-authentication users
!
hostname host1
aaa new-model
aaa local username cksmith database default
password yourPassword1
operational-virtual-router boston2
ip-address-pool addressPoolA
!
aaa local username btjones database westfordLocal40
secret 5 }9s7-4N<WK2)2=)^!6~#
operational-virtual-router boston2
ip-address-pool addressPoolA
!
aaa local username maryrdavis database westfordLocal40
secret 5 E@A:nDXJJ<irb\`mF#[j
```



```
operational-virtual-router boston1
ip-address 192.168.20.106
```

Example 5 This example uses the **users include-defaults** keywords to show the configured users and their parameters, including the default parameters **no-ip-address** and **no ip-address-pool**.

```
host1# show configuration category aaa local-authentication users include-defaults
! Configuration script being generated on TUE NOV 09 2004 13:09:03 UTC
! Juniper Edge Routing Switch ERX-1400
! Version: 6.1.0 (November 8, 2004 18:31)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
! The category displayed is: aaa local-authentication users
!
hostname host1
aaa new-model
aaa local username cksmith database default
password yourPassword1
operational-virtual-router boston2
no ip-address
ip-address-pool addressPoolA
!
aaa local username btjones database westfordLocal40
secret 5 }9s7-4N<WK2)2=)^!6~#
operational-virtual-router boston2
no ip-address
ip-address-pool addressPoolA
!
aaa local username maryrdavis database westfordLocal40
secret 5 E@A:nDXJJ<irb\`mF#[j
operational-virtual-router boston1
ip-address 192.168.20.106
no ip-address-pool
```

Example 6 This example uses the **virtual-router** keyword with the **default** specification to show the local user database that is used by the default virtual router.

```
host1# show configuration category aaa local-authentication virtual-router default
! Configuration script being generated on TUE NOV 09 2004 13:09:45 UTC
! Juniper Edge Routing Switch ERX-1400
! Version: 6.1.0 (November 8, 2004 18:31)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
! The category displayed is: aaa local-authentication
!
virtual-router default
aaa local select database westfordLocal40
```

Example 7 This example uses the **virtual-router** keyword with a named virtual router. The **include-defaults** keyword shows the default configuration, including the line showing that there is no named local user database selected.

```
host1# show configuration category aaa local-authentication virtual-router cleveland include-defaults
! Configuration script being generated on TUE NOV 09 2004 13:09:25 UTC
! Juniper Edge Routing Switch ERX-1400
! Version: 6.1.0 (November 8, 2004 18:31)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
! The category displayed is: aaa local-authentication
!
virtual-router cleveland
no aaa local select
```

Configuring Tunnel Subscriber Authentication

When a AAA domain map includes any tunnel configuration, users in this domain are considered to be tunnel subscribers. By default, any such subscriber is granted access without being authenticated by the authentication server. Access is granted even when the user provides an invalid username and password. The tunnel configuration for the subscriber comes from the AAA domain map.

For example, if the authentication protocol for a AAA domain map is RADIUS, AAA grants access to subscribers from this domain immediately without sending access requests to the configured RADIUS server. Because of this behavior, these subscribers cannot get any additional control attributes from the authentication server. This reduces your ability to manage the tunnel subscribers.

In this default situation, if you want the domain subscribers to be managed by the authentication server for any control attribute, then that domain map cannot have any tunnel configuration. Typically, this means you must configure the subscriber individually.

You can use the **tunnel-subscriber authentication** command to get around this limitation. When you enable authentication with this command, access requests for the tunnel subscribers in the domain are sent to the configured authentication server. When the access replies from authentication server are processed, various user attributes from the server can be applied to the subscribers.

When the authentication server returns tunnel attributes, these returned values take precedence over the corresponding local tunnel configuration values in the AAA domain map. If the server does not return any tunnel attributes, then the tunnel subscriber's tunnel settings are configured according to the domain map's tunnel settings.

If the authentication server returns a redirect VSA and the corresponding AAA domain map has local tunnel configurations, the VSA is ignored. Access is denied to the user when the authentication server rejects the access request.

The **tunnel-subscriber authentication** command has no effect on subscribers in a domain with no tunnel configuration. When a AAA domain map has no tunnel configuration, subscribers in the domain are authenticated by the authentication server. If the server grants access, then the subscribers get their tunnel settings only from the authentication server.

By default, tunnel subscribers in the domain are granted access with no external authentication. Use the **enable** keyword to enable authentication. Use the **disable** keyword to restore disable user authentication.

To configure authentication of tunnel subscribers within a AAA domain by an external authentication server.

■ Example

```
host1(config-domain-map)#tunnel-subscriber authentication enable
```

- Related Topics**
- tunnel-subscriber authentication
 - Mapping a User Domain Name to a Virtual Router on page 8

Configuring Name Server Addresses

You can assign IP or IPv6 addresses for DNS and IP addresses for WINS name servers. During setup negotiations between the router and remote PC clients using PPP (Internet Protocol Control Protocol [IPCP] specifically), the remote client may request the DNS and WINS server IP addresses. If the IP addresses passed to the router by the remote PC client are different from the ones configured on your router, the router returns the values that you configured as the correct values to the remote PC client. This behavior is controlled by the **ppp peer dns** and **ppp peer wins** interface commands.

If a PPP client request contains address values of 0.0.0.0 for the name servers, the router considers that the remote PC client is not configured and returns the configured values as the correct values to the remote PC client.

The DNS and WINS addresses are considered as part of the PPP user information. These addresses are provided to the PPP client as part of the IPCP negotiations between PPP peers. For details, see RFC 1877—PPP Internet Protocol Control Protocol Extensions for Name Server Addresses (December 1995).



NOTE: All name server address parameters are defined in the context of a virtual router.

Configuration Tasks

This section contains procedures for configuring the DNS and WINS primary and secondary name server addresses.

DNS Primary and Secondary NMS Configuration

To configure the DNS primary and secondary name server addresses:

1. Specify the IP address of the DNS primary name server.

```
host1(config)#aaa dns primary 10.10.10.5
```

or, for IPv6,

```
host1(config)#aaa ipv6-dns primary 2001:db8::8001
```

2. Specify the IP address of the DNS secondary name server.

```
host1(config)#aaa dns secondary 10.10.10.6
```

or, for IPv6,

```
host1(config)#aaa ipv6-dns secondary 2001:db8::8002
```



NOTE: The router uses name server addresses exclusively for PPP clients and not for domain name server resolution.

aaa dns primary

- Use to specify the IP address of the DNS primary name server.
- Example

```
host1(config)#aaa dns primary 10.10.10.5
```

- Use the **no** version to set the corresponding address to 0.0.0.0.
- See `aaa dns`

aaa dns secondary

- Use to specify the IP address of the DNS secondary name server.
- Example

```
host1(config)#aaa dns secondary 10.10.10.6
```

- Use the **no** version to set the corresponding address to 0.0.0.0.
- See `aaa dns`

aaa ipv6-dns primary

- Use to specify the IPv6 address of the DNS primary name server.
- Example

```
host1(config)#aaa ipv6-dns primary 2001:db8::8001
```

- Use the **no** version to set the corresponding address to 0 (or ::).
- See `aaa ipv6-dns`

aaa ipv6-dns secondary

- Use to specify the IPv6 address of the DNS secondary name server.
- Example

```
host1(config)#aaa ipv6-dns secondary 2001:db8::8002
```

- Use the **no** version to set the corresponding address to 0 (or ::).
- See `aaa ipv6-dns`

WINS Primary and Secondary NMS Configuration

To configure the WINS primary and secondary name server addresses:

1. Specify the IP address of the WINS primary name server.

```
host1(config)#aaa wins primary 192.168.10.05
```

2. Specify the IP address of the WINS secondary name server.

```
host1(config)#aaa wins secondary 192.168.10.40
```



NOTE: The router uses name server addresses exclusively for PPP clients and not for domain name server resolution.

aaa wins primary

- Use to specify the IP address of the WINS primary name server.
- Example

```
host1(config)#aaa wins primary 192.168.10.05
```

- Use the **no** version to set the corresponding address to 0.0.0.0.
- See `aaa wins`

aaa wins secondary

- Use to specify the IP address of the WINS secondary name server.
- Example

```
host1(config)#aaa wins secondary 192.168.10.40
```

- Use the **no** version to set the corresponding address to 0.0.0.0.
- See `aaa wins`


Configuring Local Address Servers

The local address server allocates IP addresses from a pool of addresses stored locally on the router. You can optionally configure shared local address pools to obtain addresses from a DHCP local address pool that is in the same virtual router. Addresses are provided automatically to client sessions requiring an IP address from a virtual router that is configured to use a local address pool.

A local address server is defined in the context of a virtual router. You create a local address server when you configure the first local pool. Local address servers exist as long as the virtual router exists or until you remove them by deleting all configured pools.

Figure 1 on page 54 illustrates the local address pool hierarchy. Multiple local address server instances, one per virtual router, can exist. Each local address server can have one or more local address pools. Each pool can contain a number of IP addresses that are available for allocation and used by clients, such as PPP sessions.

Figure 1: Local Address Pool Hierarchy

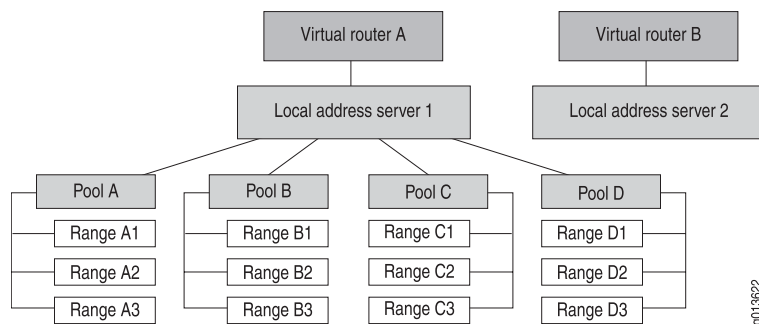

Local Address Pool Ranges

As shown in Figure 1 on page 54, each local address pool is named and contains ranges of sequentially ordered IP addresses. These addresses are allocated when the AAA server makes a request for an IP address.

If a local address pool range is exhausted, the next range of addresses is used. If all pool ranges are exhausted, you can configure a new range to extend or supplement the existing range of addresses, or you can create a new pool. The newly created pool range is then used for future address allocation. If addresses allocated from the first pool range are released, then subsequent requests for addresses are taken from the first pool range.

Addresses are assigned sequentially from a range within a pool. If a range has no addresses available, the next range within that pool is used. If a pool has no addresses available, the next configured pool is used, unless a specific pool is indicated.

Local Address Pool Aliases

An alias is an alternate name for an existing local address pool. It comprises an alias name and a pool name.

When the AAA server requests an IP address from a specific local address pool, the local address server first verifies whether an alias exists for the requested pool. If an alias exists, the IP address is allocated from the pool specified by the alias. If no alias exists, the IP address is allocated from the pool originally specified in the request.

The use of aliases simplifies management of subscribers. For example, you can use an alias to migrate subscribers from one local address pool to another. Instead of having to modify countless subscriber records on the AAA server, you create an alias to make the configuration change.


Shared Local Address Pools

Typically, the local address server allocates IP addresses from a pool of addresses that is stored locally on the router. However, *shared* local address pools enable a local address server to hand out addresses that are allocated from DHCP local server address pools within the same virtual router. The addresses are configured and managed within DHCP. Therefore, thresholds are not configured on the shared pool, but are instead managed by the referenced DHCP local server pool.

A shared local address pool references one DHCP address pool. The shared local address pool can then obtain addresses from the referenced DHCP address pool and from any DHCP address pools that are linked to the referenced DHCP address pool.

Figure 2 on page 55 illustrates a shared local address pool environment that includes four linked DHCP address pools. In the figure, both Shared_LAS_Pool_A and Shared_LAS_Pool_B reference DHCP_Pool_1, and can therefore obtain addresses from all four DHCP address pools. Shared_LAS_Pool_C references DHCP_Pool_3 and can get addresses from DHCP_Pool_3 and DHCP_Pool_4.

Figure 2: Shared Local Address Pools

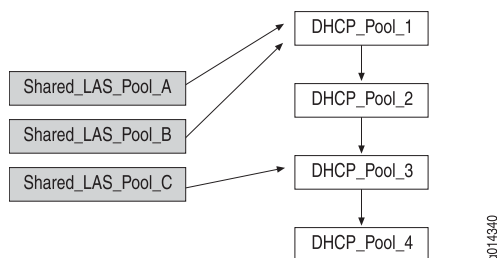

When the local address server requests an address from a shared address pool, the address is returned from the referenced DHCP pool or a subsequent linked pool. If no address is available, DHCP notifies the local address server and the search is ended.

Keep the following guidelines in mind when using shared local address pools:

- The DHCP attributes do not apply to shared local address pools; for example, the lease time for shared local address pools is infinite.
- When you delete the referenced DHCP address pool, DHCP notifies the local address server and logs out all subscribers that are using addresses from the deleted pool.
- When you delete a shared local address pool, the local address server logs out the subscribers that are using addresses from the deleted pool, then notifies DHCP and releases the addresses.
- If the chain of linked DHCP address pools is broken, no action is taken and the existing subscribers retain their address. However, the DHCP local address pools that are no longer part of the chain are now unable to provide any new addresses.

Example This following commands create the shared address pools in Figure 2 on page 55:

```
host1(config)#ip local shared-pool Shared_LAS_Pool_A DHCP_Pool_1
host1(config)#ip local shared-pool Shared_LAS_Pool_B DHCP_Pool_1
host1(config)#ip local shared-pool Shared_LAS_Pool_C DHCP_Pool_3
```

SNMP Thresholds

An address pool has SNMP thresholds associated with it that enable the local address server to signal SNMP traps when certain conditions exist. These thresholds include high utilization threshold and abated utilization threshold. If a pool's outstanding addresses exceed the high utilization threshold and the SNMP trap signaling is enabled, SNMP is notified. Likewise, when a pool's utilization drops below the abated threshold utilization threshold, SNMP is notified.

Configuring a Local Address Server

You can create, modify, and delete address pools. You can display address pool information or status with the **show ip local pool** command. The following are examples of tasks you can configure:

- Specify an addressing scheme.

```
host1(config)#ip address-pool local
```
- Map an address pool name to a range of local addresses. You can also use this command to add additional ranges to a pool.

```
host1(config)#ip local pool addrpool_10 192.168.56.10 192.168.56.15
```
- Map a primary local address pool name to a domain name.

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#address-pool-name poolA
```
- (Optional) Map a backup address pool to a domain name, which is used for address allocation if the primary local address pool is fully allocated.

```
host1(config)#aaa domain-map westford.com
```



```
host1(config-domain-map)#backup-address-pool-name backup_poolB
```

- (Optional) Map the domain name to the IPv6 local address pool, which is used for prefix delegation. If the authentication server returns the prefix pool name in the Framed-Ipv6-Pool attribute of the RADIUS-Accept-Request message, this value overrides the IPv6 local pool configured using the **ipv6-prefix-pool-name** command.

```
host1(config)#aaa domain-map westford.com  
host1(config-domain-map)#ipv6-prefix-pool-name local_addr_pool
```

- Delete an address pool.

```
host1(config)#no ip local pool addrpool_10
```



NOTE: If a pool or range is deleted and addresses are outstanding, the AAA server logs out the clients using the addresses.

- Create a shared local address pool.

```
host1(config)#ip local shared-pool Shared_LAS_Pool_A DHCP_Pool_1
```

- Delete a shared local address pool.

```
host1(config)#no ip local shared-pool Shared_LAS_Pool_C
```

- Set SNMP variables by specifying an existing pool name and values.

```
host1(config)#ip local pool addrpool_10 warning 90 80
```

address-pool-name

- Use to specify the name of the primary local address pool from which the router allocates addresses for the domain that you are configuring.
- If the authentication server does not return an address, the router allocates an address from this pool. The authentication server may override this pool name using RADIUS attributes such as Framed-Pool.
- The primary pool name is a character string up to 16 characters long.
- Example

```
host1(config)#aaa domain-map westford.com  
host1(config-domain-map)#address-pool-name poolA
```

- Use the **no** version to remove the primary local address pool name.
- See address-pool-name

backup-address-pool-name

- Use to specify the name of the backup local address pool from which the router allocates addresses for the domain that you are configuring, if the primary local address pool is fully allocated.
- The backup local address pool takes effect only if you configured a valid primary local address pool.
- If the primary local address pool has been fully allocated, and if you did not configure a backup local address pool, the request is denied. This behavior is the same as what existed in previous JUNOS releases.
- If the authentication server returns the backup local address pool name in the RADIUS-Access-Accept message, this value overrides the backup address pool configured using the **backup-address-pool-name** command.
- You can specify a local address pool to be the backup address pool for some users and the primary pool for other users.
- You can also use the same local address pool as the backup address pool for subscribers using different primary address pools.
- The backup pool name is a character string up to 16 characters long.
- Example

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#backup-address-pool-name backup_poolB
```

- Use the **no** version to remove the backup address pool name.
- See backup-address-pool-name.

ip address-pool

- Use to specify the addressing scheme: dhcp, local, or none.
- The addressing scheme none returns a special indicator to AAA that enables the remote PPP client to assign its own address.
- Example

```
host1(config)#ip address-pool dhcp
```

- Use the **no** version to specify the default, local.
- See ip address-pool

ip local alias

- Use to create an alias for an existing local address pool. The IP address is allocated from the pool specified by the alias rather than from the pool specified in the IP address request.
- An alias name may contain up to 16 characters.
- You can configure a maximum of 32 aliases per virtual router.
- A local address pool can have multiple aliases.
- You can set the name of the alias to match the name of a local address pool; however, the two names used in the alias cannot be the same.

- You can modify an existing alias with a different local address pool name.
- When a local address pool is deleted, all aliases with the matching pool name are also deleted.

- Example

```
host1(config)#ip local alias groupB pool-name addrpool_10
```

- Use the **no** version to remove the alias name.
- See ip local alias

ip local pool

- Use to map an address pool name to a range of local addresses.
- You can create a pool with no address ranges configured for it.
- A name may contain up to 16 characters.
- Example

```
host1(config)#ip local pool addrpool_10 192.168.56.10 192.168.56.15
```

- Use the **no** version to remove the local pool (all ranges), or the specified range.
- See ip local pool

ip local pool snmpTrap

- Use to enable SNMP pool utilization traps.
- Example

```
host 1(config)#ip local pool addr_test snmpTrap
```

- Use the **no** version to disable SNMP pool utilization traps.
- See ip local pool snmpTrap

ip local pool warning

- Use to set SNMP utilization warning threshold values.
- Example

```
host1(config)#ip local pool addr_test warning 90 80
```

- Use the **no** version to reset the attributes to their default values; high threshold 85, abated threshold 75.
- See ip local pool warning

ip local shared-pool

- Use to create a local shared address pool and to specify the DHCP address pool that provides the addresses.
- You can reference a DHCP address pool that has not yet been configured.

- Example

```
host1(config)#ip local shared-pool sharedPool11 dhcpPool6
```

- Use the **no** version to delete a specific local shared address pool.
- See ip local shared-pool

ipv6-prefix-pool-name

- Use to specify the name of the IPv6 local address pool from which the delegating router allocates prefixes to the requesting routers for the domain that you are configuring.
- When a user is authenticated using a RADIUS server, the RADIUS server might return one or more of the following attributes in the Access-Accept message in response to the client authentication request:
 - Ipv6-NdRa-Prefix (VSA 26-129)
 - Framed-IPv6-Prefix (RADIUS IETF attribute 97)
 - Delegated-IPv6-Prefix (RADIUS IETF attribute 123)
 - Framed-IPv6-Pool (RADIUS IETF attribute 100)
- The prefix or pool name that the authentication server returns in any of these attributes of the RADIUS-Access-Accept message takes priority over the local prefix pool name configured for the domain map.
- If the pool name or prefix is not present in the RADIUS-Access-Accept message, the IPv6 local address pool name configured using the **ipv6-prefix-pool-name** command is used to delegate prefixes to requesting DHCPv6 clients.
- The IPv6 local pool name is a character string up to 16 characters long.
- Example

```
host1(config)#aaa domain-map sunnyvale.com  
host1(config-domain-map)#ipv6-prefix-pool-name local_addr_pool
```

- Use the **no** version to remove the IPv6 local address pool name from the domain map.
- See ipv6-prefix-pool-name.

Configuring DHCP Features

DHCP provides a mechanism through which computers using Transmission Control Protocol/IP (TCP/IP) can obtain an IP address and protocol configuration parameters automatically from a DHCP server on the network.

The E Series router provides support for the following DHCP features:

- DHCP proxy client
- DHCP relay agent

- DHCP relay proxy
- DHCP local server
- DHCP external server

For more information about DHCP, see “DHCP Overview Information” on page 461.

Creating an IP Interface


You can configure IP interfaces that support the following configurations:

- A single PPP client per ATM or Frame Relay subinterface
- Multiple PPP clients per ATM subinterface

Single Clients per ATM Subinterface

Figure 3 on page 61 shows a conceptual view of the configuration of a single PPP client per ATM subinterface.

Figure 3: Single PPP Clients per ATM Subinterface

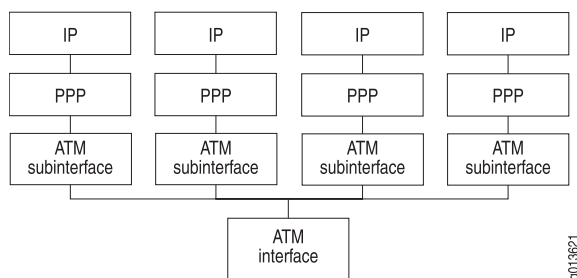

Configure an ATM interface by entering Configuration mode and performing the following tasks. For more information about configuring ATM interfaces, see *JUNOS Link Layer Configuration Guide*.

1. Configure a physical interface.

```
host1(config)#interface atm 0/1
```

2. Configure the subinterface.

```
host1(config-if)#interface atm 0/1.20
```

3. Configure a permanent virtual circuit (PVC) by specifying the vcd (virtual circuit descriptor), the vci (virtual channel identifier), the vpi (virtual path identifier), and the encapsulation type.

```
host1(config-if)#atm pvc 10 22 100 aal5snap
```

4. Configure PPP encapsulation.

```
host1(config-if)#encapsulation ppp
```

5. Configure PAP or CHAP authentication.

```
host1((config-if))#ppp authentication chap
```


6. Assign a profile to the PPP interface.

```
host1(config-subif)#profile foo
```

Multiple Clients per ATM Subinterface

Figure 4 on page 62 shows how PPPoE supports multiplexing of multiple PPP sessions per ATM subinterface.

Figure 4: Multiple PPP Clients per ATM Subinterface

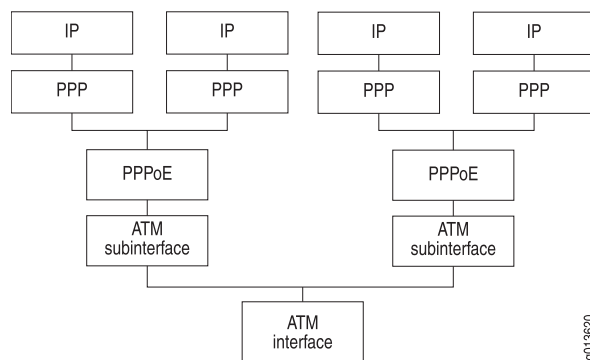

Configure an ATM interface by entering Configuration mode and performing the following tasks. For more information about configuring ATM interfaces, see *JUNOS Link Layer Configuration Guide*.

1. Configure a physical interface.

```
host1(config)#interface atm 0/1
```

2. Configure the subinterface.

```
host1(config-if)#interface atm 0/1.20
```

3. Configure a PVC by specifying the vcd (virtual circuit descriptor), the vci (virtual channel identifier), the vpi (virtual path identifier), and the encapsulation type.

```
host1(config-if)#atm pvc 10 22 100 aal5snap
```

4. Configure PPPoE encapsulation.

```
host1(config-if)#encapsulation pppoe
```

5. Configure the subinterface for one PPP client.

```
host1(config-if)#interface atm 0/1.20.1
```

6. Configure PPP encapsulation.

```
host1(config-if)#encapsulation ppp
```

7. Configure PAP or CHAP authentication.

```
host1((config-if))#ppp authentication chap
```

8. Apply the profile to the PPP interface.

```
host1(config-subif)#profile foo2
```

9. Configure the subinterface for a second PPP client.

```
host1(config-if)#interface atm 0/1.20.2
```

10. Configure PPP encapsulation.

```
host1(config-if)#encapsulation ppp
```

11. Configure PAP or CHAP authentication.

```
host1((config-if))#ppp authentication chap
```

12. Apply the profile to the PPP interface.

```
host1(config-subif)#profile foo2
```

Configuring AAA Profiles

An AAA profile is a set of characteristics that act as a pattern that you can assign to domain names. Once you create an AAA profile, you can map it between a PPP client's domain name and certain AAA services on given interfaces. Using AAA profiles, you can:

- Allow or deny a domain name access to AAA authentication
- Map the original domain name to the mapped domain name for domain name lookup
- Use domain name aliases
- Force tunneling whenever a domain map contains tunnel attributes
- Manually set the NAS-Port-Type attribute (RADIUS attribute 61) for ATM and Ethernet interfaces
- Set the Service-Description attribute (RADIUS attribute 26-53)

An AAA profile contains a set of commands to control access for the incoming PPP subscriber. If no AAA profile is used, AAA continues as normal. The user's name and domain name are not changed as a result of an AAA profile mapping.



NOTE: There are two domain names with special meaning. The domain name **none** indicates that there is no domain name present in the subscriber's name. For more information about **none**, see the section "Mapping User Requests Without a Valid Domain Name" on page 8. The domain name **default** indicates that no other match occurs. For more information about **default**, see the section "Mapping User Requests Without a Configured Domain Name" on page 9.

Allowing or Denying Domain Names

You can control a PPP subscriber's access to certain domains on given interfaces. As the administrator, you can use the **deny** command to prevent PPP subscribers from using unauthorized domain names. Using the **allow** command, you can allow PPP subscribers to use authorized domain names.

Configuration Example

In this example, the administrator wants to restrict access of a PPP interface to the specific domain **abc.com**.

1. Create an AAA profile.

```
host1(config)#aaa profile restrictToABC
```

2. Specify the domain name you want to allow.

```
host1(config-aaa-profile)#allow abc.com
```

3. Specify the domain name you want to restrict.

```
host1(config-aaa-profile)#deny default
```

4. Associate the AAA profile to the designated PPP interface.

```
host1(config-if)#ppp aaa-profile restrictToABC
```

When configured as such, the following is a likely scenario:

- PPP passes the AAA profile **restrictToABC** to AAA in the authentication request.
- AAA performs the following:
 - Receives the authentication request from PPP with the subscriber's name **will@xyz.com**.
 - Parses the domain name **xyz.com** and examines the specified AAA profile **restrictToABC**.
 - Determines that the AAA profile **restrictToABC** is valid.
 - Searches **restrictToABC** for a match on the PPP subscriber's domain name and finds no match.

- Searches **restrictToABC** for a match on the domain name **default**.
- Finds a match and denies the user access.

Using Domain Name Aliases

You can translate an original domain name to a new domain name via the **translate** command. The command allows you to create domain name aliases; that is, the grouping of multiple domain names into a single domain name. You can partition PPP subscribers with the same domain into separate domains, based on the PPP interface.



NOTE: Partitioning subscribers does not cause modification of a user's name or domain.

When you use aliases, you greatly simplify the configuration process. When there are a large number of domains and you use aliases, it reduces the configuration volume, thus requiring less NVS and memory usage.

Example 1 In this example, an administrator wants to associate all subscribers of a PPP interface with a specific domain name.

1. Create an AAA profile.

```
host1(config)#aaa profile forwardToXyz
```

2. Map the original domain name to the mapped domain name for domain map lookup.

```
host1(config-aaa-profile)#translate default xyz.com
```

3. Associate the AAA profile with the designated PPP interface.

```
host1(config-if)#ppp aaa-profile forwardToXyz
```

When configured as such, the following scenario is typical:

- PPP passes the AAA profile **forwardToXyz** to AAA in the authentication request.
- AAA performs the following tasks:
 - Receives the authentication request from PPP with the subscriber's name **morris@abc.com**.
 - Parses the domain name **abc.com** and examines the specified AAA profile **forwardToXyz**.
 - Determines that the AAA profile **forwardToXyz** is valid.
 - Searches **forwardToXyz** for a match on the PPP subscriber's domain name and finds no match.

- Searches **forwardToXyz** for a match on the domain name **default**.
- Finds a match and continues as normal using the domain name **xyz.com**.



NOTE: If there is no matching entry in the AAA profile for the user's domain name or for the domain name **default**, then AAA continues processing as if there were no AAA profile.

If the user's name does not contain a domain name, then AAA attempts to match to the domain name **none** in the AAA profile. If there is no entry for **none**, then AAA attempts to match for the domain name **default** in the AAA profile. If there is no entry for either **none** or **default**, then AAA continues processing as if there were no AAA profile.

Example 2 In this example, an administrator wants to use aliases; that is, to associate multiple domain names with a specific domain name and not allow other domain names.

1. Create an AAA profile.

```
host1(config)#aaa profile toAbc
```

2. Map the original domain name to the mapped domain name for domain map lookup.

```
host1(config-aaa-profile)#translate abc1.com abc.com
host1(config-aaa-profile)#translate abc2.com abc.com
host1(config-aaa-profile)#translate abc3.com abc.com
```

3. Specify the domain name you want to restrict.

```
host1(config-aaa-profile)#deny default
```

4. Associate the AAA profile with the designated PPP interface.

```
host1(config-if)#ppp aaa-profile toAbc
```

When configured as such, the following scenario is typical:

- PPP passes the AAA profile toAbc to AAA in the authentication request.
- AAA:
 - Receives the authentication request from PPP with the subscriber's name **jane@abc1.com**
 - Parses the domain name **abc1.com** and examines the specified AAA profile toAbc
 - Determines that the AAA profile **toAbc** is valid

- Searches **toAbc** for a match on the PPP subscriber's domain name and finds a match
- Continues as normal using the domain name **abc.com**



NOTE: If there is no matching entry in the AAA profile for the user's domain name or for the domain name **default**, then AAA continues processing as if there were no AAA profile.

If the user's name does not contain a domain name, then AAA attempts to match to the domain name **none** in the AAA profile. If there is no entry for **none**, then AAA attempts to match for the domain name **default** in the AAA profile. If there is no entry for either **none** or **default**, then AAA continues processing as if there were no AAA profile.

aaa profile

- Use to configure a new AAA profile.
- Example


```
host1(config)#aaa profile boston123
```
- Use the **no** version to delete the AAA profile.
- See aaa profile

allow

- Use to specify the domain name(s) that you want to be allowed access to AAA authentication.
- This command does not indicate that the user will be granted access; it is simply the first access point to AAA authentication.
- Using this command does not implicitly deny all other domains.
- Example


```
host1(config-aaa-profile)#allow xyz.com
```
- Use the **no** version to negate the command.
- See allow

deny

- Use to specify the domain name(s) that you want to be denied access to AAA authentication.
- Example


```
host1(config-aaa-profile)#deny xyz.com
```

- Use the **no** version to negate the command.
- See deny

ppp aaa-profile

- Use to assign an AAA profile to static and dynamic, multilink and nonmultilink PPP interfaces.
- The PPP application associates the AAA profile with the interface and passes the AAA profile to AAA for authentication.
- If an AAA profile is deleted after it has been assigned to an interface, AAA will deny the authentication and log a message.
- When you remove an AAA profile, it does not remove any corresponding bindings between PPP interfaces or interface profiles and the AAA profile. If an AAA profile with the same name is added, the interface cannot authenticate until the AAA profile is reassigned.



NOTE: Although an AAA profile and an interface profile have similar functionality, they are not related and should be treated differently.

- Example

```
host1(config-if)#ppp aaa-profile westford24
```

- Use the **no** version to remove the AAA profile assignment.
- See ppp aaa-profile

translate

- Use to map the original domain name to the mapped domain name for domain map lookup.
- This command allows you to group multiple domain names into a single domain name (that is, to use aliases).
- You can use this command to partition PPP subscribers with the same domain into separate domains, based on the PPP interface. By doing this, you do not cause modification of the user's name or domain.

- Example

```
host1(config-aaa-profile)#translate abc.com xyz.com
```

- Use the **no** version to negate the command.
- See translate

Manually Setting NAS-Port-Type Attribute

You can manually configure the NAS-Port-Type RADIUS attribute (attribute 61) in AAA profiles for ATM and Ethernet interfaces. Doing so allows AAA profiles to determine the NAS port type for a given connection.

To set the NAS-Port-Type attribute for ATM or Ethernet interfaces:

1. Create an AAA profile.

```
host1(config)#aaa profile nasPortType
```

2. (Optional) Set the NAS-Port-Type attribute for ATM interfaces.

```
host1(config-aaa-profile)#nas-port-type atm wireless-80211
```

3. (Optional) Set the NAS-Port-Type attribute for Ethernet interfaces.

```
host1(config-aaa-profile)#nas-port-type ethernet wireless-cable
```

aaa profile

- Use to create and configure a AAA profile.
- Example

```
host1(config)#aaa profile nasPortType
```

- Use the **no** version to delete the AAA profile.
- See aaa profile

nas-port-type atm

- Use to specify the RADIUS NAS-Port-Type attribute (61) for ATM interfaces. You can set the attribute to:
 - *value*—Number in the range 0–65535
 - **adsl-cap**—Asymmetric DSL, carrierless amplitude phase (CAP) modulation
 - **adsl-dmt**—Asymmetric DSL, discrete multitone (DMT)
 - **cable**
 - **iapp**—Inter Access Point Protocol (IAPP)
 - **idsl**—ISDN DSL
 - **sdsl**—Symmetric DSL
 - **wireless-1x-ev**—Wireless 1xEV
 - **wireless-80211**—Wireless 802.11
 - **wireless-cdma**—Wireless code division multiple access (CDMA)

- **wireless-other**
- **wireless-umts**—Wireless universal mobile telecommunications system (UMTS)
- **xdsl**—DSL of unknown type
- Example


```
host1(config-aaa-profile)#nas-port-type atm wireless-80211
```
- Use the **no** version to remove the NAS-Port-Type setting for ATM interfaces.
- See nas-port-type atm

nas-port-type ethernet

- Use to specify the RADIUS NAS-Port-Type attribute (61) for Ethernet interfaces. You can set the attribute to:
 - *value*—Number in the range 0–65535
 - **cable**
 - **iapp**—IAPP
 - **wireless-1x-ev**—Wireless 1xEV
 - **wireless-80211**—Wireless 802.11
 - **wireless-cdma**—Wireless CDMA
 - **wireless-other**
 - **wireless-umts**—Wireless UMTS
- Example


```
host1(config-aaa-profile)#nas-port-type ethernet wireless-80211
```
- Use the **no** version to remove the NAS-Port-Type setting for Ethernet interfaces.
- See nas-port-type ethernet

Service-Description Attribute

You can specify a service description that will be associated with an AAA profile. The description can then be exported through RADIUS by the Service-Description attribute (RADIUS attribute 26-53) in AAA profiles.

To set the Service-Description attribute:

1. Create the AAA profile.

```
host1(config)#aaa profile xyzCorpPro2
```

2. Set the Service-Description attribute.

```
host1(config-aaa-profile)#service-description bos-xyzcorp
```

aaa profile

- Use to create and configure a AAA profile.
- Example

```
host1(config)#aaa profile xyzCorpPro2
```

- Use the **no** version to delete the AAA profile.
- See aaa profile

service-description

- Use to specify a description that is associated with the AAA profile. The description can be transmitted to RADIUS in the Service-Description attribute (26-53)
- The service description can be a maximum of 64 characters.
- Example

```
host1(config-aaa-profile)#service-description service11
```

- Use the **no** version to remove the service description for the profile.
- See service-description

Using RADIUS Route-Download Server to Distribute Routes

The JUNOSe RADIUS route-download server provides periodic automatic distribution of IPv4 static access routes, which enables preconfiguration and preadvertising of access routes before they are assigned to clients. Using the route-download server helps eliminate routing protocol storms and other delays in client service activation that can be caused by protocol convergence or a large number of simultaneous customer activations.

The RADIUS route-download server periodically sends a RADIUS Access-Request message to the RADIUS server to request that routes be downloaded. The RADIUS server then responds with an Access-Accept message and downloads the configured routes. When the download operation is complete, the route-download server installs the access routes in the routing table.

JUNOSe software supports the creation of one RADIUS route-download server per chassis.

Format of Downloaded Routes

The RADIUS server sends the downloaded routes to the RADIUS route-download server in the following format:

```
[ { vir | virtual-router } virtualRouterName ] [ vrf vrfName ] prefix-mask [ { null0 | null 0 } [ cost ] ] [ tag tagValue ]
```

The route-download server accepts downloaded routes in either the Framed-Route attribute (RADIUS attribute 22) or the Cisco-AVPair attribute (Cisco VSA 26-1).

Downloaded Route Format Examples

Framed-Route (RADIUS attribute 22)

```
NAS-1 Password = "14raddlsvr" User-Service-Type = Outbound-User
Framed-Route = "192.168.3.0 255.255.255.0 null0"
Framed-Route = "vrf vrfboston 192.168.1.0/24 null 0 0 tag 6"
Framed-Route = "vir host1 vrf vrfsunny 192.168.0.0/16 null0 0 tag 8"
```

Cisco-AVPair (Cisco VSA 26-1)

```
NAS-1 Password = "14raddlsvr" User-Service-Type = Outbound-User
cisco-avpair = "ip:route = 192.168.3.0 255.255.255.0 null0"
cisco-avpair = "ip:route = vrf vrfboston 192.168.1.0/24 null 0 0 tag 6"
cisco-avpair = "ip:route = vir host1 vrf vrfsunny 192.168.0.0/16 null0 0 tag 8"
```



NOTE: The prefix-mask entry in downloaded routes can be in the form of prefix length, prefix mask, or prefix. If prefix is used, the mask is determined by the IP address class of the prefix.

How the Route-Download Server Downloads Routes

The route-download server starts the initial route-download operation (for example, after a system reboot or the first time the route-download server is enabled) as soon as IP is established in the virtual router in which the download is performed. After the initial route-download process is established, the router repeats the route download operation based on either the default download schedule or the schedule you specify. You can also initiate an immediate route download at any time.

The RADIUS route-download server downloads routes in two stages—first, all routes are downloaded from the RADIUS server to the router’s download database and examined for errors. Next, the router updates the routing table with the new routes, using the following guidelines:

- Adds all downloaded routes that are not already installed in the routing table
- Does not add downloaded routes that are already installed in the routing table
- Deletes routes from the routing table that do not appear in the newly downloaded group

Configuring the Route-Download Server to Download Routes

When you configure the E Series router as a route-download server, you specify the RADIUS server that you want to download the routes to your router. You can also modify the route-download server’s default configuration parameters, such as when

to start the download process each day, how often to download routes, and how long to wait after a download error before retrying the process.

To configure a RADIUS route-download server:

1. Specify the IP address and the key of the RADIUS server that you want to download routes.

```
host1(config)#radius route-download server 192.168.1.17
host1(config-radius)#key 35radsrv92
```

2. (Optional) Specify the UDP port used for RADIUS route-download server requests.

```
host1(config-radius)#udp-port 1812
host1(config-radius)#exit
host1(config)#
```

3. Enable the route-download feature and optionally modify default parameters as needed.

```
host1(config)#aaa route-download 1200 retry-interval 25 password dl1456atl
synchronization 03:45:00
```

4. (Optional) Verify your route-download configuration:

```
host1(config)#exit
host1#show aaa route-download

AAA Route Downloader:      configured in virtual router default
Download Interval:         1200 minutes
Retry Interval:            25 minutes
Default Cost:              2
Default Tag:               0
Base User Name:             <HOSTNAME>
Password:                  dl1456atl
Synchronization:           03:45:00

Status:                    downloading
Last Download Attempt:     TUE FEB 9 22:07:30 2007
Last Download Success:     <NEVER>
Last Regular Download:     not complete
Next Download Scheduled:   <DOWNLOAD ACTIVE>
Next Regular Download:     WED FEB 9 22:27:00 2007
```

aaa route-download

- Use to enable the RADIUS route-download server on the router and to configure parameters for the server. You can configure the following parameters:

- **download interval**—The amount of time the route-download server waits between route download operations. The newly created server downloads routes as soon as the IP protocol is active on the virtual router that performs the route download operation, and then repeats the download operation every 720 minutes by default. You can set a download interval in the range 1–1440 minutes.
- **retry-interval**—The amount of time the server waits after a download failure before attempting another route download. You can set the retry interval in the range 1–60 minutes. The default interval is 10 minutes.



NOTE: If the download interval is less than the retry interval, the server ignores the retry interval setting.

- **cost**—The cost of a downloaded route. You can specify a cost in the range 1–254. The default cost is 2.
- **tag**—The tag assigned to a downloaded route. You can specify a tag in the range 1–4294967295. The default tag is 0.
- **base-user-name**—The virtual router that is used for route-download requests. The default name is the router hostname.
- **password**—The password used in RADIUS Access-Request messages for route-download requests. You can specify from 1 through 32 alphanumeric characters. The default password is juniper.
- **synchronization**—The time that the server starts the route download operation each day. You specify the time in 24-hour format, for example 03:45:00.

■ Example

```
host1(config)#aaa route-download 1200 retry-interval 25 password dl1456atl
synchronization 03:45:00
```

- Use the **no** version to disable the route-download server.
- See `aaa route-download`

aaa route-download now

- Use to specify that the RADIUS route-download server immediately restart the route download operation.
- If a download is currently in progress when you issue this command without the **force** keyword, the in-progress download continues until complete. No additional download is started.
- Use the **force** keyword to start an immediate download; a currently running download is interrupted. The download is not retried if it fails.
- Use the **adjust-scheduler** keyword to restart the configured download interval from the time of this download. However, if the download fails, the download interval is not changed and the download is not retried.

- Example

```
host1#aaa route-download now force adjust-scheduler
```

- There is no **no** version.
- See `aaa route-download now`

aaa route-download suspend

- Use to temporarily suspend the RADIUS route-download server operation.
- Example

```
host1#aaa route-download suspend
```

- Use the **no** version to restore the route download operation.
- See `aaa route-download suspend`

clear ip routes download

- Use to synchronize downloaded access routes and the routes that are installed in the routing tables of virtual routers.
- Use the following options to synchronize downloaded routes for a specific virtual router:
 - Specify a particular VRF whose downloaded routes you want synchronized. If you do not specify an optional VRF, the current virtual router is used.
 - Specify the IP address and IP mask that identifies the subset of downloaded routes that you want cleared in the routing table of the current virtual router or in the specified VRF.
 - Use the wildcard character (*) to clear all downloaded routes in the routing table of the current virtual router or in the specified VRF.
- Use the following keywords to perform global clearing operations:
 - **all**—Clears all downloaded routes from all virtual routers and VRFs.
 - **reload**—Initiates a download of routes and then clear the routes from the routing table of all virtual routers and VRFs.



NOTE: Clear commands fail if the route-download server is in the process of downloading routes from the RADIUS server.

- Example 1—Clear all downloaded routes from the current virtual router

```
host1#clear ip routes download *
```

- Example 2—Clear a subset of routes from a specific VRF

```
host1#clear ip routes download vrf NY12 192.168.50.102 255.255.0.0
```

- Example 3—Clear all downloaded routes from all virtual routers and VRFs

```
host1#clear ip routes download all
```

- There is no **no** version.
- See clear ip routes download

radius route-download server

- Use to configure a RADIUS route-download server and enter RADIUS Configuration mode. Specify the IP address of the RADIUS server that you want to download access routes.



NOTE: When the RADIUS route-download server is enabled, the router ignores the **radius rollover-on-reject enable** command—the **radius rollover-on-reject enable** command has no effect for a RADIUS route-download server.

- You can configure a single instance of the route downloader on the router.
- Example

```
host1(config)#radius route-download server 10.10.5.10
host1(config-radius)#
```

- Use the **no** version to delete the instance of the RADIUS route-download server.
- See radius route-download server

Using the AAA Logical Line Identifier to Track Subscribers

You can configure the router to support the AAA logical line identification feature. This feature enables service providers to track subscribers on the basis of a virtual port known as the logical line ID (LLID).

The LLID is an alphanumeric string that logically identifies a subscriber line. The service provider maps each subscriber to an LLID based on the user name and circuit ID from which the customer's calls originate. When a subscriber moves to a new physical line, the service provider's customer profile database is updated to map to the same LLID.

Because a subscriber's LLID remains the same regardless of the subscriber's physical location, using the LLID gives service providers a more secure mechanism for tracking subscribers and maintaining the customer database.

How the Router Obtains and Uses the LLID

To obtain an LLID for a subscriber, the router must issue two RADIUS access requests: a preauthentication request to obtain the LLID, followed by an authentication request encoded with the LLID returned in response to the preauthentication request.

To configure this feature, you:

1. Create an AAA profile that supports preauthentication (by using the **pre-authenticate** command in AAA Profile Configuration mode).
2. Specify the IP address of a RADIUS preauthentication server (by using the **radius pre-authentication server** command in Global Configuration mode) and of an authentication server (by using the **radius authentication server** command in Global Configuration mode).

The following steps describe how the router uses RADIUS to obtain and use the LLID. It is assumed that you have already configured an AAA profile for preauthentication and have defined both a RADIUS preauthentication server and a RADIUS authentication server. Typically, the preauthentication server and the authentication server reside in the same virtual router context in which the PPP subscriber is authenticated.

The router obtains and uses the LLID as follows:

1. A PPP subscriber requests authentication through RADIUS.
2. The router sends an Access-Request message to the RADIUS preauthentication server to obtain an LLID for the subscriber.
This step is referred to as the preauthentication request because it occurs before user authentication and authorization.
3. The preauthentication server returns the LLID to the router in the Calling-Station-Id (RADIUS attribute 31) of an Access-Accept message.
The router ignores any RADIUS attributes other than the Calling-Station-Id that are returned in the preauthentication Access-Accept message.
4. The router encodes the LLID in the RADIUS Calling-Station-Id and sends an Access-Request message to the RADIUS authentication server.
This step is referred to as the authentication request.
5. The RADIUS authentication server returns an Access-Accept message to the router that includes the tunnel attributes for the subscriber session.
6. For tunneled PPP subscribers, the router, acting as an L2TP access concentrator (LAC), encodes the LLID into L2TP Calling Number AVP 22 and sends this to the L2TP network server (LNS) in an incoming-call request (ICRQ) packet.

After a successful preauthentication request, the router always encodes the LLID in Calling Number AVP 22. The use of **aaa** commands such as **aaa tunnel calling-number-format** to control or change the inclusion of the LLID in Calling Number AVP 22 has no effect.

RADIUS Attributes in Preauthentication Request

Table 5 on page 78 describes the RADIUS IETF attributes that are always included in a preauthentication request to obtain the LLID. The attributes are listed in ascending order by standard number.

Table 5: RADIUS IETF Attributes in Preauthentication Request

Attribute Number	Attribute Name	Description
[1]	User-Name	Name of the user associated with the LLID, in the format: NAS-Port: < NAS-IP-Address > : < Nas-Port-Id > For example, nas-port:172.28.30.117:atm 4/1.104:2.104
[2]	User-Password	Password of the user to be authenticated; always set to “juniper”
[4]	NAS-IP-Address	IP address of the network access server (NAS) that is requesting authentication of the user; for example, 172.28.30.117
[5]	NAS-Port	Physical port number of the NAS that is authenticating the user; this is always interpreted as a bit field
[6]	Service-Type	Type of service the user has requested or the type of service to be provided; for example, framed
[61]	NAS-Port-Type	Type of physical port the NAS is using to authenticate the user
[77]	Connect-Info	Actual user name; for example, jdoe@xyzcorp.east.com
[87]	NAS-Port-Id	Text string that identifies the physical interface of the NAS that is authenticating the user; for example, atm 4/1.104:2.104

The use of **radius** commands such as **radius calling-station-format** or **radius override calling-station-id** to control or change the inclusion of these attributes in the preauthentication request has no effect.

For more information about these attributes, see “RADIUS IETF Attributes” on page 259.

Considerations for Using the LLID

The following considerations apply when you configure the router for subscriber preauthentication:

- Only PPP subscribers authenticating through RADIUS can use the AAA LLID feature on the router. PPP subscribers tunneled through domain maps cannot take advantage of this feature.
- The Calling-Station-Id [31] attribute is typically sent in RADIUS Access-Request messages, not in Access-Accept messages as is the case for this feature. As a result, your RADIUS server might require special configuration procedures to enable the Calling-Station-Id attribute to be returned in Access-Accept messages. See the documentation that came with your RADIUS server for information.

- The router ignores any RADIUS attributes other than the Calling-Station-Id that are returned in the preauthentication Access-Accept message.
- If a preauthentication request fails due to misconfiguration of the preauthentication server, timeout of the preauthentication server, or rejection of the preauthentication request by the preauthentication server, the authentication process continues normally and the preauthentication request is ignored.
- The router preserves the LLID value for established subscribers after a stateful SRP switchover.
- The **radius rollover-on-reject enable** command has no effect for a RADIUS preauthentication server. That is, you cannot use the **radius rollover-on-reject enable** command to configure the router to roll over to the next RADIUS preauthentication server when the router receives an Access-Reject message for the user it is authenticating. For information, see “radius rollover-on-reject” on page 33.

Configuring the Router to Obtain the LLID for a Subscriber

To configure the router to obtain the LLID for a subscriber:

1. Create an AAA profile that supports subscriber preauthentication.

```
host1(config)#aaa profile preAuthLlid
host1(config-aaa-profile)#pre-authenticate
host1(config-aaa-profile)#exit
```

2. Define a RADIUS preauthentication server.

```
host1(config)#radius pre-authentication server 10.10.10.1
host1(config-radius)#key abc123
host1(config-radius)#exit
```

3. Associate the AAA profile with the designated PPP interface.

```
host1(config)#interface atm 4/3.101
host1(config-subif)#ppp aaa-profile preAuthLlid
```

4. (Optional) Verify that preauthentication support is configured for the AAA profile.

```
host1(config-subif)#run show aaa profile name PreAuthLlid
preAuthLlid:
  atm nas-port-type: ADLSL-CAP
  ethernet nas-port-type: Cable
  profile-service-description: xyzService
  pre-authenticate
  allow xyz.com
  deny default
  translate xyz1.com abc.com
```

For information, see “Setting Baselines for Remote Access” on page 114.

5. (Optional) Verify configuration of the RADIUS preauthentication server.

```
host1(config-subif)#run show radius pre-authentication servers
```

RADIUS Pre-Authentication Configuration						
IP Address	Udp Port	Retry Count	Timeout	Maximum Sessions	Dead Time	Secret
10.10.10.1	1812	3	3	255	0	radius

You can also display configuration information for preauthentication servers by using the **show radius servers** command. For information, see “Setting Baselines for Remote Access” on page 114.

6. (Optional) Display statistics for the RADIUS preauthentication server.

To display preauthentication statistics, use the **show radius pre-authentication statistics** command. For information, see “Setting Baselines for Remote Access” on page 114.

To display a count of preauthentication requests and responses, use the **show aaa statistics** command. For information, see “Setting Baselines for Remote Access” on page 114.

aaa profile

- Use to configure a new AAA profile.
- Example

```
host1(config)#aaa profile boston123
```

- Use the **no** version to delete the AAA profile.
- See aaa profile

key

- Use from RADIUS Configuration mode to configure the secret for a RADIUS preauthentication server.
- The server secret is a text string used by RADIUS to encrypt the client and server authenticator field during exchanges between the router and a RADIUS preauthentication server. The router encrypts PPP PAP passwords using this text string.
- The default behavior is no server secret.
- Example

```
host1(config-radius)#key gismo
```

- Use the **no** version to remove the secret.



NOTE: The preauthentication request fails if you do not specify a key for the preauthentication server.

- See key

ppp aaa-profile

- Use to assign an AAA profile to static and dynamic, multilink and nonmultilink PPP interfaces.
- For more information about how to use this command, see “ppp aaa-profile” on page 68.
- Example

```
host1(config-if)#ppp aaa-profile preAuth
```

- Use the **no** version to remove the AAA profile assignment.
- See ppp aaa-profile

pre-authenticate

- Use to configure an AAA profile to support RADIUS preauthentication.
- During preauthentication, the router sends an Access-Request message to a RADIUS preauthentication server to obtain an LLID for a subscriber. In response, the preauthentication server returns the LLID in the RADIUS Calling-Station-Id [31] attribute of an Access-Accept message.
- Example

```
host1(config-aaa-profile)#pre-authenticate
```

- Use the **no** version to remove preauthentication support from the AAA profile.
- See pre-authenticate

radius pre-authentication server

- Use to specify the IP address of a RADIUS preauthentication server.
- This command accesses RADIUS Configuration mode, from which you can configure additional parameters for the RADIUS preauthentication server.
- Example

```
host1(config)#radius pre-authentication server 10.10.10.2
```

- Use the **no** version to delete the instance of the RADIUS preauthentication server.
- See radius pre-authentication server

Troubleshooting Subscriber Preauthentication

You can configure the router to send traps to SNMP when a RADIUS preauthentication server fails to respond to messages. To do so, you use the same procedure and commands as you do to configure SNMP traps for a RADIUS authentication server.

For example, to enable SNMP traps when a particular RADIUS preauthentication server fails to respond to Access-Request messages, use the **radius trap auth-server-not-responding enable** command.

For more information, see “Configuring SNMP Traps” on page 37.

Using VSAs for Dynamic IP Interfaces

Table 6 on page 82 describes the VSAs that apply to dynamic IP interfaces and are supported on a per-user basis from RADIUS. For details, see *JUNOS Link Layer Configuration Guide*.

Table 6: VSAs That Apply to Dynamic IP Interfaces

VSA	Description	Type	Length	Subtype	Subtype Length	Value
Ingress-Policy-Name	Specifies the name of the input (ingress) policy	26	len	10	sublen	string: <i>input-policy-name</i>
Egress-Policy-Name	Specifies the name of the output (egress) policy	26	len	11	sublen	string: <i>output-policy-name</i>
Ingress-Statistics	Indicates whether statistics are collected on input	26	12	12	6	integer: 0 – disable, 1 – enable
Egress-Statistics	Indicates whether statistics are collected on output	26	12	13	6	integer: 0 – disable, 1 – enable
QoS-Profile-Name	Specifies the name of the QoS profile to attach to the interface	26	len	26	sublen	string: <i>qos-profile-name</i>

To use the VSAs shown in Table 6 on page 82:

- Specify the policy, or one or more QoS VSAs in the desired RADIUS user entries.
- Create the ingress or egress policy, or the QoS profile. Policies minimally consist of one or more policy commands and may include classifier control lists and rate limit profiles. See the *JUNOS Policy Management Configuration Guide* for more information about policies and policy routing. See the *JUNOS Quality of Service Configuration Guide* for information about creating QoS profiles.

When a dynamic interface is created according to a profile, the router checks with RADIUS to determine whether an input or output policy or a QoS profile must be applied to the interface. The VSA, if present, provides the name, enabling policy or QoS profile lookup. If found, the policy or QoS profile is applied to the dynamic interface.

The router also determines whether the creation profile specifies any policies to be applied to the interface. Policies specified by the RADIUS VSA supersede any specified by the profile, as described in the following example:

The RADIUS user entry includes an Ingress-Policy-Name VSA that specifies the policy input5. The profile specifies two policies, input7 and output1. In this case, the RADIUS-specified input policy (input5) and the profile-specified output policy (output1) are applied to the dynamic interface.

For information about assigning policies via profiles, see the *JUNOS Policy Management Configuration Guide*. Only attributes assigned by RADIUS appear in RADIUS Acct-Start messages. RADIUS attributes specified by a profile for dynamic interfaces do not appear in RADIUS Acct-Start messages because the profile is not active when the Acct-Start message is generated. These attributes appear in RADIUS Acct-Stop messages for a profile that is active when the session is terminated.

Traffic Shaping for PPP over ATM Interfaces

The router supports the configuration of traffic shaping parameters for PPP over ATM (PPPoA) via domain-based profiles and RADIUS. In connection with this feature, Table 7 on page 83 describes VSAs that apply to dynamic IP interfaces and are supported on a per-user basis from RADIUS.

Table 7: Traffic-Shaping VSAs That Apply to Dynamic IP Interfaces

VSA	Description	Type	Length	Subtype	Subtype Length	Value
Service-Category	Specifies the type of service	26	12	14	6	integer: 1 – UBR 2 – UBR PCR 3 – NRT VBR 4 – CBR 5 – RT VBR
PCR	Specifies the value for the peak cell rate (PCR)	26	12	15	6	integer
SCR	Specifies the value for the sustained cell rate (SCR)	26	12	16	6	integer
MBS	Specifies the maximum burst size (MBS)	26	12	17	6	integer

To configure traffic-shaping parameters for PPPoA via domain maps, use the **atm** command in Domain Map Configuration mode.

atm

- Use to configure traffic-shaping parameters for PPPoA.
- Use one of the following keywords to select the traffic category to configure:
 - **ubr**—Unspecified bit rate
 - **ubrpcr**—Unspecified bit rate with peak cell rate
 - **nrtvbr**—Non-real time variable bit rate
 - **rtvbr**—Real time variable bit rate
 - **cbr**—Constant bit rate
- Example


```
host1(config)#aaa domain-map atmTraffic
host1(config-domain-map)#atm rtvbr 3897832145 3597861230 4294967295
```
- Use the **no** version to remove the traffic-shaping configuration.
- See atm

Mapping Application Terminate Reasons to RADIUS Terminate Codes

The JUNOS software uses a default configuration that maps terminate reasons to RADIUS Acct-Terminate-Cause attributes. You can optionally create customized mappings between a terminate reason and a RADIUS Acct-Terminate-Cause attribute—these mappings enable you to provide different information about the cause of a termination.

When a subscriber's L2TP or PPP session is terminated, the router logs a message for the internal terminate reason and logs another message for the RADIUS Acct-Terminate-Cause attribute (RADIUS attribute 49). RADIUS attribute 49 is also included in RADIUS Acct-Off and Acct-Stop messages. You can use the logged information to help monitor and troubleshoot terminated sessions.

Use the **show terminate-code** command to display information about the mappings between application terminate reasons and RADIUS Acct-Terminate-Cause attributes.

Table 8 on page 84 lists the IETF RADIUS Acct-Terminate-Cause codes that you can use to map application terminate reasons. In addition, you can also configure and use proprietary codes for values beyond 22.

Table 8: Supported RADIUS Acct-Terminate-Cause Codes

Code	Name	Description
1	User Request	User initiated the disconnect (log out)

Table 8: Supported RADIUS Acct-Terminate-Cause Codes *(continued)*

Code	Name	Description
2	Lost Carrier	DCD was dropped on the port
3	Lost Service	Service can no longer be provided; for example, the user's connection to a host was interrupted
4	Idle Timeout	Idle timer expired
5	Session Timeout	Subscriber reached the maximum continuous time allowed for the service or session
6	Admin Reset	System administrator reset the port or session
7	Admin Reboot	System administrator terminated the session on the NAS; for example, prior to rebooting the NAS
8	Port Error	NAS detected an error on the port that required ending the session
9	NAS Error	NAS detected an error (other than on the port) that required ending the session
10	NAS Request	NAS ended the session for a non-error reason
11	NAS Reboot	NAS ended the session due to a non-administrative reboot
12	Port Unneeded	NAS ended the session because the resource usage fell below the low threshold; for example, the bandwidth-on-demand algorithm determined that the port was no longer needed
13	Port Preempted	NAS ended the session to allocate the port to a higher-priority use
14	Port Suspended	NAS ended the session to suspend a virtual session
15	Service Unavailable	NAS was unable to provide the requested service
16	Callback	NAS is terminating the current session in order to perform callback for a new session
17	User Error	An error in the user input caused the session to be terminated
18	Host Request	The login host terminated the session normally
19	Supplicant Restart	Supplicant state machine was reinitialized
20	Reauthentication Failure	A previously authenticated supplicant failed to reauthenticate successfully following expiration of the reauthentication timer or explicit reauthentication request by management action
21	Port Reinitialized	The port's MAC has been reinitialized
22	Port Administratively Disabled	The port has been administratively disabled

Configuration Example

This example describes a sample configuration procedure that creates custom mappings for PPP terminate reasons.

1. Configure the router to include the Acct-Terminate-Cause attribute in RADIUS Acct-Off messages.

```
host1(config)#radius include acct-terminate-cause acct-off enable
```

2. (Optional) Display the current PPP terminate-cause mappings.

```
host1(config)# run show terminate-code ppp
```

Apps	Terminate Reason	Radius Description	Code
ppp	authenticate-authenticator-timeout	authenticate authenticator timeout	17
ppp	authenticate-challenge-timeout	authenticate challenge timeout	10
ppp	authenticate-chap-no-resources	authenticate chap no resources	10
ppp	authenticate-chap-peer-authenticator-timeout	authenticate chap peer authenticator timeout	17
ppp	authenticate-deny-by-peer	authenticate deny by peer	17
ppp	authenticate-inactivity-timeout	authenticate inactivity timeout	4

--More--

3. (Optional) Display all PPP terminate reasons.

```
host1(config)# terminate-code ppp ?
```

authenticate-authenticator-timeout	Configure authenticate authenticator timeout translation
authenticate-challenge-timeout	Configure authenticate challenge timeout translation
authenticate-chap-no-resources	Configure authenticate chap resources translation
authenticate-chap-peer-authenticator-timeout	Configure authenticate chap peer authenticator timeout translation
authenticate-deny-by-peer	Configure authenticate deny peer translation

--More--

4. Configure your customized PPP terminate-cause to RADIUS Acct-Terminate-Cause code mappings.

```
host1(config)#terminate-code ppp authenticate-authenticator-timeout radius 3
host1(config)#terminate-code ppp authenticate-challenge-timeout radius 4
```

5. Verify the new terminate-cause mappings.

```
host1(config)#run show terminate-code ppp
```

Apps	Terminate Reason	Description	Radius Code
ppp	authenticate-authenticator-timeout	authenticate authenticator timeout	3
ppp	authenticate-challenge-timeout	authenticate challenge timeout	4
ppp	authenticate-chap-no-resources	authenticate chap no resources	10
ppp	authenticate-chap-peer-authenticator-timeout	authenticate chap peer authenticator timeout	17
ppp	authenticate-deny-by-peer	authenticate deny by peer	17
ppp	authenticate-inactivity-timeout	authenticate inactivity timeout	4
ppp	authenticate-max-requests	authenticate max requests	10
--More--			

radius include

- Use to include the Acct-Terminate-Cause attribute (RADIUS attribute 49) in RADIUS Acct-Off messages.
- You control inclusion of the Acct-Terminate-Cause attribute by enabling or disabling this command.
- Example

```
host1(config)#radius include acct-terminate-cause acct-off disable
```

- Use the **no** version to restore the default, enable.
- See radius include

terminate-code

- Use to configure a customized mapping relationship between an application's terminate reason and a RADIUS Acct-Terminate-Cause code (RADIUS attribute 49).
- To set up the mapping, specify the following variables with this command:
 1. Specify the application where the terminate event occurs. You can specify **aaa**, **l2tp**, **ppp**, or **radius-client**.
 2. Specify the application's terminate reason that you want to map.
 - Use the question mark character (?) to display a list of the application's terminate reasons. For example:

```
host1(config)#terminate-code l2tp ?
```

- See "AAA Terminate Reasons" on page 279 for a list of the default terminate reasons for the AAA, L2TP, PPP, and RADIUS client applications.
- 3. Specify RADIUS as the translation application that is used for mapping. Then, specify the RADIUS Acct-Terminate-Cause code that you want to map to the

application's terminate reason. See Table 8 on page 84 for a list of supported RADIUS codes.

- Example

```
host1(config)#terminate-code ppp authenticate-challenge-timeout radius 4
```

- Use the **no** version to restore a default mapping, which are listed in “AAA Terminate Reasons” on page 279. For example:

```
host1(config)#no terminate-code aaa deny-address-allocation-failure radius
```

- See terminate-code

Configuring Timeout

You can configure an idle timeout or a session timeout. The values you set are the default values for PPP B-RAS users. Attributes returned by RADIUS override these default settings on a per-user basis.

When you set the idle timeout, the PPP application on the router monitors both ingress (inbound) traffic and egress (outbound) traffic by default for the configured idle timeout period to determine whether to disconnect an inactive PPP session. If there is no activity in either direction on the interfaces for more than the configured idle timeout period, the router terminates the PPP session.

You can optionally configure the router to monitor only ingress traffic for the configured idle timeout period to determine session inactivity and subsequent disconnection of an inactive PPP session. Monitoring only ingress traffic for the idle timeout is useful for networks in which the PPP keepalive timer is disabled for wireless subscribers. Without the keepalive timer, the router cannot detect whether a wireless subscriber has been disconnected. Monitoring egress traffic does not indicate inactivity for wireless subscribers because egress traffic is always flowing. Enabling the router to monitor only ingress traffic enables you to selectively disconnect subscribers, including wireless subscribers, if no traffic is received for the configured idle timeout period.

aaa timeout

- Use to set either an idle or a session timeout.
- The range in seconds for an idle timeout is 300–86400.
- To enable the PPP application to monitor only ingress traffic for the configured idle timeout period to determine whether to disconnect an inactive PPP session, use the **ingress-only** keyword with the **aaa timeout idle** command. If there is no ingress traffic on the interface for more than the configured idle timeout period, the router terminates the PPP session.
- To enable ingress-only traffic monitoring for the idle timeout, you must also configure the idle timeout value by issuing the **aaa timeout idle** command.
- If you do not specify the **ingress-only** keyword, PPP monitors both ingress traffic and egress traffic for the idle timeout period to determine inactivity and subsequent disconnection of an inactive PPP session.

- The range in seconds for a session timeout is a minimum of 1 minute (60 seconds) through a maximum of 366 days (31622400 seconds).
- These values can also be set by RADIUS, where the range is not enforceable. PPP and L2TP will round the timeout values from RADIUS as follows:
 - If the session timeout is less than the minimum (60 seconds), that value is used.
 - If the idle timeout is less than the minimum (300 seconds), it is rounded up to the minimum.
 - If either timeout is greater than the maximum, it is rounded down to the maximum.
 - All other timeouts are rounded to the nearest minute.
- For a session timeout, the router interprets the default value (indicated by **0**) to mean that the PPP or L2TP user session should be forced to the maximum session timeout, 366 days. This means that the duration of a PPP or an L2TP user session cannot exceed 366 days; once the maximum session timeout is reached, the router terminates the user session.
- Example 1—Sets the idle timeout to 1200 seconds, and enables the router to monitor only ingress traffic for this idle timeout period to determine whether to disconnect the inactive PPP session.

```
host1(config)#aaa timeout idle 1200
host1(config)#aaa timeout idle ingress-only
```

- Example 2—Sets the session timeout to 3600 seconds.

```
host1(config)#aaa timeout session 3600
```

- Use the **no** version to restore the idle or session timeout to its default value, 0 seconds, and to disable ingress-only traffic monitoring for the idle timeout if it is configured.
- See `aaa timeout`

Limiting Active Subscribers

You can limit the number of active subscribers on a port or virtual router.

aaa subscriber limit per-port

- Use to limit the number of active subscribers permitted on a port.
- Example

```
host1(config)#aaa subscriber limit per-port 2/0 20
```

- Use the **no** version to return to the default value, 0 (zero).
- See `aaa subscriber limit per-port`

aaa subscriber limit per-vr

- Use to limit the number of active subscribers permitted on a virtual router.
- Because profiles are applied to subscribers after the PPP authentication phase, subscribers that have their VR context specified by profiles are not denied access. Instead, when IP notifies AAA of the subscribers VR context, AAA checks limits. If the subscriber exceeds the VR limit, AAA revokes the subscriber's access and logs out the subscriber.
- Example


```
host1:vr17(config)#aaa subscriber limit per-vr 20
```
- Use the **no** version to return to the default value, 0 (zero).
- See `aaa subscriber limit per-vr`

Notifying RADIUS of AAA Failure

If a user passes RADIUS authentication, but fails AAA authentication, the RADIUS server may still allocate an address for the user from its internal address pool. To indicate to the RADIUS server to free the address, you can set up the router to send an Acct-Stop message if a user fails AAA.

aaa accounting acct-stop on-aaa-failure

- Use to cause the router to send an Acct-Stop message if a user fails AAA, but RADIUS grants access.
- Example


```
host1:vr17(config)#aaa accounting acct-stop on-aaa-failure disable
```
- Use the **no** version to return to the default value, enabled.
- See `aaa accounting acct-stop on-aaa-failure`

aaa accounting acct-stop on-access-deney

- Use to cause the router to issue an Acct-Stop message if RADIUS denies access.
- Example


```
host1:vr17(config)#aaa accounting acct-stop on-access-deney enable
```
- Use the **no** version to return to the default value, disabled.
- See `aaa accounting acct-stop on-access-deney`

Configuring Standard RADIUS IPv6 Attributes for IPv6 Neighbor Discovery Router Advertisements and DHCPv6 Prefix Delegation

When an E Series router is configured for IP version 6, it uses router advertisements to announce its presence to other nodes connected to it. Hosts discover the addresses of their neighboring routers by listening for these advertisements. When the routing

protocol process first starts on the server router, the server sends router advertisement packets every few seconds. Then, the server sends these packets less frequently. The server responds to route solicitation packets it receives from a client. The response is sent unicast, unless a router advertisement packet is due to be sent out momentarily. IPv6 supports the following router advertisement mechanisms:

- ICMPv6 Neighbor Discovery router advertisements
- DHCPv6 Prefix Delegation
- ICMPv6 Neighbor Discovery router advertisements followed by DHCPv6 Prefix Delegation

The AAA service on the router stores the prefixes that it receives from the RADIUS server during the PPPv6 authentication phase. After the PPPv6 link is established between the subscriber and the B-RAS application running on the router, the router receives the ICMPv6 router solicitation message, the DHCPv6 Solicit message, or both of them based on the prefix advertisement mechanism. In previous releases, you were not able to configure the RADIUS attribute or VSA to be used for IPv6 Neighbor Discovery router advertisements and DHCPv6 Prefix Delegation through the CLI. As a result, the IPv6-NdRa-Prefix attribute returned in the Access-Accept message was used for IPv6 Neighbor Discovery router advertisements and the Framed-IPv6-Prefix RADIUS attribute in the Access-Accept message was used for DHCPv6 Prefix Delegation.

In this release, you can control the RADIUS IETF attribute or VSA to be used for IPv6 Neighbor Discovery router advertisements and DHCPv6 Prefix Delegation by using **aaa ipv6-nd-ra-prefix framed-ipv6-prefix** and **aaa dhcpv6-delegated-prefix delegated-ipv6-prefix** commands, respectively, in Global Configuration mode on each virtual router.

aaa ipv6-nd-ra-prefix framed-ipv6-prefix

- Use to set the Framed-IPv6-Prefix RADIUS attribute to be used for IPv6 Neighbor Discovery router advertisements.
- If you issue this command without issuing the **aaa dhcpv6-delegated-prefix delegated-ipv6-prefix** command, a warning message is displayed prompting you to configure the Delegated-IPv6-Prefix attribute for DHCPv6 Prefix Delegation. The message also states that the Framed-IPv6-Prefix RADIUS attribute will be used for both IPv6 Neighbor Discovery router advertisements and DHCPv6 Prefix Delegation, if the Delegated-IPv6-Prefix attribute is not configured for Prefix Delegation.



NOTE: This warning message is displayed only if you configured the logging severity level as warning for the aaaServerGeneral logging event category.

- Use the **no** version to restore the default behavior, which causes the IPv6-NdRa-Prefix VSA to be used for router advertisements.
- Example

```
host1:VR1(config)#aaa ipv6-nd-ra-prefix framed-ipv6-prefix
```

- See `aaa ipv6-nd-ra-prefix framed-ipv6-prefix`.

aaa dhcpv6-delegated-prefix delegated-ipv6-prefix

- Use to set the Delegated-IPv6-Prefix RADIUS attribute to be used for DHCPv6 Prefix Delegation.
- If you used the **`aaa ipv6-nd-ra-prefix framed-ipv6-prefix`** command to set the Framed-IPv6-Prefix RADIUS attribute to be used for IPv6 Neighbor Discovery router advertisements, you must also issue the **`aaa dhcpv6-delegated-prefix delegated-ipv6-prefix`** command after you issue the **`aaa ipv6-nd-ra-prefix framed-ipv6-prefix`** command to enable the use of the Delegated-IPv6-Prefix attribute for DHCPv6 Prefix Delegation. Otherwise, the Framed-IPv6-Prefix attribute is used for both IPv6 Neighbor Discovery router advertisements and DHCPv6 Prefix Delegation.
- Use the **`no`** version to restore the default behavior, which causes the Framed-IPv6-Prefix RADIUS attribute to be used for Prefix Delegation.
- Example

```
host1:VR1(config)#aaa dhcpv6-delegated-prefix delegated-ipv6-prefix
```

- See `aaa dhcpv6-delegated-prefix delegated-ipv6-prefix`.

Propagation of LAG Subscriber Information to AAA and RADIUS

The RADIUS application sends the link aggregation group (LAG) interface ID to the RADIUS server when the subscriber is connected over LAG in DHCP standalone authenticate mode. In DHCP standalone authenticate mode, the DHCP local server enables you to configure AAA-based authentication of standalone mode DHCP clients. In addition to providing increased security, AAA authentication also provides RADIUS-based input to IP address pool selection for standalone mode clients. The RADIUS applications use the LAG interface ID to create the Acct-Session-Id, Nas-Port-Type, Nas-Port-Id, Nas-Port, and Calling-Station-Id attributes and send them to the RADIUS server in the Access-Request, Acct-Start, and Acct-Stop messages.

The RADIUS client uses one of the following LAG interface ID formats:

```
lag lag-name [.subinterface [:vlan]]
```

or

```
lag lag-name [.subinterface [:svlan-vlan]]
```

where:

- *lag-name*—Name of the LAG bundle
- *subinterface*—Number of the LAG subinterface, in the range 1–2147483647
- *vlan*—VLAN ID number
- *svlan-vlan*—S-VLAN ID number in the range 0–4095

The RADIUS application sends the LAG interface ID to the RADIUS server only when the subscribers in DHCP standalone authenticate mode are initialized. When other subscribers such as PPP subscribers and DHCP equal-access mode subscribers initialize over a LAG interface, the RADIUS application sends only the name of the first Ethernet interface in the LAG bundle, and not the LAG interface ID. In this case, the Ethernet interface ID is displayed in the output of the **show subscribers interface** command.

The RADIUS client application creates the following RADIUS attributes based on the LAG interface ID:

[44] Acct-Session-Id—When you issue the **radius acct-session-id-format description** command, the RADIUS client uses the generic format: `erx <interface type> <interface identifier> : <hex number>` with the LAG interface ID as the interface identifier.

[61] Nas-Port-Type— When you issue the **radius ethernet-port-type** command from Global Configuration mode or the **nas-port-type ethernet** command from AAA Profile Configuration mode, RADIUS calculates the value of the Nas-Port-Type attribute. If you use neither of these commands, RADIUS uses the default [15] Nas-Port-Ethernet value for this attribute.

[5] Nas-Port— RADIUS derives a unique value from the subscriber's profileHandle and uses the value for the Nas-Port attribute. The **radius nas-port-format**, **radius vlan nas-port-format stacked**, and **radius pppoe nas-port-format** commands do not affect the value of the Nas-Port attribute.

[87] Nas-Port-Id— The **radius override nas-port-id remote-circuit-id** command configures RADIUS to use the PPPoE remote circuit ID for the Nas-Port-Id attribute. By default, RADIUS uses the LAG interface ID for the Nas-Port-Id attribute. Use the **aaa intf-desc-format include sub-intf disable** command to exclude the subinterface and S-VLAN ID in the LAG interface ID. By default, the subinterface and S-VLAN ID are included in the LAG interface ID.

[31] Calling-Station-Id—The **radius override calling-station-id remote-circuit-id** command enables RADIUS to use the PPPoE remote circuit ID for the Calling-Station-Id attribute. By default, RADIUS uses a delimited format for the interface description. The **radius calling-station-format** command does not affect the value of the Calling-Station-Id attribute.

For example, a subscriber with the default AAA or RADIUS configuration who is connected over a LAG interface lag1, with subinterface-1, VLAN ID 10, S-VLAN ID 1, and router named asterix uses the following values for RADIUS attributes in RADIUS authentication and accounting messages:

Table 9: RADIUS Attributes Specifying LAG Interface

Field Name	Field Description
Acct-Session-Id	erx lag1.1:1-10:0001048620
Nas-Port-Type	15
Nas-Port	2148532268

Table 9: RADIUS Attributes Specifying LAG Interface (*continued*)

Field Name	Field Description
Nas-Port-Id	lag lag1.1:1-10
Calling-Station-Id	#asterix#lag1#10

- Related Topics**
- *Chapter 2, Monitoring and Troubleshooting Remote Access*
 - *Chapter 3, Configuring RADIUS Attributes*
 - Configuring AAA Authentication for DHCP Local Server Standalone Mode on page 487
 - show subscribers

Configuring the SRC Client

The JUNOS software has an embedded client that interacts with the Juniper Networks SRC software, enabling the SRC software to manage the router's policy and QoS configuration.

The connection between the router and the SRC software uses the Common Open Policy Service (COPS) protocol and is fully compliant with the COPS usage for policy provisioning (COPS-PR) specification. The router's SRC client functions as the COPS client, or policy enforcement point (PEP). The SRC software functions as the COPS server, or policy decision point (PDP).

Table 10 on page 94 provides common terms used in the COPS environment.

Table 10: SRC Client and COPS Terminology

Term	Description
COPS	Common Open Policy Service; query-and-response protocol used to exchange policy information between a policy server and its clients.
COPS-PR	COPS usage for policy provisioning; the PEP requests policy provisioning when the operational state of interface and DHCP addresses changes.
PDP	Policy decision point; the COPS server, which makes policy decisions for itself and for clients that request decisions. The SRC software is the PDP.
PEP	Policy enforcement point; the COPS client, which enforces policy decisions. The JUNOS COPS interface is a PEP.
PIB	Policy Information Base; a collection of sets of attributes that represent configuration information for a device.
SRC	Session and Resource Control (SRC) software, formerly the Service Deployment System (SDX) software; functions as a COPS PDP.

The JUNOS Software COPS-PR implementation uses the outsourcing model that is described in RFC 3084. In this model, the PEP delegates responsibility to the PDP to make provisioning decisions on the PEP's behalf.



NOTE: When you upgrade from an earlier JUNOS release, the software removes the instance of SSCC that was configured with XDR.

If you are going to perform a unified ISSU from a JUNOS release numbered lower than Release 10.0.0 and you have an XDR configuration, unified ISSU is not supported while an XDR configuration is presented.

The provisioning is event-driven and is based on policy requests rather than on an action taken by an administrator—the provisioning is initiated when the PDP receives external requests and PEP events. Provisioning can be performed in bulk (for example, an entire QoS configuration) or in smaller segments (for example, updating a marking filter). The following list shows the interaction between the PEP and the PDP during the COPS-PR operation.

1. Initial connection
 - a. PEP starts the COPS-PR connection with the PDP.
 - b. PDP requests synchronization.
 - c. PEP sends all currently provisioned policies to PDP.
2. Change of interface state
 - a. PEP requests provisioning of an interface from the PDP.
 - b. PDP determines policies and sends provisioning data to the PEP.
 - c. PEP provisions the policies.
3. PDP requests policy provisioning
 - a. PDP determines new policies and sends provisioning data to the PEP.
 - b. PEP provisions the policies.

The information exchange between the PDP and PEP consists of data that is modeled in Policy Information Bases (PIBs) and is encoded using the standard ASN.1 basic encoding rules (BERs).

JUNOS Software uses the following PIBs:

Proprietary PIB

- JUNOS-IP-PIB—This PIB defines the data model for manipulating IP service policies and addresses offered through DHCP in JUNOS software.

Non-proprietary PIBs

- COPS-PR-SPPI
- COPS-PR-SPPI-TC
- DIFFSERV-PIB
- FRAMEWORK-FEEDBACK-PIB
- FRAMEWORK-PIB
- FRAMEWORK-TC-PIB

The COPS-PR support in JUNOS Software uses the proprietary PIB. This PIB consists of a series of tables that is supported in previous JUNOS software releases, including the proprietary accounting and address assignment mechanisms.

You can force the router to restart a COPS connection to, and resynchronize with, a PDP, without disabling the SRC client's COPS support. The SRC software and the SRC client maintain common state information in PIBs that both the SRC software and the SRC client use. Previously, you disabled the SRC client and reenabled it to start synchronization. The disabling of the SRC client's COPS support was undesirable for the applications that required resynchronization in addition to maintaining the COPS support. If the state of the SRC software is not synchronized with the router, the SRC software may be required to initiate resynchronization from the router.

The proprietary PIB provides the Policy Manager and QoS Manager functionality shown in the following lists.

- Policy Manager
 - Committed access rate
 - Packet filtering
 - Policy routing
 - QoS classification and marking
 - Rate limiting
 - Traffic class
- QoS Manager
 - Queues
 - Schedulers
 - Traffic classes

The JUNOS-IP-PIB file is updated with each JUNOS release. Since the PIB is implemented by both Juniper Networks SRC and JUNOS devices, distribution of the

PIB file to customers is not necessary. Customers can access the proprietary PIB file, on approval from Juniper Networks, through Juniper support.

You can configure SRC clients on a per-virtual-router basis. To configure the SRC client:

1. Enable the SRC client. With the CLI **sscc enable** command you can specify BER-encoded information exchange for COPS-PR.

```
host1(config)#sscc enable cops-pr
```

2. Specify the IP addresses of up to three service activation engines (SAEs) (primary, secondary, and tertiary). You can optionally specify the port on which the SAEs listen for activity.

```
host1(config)#sscc primary address  
host1(config)#sscc secondary address 192.168.12.1 port 3288
```

3. (Optional) Enable policy and QoS configuration support for IPv6 interfaces.

```
host1(config)#sscc protocol ipv6
```

4. (Optional) Enable policy and QoS configuration support for L2TP interfaces on an L2TP access concentrator (LAC).

```
host1(config)#sscc protocol lac
```

5. (Optional) Specify on which router the TCP/COPS connection is to be established.

```
host1(config)#sscc transportRouter chicago
```

6. (Optional) Specify a fixed source address for the TCP/COPS connection created for an SRC client session.

```
host1(config)#sscc sourceAddress 10.9.123.8
```

7. (Optional) Specify a fixed source interface for the TCP/COPS connection.

```
host1(config)#sscc sourceInterface atm 3/0
```

8. (Optional) Specify the delay period during which the SRC client waits for a response from the SAE.

```
host1(config)#sscc retryTimer 120
```

9. (Optional) Enable the user IP address mask to be sent to a Policy Decision Point (PDP) in place of the interface IP address mask for a virtual router.

```
host1(config)#sscc option user-ip-mask-override
```

10. (Optional) Enable the calling station ID to be sent to a PDP for a virtual router.

```
host1(config)#sscc option send-calling-station-id
```

11. (Optional) Enable the SRC client to obtain updated line rate parameters from ANCP and transmit them to the COPS server

host1(config)#**sscc update-policy-request enable**

12. (Optional) Restart a COPS connection to, and resynchronize with, a PDP.

host1#**sscc restart**

sscc address

- Use to configure the SRC client with the IP addresses of the SAEs and the ports on which the SAEs listen for activity.
- You can specify primary, secondary, and tertiary SAEs, and the port numbers on which each listens for activity. By default, the SAE listens on port 3288.
- Example

host1(config)#**sscc primary address 192.168.128.10 port 3288**

- Use the **no** version to remove a specific SAE (primary, secondary, or tertiary) from the list of SAEs.
- See **sscc address**

sscc enable

- Use to enable the SRC client's COPS support in the router.
- Use with the **cops-pr** keyword to enable COPS-PR support.
- Example

host1(config)#**sscc enable cops-pr**

- Use the **no** version to disable the feature.
- See **sscc enable**

sscc protocol ipv6

- Use to configure IPv6 support on the SRC client. IPv6 support enables policy and QoS configuration on IPv6 interfaces. The IPv6 support is in addition to the default IPv4 support.
- Example

host1(config)#**sscc protocol ipv6**

- Use the **no** version to disable IPv6 support on the SRC client.
- See **sscc protocol ipv6**

sscc protocol lac

- Use to configure support for L2TP LAC interfaces on the SRC client. LAC support enables policy and QoS configuration on L2TP interfaces.
- When you configure LAC interfaces to be managed by the SRC client, the router generates COPS messages for every LAC interface created and removed from the router and sends them to the COPS server.

- Such messages contain the necessary details about the newly created and removed LAC interfaces that enable the SRC software or the COPS server to determine the policy and QoS management for these interfaces
- Observe the following guidelines when you configure the policy and QoS settings support for L2TP LAC interfaces:
 - Access Node Control Protocol (ANCP), also known as Layer 2 Control (L2C) rate report, which contains the a QoS adjustment factor to be applied to the upstream data rate and downstream data rate reported by ANCP for a DSL type, for L2TP LAC interfaces is not supported.
 - LAC interfaces that participate in L2TP tunnel switching are not supported for management of policy and QoS settings by the SRC client.
 - L2TP dial-out sessions, in which VPNs that use B-RAS to dial out to remote offices that have only narrowband dial-up access, are not supported for policy and QoS management by the COPS client.
 - L2TP network server (LNS) sessions are not supported for policy and QoS management by the COPS client because the interfaces configured on router, which functions as an LNS, are not reported as L2TP interfaces to the SRC software.
- Example


```
host1(config)#sscc protocol lac
```
- Use the **no** version to restore the default, which is to disable L2TP LAC support on the SRC client.
- See `sscc protocol lac`

sscc restart

- Use to force the router to restart a COPS connection to, and resynchronize with, the SRC software, without removing the SRC client. The **no ssc enable cops** command removes the SRC client.
- When you issue this command, the SRC client closes the connection and connects again to the SRC software, which then requests complete synchronization. As part of the synchronization, the SRC client provides information about the policies that are already installed on the router to the SRC software.
- To enable a complex restart where the SRC client closes the connection and clears the PIB structures and tables, use the optional **clean-state** keyword. Then, the SRC client connects to the SRC software, which requests full synchronization, which restores correct policies and QoS provisioning. Using this option consumes more time because the command enables the router to clear the existing PIB structures in addition to performing the synchronization.
- Example


```
host1#sscc restart clean-state
```
- There is no **no** version.
- See `sscc restart`

sscc retryTimer

- Use to specify the delay period (in the range 5–300 seconds) during which the SRC client waits for a response from the SAE.
- If only a primary SAE is configured, the client resends the request to the primary SAE.
- The client attempts to connect to a tertiary SAE only if both the primary and secondary SAEs are unavailable. For example, if the client is connected to the secondary SAE when the delay period expires, the client first tries to connect to the primary SAE before trying the tertiary SAE. The client waits for the length of the delay period before each attempt.
- Example

```
host1(config)#sscc retryTimer 90
```

- Use the **no** version to restore the default value, 90 seconds.
- See ssc retryTimer

sscc sourceAddress

- Use to specify a fixed source address for the TCP/COPS connection created for an SRC client session. This is the local address.
- If you do not specify a source address, the TCP/COPS connection is not bound to a specific source (that is, local) address.
- Example

```
host1(config)#sscc sourceAddress 10.9.123.8
```

- Use the **no** version to remove the specified address.
- See ssc sourceAddress

sscc sourceInterface

- Use to specify a fixed source interface for the TCP/COPS connection created for an SRC client session. This is a local interface.
- You may need to set a source interface in cases where a firewall, access control list, or policy configuration exists; and it is important to know what the interface is, or you need to set the interface independently from other protocols that have conflicting requirements.
- If you do not specify a source interface, the TCP/COPS connection is not bound to a specific source (that is, local) interface.
- Example

```
host1(config)#sscc sourceInterface atm 3/0
```

- Use the **no** version to remove the source interface.
- See ssc sourceInterface

sscc transportRouter

- Use to specify on which router the TCP/COPS connection is to be established.
- The router can be the same as or different from the router the SRC client session is created in and associated with.
- If you do not specify the transport router for an SRC client session, the transport router defaults to the router associated with the session.
- Example

```
host1(config)#sscc transportRouter chicago
```

- Use the **no** version to remove the specified SRC client transport router.
- See `sscc transportRouter`

sscc option

- Use to send either the user IP address mask instead of the interface IP address mask or the calling station ID to a Policy Decision Point (PDP).
- Example

```
host1(config)#sscc option user-ip-mask-override
```

```
host1(config)#sscc option send-calling-station-id
```

- Use the **no** version to remove the specified `user-ip-mask-override` and `send-calling-station-id`.
- See `sscc option`

sscc update-policy-request enable

- Use to enable updated DSL line rate parameters to be collected from ANCP and transmitted to the COPS server with the corresponding COPS messages.
- The SRC client gathers line rate information from the access node and transfers it to the COPS sever, both during connection establishment between a subscriber and an access node, and when any of the values of the line rate parameters changes after the connection is built.
- A COPS server that is running SRC software Release 3.0.0 and earlier releases does not support the receipt of updated DSL line rate information from the SRC client. If you configure the SRC client to send updated line rate parameters to the COPS server, regardless of the version of SRC software that it is running, the COPS server ignores the received updated line rate information and processes the other COPS details. Therefore, this feature of retrieval of updated line rate parameters from ANCP by the SRC client is backward compatible with older versions of SRC software.
- When you enter the **sscc update-policy-request enable** command, a warning message is displayed, prompting you to confirm whether you want to enable the router that functions as the SRC client to forcibly send line rate information parameters to the COPS server, which is running a release of SRC software earlier than Release 3.0.0 that is not compatible with the line rate message format.
- Example

```
host1(config)#sscc update-policy-request enable
```

- Use the **no** version to restore the default behavior, which disables updated line rate parameters to be sent to the COPS server.
- See `sscc update-policy-request enable`

Retrieval of DSL Line Rate Information from Access Nodes Overview

You can retrieve updated DSL line rate information from the Access Node Control Protocol (ANCP) and report this information to the SRC software with corresponding COPS messages. ANCP is also known as Layer 2 Control (L2C). To enable the router that functions as the SRC client to obtain updated line rate parameters from ANCP and transmit them to the COPS server, use the **sscc update-policy-request enable** command in Global Configuration mode. You can configure this setting on a per-virtual-router basis.

In networks with digital subscriber line access multiplexers (DSLAMs), after a connection is established between an subscriber and a routing gateway, the access node or DSLAM obtains the line rate information of the subscriber using a synchronization process. The line rate parameters are transferred in the COPS interface request by using the ANCP topology discovery message to the router that functions as the network access server (NAS). Typically, a COPS interface request is sent from the access node to the SRC client whenever an interface becomes operational.

You can configure the SRC client to obtain the line rate details from the access node whenever any change in the values of the parameters occurs. The capability to receive line rate data, when it changes on the access node, is disabled by default on the SRC client.

The access node passes the DSL line rate parameters, whenever they change, to the SRC client. The SRC client appends updated parameters to the COPS messages that it sends to the COPS server or SRC server. A COPS server processes the following topology parameters that it receives from the SRC client in the updated COPS messages:

- `junoselpInterfaceMode`
- `junoselpInterfaceUpstreamRate`
- `junoselpInterfaceDownstreamRate`
- `junoselpInterfaceMinimumDataRateUpstream`
- `junoselpInterfaceMinimumDataRateDownstream`
- `junoselpInterfaceAttainableDataRateUpstream`
- `junoselpInterfaceAttainableDataRateDownstream`
- `junoselpInterfaceMaximumDataRateUpstream`
- `junoselpInterfaceMaximumDataRateDownstream`
- `junoselpInterfaceMinimumLowPowerDataRateUpstream`
- `junoselpInterfaceMinimumLowPowerDataRateDownstream`

- `junoseIpInterfaceMaximumInterleavingDelayUpstream`
- `junoseIpInterfaceActualInterleavingDelayUpstream`
- `junoseIpInterfaceMaximumInterleavingDelayDownstream`
- `junoseIpInterfaceActualInterleavingDelayDownstream`
- `junoseIpInterfaceDSLlineState`

A COPS server that runs an SRC software release earlier than Release 3.0.0 does not support and process the preceding topology parameters that are appended to the COPS messages. Such COPS servers analyze the information, other than the parameters that describe updated DSL line rate details, that they receive in the COPS messages for policy management. Therefore, the COPS-PR operation ensures backward compatibility of the SRC clients with the COPS servers running SRC software releases earlier than Release 3.0.0 by ignoring the received line rate details.

When you configure the **`sscc update-policy-request enable`** command, a warning message is displayed, prompting you to confirm whether you want to enable the router that functions as the SRC client to forcibly send line rate information parameters to the COPS server, which is running a release of SRC software earlier than Release 3.0.0 that is not compatible with the line rate message format.

Even if you confirm the prompt to enable the SRC client to forcibly send updated DSL line rate parameters to the COPS server, the COPS server that is running a release of SRC software earlier than Release 3.0.0 ignores the updated line rate details that it receives and processes only the other information in the COPS messages.

The Policy Information Base (PIB) is modified to extend the `JunoseIpInterfaceEntry` object. ANCP now notifies the SRC software about any change in the ANCP parameters. If this change in rate is greater than 10 percent or a change in mode, SRC software reports this upgrade to the service activation engine (SAE) in SRC version 3.0.0 and later.

- Related Topics**
- [Configuring the SRC Client on page 94](#)
 - `sscc update-policy-request enable`
 - [Monitoring SRC Client Connection Status on page 153](#)

DHCPv6 Local Address Pools for Allocation of IPv6 Prefixes Overview

In previous releases, you configured DHCPv6 local servers on a virtual router to delegate IPv6 prefixes to DHCPv6 clients. In this release, you can configure IPv6 local address pools to allocate IPv6 prefixes to clients in networks that use DHCPv6. These pools can be used to assign prefixes from a delegating router, which is an E Series router configured as a DHCPv6 local server, to the requesting router, which is the customer premises equipment (CPE) at the edge of the remote client site that acts as the DHCP client.

The DHCPv6 prefix delegation feature is useful in scenarios in which the delegating router does not have information about the topology of the networks in which the

customer edge device or requesting router is located. In such cases, the delegating router requires only the identity of the requesting router to choose a prefix for delegation. An IPv6 local pool is configured on the delegating router, which contains information about the prefixes, their validity periods, and other parameters to control their assignment to the requesting routers. The delegating router is configured with a set of prefixes that is used to assign to a CPE or DHCPv6 client, when it first establishes a connection with an Internet service provider (ISP).

When the delegating router receives a request from a DHCPv6 client, it selects an available prefix and delegates it to the client. The DHCPv6 client subnets the delegated prefix and assigns the prefixes to links at the customer edge.

Keep the following points in mind when you configure IPv6 local address pools to assign prefixes to requesting routers:

- You must enable the IPv6 local address pool feature to be able to configure IPv6 local address pools.
- You can configure IPv6 local address pools for DHCP to allocate prefixes to client requests that are received over PPP or non-PPP links, such as VLAN, S-VLAN, or Ethernet.
- You can configure multiple local address pools on a single virtual router, up to a maximum of 500 pools per virtual router.
- You can also configure multiple address pools on multiple virtual routers. Each IPv6 local address pool must have a unique name.
- You can configure a valid and preferred lifetime for each IPv6 prefix, which determines the length of time the requesting router can use the prefix.
- You can configure multiple prefix ranges in an IPv6 local pool. The ranges can have the same or different assigned prefix lengths.
- You cannot configure overlapping prefix ranges in an IPv6 local pool. If you try to configure a prefix range that overlaps with an existing prefix range in the IPv6 local pool, an error message is displayed stating that the prefix range could not be configured. Similarly, an error message is displayed if you try to configure a prefix range in an IPv6 local pool that overlaps with a prefix range in another IPv6 local pool on the same virtual router.
- You can configure certain prefix ranges to be excluded from being used for delegation to the requesting router.
- You can configure the IPv6 addresses of a primary and secondary DNS server in an IPv6 local pool. The DNS server addresses are returned to the client in DHCPv6 responses as part of the DNS Recursive Name Server option.
- You can configure a list of up to four domain names in an IPv6 local pool to be used during the resolution of hostnames to IP addresses. These domain names are returned to clients in the DHCPv6 responses as part of the Domain Search List option.
- You can configure an IPv6 local address pool in an AAA domain map to assign prefixes to requesting DHCPv6 clients using the **ipv6 prefix-pool-name** command in Domain Map Configuration mode. If the authentication server returns the IPv6 local address pool name in the Framed-IPv6-Pool attribute of the RADIUS-Access-Accept message, this pool overrides the IPv6 local address pool configured in the domain map.

- You cannot delete a pool or a prefix range from which prefixes have been allocated to requesting routers or DHCPv6 clients. However, you can forcibly delete such a pool or prefix range by using the **force** keyword in the **ipv6 local pool** *poolName* and **prefix** commands. If a pool is deleted or the prefix range associated with the pool is deleted, and prefixes have been assigned to DHCPv6 clients or requesting routers, the corresponding DHCPv6 bindings are also deleted.
- When multiple prefix ranges are configured in a pool, the DHCPv6 prefix delegation feature allocates prefixes from the configured ranges in the order of the assigned prefix length. The delegating router or the DHCPv6 server attempts to allocate a prefix from the range with lowest assigned prefix length. If this attempt fails because the pool has been fully allocated, the server tries to allocate a prefix from the subsequent prefix ranges. These ranges could have the same prefix length as the first one or a higher length.



NOTE: Although you can configure an IPv6 local pool with the assigned prefix length as /128, which implies a full IPv6 address, this assignment is not useful for the DHCPv6 prefix delegation feature because it assigns a prefix with a length of only /64 or less. A pool with an assigned prefix length of /128 is useful when complete IPv6 addresses are assigned to the DHCPv6 clients.

When a PPP user establishes a PPP connection with the E Series router functioning as a remote access server, the subscriber is first authenticated using the RADIUS protocol. The Access-Accept message returned from the RADIUS server can contain different IPv6 attributes, including the Framed-IPv6-Pool attribute, which contains the name of the IPv6 pool from which a prefix needs to be assigned to the subscriber. The prefix is assigned to the subscriber using the DHCPv6 prefix delegation feature, which is covered in the next section.

DHCPv6 Prefix Delegation Example

Consider a scenario in which a number of devices on a home network are connected to a customer premises equipment, CPE1, which is the requesting router. CPE1 is connected using a PPP link to the provider edge device, PE1, which is an E Series router operating as the DHCPv6 server or delegating router. After the IPv6 link is formed between CPE1 and PE1 and the IPv6 link-local address is created, CPE1 requests and obtains prefixes that are shorter than /64 (usually of length, /48) from PE1.

CPE1 is connected to the home network. CPE1 divides the single delegated prefix that it received from PE1 into multiple /64 prefixes and assigns one /64 prefix to each of the links in the home network. The address allocation mechanism in the subscriber network can be performed using ICMPv6 neighbor discovery in router advertisements, DHCPv6, or a combination of these two methods.

When PE1 receives a request for prefix delegation from CPE1, PE1 assigns prefixes from the list of unallocated prefixes in the IPv6 local pool.

Order of Preference in Determining the Local Address Pool for Allocating Prefixes

You can configure multiple local address pools on a virtual router. When multiple pools are configured, the pool that is used to allocate the prefix to the requesting router is selected using the following order of preference: If a pool name is returned by the RADIUS server in the Framed-IPv6-Pool attribute, that pool is used to delegate the prefix to the client.

- If the RADIUS server does not return a pool name in the Framed-IPv6-Pool attribute, the pool name configured in the AAA domain map is used.
- If no local address pool name is configured in the AAA domain map, the IPv6 address of the interface on which the request was received is used to determine the pool.
- If the interface address matches with any of the prefix ranges configured in the IPv6 local address pool on the router, that pool is used to delegate the prefix to the client.

Order of Preference in Allocating Prefixes and Assigning DNS Addresses to Requesting Routers

Prefix delegation can be configured at the interface level and at the router level. Also, certain VSA attributes returned in the RADIUS Access-Accept message from the authentication server can impact the selection of the prefix to be assigned to the requesting router. The level of preference attached to each of these prefix delegation configurations is crucial. The delegating router uses the following order of preference to determine the source from which the DHCPv6 prefix is delegated to the requesting router from the DHCPv6 server:

1. An interface that is configured for prefix delegation is given priority over the RADIUS attributes returned in the Access-Accept message or the prefixes configured in the IPv6 local address pool on the delegating router.
2. The RADIUS server might return one or more of the following attributes in the Access-Accept message in response to the client authentication request:
 - Ipv6-NdRa-Prefix (VSA 26-129)
 - Framed-IPv6-Prefix (RADIUS IETF attribute 97)
 - Delegated-IPv6-Prefix (RADIUS IETF attribute 123)
 - Framed-IPv6-Pool (RADIUS IETF attribute 100)

If any of the first three attributes are returned, then the prefix contained in those attributes is used and the pool name in the Framed-IPv6-Pool attribute is ignored. For example, if both the Delegated-IPv6-Prefix or Framed-IPv6-Prefix, and Framed-IPv6-Pool attributes are returned from the RADIUS server, the DHCPv6 prefix delegation mechanism uses the Delegated-IPv6-Prefix attribute to advertise the prefix to clients.

3. If prefix delegation is not configured at the interface level and if no prefix is returned from the attribute in the RADIUS Access-Accept message, the prefix configured in the IPv6 local pool is delegated to the requesting router.

If you configured a list of IPv6 DNS servers and a string of domain names in the IPv6 local address pool, the order of preference in returning the DNS server address or domain name to the requesting client in the DHCPv6 response is as follows:

- Information returned from the RADIUS server for DNS servers only
- Information from the pool
- Locally configured DNS attributes

Configuring the DHCPv6 Local Address Pools

The IPv6 local address pool for DHCP is an object that contains information about prefix configuration parameters and guidelines that govern the assignment of these prefixes to requesting routers. If you configured an interface for prefix delegation, the prefix assigned to that interface takes precedence over the prefix or range of prefixes configured at the router level in an IPv6 local pool.

To configure an IPv6 local address pool to be used for DHCPv6 prefix delegation:

1. Enable the IPv6 local address pool to assign prefixes to the requesting router.

```
host1(config)#ipv6 address-pool local
```

2. Configure the name of the IPv6 local address pool from which the delegating router assigns prefixes to the DHCPv6 client or requesting router.

```
host1(config)#ipv6 local pool dhcpv6pd_pool
```



NOTE: You must enable the IPv6 local address pool feature to be able to configure IPv6 local address pools.

3. Specify the IPv6 prefix range from which prefixes can be delegated to the DHCPv6 client. You can specify the prefix range in one of the following ways:

- Configure the prefix range by specifying an IPv6 prefix and the length of the prefix to be delegated. This prefix length is also called the assigned prefix length.

```
host1(config-v6-local)#prefix 2002:2002::/32 48
```

In this case, the starting and ending prefixes of the range are implicitly specified. In this example, the start of the range is 2002:2002::/48 and the end of the range is 2002:2002:ffff::/48. All prefixes assigned from this range have 48 as the prefix length.

- Alternatively, configure the prefix range by specifying the starting and ending IPv6 prefixes of the range.

```
host1(config-v6-local)#prefix 3003:3003::/56 3003:3003:0:1000::/56
```

In this case, the starting and ending prefixes of the range are explicitly specified. In the preceding example, a prefix range is configured with 16 prefixes that can be allocated to clients. All prefixes assigned from this range

have 56 as the prefix length. When you specify the prefix range in this way, you must ensure that the starting and ending prefixes are of the same length.

4. Specify the time period when the requesting router can use the prefix. You can configure a preferred lifetime or a valid lifetime for the requesting router to use when you configure the prefix range. If no lifetime is specified when you configure the prefix range, the default lifetime of 1 day is assigned.



NOTE: The preferred lifetime must be less than or equal to the valid lifetime.

- Specify the number of days and, optionally, the number of hours, minutes, and seconds. You cannot specify a lifetime of zero (that is, you cannot set the days, hours, minutes, and seconds fields all to zero).

```
host1(config-v6-local)#prefix 5005:5005::/32 48 preferred 1 2 3 4
```

In this example, the preferred lifetime is set to 1 day, 2 hours, 3 minutes, and 4 seconds. Because the valid lifetime is not configured, the default value of 1 day is assigned.

- Use the **infinite** keyword to specify a lifetime that does not expire.

```
host1(config-v6-local)#prefix 5005:5005::/32 48 valid infinite
```

In this example, the period for which the prefix remains valid indefinitely for the requesting router to use after it has been delegated by the DHCPv6 server. In this case, the preferred lifetime is set to 1 day by default.

5. Specify the IPv6 address of the DNS servers to be returned to the client. You can configure a primary and secondary DNS server. The DNS server addresses are returned to the client in DHCPv6 responses as part of the DNS Recursive Name Server option.

```
host1(config-v6-local)#dns-server 3001::1 3001::2
```

If the DNS server is not configured in the IPv6 local address pool, the DNS server configured on the DHCPv6 local server is used to delegate prefixes. However, if DNS servers are configured both in the IPv6 local pool and on the DHCPv6 local server, the values configured in the IPv6 local pool take precedence.

6. Specify the name of a DNS domain in the IPv6 local pool to be returned to clients in the DHCPv6 responses as part of the Domain Search List option. The client uses this domain name for DNS resolution. You can specify a maximum of four DNS domains for an IPv6 local pool's search list.

```
host1(config-v6-local)#dns-domain-search test1.com  
host1(config-v6-local)#dns-domain-search test2.com
```

You can configure one domain name per line. Enter the command on separate lines to configure additional domain names.

7. Set certain prefixes to be excluded from being allocated to the requesting router. You can exclude those addresses that are assigned to local interfaces. You can exclude specific prefixes or a range of prefixes from delegation to clients.

```
host1(config-v6-local)#exclude-prefix 5005:5005:2::/48 5005:5005:a::/48
```

In this example, all prefixes between the starting prefix of the range, 5005:5005:2::/48, and the ending prefix of the range, 5005:5005:a::/48 are excluded from allocation to clients.

8. Map the domain name to the IPv6 local address pool, which is used for prefix delegation. If the authentication server returns the prefix pool name in the Framed-Ipv6-Pool attribute of the RADIUS-Accept-Request message, this value overrides the IPv6 local pool configured using the **ipv6-prefix-pool-name** command.

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#ipv6-prefix-pool-name local_addr_pool
```

For more information about mapping domain names to the IPv6 local address pool, see `ipv6-prefix-pool-name`.

Limitation on the Number of Prefixes Used by Clients

If you configure a very large prefix range in an IPv6 local address pool, the number of prefixes that can be used from that range by DHCPv6 clients is limited to 1048576.

Consider the following example in which an IPv6 local address pool, `largePrefixRange`, is configured. The prefix range is specified by the starting prefix and its length as `3003:3003::/32`.

```
host1(config)#ipv6 local pool largePrefixRange
host1(config-v6-local)#prefix 3003:3003::/32 64
host1(config-v6-local)#end
```

The Total field of the output of the following **show ipv6 local pool largePrefixRange** and **show ipv6 local pool** commands indicates the number of prefixes that can be allocated to DHCPv6 clients: 1048756.

```
host1#show ipv6 local pool largePrefixRange
```

```
Pool : largePrefixRange
```

```
Utilization : 0
```

Start	End	Total	In Use
3003:3003::/64	3003:3003:ffff:ffff::/64	1048576	0
Start	Exclude Util Preferred Lifetime	Valid Lifetime	
3003:3003::/64	0 0 1 day	1 day	

```
host1#show ipv6 local pool
```

```
IPv6 Local Address Pools
```

Pool	Start	End
largePrefixRange	3003:3003::/64	3003:3003:ffff:ffff::/64

Pool	Total	In Use
-----	-----	-----
largePrefixRange	1048576	0

Using DHCPv6 Local Address Pools for Prefix Delegation over non-PPP Links Example

When a customer premises equipment (CPE) or requesting router and the provider edge (PE) router are connected using a PPP link, one of the following pool names is used to determine the IPv6 local address pool to be used for DHCPv6 Prefix Delegation to the CPE:

- The pool name returned by the RADIUS server in the Framed-IPv6-Pool attribute
- The pool name configured in the AAA domain map

However, for a CPE that is connected to the PE router using a non-PPP link, such as Ethernet, VLAN, or S-VLAN, the method for authentication of clients for DHCPv6 Prefix Delegation is not available in JUNOS Release 10.1.x. In such cases, you can select the pool to be used for delegation of prefixes to the CPE by ensuring that the address of the interface over which the DHCPv6 request is received corresponds to any one of the prefix ranges in the configured local address pool.

The following example shows how you can configure an interface with an IPv6 address that matches a prefix configured in an IPv6 local address pool to enable allocation of prefixes from the configured pool for client requests over non-PPP links.

```

! Configure an IPv6 local address pool named example. Specify the IPv6 prefix
! range from which prefixes can be delegated to DHCPv6 clients by specifying an
! IPv6 prefix and the assigned prefix length. Configure the prefix 4004:4004::/48
! to be excluded from being allocated to the requesting client. Exit the IPv6 Local
! Pool Configuration mode.
host1(config)#ipv6 local pool example
host1(config-v6-local)#prefix 4004:4004::/32 48
host1(config-v6-local)#exclude-prefix 4004:4004::/48
host1(config-v6-local)#exit
!
! Create a loopback interface with the IPv6 address matching that of a prefix range
! configured in the example local pool. Exit the Interface Configuration mode.
host1(config)#interface loopback 1
host1(config-if)#ipv6 address 4004:4004::1/48
host1(config-if)#exit
!
! Create a Gigabit Ethernet interface and assign VLAN as the encapsulation
! method. Exit the Interface Configuration mode.
host1(config)#interface gigabitEthernet 2/1/4
host1(config-if)#encapsulation vlan
host1(config-if)#exit
!
! Create a VLAN subinterface, assign a loopback address to it, and enable
! IPv6 Neighbor Discovery. Exit the Interface Configuration mode.
host1(config)#interface gigabitEthernet 2/1/4.100
host1(config-if)#vlan id 100
host1(config-if)#ipv6 unnumbered loopback 1

```

```
host1(config-if)#ipv6 nd
```

```
host1(config-if)#exit
```

When the PE router receives a request for DHCPv6 Prefix Delegation over the gigabit Ethernet interface 2/1/4.100, prefixes are allocated to the client from the example local pool. In this example, the local pool to use for allocation of prefixes is selected based on the IPv6 address of the interface over which the request is received.

Chapter 2

Monitoring and Troubleshooting Remote Access

Use the commands in this chapter to set baselines for and to monitor remote access.

- Setting Baselines for Remote Access on page 114
- How to Monitor PPP Interfaces on page 116
- Monitoring AAA Accounting Configuration on page 116
- Monitoring AAA Accounting Default on page 117
- Monitoring Accounting Interval on page 118
- Monitoring Specific Virtual Router Groups on page 118
- Monitoring the Default AAA Authentication Method List on page 119
- Monitoring Domain and Realm Name Delimiters on page 119
- Monitoring Mapping Between User Domains and Virtual Routers on page 119
- Monitoring Tunnel Subscriber Authentication on page 121
- Monitoring Routing Table Address Lookup on page 122
- Monitoring the AAA Model on page 122
- Monitoring IP Addresses of Primary and Secondary DNS and WINS Name Servers on page 122
- Monitoring AAA Profile Configuration on page 123
- Monitoring Statistics about the RADIUS Route-Download Server on page 124
- Monitoring Routes Downloaded by the RADIUS Route-Download Server on page 126
- Monitoring Chassis-Wide Routes Downloaded by RADIUS Route-Download Servers on page 127
- Monitoring Authentication, Authorization, and Accounting Statistics on page 129
- Monitoring the Number of Active Subscribers Per Port on page 131
- Monitoring the Maximum Number of Active Subscribers Per Virtual Router on page 131
- Monitoring Session Timeouts on page 131
- Monitoring Interim Accounting for Users on the Virtual Router on page 132
- Monitoring Virtual Router Groups Configured for AAA Broadcast Accounting on page 132

- Monitoring Configuration Information for AAA Local Authentication on page 133
- Monitoring AAA Server Attributes on page 134
- Monitoring the COPS Layer Over SRC Connection on page 136
- Monitoring Statistics About the COPS Layer on page 138
- Monitoring Local Address Pool Aliases on page 140
- Monitoring Local Address Pools on page 140
- Monitoring Local Address Pool Statistics on page 142
- Monitoring Shared Local Address Pools on page 142
- Monitoring the Routing Table on page 143
- Monitoring the B-RAS License on page 144
- Monitoring the RADIUS Server Algorithm on page 144
- Monitoring RADIUS Override Settings on page 144
- Monitoring the RADIUS Rollover Configuration on page 145
- Monitoring RADIUS Server Information on page 145
- Monitoring RADIUS Services Statistics on page 147
- Monitoring RADIUS SNMP Traps on page 151
- Monitoring RADIUS Accounting for L2TP Tunnels on page 151
- Monitoring RADIUS UDP Checksums on page 152
- Monitoring RADIUS Server IP Addresses on page 152
- Monitoring the RADIUS Attribute Used for IPv6 Neighbor Discovery Router Advertisements on page 152
- Monitoring the RADIUS Attribute Used for DHCPv6 Prefix Delegation on page 153
- Monitoring SRC Client Connection Status on page 153
- Monitoring SRC Client Connection Statistics on page 155
- Monitoring the SRC Client Version Number on page 157
- Monitoring Subscriber Information on page 157
- Monitoring Application Terminate Reason Mappings on page 162
- Monitoring IPv6 Local Pools for DHCP Prefix Delegation By All Configured Pools on page 164
- Monitoring IPv6 Local Pools for DHCP Prefix Delegation By Pool Name on page 165
- Monitoring IPv6 Local Pool Statistics for DHCP Prefix Delegation on page 166

Setting Baselines for Remote Access

You can set baseline statistics using the **baseline** commands. The router implements the baseline by reading and storing the statistics at the time the baseline is set and then subtracting this baseline when you retrieve baseline-relative statistics.

Issue the **delta** keyword with the **show aaa statistics** command to show baselined statistics.

1. Setting a Baseline for AAA Statistics on page 115
2. Setting a Baseline for AAA Route Downloads on page 115
3. Setting a Baseline for COPS Statistics on page 115
4. Setting a Baseline for Local Address Pool Statistics on page 115
5. Setting a Baseline for RADIUS Statistics on page 116
6. Setting the Baseline for SRC Statistics on page 116

Setting a Baseline for AAA Statistics

Purpose Set a baseline for all AAA statistics.

Action Issue the **baseline aaa** command:

host1#**baseline aaa**

There is no **no** version.

Setting a Baseline for AAA Route Downloads

Purpose Set a baseline for route downloads.

Action Issue the **baseline aaa route-download** command:

host1#**baseline aaa route-download**

There is no **no** version.

Setting a Baseline for COPS Statistics

Purpose Set a baseline for COPS statistics.

Action Issue the **show cops statistics** command:

host1#**show cops statistics**

There is no **no** version.

Setting a Baseline for Local Address Pool Statistics

Purpose Set a baseline for local address pool statistics.

Action Issue the **show local pool statistics** command:

host1#**show local pool statistics**

There is no **no** version.

Setting a Baseline for RADIUS Statistics

Purpose Set a baseline for RADIUS statistics.

Action Issue the **show radius statistics** command:

```
host1#show radius statistics
```

There is no **no** version.

Setting the Baseline for SRC Statistics

Purpose Set a baseline for SRC statistics.

Action Issue the **show ssrc statistics** command:

```
host#1show ssrc statistics
```

There is no **no** version.

How to Monitor PPP Interfaces

Purpose Monitor PPP interfaces.

Action Use the following commands:

- **show ppp interface summary**
- **show ppp interface** *<selective control>*

For details on the **show ppp** commands, see *JUNOS Link Layer Configuration Guide*.

You can use the output filtering feature of the **show** command to include or exclude lines of output based on a text string you specify. For details, see *JUNOS System Basics Configuration Guide*.



NOTE: AAA and RADIUS statistics are not preserved across a warm restart when stateful SRP Switchover is enabled.

Monitoring AAA Accounting Configuration

Purpose Display the AAA accounting configuration.

Action To display the **show aaa accounting** command:

```
host1:vrXyz7#show aaa accounting
Accounting duplication set to router vrXyz25
Broadcast accounting uses group groupXyzCompany20
send acct-stop on AAA access deny is enabled
send acct-stop on authentication server access deny is disabled
acct-interval (for PPP Clients) 0
service-acct-interval 0
send immediate-update is enabled
```

Meaning Table 11 on page 117 lists the **show aaa accounting** command output fields.

Table 11: show aaa accounting Output Fields

Field Name	Field Description
Accounting duplication	Name of the virtual router to which duplicate accounting records are sent to the accounting server
Broadcast accounting	Name of the virtual router groups to which broadcast accounting records are sent to the accounting server
send acct-stop on AAA access deny	Enabled, disabled
send acct-stop on authentication server access deny	Enabled, disabled
acct-interval (for PPP Clients)	Number of minutes between accounting update operations
service-acct-interval	Number of minutes between interim accounting updates for services created by the Service Manager feature
send immediate-update	On receipt of response to Acct-Start message; enabled, disabled

Related Topics ■ show aaa accounting

Monitoring AAA Accounting Default

Purpose Display the AAA accounting default method for a subscriber type.

You can view the method used for ATM 1483, IPSec, PPP, RADIUS relay server, and tunnel subscribers, and IP subscriber management interfaces.

Action To display the default AAA accounting method:

```
host1#show aaa accounting tunnel default
radius
```

Related Topics ■ [show aaa accounting default](#)

Monitoring Accounting Interval

Purpose Display the accounting interval.

Action To display the accounting interval:

```
host1#show aaa accounting interval
acct-interval (for PPP Clients) 10
```

Related Topics ■ [show aaa accounting interval](#)

Monitoring Specific Virtual Router Groups

Purpose Display the names of a specific virtual router group or of all virtual router groups configured on the router, and of the virtual routers making up the groups.

Action To display the names of a specific virtual router group or of all virtual router groups configured on the router. Display the virtual routers making up the groups:

```
host1#show aaa accounting vr-group
vr-group groupXyzCompany10:
  virtual-router 1 vrXyzA
  virtual-router 2 vrXyzB
  virtual-router 3 vrXyzC
  virtual-router 4 vrXyzD
vr-group groupXyzCompany20:
  virtual-router 1 vrXyzP
  virtual-router 2 vrXyzQ
  virtual-router 3 vrXyzR
  virtual-router 4 vrXyzS
```

Meaning Table 12 on page 118 lists the **show aaa accounting vr-group** command output fields.

Table 12: show aaa accounting vr-group Output Fields

Field Name	Field Description
vr-group	Name of the virtual router group

Monitoring the Default AAA Authentication Method List

Purpose Display the default AAA authentication method list for a subscriber type. You can view the method list used for ATM 1483 subscribers, IPsec subscribers, IP subscriber management interfaces, PPP subscribers, RADIUS relay subscribers, and tunnel subscribers.

For example, you can verify that the local authentication method is configured for PPP subscribers.

Action To display the default AAA authentication method list for a subscriber type:

```
host1#show aaa authentication ppp default
local none
```

Related Topics ■ show aaa authentication default

Monitoring Domain and Realm Name Delimiters

Purpose Display the domain and realm name delimiters, parse order, and parse direction configured on the router.

Action To display the domain and realm name delimiters, parse order, and parse direction configured on the router.

```
host1#show aaa delimiters
domain delimiters "@"!
realm delimiters "/"
parse order is realm-first
domain parse direction is right-to-left
realm parse direction is left-to-right
```

Related Topics ■ show aaa delimiters

Monitoring Mapping Between User Domains and Virtual Routers

Purpose Display the mapping between user domains and virtual routers.

The following keywords have significance when used as user domains:

- **none**—All client requests with no user domain name are associated with the virtual router mapped to the **none** entry
- **default**—All client requests with a domain present that have no map are associated with the virtual router mapped to the **default** entry

Action To display the mapping between user domains and virtual routers:

```

host1#show aaa domain-map
Domain: lac-tunnel; router-name: lac; ipv6-router-name: default
Tunnel
Tag      Tunnel Peer      Tunnel Source      Tunnel Type      Tunnel Medium      Tunnel Password      Tunnel Id
-----
5         192.168.1.1      <null>             12tp             ipv4             welcome             lac-tunnel

Tunnel      Tunnel      Tunnel      Tunnel      Tunnel      Tunnel
Tag      Client Name      Server Name      Preference      Max Sessions      Tunnel RWS
-----
5         lac             boston          5              0              4

Tunnel      Tunnel      Tunnel      Tunnel      Tunnel
Tag      Virtual Router      Failover Resync      Switch Profile      Tx Speed Method
-----
5         <null>             silent failover      denver             qos

```

Meaning Table 13 on page 120 lists the **show aaa domain-map** command output fields.

Table 13: show aaa domain-map Output Fields

Field Name	Field Description
Domain	Name of the domain
router-name	Virtual router to which user domain name is mapped
tunnel-group	Name of the tunnel group assigned to the domain map
ipv6-router-name	IPv6 virtual router to which user domain name is mapped
local-interface	Interface information to use on the local (E Series) side of the subscriber's interface
ipv6-local-interface	IPv6 interface information to use on the local (E Series) side of the subscriber's interface
poolname	Local address pool from which the router allocates addresses for this domain
IP hint	IP hint is enabled
strip-domain	Strip domain is enabled
override-username	Single username used for all users from a domain in place of the values received from the remote client
override-password	Single password used for all users from a domain in place of the values received from the remote client
Tunnel Tag	Tag that identifies the tunnel
Tunnel Peer	Destination address of the tunnel

Table 13: show aaa domain-map Output Fields *(continued)*

Field Name	Field Description
Tunnel Source	Source address of the tunnel
Tunnel Type	L2TP
Tunnel Medium	Type of medium for the tunnel; only IPv4 is supported
Tunnel Password	Password for the tunnel
Tunnel Id	ID of the tunnel
Tunnel Client Name	Host name that the LAC sends to the LNS when communicating to the LNS about the tunnel
Tunnel Server Name	Host name expected from the peer (the LNS) when during tunnel startup
Tunnel Preference	Preference level for the tunnel
Tunnel Max Sessions	Maximum number of sessions allowed on a tunnel
Tunnel RWS	L2TP receive window size (RWS) for a tunnel on the LAC; displays either the configured value or the default behavior, which is indicated by system chooses
Tunnel Virtual Router	Name of the virtual router to map to the user domain name
Tunnel Failover Resync	L2TP peer resynchronization method
Tunnel Switch Profile	Name of the L2TP tunnel switch profile
Tunnel Tx Speed Method	Method that the router uses to calculate the transmit connect speed of the subscriber's access interface: static layer2, dynamic layer2, qos, actual, not set

Related Topics ■ show aaa domain-map

Monitoring Tunnel Subscriber Authentication

Purpose Verify configuration of tunnel subscriber authentication. When authentication is enabled, the output indicates this configuration. When authentication is disabled, the output presents no information about the configuration.

Action To display tunnel subscriber authentication configuration:

```
host1#show aaa domain-map
Domain: tunnel.com; router-name: default; ipv6-router-name: default;
tunnel-subscriber authentication: enable
```

Meaning Authentication is enabled.

Related Topics ■ show aaa domain-map

Monitoring Routing Table Address Lookup

Purpose Display whether the routing table address lookup or duplicate address check is enabled or disabled.

Action To display whether the routing table address lookup or duplicate address check is enabled or disabled:

```
host1#show aaa duplicate-address-check
enabled
```

Related Topics ■ show aaa duplicate-address-check

Monitoring the AAA Model

Purpose Display the AAA model.

Action To display the AAA model:

```
host1#show aaa model
aaa model: old model
```

Related Topics ■ show aaa model

Monitoring IP Addresses of Primary and Secondary DNS and WINS Name Servers

Purpose Display the IP addresses of the primary and secondary DNS and WINS name servers.

Action To display the IP addresses of the primary and secondary DNS and WINS name servers:

```
host1#show aaa name-servers
Name Server Addresses (for PPP Clients):
primary DNS Addr          10.2.3.4
secondary DNS Addr        10.6.7.8
primary NBNS (WINS) Addr  10.22.33.44
secondary NBNS (WINS) Addr 10.66.77.88
```

Meaning The IP addresses of DNS and WINS name servers are displayed.

Related Topics ■ show aaa name-servers

Monitoring AAA Profile Configuration

Purpose Display the configuration of all AAA profiles or of a specific profile.

Action To display the configuration of all AAA profiles or of a specific profile:

```
host1#show aaa profile name PreAuth1
preAuth1:
  atm nas-port-type: ADLSL-CAP
  ethernet nas-port-type: Cable
  profile-service-description: xyzService
  pre-authenticate
  allow xyz.com
  deny default
  translate xyz1.com abc.com
```

Meaning Table 14 on page 123 Lists the **show aaa profile** command output fields.

Table 14: show aaa profile Output Fields

Field Name	Field Description
atm nas-port-type	Configuration of NAS-Port-Type attribute for ATM interfaces
ethernet nas-port-type	Configuration of NAS-Port-Type attribute for Ethernet interfaces
profile-service-description	Description configured in the Service-Description attribute
pre-authenticate	Indicates that subscriber preauthentication is configured for the profile
allow	One or more domain names that are allowed access to AAA authentication
deny	One or more domain names that are denied access to AAA authentication
translate	Original domain name and the name to which it is mapped for domain map lookup

Related Topics ■ `show aaa profile`

Monitoring Statistics about the RADIUS Route-Download Server

Purpose Display statistics about the RADIUS route-download server configuration.

- Use the optional **statistics** keyword to display information about the RADIUS route download server operation.
- Use the optional **delta** keyword to show baselined statistics.

Action To display statistics about the RADIUS route-download server configuration:

```
host1#show aaa route-download
AAA Route Downloader:    configured in virtual router default
Download Interval:       720 minutes
Retry Interval:          10 minutes
Default Cost:            2
Default Tag:             0
Base User Name:          <HOSTNAME>
Password:                <DEFAULT>
Synchronization:        <NOT SET>
Status:                  idle
Last Download Attempt:   TUE DEC 19 22:46:47 2006
Last Download Success:   TUE DEC 19 22:46:47 2006
Last Regular Download:   complete
Next Download Scheduled: WED DEC 20 10:46:47 2006
Next Regular Download:   WED DEC 20 10:46:47 2006
```

To display information about the RADIUS route download server operation:

```
host1#show aaa route-download statistics
Total Download Attempts: 2
Successful Downloads:    2
Downloaded Fragments:    3756
Downloaded Routes:       192000
IP Updates:              1
Updated Routes:          96000
Cleared Route Intervals: 0
```

Meaning Table 15 on page 124 lists the `show aaa route-download` command output fields.

Table 15: show aaa route-download Output Fields

Field Name	Field Description
AAA Route Downloader	Virtual router where the RADIUS route-download server is configured
Download Interval	Number of minutes between route downloads
Retry Interval	Number of minutes before retry after a download failure

Table 15: show aaa route-download Output Fields (continued)

Field Name	Field Description
Default Cost	Default cost of downloaded routes
Default Tag	Default tag for downloaded routes
Base User Name	Virtual router used for route-download requests; either < HOSTNAME > or the configured name
Password	Password for route-download requests or < DEFAULT >
Synchronization	Either < NOT SET > or the time that the server starts the route download operation each day
Status	Current status of route-download server; waiting for base router, waiting for IP warmstart, idle, downloading, updating ip, downloading and updating ip, or suspended
Last Download Attempt	Either < NEVER > or the day, date, and time of attempt
Last Download Success	Either < NEVER > or the day, date, and time of success
Last Regular Download	Status of last regular download; either complete or not complete
Next Download Scheduled	< DOWNLOAD ACTIVE > , < NOT SCHEDULED > , or the day, date, and time of next download
Next Regular Download	Day, date, and time
Total Download Attempts	Number of downloads attempted
Successful Downloads	Number of successful download operations
Downloaded Fragments	Number of downloaded fragments
Downloaded Routes	Number of downloaded routes
IP Updates	Number of IP updates
Updated Routes	Number of updated routes
Cleared Route Intervals	Number of cleared route intervals

Related Topics ■ [show aaa route-download](#)

Monitoring Routes Downloaded by the RADIUS Route-Download Server

Purpose Display information about the routes that are downloaded by the RADIUS route-download server.

Use the optional **detail** keyword to display more detailed information about the downloaded routes.

Action To display information about the routes that are downloaded by the RADIUS route-download server:

```
host1#show aaa route-download routes
96000 downloaded routes
```

To display detailed information about the routes that are downloaded by the RADIUS route-download server:

```
host1#show aaa route-download routes detail
Prefix/Length      Type      NextHop      Dst/Met  Intf  Tag
-----
192.168.1.1/32     Access-P  255.255.255.255  254/2    null0  0
192.168.1.5/32     Access-P  255.255.255.255  254/2    null0  0
192.168.1.9/32     Access-P  255.255.255.255  254/2    null0  0
192.168.1.13/32    Access-P  255.255.255.255  254/2    null0  0
192.168.1.17/32    Access-P  255.255.255.255  254/2    null0  0
192.168.1.21/32    Access-P  255.255.255.255  254/2    null0  0
```

Meaning Table 16 on page 126 lists the **show aaa route-download routes** command output fields.

Table 16: show aaa route-download routes Output Fields

Field Name	Field Description
downloaded routes	Number of current downloaded routes
Prefix/Length	IP address prefix and mask information for downloaded routes
Type	Type of downloaded routes; Access-P indicates routes downloaded from the RADIUS route-download server
NextHop	IP address of the next hop
Dst/Met	Administrative distance and number of hops for the route
Tag	Tag assigned to downloaded routes
Intf	Interface type and specifier

Related Topics ■ show aaa route-download routes

Monitoring Chassis-Wide Routes Downloaded by RADIUS Route-Download Servers

- Purpose** Display chassis-wide information about routes that are downloaded by RADIUS route-download servers.
- Use the optional **detail** keyword to display more detailed information about the downloaded routes.
- Use the optional **start** keyword to specify the first router context that you want to display in the output. For example, aaa:a2 specifies that the display shows a list of router contexts starting with VRF a2 in virtual router aaa.
- Action** To display chassis-wide information about routes that are downloaded by RADIUS route-download servers:

```
host1#show aaa route-download routes global
```

Virtual Router	VRF	Present	Number of Routes
aaa		n	4
aaa	a1	n	4
default		y	4
default	d1	n	4

To display more detailed information about the downloaded routes:

```
host1# show aaa route-download routes global detail
```

Virtual Router	VRF	Present	Prefix/Length	Type	NextHop	Dst/Met	Intf	Tag
aaa		n	192.168.1.1/32	Access-P	255.255.255.255	0/2	null0	0
aaa		n	192.168.1.2/32	Access-P	255.255.255.255	0/2	null0	0
aaa		n	192.168.3.1/32	Access-P	255.255.255.255	0/2	null0	0
aaa		n	192.168.4.1/32	Access-P	255.255.255.255	0/2	null0	0
aaa	a1	n	192.168.5.3/32	Access-P	255.255.255.255	0/2	null0	0
aaa	a1	n	192.168.7.1/32	Access-P	255.255.255.255	0/2	null0	0
aaa	a1	n	192.168.7.5/32	Access-P	255.255.255.255	0/2	null0	0
aaa	a1	n	192.168.9.1/32	Access-P	255.255.255.255	0/2	null0	0
default		y	192.168.22.1/32	Access-P	255.255.255.255	0/2	null0	0
default		y	192.168.23.1/32	Access-P	255.255.255.255	0/2	null0	0
default		y	192.168.24.1/32	Access-P	255.255.255.255	0/2	null0	0
default		y	192.168.25.1/32	Access-P	255.255.255.255	0/2	null0	0
default	d1	n	192.168.40.6/32	Access-P	255.255.255.255	0/2	null0	0
default	d1	n	192.168.40.7/32	Access-P	255.255.255.255	0/2	null0	0
default	d1	n	192.168.40.8/32	Access-P	255.255.255.255	0/2	null0	0
default	d1	n	192.168.40.9/32	Access-P	255.255.255.255	0/2	null0	0

To specify the first router context that you want to display in the output:

```
host1#show aaa route-download routes global start aaa:a2
```

Virtual Router	VRF	Present	Number of Routes
default		y	4
default	d1	n	4

Meaning Table 17 on page 128 lists the `show aaa route-download routes global` command output fields.

Table 17: show aaa route-download routes global Output Fields

Field Name	Field Description
Virtual Router	Name of the virtual router used to download the routes
VRF	Name of the VRF used to download the routes
Present	Routes have been downloaded; y (yes) or n (no) indicates if the router context has been created.
Number of Routes	Number of current downloaded routes
Prefix/Length	IP address prefix and mask information for downloaded routes
Type	Type of downloaded routes; Access-P indicates routes downloaded from the RADIUS route-download server
NextHop	IP address of the next hop

Table 17: show aaa route-download routes global Output Fields (continued)

Field Name	Field Description
Dst/Met	Administrative distance and number of hops for the route
Tag	Tag assigned to downloaded routes
Intf	Interface type and specifier

Related Topics ■ show aaa route-download routes global

Monitoring Authentication, Authorization, and Accounting Statistics

Purpose Display authentication, authorization, and accounting statistics.

Use the optional **delta** keyword to specify that baselined statistics are to be shown.

Action To display authentication, authorization, and accounting statistics:

```

host1#show aaa statistics
      AAA Statistics
      -----
      Statistic                               Count
      -----
incoming initiate requests                   109
incoming disconnect requests                  7
outgoing grant (tunnel) responses             3
outgoing grant responses                     6
outgoing deny responses                      0
outgoing error responses                     0
outgoing Authentication requests              9
incoming Authentication responses             9
outgoing Re-Authentication requests           0
incoming Re-Authentication responses          0
outgoing Pre-Authentication requests          1
incoming Pre-Authentication responses          1
outgoing Accounting requests                 120
incoming Accounting responses                 120
outgoing Duplicate Acct requests             18
incoming Duplicate Acct responses            18
outgoing Broadcast Acct requests             32
incoming Broadcast Acct responses            32
outgoing Address requests                    0
incoming Address responses                    0

```

Meaning Table 18 on page 130 lists the **show aaa statistics** command output fields.

Table 18: show aaa statistics Output Fields

Field Name	Field Description
incoming initiate requests	Number of incoming AAA requests (from other E Series applications) for user connect services
incoming disconnect requests	Number of incoming AAA requests (from other E Series applications) for user disconnect services
outgoing grant (tunnel) responses	Number of outgoing tunnel grant responses to AAA requests
outgoing grant responses	Number of outgoing grant responses to AAA requests
outgoing deny responses	Number of outgoing deny responses to AAA requests
outgoing error responses	Number of outgoing error responses to AAA requests
outgoing Authentication requests	Number of authentication requests from AAA to the authentication task
incoming Authentication responses	Number of authentication responses from the authentication task to AAA
outgoing Re-Authentication requests	Number of reauthentication requests from AAA to the authentication task
incoming Re-Authentication responses	Number of reauthentication responses from the authentication task to AAA
outgoing Pre-Authentication requests	Number of preauthentication requests from AAA to the preauthentication task
incoming Pre-Authentication responses	Number of preauthentication responses from the preauthentication task to AAA
outgoing Accounting requests	Number of accounting requests (starts, updates, stops) from AAA to the accounting task
incoming Accounting responses	Number of accounting responses (starts, updates, stops) from the accounting task to AAA
outgoing Duplicate Acct requests	Number of duplicate accounting requests (starts, updates, stops) from AAA to the accounting task
incoming Duplicate Acct responses	Number of duplicate accounting responses (starts, updates, stops) from the accounting task to AAA
outgoing Broadcast Acct requests	Number of broadcast accounting requests (starts, updates, stops) from AAA to the accounting task
incoming Broadcast Acct responses	Number of broadcast accounting responses (starts, updates, stops) from the accounting task to AAA
outgoing Address requests	Number of address allocation/release requests from AAA to address allocation task

Table 18: show aaa statistics Output Fields *(continued)*

Field Name	Field Description
incoming Address responses	Number of address allocation/release responses from the address allocation task to AAA

Related Topics ■ show aaa statistics

Monitoring the Number of Active Subscribers Per Port

Purpose Display the maximum number of active subscribers configured per port.

Action To display the maximum number of active subscribers configured per port:

```
host1#show aaa subscriber per-port-limit
Subscriber Port Limits
-----
Port          Limit
-----
0/2           5
0/3           2
3/2           2
```

Related Topics ■ show aaa subscriber per-port-limit

Monitoring the Maximum Number of Active Subscribers Per Virtual Router

Purpose Display the maximum number of active subscribers configured per virtual router.

Action To display the maximum number of active subscribers configured per virtual router:

```
host1# show aaa subscriber per-vr-limit
subscriber limit is 0
```

Related Topics ■ show aaa subscriber per-vr-limit

Monitoring Session Timeouts

Purpose Display idle and session timeouts.

Action To display idle and session timeouts:

```
host1#show aaa timeout
idle timeout 1200 seconds monitor ingress only
session timeout 3600 seconds
```

Related Topics ■ show aaa timeout

Monitoring Interim Accounting for Users on the Virtual Router

Purpose Display the default interval used for interim accounting for users on the virtual router. An entry of 0 indicates that the feature is disabled.

Action To display the default interval used for interim accounting for users on the virtual router:

```
host1:vrXyz7#show aaa user accounting interval
user-acct-interval 20
```

Related Topics ■ show aaa user accounting interval

Monitoring Virtual Router Groups Configured for AAA Broadcast Accounting

Purpose Display the virtual router groups that are configured for AAA broadcast accounting.

For additional information about the **show configuration** command, see *JUNOS System Basics Configuration Guide*.

Action To display the virtual router groups that are configured for AAA broadcast accounting:

```
host1#show configuration category aaa global-attributes
! Configuration script being generated on MON JAN 10 2005 15:19:19 UTC
! Juniper Edge Routing Switch ERX-1440
! Version: 9.9.9 development-4.0 (January 7, 2005 17:26)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
! The category displayed is: aaa global-attributes
!
aaa accounting vr-group groupXyzCompany10
aaa virtual-router 1 vrXyzA
aaa virtual-router 2 vrXyzB
aaa virtual-router 3 vrXyzC
aaa virtual-router 4 vrXyzD
aaa accounting vr-group groupXyzCompany20
aaa virtual-router 1 vrXyzP
aaa virtual-router 2 vrXyzQ
aaa virtual-router 3 vrXyzR
aaa virtual-router 4 vrXyzS
!
hostname "host1"
```

Meaning Table 19 on page 133 lists the **show configuration category aaa global-attributes** command output fields.

Table 19: show configuration category aaa global-attributes Output Fields

Field Name	Field Description
aaa accounting vr-group	Name of virtual router groups
aaa virtual-router	Name and index number of the virtual routers that are members of the virtual router group

Related Topics ■ **show configuration category aaa global-attributes**

Monitoring Configuration Information for AAA Local Authentication

Purpose Display the configuration information for AAA local authentication. You can display information for the following keywords:

- ■ **databases**—Local user databases configured on the router
- ■ **users**—Users configured in the local user databases
- ■ **virtual-router**—Local user database selected by the specified virtual router for local authentication
- For additional information about the **show configuration** command, see *JUNOS System Basics Configuration Guide*.

Action To display the configuration information for AAA local authentication:

```
host1#show configuration category aaa local-authentication databases
! Configuration script being generated on TUE NOV 09 2004 12:50:18 UTC
! Juniper Edge Routing Switch ERX-1400
! Version: 6.1.0 (November 8, 2004 18:31)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
! The category displayed is: aaa local-authentication databases
!
hostname host1
aaa new-model
aaa local database default
aaa local database svalcldb10
```

Meaning Table 20 on page 134 lists the **show configuration category aaa local-authentication** command output fields.

Table 20: show configuration category aaa local-authentication Output Fields

Field Name	Field Description
aaa local database	Name of the local user database; the name default specifies the default local user database
aaa local select database	Local user database that the virtual router uses for local authentication
aaa local username	Unique user entry in the local user database
database	Name of the local user database for the specified username
hostname	Name of the host router
ip-address	IP address parameter for the user entry
ip-address-pool	IP address pool parameter for the user entry
operational virtual-router	Virtual router parameter for the user entry
password	Password used to authenticate the subscriber
secret	Secret used to authenticate the subscriber
virtual-router	Name of virtual router

Related Topics ■ **show configuration category aaa local-authentication**

Monitoring AAA Server Attributes

Purpose Display status of the attributes on the AAA server, including AAA accounting duplication and broadcast.

For additional information about the **show configuration** command, see *JUNOS System Basics Configuration Guide*.

Action To display status of the attributes on the AAA server, including AAA accounting duplication and broadcast:

```
host1#show configuration category aaa server-attributes include-defaults!
Configuration script being generated on MON JAN 10 2005 15:12:02 UTC
! Juniper Edge Routing Switch ERX-1440
! Version: 9.9.9 development-4.0 (January 7, 2005 17:26)
! Copyright (c) 1999-2004 Juniper Networks, Inc. All rights reserved.
!
! Commands displayed are limited to those available at privilege level 15
!
! NOTE: This script represents only a subset of the full system configuration.
```

```

! The category displayed is: aaa server-attributes
!
virtual-router default
aaa accounting duplication lac
aaa accounting broadcast group1
aaa duplicate-address-check enable
aaa accounting acct-stop on-aaa-failure enable
aaa accounting acct-stop on-access-deny disable
aaa subscriber limit per-vr 0
aaa intf-desc-format include sub-intf enable
aaa intf-desc-format include adapter enable
aaa accounting immediate-update disable
!
! =====
!
virtual-router lac
no aaa accounting duplication
no aaa accounting broadcast
aaa duplicate-address-check enable
aaa accounting acct-stop on-aaa-failure enable
aaa accounting acct-stop on-access-deny disable
aaa subscriber limit per-vr 0
aaa intf-desc-format include sub-intf enable
aaa intf-desc-format include adapter enable
aaa accounting immediate-update disable
!
! =====
!
virtual-router isp
no aaa accounting duplication
no aaa accounting broadcast
aaa duplicate-address-check enable
aaa accounting acct-stop on-aaa-failure enable
aaa accounting acct-stop on-access-deny disable
aaa subscriber limit per-vr 0
aaa intf-desc-format include sub-intf enable
aaa intf-desc-format include adapter enable
aaa accounting immediate-update disable

```

Meaning Table 21 on page 135 lists the **show configuration category aaa server-attributes include-defaults** command output fields.

Table 21: show configuration category aaa server-attributes include-defaults Output Fields

Field Name	Field Description
virtual router	Name of the virtual router
aaa accounting duplication	Virtual router used for duplicate accounting
aaa accounting broadcast	Virtual router group used for broadcast accounting
aaa duplicate-address-check	Enabled, disabled
aaa accounting acct-stop on-aaa-failure	Enabled, disabled

Table 21: show configuration category aaa server-attributes include-defaults Output Fields (continued)

Field Name	Field Description
aaa accounting acct-stop on-access-deny	Enabled, disabled
aaa subscriber limit per-vr	Enabled, disabled
aaa intf-desc-format include sub-intf	Enabled, disabled
aaa intf-desc-format include adapter	Enabled, disabled
aaa accounting immediate-update	Enabled, disabled

Related Topics ■ show configuration category aaa server-attributes include-defaults

Monitoring the COPS Layer Over SRC Connection

Purpose Display information about the COPS layer over which the SRC connection is made.

Action To display information about the COPS layer over which the SRC connection is made:

```

host1#show cops info
General Cops Information:

    Sessions Created: 1
    Sessions Deleted: 0
    Current Sessions: 1
    Bytes Received: 680
    Packets Received: 17
    Bytes Sent: 692
    Packets Sent: 21
    Keep Alive Received: 12
    Keep Alive Sent: 12

Session Information
Remote Ip Address: 10.10.0.223
Remote TCP Port: 4001
Client Type: 16384
Bytes Received: 2224
Packets Received: 5
Bytes Sent: 596
Packets Sent: 9
REQ Sent: 4
DEC Rcv: 4
RPT Sent: 4
DRQ Sent: 0
SSQ Rcv: 0
OPN Sent: 1

```



```

CAT Rcv:      1
CC Sent:      0
CC Rcv:       0
SSC Sent:     0

```

Meaning Table 22 on page 137 lists the **show cops info** command output fields.

Table 22: show cops info Output Fields

Field Name	Field Description
Session Created	Number of COPS sessions created
Sessions Deleted	Number of COPS sessions deleted
Current Sessions	Number of current COPS sessions
Bytes Received	Number of bytes received on all COPS sessions
Packets Received	Number of packets received on all COPS sessions
Bytes Sent	Number of bytes transmitted on all COPS sessions
Packets Sent	Number of packets transmitted on all COPS sessions
Keep Alive Received	Number of COPS keepalive messages received
Keep Alive Sent	Number of COPS keepalive messages <i>sent</i>
Remote IP Address	IP address of the remote peer
Remote TCP Port	TCP port number of the remote peer
Client Type	Type of client for the session. For this release the client type must be 16640 (SRC client).
Bytes Received	Number of bytes received for this COPS session
Packets Received	Number of packets received for this COPS session
Bytes Sent	Number of bytes sent on this COPS session
Packets Sent	Number of packets sent on this COPS session
REQ Sent	Number of Request packets sent on this COPS session
DEC Rcv	Number of Decision packets received on this COPS session
RPT Sent	Number of Report packets sent on this COPS session
DRQ Sent	Number of Delete Requests sent on this COPS session
SSQ Rcv	Number of Synch Requests received on this COPS session
OPN Sent	Number of Open messages sent on this COPS session

Table 22: show cops info Output Fields (continued)

Field Name	Field Description
CAT Rcv	Number of Client Accepts packets received on this COPS session
CC Sent	Number of Client Closes packets sent on this COPS session
CC Rcv	Number of Client Closes packets received on this COPS session
SSC Sent	Number of Sync Complete packets sent on this COPS session

Related Topics ■ show cops info

Monitoring Statistics About the COPS Layer

Purpose Display statistics about the COPS layer over which the SRC connection is made.

Action To display statistics about the COPS layer:

```
host1#show cops statistics
General Cops Information:
  Sessions Created: 0
  Sessions Deleted: 0
  Current Sessions: 0
  Bytes Received: 1108
  Packets Received: 12
  Bytes Sent: 1572
  Packets Sent: 18
  Keep Alive Received: 2
  Keep Alive Sent: 2
Session Information:
  Client Type: 24754
  Bytes Received: 2539032
  Packets Received: 20388
  Bytes Sent: 4386648
  Packets Sent: 51337
  REQ Sent: 21203
  DEC Rcv: 20388
  RPT Sent: 20391
  DRQ Sent: 9743
  SSQ Rcv: 0
  OPN Sent: 0
  CAT Rcv: 0
  CC Sent: 0
  CC Rcv: 0
  SSC Sent: 0
```

Meaning Table 23 on page 139 lists the **show cops statistics** command output fields.

Table 23: show cops statistics Output Fields

Field Name	Field Description
Session Created	Number of COPS sessions created
Sessions Deleted	Number of COPS sessions deleted
Current Sessions	Number of current COPS sessions
Bytes Received	Number of bytes received on all COPS sessions
Packets Received	Number of packets received on all COPS sessions
Bytes Sent	Number of bytes transmitted on all COPS sessions
Packets Sent	Number of packets transmitted on all COPS sessions
Keep Alive Received	Number of COPS keepalive messages received
Keep Alive Sent	Number of COPS keepalive messages <i>sent</i>
Client Type	Type of client for the session
Bytes Received	Number of bytes received for this COPS session
Packets Received	Number of packets received for this COPS session
Bytes Sent	Number of bytes sent on this COPS session
Packets Sent	Number of packets sent on this COPS session
REQ Sent	Number of Request packets sent on this COPS session
DEC Rcv	Number of Decision packets received on this COPS session
RPT Sent	Number of Report packets sent on this COPS session
DRQ Sent	Number of Delete Requests sent on this COPS session
SSQ Rcv	Number of Synch Requests received on this COPS session
OPN Sent	Number of Open messages sent on this COPS session
CAT Rcv	Number of Client Accepts packets received on this COPS session
CC Sent	Number of Client Closes packets sent on this COPS session
CC Rcv	Number of Client Closes packets received on this COPS session

Table 23: show cops statistics Output Fields (continued)

Field Name	Field Description
SSC Sent	Number of Sync Complete packets sent on this COPS session

Related Topics ■ show cops statistics

Monitoring Local Address Pool Aliases

Purpose Display information about aliases for the local address pools configured on your router. If you do not specify a particular alias, the router displays all aliases.

Action To display information about local address pool aliases:

```
host1#show ip local alias
Alias    Pool
-----
alias1   poolA
alias2   poolB
alias3   poolC
poolA    poolD
poolB    poolD
poolC    poolD
```

Meaning Table 24 on page 140 lists the show **ip local alias** command output fields.

Table 24: show ip local alias Output Fields

Field Name	Field Description
Alias	Name of alias for the local address pool
Pool	Name of the local address pool

Related Topics ■ show ip local alias

Monitoring Local Address Pools

Purpose Display information about the local address pools configured on your router. If you do not specify the name of a local address pool, the router displays all local address pools.

Action To display information about local address pools:

```
host1#show ip local pool
      High  Abated
Pool  Thresh Thresh Trap  Group
-----
poolA      85      75    N
Aliases
-----
alias1
      Begin      End      Free  In
      -----
      10.1.1.1  10.1.1.10    10     0
      10.1.2.1  10.1.2.10    10     0
      10.1.3.1  10.1.3.10    10     0
      High  Abated
Pool  Thresh Thresh Trap  Group
-----
poolB      85      75    N
Aliases
-----
alias2
      Begin      End      Free  In
      -----
      10.2.1.1  10.2.1.10    10     0
      10.2.2.1  10.2.2.10    10     0
      High  Abated
Pool  Thresh Thresh Trap  Group
-----
poolC      85      75    N
Aliases
-----
alias3
      Begin      End      Free  In
      -----
      10.3.1.1  10.3.1.10    10     0
      High  Abated
Pool  Thresh Thresh Trap  Group
-----
poolD      85      75    N
Aliases
-----
poolA
poolB
poolC
      Begin      End      Free  In
      -----
      10.4.1.1  10.4.1.255  255     0
```

Meaning Table 25 on page 141 lists the **show ip local pool** command output fields.

Table 25: show ip local pool Output Fields

Field Name	Field Description
Pool	User-specified name of the address pool

Table 25: show ip local pool Output Fields *(continued)*

Field Name	Field Description
High Thresh	High utilization threshold value
Abated Thresh	Abated utilization threshold value
Trap	Enable SNMP pool utilization traps: Y (yes) or N (no)
Aliases	Aliases for the local address pool
Begin	Starting IP address
End	Ending IP address
Free	Number of addresses available for use
In Use	Number of addresses currently in use

Related Topics ■ [show ip local pool](#)

Monitoring Local Address Pool Statistics

Purpose Display local address pool statistics. Use the optional **delta** keyword to specify that baselined statistics are to be shown.

Action To display local address pool statistics:

```
host1#show ip local pool statistics
Local Address Pool Statistics
```

Statistic	Values
Requests denied (pool exhaustion)	0

Related Topics ■ [show ip local pool statistics](#)

Monitoring Shared Local Address Pools

Purpose Display the shared local address pool configurations.

Action To display shared local address pool configuration information:

```
host1#show ip local shared-pool
Shared Pool  In Use  Dhcp Pool
-----
```

```
shared_poolA 253    dhcp_pool_25
shared_poolB 83     dhcp_pool_25
shared_poolC 99     dhcp_pool_17
```

Meaning Table 26 on page 143 lists the **show ip local shared-pool** command output fields.

Table 26: show ip local shared-pool Output Fields

Field Name	Field Description
Shared Pool	Name of the shared local address pool
In Use	Number of addresses allocated
Dhcp Pool	Name of the DHCP address pool

Related Topics ■ [show ip local shared-pool](#)

Monitoring the Routing Table

Purpose Display the current state of the routing table, including routes not used for forwarding. An Access-P entry in the Type column of the output indicates routes that are downloaded by the RADIUS route-download server.

Action To display information in the routing table:

```
host1#show ip route
Protocol/Route type codes:
  I1- ISIS level 1, I2- ISIS level2,
  I- route type intra, IA- route type inter, E- route type external,
  i- metric type internal, e- metric type external,
  P- periodic download, O- OSPF, E1- external type 1, E2- external type2,
  N1- NSSA external type1, N2- NSSA external type2
  L- MPLS label, V- VRF, *- via indirect next-hop
```

Prefix/Length	Type	Next Hop	Dst/Met	Interface
0.0.0.0/0	Static	10.13.10.1	1/0	FastEthernet6/0/0
192.168.10.0/23	Connect	10.13.10.187	0/0	FastEthernet6/0/0
192.168.21.21/32	Access-P	255.255.255.255	254/2	null0
192.168.22.22/32	Access-P	255.255.255.255	254/2	null0
192.168.23.23/32	Access-P	255.255.255.255	254/2	null0
192.168.24.24/32	Access-P	255.255.255.255	254/2	null0

Meaning Refer to the description of the **show ip route** command in *JUNOS IP, IPv6, and IGP Configuration Guide* for additional information about the **show ip route** command.

Related Topics ■ [show ip route](#)

Monitoring the B-RAS License

Purpose Display the B-RAS license.

Action To display the B-RAS license:

```
host1#show license b-ras
K4bZ16Lr
```

Related Topics ■ [show license b-ras](#)

Monitoring the RADIUS Server Algorithm

Purpose Display information about the currently configured RADIUS server algorithm.

Action To display the RADIUS server algorithm:

```
host1#show radius algorithm
direct
```

Related Topics ■ [show radius algorithm](#)

Monitoring RADIUS Override Settings

Purpose Display the current RADIUS override settings.

Action To display the RADIUS override settings:

```
host1:vrXyz7#show radius override
nas-ip-addr: nas-ip-addr
nas-info:    from authentication virtual router
```

Meaning Table 27 on page 144 lists the **show radius override** command output fields.

Table 27: show radius override Output Fields

Field Name	Field Description
nas-ip-addr	Either the NAS-IP-Address [4] attribute is used, or it is overridden with the Tunnel-Client-Endpoint [66] attribute.

Table 27: show radius override Output Fields (continued)

Field Name	Field Description
nas-info	Either the NAS-IP-Address [4] and NAS-Identifier [32] attributes of the virtual router generating the accounting information are used, or they are overridden with the respective attributes of the authentication virtual router.

Related Topics ■ show radius override

Monitoring the RADIUS Rollover Configuration

Purpose Display the configuration of the RADIUS rollover-on-reject feature.

Action To display the RADIUS rollover configuration:

```
host1#show radius rollover-on-reject
rollover-on-reject enabled
```

Meaning RADIUS rollover-on-reject is enabled.

Related Topics ■ show radius rollover-on-reject

Monitoring RADIUS Server Information

Purpose Display RADIUS server information.

Use with the optional **accounting**, **authentication**, **dynamic-request**, **route-download**, or **pre-authentication** keywords to limit output to the specific type of server.

Action To display RADIUS server configuration information:

```
host1#show radius servers
RADIUS Authentication Configuration
-----
IP Address      Udp  Retry      Maximum  Dead
Port            Count  Timeout    Sessions Time
-----
172.28.30.117   1812   3          255      30
172.28.30.118   1812   3          255      30
172.28.30.119   1812   3          255      30
RADIUS Accounting Configuration
-----
IP Address      Udp  Retry      Maximum  Dead
Port            Count  Timeout    Sessions Time
-----
172.28.30.117   1812   3          255      30
172.28.30.118   1812   3          255      30
172.28.30.119   1812   3          255      30
Secret          Status
-----
radius          dead
radius          active
radius          alive
```

172.28.30.117	1813	3	3	255	30	radius	dead
172.28.30.118	1813	3	3	255	30	radius	active
172.28.30.119	1813	3	3	255	30	radius	alive
RADIUS Pre-Authentication Configuration							
IP Address	Udp Port	Retry Count	Timeout	Maximum Sessions	Dead Time	Secret	Status
172.28.30.117	1812	3	3	255	30	radius	dead
172.28.30.118	1812	3	3	255	30	radius	active
172.28.30.119	1812	3	3	255	30	radius	alive
RADIUS Route-Download Configuration							
IP Address	Udp Port	Retry Count	Timeout	Maximum Sessions	Dead Time	Secret	Status
192.168.30.16	1812	3	3	255	30	radius	dead
192.168.30.17	1812	3	3	255	30	radius	active
192.168.30.18	1812	3	3	255	30	radius	alive

Meaning If a RADIUS server was never configured on the virtual router, the command displays the following message:

```
host1#show radius servers
no radius servers configured
```

If a RADIUS server was configured previously and then removed on the virtual router, the command displays the following information:

```
host1#show radius servers
RADIUS Authentication Configuration
IP Address  Udp Port  Retry Count  Timeout  Maximum Sessions  Dead Time  Secret  Status
-----
RADIUS Accounting Configuration
IP Address  Udp Port  Retry Count  Timeout  Maximum Sessions  Dead Time  Secret  Status
-----
RADIUS Pre-Authentication Configuration
IP Address  Udp Port  Retry Count  Timeout  Maximum Sessions  Dead Time  Secret  Status
-----
RADIUS Route-Download Configuration
IP Address  Udp Port  Retry Count  Timeout  Maximum Sessions  Dead Time  Secret  Status
-----
```

Table 28 on page 146 lists the **show radius servers** command output fields.

Table 28: show radius servers Output Fields

Field Name	Field Description
IP Address	IP address of RADIUS server

Table 28: show radius servers Output Fields (continued)

Field Name	Field Description
Udp Port	Number of the UDP port of the RADIUS server
Retry Count	Maximum number of times that the router retransmits a RADIUS packet to the RADIUS server
Timeout	Interval (in seconds) before the router retransmits a RADIUS packet to the RADIUS server
Maximum Sessions	Number of outstanding requests to the RADIUS server
Dead Time	Amount of time to remove the authentication server or accounting server from the available list when a timeout occurs
Secret	Configured authentication server or accounting server secret
Status	<p>Status of the configured RADIUS server:</p> <ul style="list-style-type: none"> ■ dead-The status displayed if the server does not respond within the configured number of retransmit counts, and if Dead Time is configured to a non-zero value. ■ active-The status displayed of the earliest configured, non-dead server if the server is accessed using the direct algorithm. The status displayed of all non-dead servers if the server is accessed using the round-robin algorithm. ■ alive-The status displayed of all non-dead servers except the earliest configured non-dead server, if the server is accessed using the direct algorithm. The status of none of the servers if the server is accessed using the round-robin algorithm.

Related Topics ■ show radius servers

Monitoring RADIUS Services Statistics

Purpose Use to display statistics for RADIUS services.

Use with the optional **accounting**, **authentication**, **dynamic-request**, **route-download**, or **pre-authentication** keywords to limit output to the specific type of statistics. Use the optional **delta** keyword to specify that baselined statistics are to be shown.

Action To display RADIUS authentication and accounting statistics:

```

host1#show radius statistics
      RADIUS Authentication Statistics
      -----
      Statistic      10.10.121.128
      -----
      UDP Port      1812
      Round Trip Time      0
      Access Requests      0
      Rollover Requests      0
      Retransmissions      0
      Access Accepts      0
      Access Rejects      0
      Access Challenges      0
      Malformed Responses      0
      Bad Authenticators      0
      Requests Pending      0
      Request Timeouts      0
      Unknown Responses      0
      Packets Dropped      0
      RADIUS Accounting Statistics
      -----
      Statistic      10.10.121.128
      -----
      UDP Port      1646
      Round Trip Time      2
      Requests      1
      Start Requests      1
      Interim Requests      0
      Stop Requests      0
      Reject Requests      0
      Rollover Requests      0
      Retransmissions      3
      Responses      1
      Start Responses      1
      Interim Responses      0
      Stop Responses      0
      Reject Responses      0
      Malformed Responses      0
      Bad Authenticators      0
      Requests Pending      0
      Request Timeouts      3
      Unknown Responses      0
      Packets Dropped      0

```

To display RADIUS pre-authentication statistics:

```

host1#show radius pre-authentication statistics
      RADIUS Pre-Authentication Statistics
      -----
      Statistic      172.28.30.117
      -----
      UDP Port      1812
      Round Trip Time      0
      Access Requests      2809
      Rollover Requests      0
      Retransmissions      56
      Access Accepts      2809
      Access Rejects      0
      Access Challenges      0
      Malformed Responses      0
      Bad Authenticators      0

```

```
Requests Pending      0
Request Timeouts     72
Unknown Responses     0
Packets Dropped       2
```

To display RADIUS route-download statistics:

```
host1#show radius route-download statistics
RADIUS Route-Download Statistics
-----
Statistic              192.168.30.16
-----
UDP Port                1812
Round Trip Time         0
Access Requests         1613
Rollover Requests       0
Retransmissions         6
Access Accepts          1612
Access Rejects          1
Access Challenges       0
Malformed Responses     0
Bad Authenticators      0
Requests Pending        0
Request Timeouts        6
Unknown Responses       0
Packets Dropped         5
```

Meaning Table 29 on page 149 lists the **show radius statistics** command output fields.



NOTE: All descriptions apply to the primary, secondary, and tertiary RADIUS authentication and accounting servers.

Table 29: show radius statistics Output Fields

Field Name	Field Description
UDP Port	Number of the UDP port of a RADIUS server
Round Trip Time	Hundreds of seconds from request to response
Access Requests	Number of access requests sent to server
Rollover Requests	Number of requests coming into server as a result of the previous server timing out
Retransmissions	Number of retransmissions
Access Accepts	Number of Access-Accepts received from the server
Access Rejects	Number of Access-Rejects received from the server
Access Challenges	Number of access challenges received from the server

Table 29: show radius statistics Output Fields (continued)

Field Name	Field Description
Malformed Responses	Number of responses with attributes having an invalid length or unexpected attributes (such as two attributes when the response is required to have at most one)
Bad Authenticators	Number of responses in which the authenticator is incorrect for the matching request. This can occur if the RADIUS secret for the client and server does not match.
Requests Pending	Number of requests waiting for a response
Request Timeouts	Number of requests that timed out
Unknown Responses	Number of unknown responses. The RADIUS response type in the header is invalid or unsupported.
Packets Dropped	Number of packets dropped either because they are too short or the E Series router receives a response for which there is no corresponding request. For example, if the router sends a request and the request times out, the router removes the request from the list and sends a new request. If the server is slow and sends a response to the first request after the router removes the request, the packet is dropped.
Requests	Total number of accounting requests sent, which is the combined total of Start Requests, Interim Requests, Stop Requests, and Reject Requests
Start Requests	Number of accounting start requests sent; includes Acct-On, Acct-Start, Acct-Link-State, and Acct-Tunnel-Start requests
Interim Requests	Number of interim accounting requests
Stop Requests	Number of accounting stop requests sent; includes Acct-Off, Acct-Stop, Acct-Link-Stop, and Acct-Tunnel-Stop requests
Reject Requests	Number of accounting reject requests sent; includes Acct-Link-Reject and Acct-Tunnel-Reject requests
Responses	Number of accounting responses received from the server
Start Responses	Number of accounting start responses received; includes Acct-On, Acct-Start, Acct-Link-Start, and Acct-Tunnel-Start responses
Interim Responses	Number of interim accounting responses
Stop Responses	Number of accounting stop responses received; includes Acct-Off, Acct-Stop, Acct-Link-Stop, and Acct-Tunnel-Stop responses

Table 29: show radius statistics Output Fields *(continued)*

Field Name	Field Description
Reject Responses	Number of accounting reject responses received; includes Acct-Link-Reject and Acct-Tunnel-Reject responses

Related Topics ■ show radius statistics

Monitoring RADIUS SNMP Traps

Purpose Display the configuration of RADIUS SNMP traps.

Action To display RADIUS SNMP traps configuration information:

```
host1#show radius trap
trap for auth-server-not-responding enabled
trap for no-auth-server-responding disabled
trap for auth-server-responding enabled
trap for acct-server-not-responding enabled
trap for no-acct-server-responding disabled
trap for acct-server-responding disabled
```

Meaning A list of the configured RADIUS-related SNMP traps is displayed.

Related Topics ■ show radius trap

Monitoring RADIUS Accounting for L2TP Tunnels

Purpose Display the status for RADIUS accounting for L2TP tunnels.

Action To display RADIUS accounting for L2TP tunnels:

```
host1#show radius tunnel-accounting
disabled
```

Meaning RADIUS accounting is either enabled or disabled.

Related Topics ■ [show radius tunnel-accounting](#)

Monitoring RADIUS UDP Checksums

Purpose Display information about UDP checksums.

Action To display the status of RADIUS UDP checksums:

```
host1#show radius udp-checksum
enabled
```

Meaning RADIUS checksums status is either enabled or disabled.

Related Topics ■ [show radius udp-checksum](#)

Monitoring RADIUS Server IP Addresses

Purpose Display the IP address of the RADIUS servers.

Action To display the RADIUS server IP address:

```
host1#show radius update-source-address
192.168.1.228
```

Related Topics ■ [show radius update-source-addr](#)

Monitoring the RADIUS Attribute Used for IPv6 Neighbor Discovery Router Advertisements

Purpose Display the RADIUS attribute used for IPv6 Neighbor Discovery router advertisements.

Action To display the RADIUS attribute used for IPv6 Neighbor Discovery router advertisements:

```
host1#show aaa ipv6-nd-ra-prefix
IPv6 ND RA Prefix      : IPv6-NdRa-Prefix (Juniper VSA)
```


Related Topics ■ `show aaa ipv6-nd-ra-prefix`

Monitoring the RADIUS Attribute Used for DHCPv6 Prefix Delegation

Purpose Display the RADIUS attribute used for DHCPv6 Prefix Delegation.

Action To display the RADIUS attribute used for DHCPv6 Prefix Delegation:

```
host1#show aaa dhcpv6-delegated-prefix
DHCPv6 Delegated Prefix : Framed-IPv6-Prefix
```

Related Topics ■ `show aaa dhcpv6-delegated-prefix`

Monitoring SRC Client Connection Status

Purpose Display the current status of the SRC client connection to the SAEs. The command output refers to the SRC client by its former name, SSC client.

Action To display the status of the SRC client connection:

```
host1#show ssc info
The SSC Client configured protocols : IP(v4), DHCP(v4), L2TP(LAC)
The SSC Client is currently unconnected
The SSC Client configured servers are:
  Primary: 10.10.2.2:3
  Secondary: 0.0.0.0:0
  Tertiary: 0.0.0.0:0
  Local Source: FastEthernet 0/0, Local Source Address: 10.13.5.61
  The configured transport router is: default
  The configured retry timer is (seconds): 90
  The configured update-policy-request is: Enabled
  The connection state is: NoConnection
SSC Client Statistics:
Policy Commands received      0
Policy Commands(List)        0
Policy Commands(Acct)         0
Bad Policy Cmds received      0
Error Policy Cmds received    0
Policy Reports sent           0
Connection Open requests      0
Connection Open completed     0
Connection Closed sent        0
Connection Closed remotely    0
Create Interfaces sent         0
Delete Interfaces sent         0
Active IP Interfaces           2
IP Interface Transitions      0
Synchronizes received         0
Synchronize Complete sent     0
Internal Errors                0
Communication Errors           0
```

```

Tokens Seen          0
Active Tokens        0
Token Transitions    0
Token Creates Sent   0
Token Deletes Sent   0
Active Addresses     0
Address Transitions  0
Create Addresses Sent 0
Delete Addresses Sent 0
Authentication Successes 0
Authentication Failures 0

```

Meaning Table 30 on page 154 lists the **show sssc info** command output fields.

Table 30: show sssc info Output Fields

Field Name	Field Description
The SSC client configured protocols	Protocols that are enabled on the virtual router for policy and QoS management by the SRC software
The SSC client configured servers	IP addresses of the primary, secondary, and tertiary SAEs
Local Source	Fixed source interface for the TCP/COPS connection
Local Source Address	Fixed source address for the TCP/COPS connection
The configured transport router is	Router on which is TCP/COPS connection is established
The configured retry timer is (seconds)	Delay period the client waits for a response from the SAE before submitting request again
The configured update-policy-request is	Whether the router or the SRC client retrieves DSL line rate parameters, whenever the values change after connection establishment, from ANCP and transfers the details to the COPS server with other COPS messages, enabled or disabled
The connection state is	Current state of the TCP/COPS connection

Table 30: show ssc info Output Fields (continued)

Field Name	Field Description
SSC Client Statistics	<p>Statistics about the connection between the SRC client and SAE</p> <ul style="list-style-type: none"> ■ Policy Commands received—Number of policy commands received on the SRC client connection ■ Policy Commands(List)—Number of Policy Commands with subtype List ■ Policy Commands(Acct)—Number of Policy Commands with subtype Accounting ■ Bad Policy Cmds received—Number of Policy Commands received with bad policies ■ Error Policy Cmds received—Number of Policy Commands received with errors ■ Policy Reports sent—Number of Policy Reports sent ■ Connection Open requests—Number of connections the SRC client has tried to open with a remote SAE ■ Connection Open completed—Number of connections successfully open to the SAE ■ Connection Closed sent—Number of connections the SRC client has closed ■ Connection Closed remotely—Number of connections that were closed by the remote SAE ■ Create Interfaces sent—Number of create interface indications sent to the SAE ■ Delete Interfaces sent—Number of delete interface indications sent to the SAE ■ Active IP Interfaces—Current number of active IP interfaces the SRC client is aware of ■ IP Interface Transitions—Number of IP interface transitions logged by the SRC client ■ Synchronizes received—Number of synchronization requests the SRC client received from the SAE ■ Synchronize Complete sent—Number of synchronization complete indications sent ■ Internal Errors—Number of internal errors ■ Communication Errors—Number of errors with lower-layer communications (such as socket errors)

Related Topics ■ show ssc info

Monitoring SRC Client Connection Statistics

Purpose Display statistics about connection between the SRC client and SAE. The command output refers to the SRC client by its former name, SSC client.

Action To display statistics for the SRC client connection:

```
host1#show sssc statistics
SSC Client Statistics:
  Policy Commands received    0
  Policy Commands(List)      0
  Policy Commands(Acct)      0
  Bad Policy Cmds received    0
  Error Policy Cmds received  0
  Policy Reports sent         3
  Connection attempts         7
  Connection Open requests    7
  Connection Open completed   0
  Connection Closed sent      0
  Connection Closed remotely  5
  Create Interfaces sent      0
  Delete Interfaces sent      3
  Active IP Interfaces        3282
  IP Interface Transitions    3281
  Synchronizes received       0
  Synchronizes rcvd & dropped 0
  Synchronize Complete sent   2
  Internal Errors             0
  Communication Errors        0
  Discovers Seen              15263
  Active Discovers            4911
  Discover Transitions         20704
  Discover Creates Sent        15263
  Discover Deletes Sent        10352
  Active Addresses            3274
  Address Transitions          3280
  Create Addresses Sent        3277
  Delete Addresses Sent        3
```

Meaning Table 31 on page 156 lists the **show sssc statistics** command output fields.

Table 31: show sssc statistics Output Fields

Field Name	Field Description
Policy Commands received	Number of policy commands received on the SRC client connection
Policy Commands(List)	Number of Policy Commands with subtype List
Policy Commands(Acct)	Number of Policy Commands with subtype Accounting
Bad Policy Cmds received	Number of Policy Commands received with bad policies
Error Policy Cmds received	Number of Policy Commands received with errors
Policy Reports sent	Number of Policy Reports sent
Connection Open requests	Number of connections the SRC client has tried to open with a remote SAE
Connection Open completed	Number of connections successfully open to the SAE

Table 31: show ssc statistics Output Fields (continued)

Field Name	Field Description
Connection Closed sent	Number of connections the SRC client has closed
Connection Closed remotely	Number of connections that were closed by the remote SAE
Create Interfaces sent	Number of create interface indications sent to the SAE
Delete Interfaces sent	Number of delete interface indications sent to the SAE
Active IP Interfaces	Current number of active IP interfaces the SRC client is aware of
IP Interface Transitions	Number of IP interface transitions logged by the SRC client
Synchronizes received	Number of synchronization requests the SRC client received from the SAE
Synchronize Complete sent	Number of synchronization complete indications sent
Internal Errors	Number of internal errors
Communication Errors	Number of errors with lower-layer communications (such as socket errors)

Related Topics ■ show ssc statistics

Monitoring the SRC Client Version Number

Purpose Display the SRC client (formerly SDX client) version number.

Action To display the SRC client version number:

```
host1#show ssc version
The SSC Client version is: 4.0
```

Related Topics ■ show ssc version

Monitoring Subscriber Information

Purpose Display the active subscribers on the router. If you specify a username, the router displays only the users that match. When you issue the command in the default VR,

all users are displayed. When you issue the command in a nondefault VR, only those users attached to that VR are displayed. The following list describes keywords that you can use with the **show subscribers** command:

- You can use the **domain**, **interface**, **port**, **slot**, **username**, or **virtual-router** keywords on all routers to filter the results. If you do not use a keyword, all active users are displayed.
- When you use the **interface** keyword to display detailed subscriber information by interface, you must also specify the **atm**, **ethernet**, or **lag** keyword, an interface specifier, and optionally a subinterface specifier.
- If you specify the **lag** keyword, the output displays active subscribers for the specified LAG interface. By default, the **aaa intf-desc-format include sub-intf enable** command includes the subinterface and S-VLAN ID in the LAG interface ID. Use the **aaa intf-desc-format include sub-intf disable** command to exclude the subinterface and S-VLAN ID from the LAG interface ID.
- The output displayed in the interface field depends on the configuration of two commands at the time the subscriber logs in: **aaa intf-desc-format include sub-intf** and **aaa intf-desc-format include adapter** (for the E120 and E320 Broadband Services Routers).
 - When the **aaa intf-desc-format include sub-intf disable** command has been issued, the subinterface is stripped from the subscriber's interface field at login and is not displayed in the output. In the default state, or when the **aaa intf-desc-format include sub-intf enable** command has been issued, the subinterface is included in the subscriber's interface field at login, and is displayed in the output.
 - When the **aaa intf-desc-format include adapter disable** command has been issued, the adapter is stripped from the subscriber's interface field at login and is not displayed in the output. In the default state, or when the **aaa intf-desc-format include adapter enable** command has been issued, the adapter is included in the subscriber's interface field at login and is displayed in the output.
 - Even when the subinterface has been stripped from the subscriber's interface field, you can still include the subinterface specifier in the **show subscribers interface** command. Even though the subinterface itself is not displayed, only subscribers on the specified subinterface are displayed.
 - These considerations do not apply when you issue the **summary** keyword. The output displayed in the Interface field of summary versions is not affected by the state of either the **aaa intf-desc-format include sub-intf** command or the **aaa intf-desc-format include adapter** command when the subscriber logs in.
- You can use the **ipv6** keyword to display all IPv6 subscribers or include the IPv6 prefix to limit the display to only IPv6 subscribers on a specific network.
- You can use the **icr-partition** keyword to display the active subscribers for a particular ICR partition configured on a chassis.
- You can use the **summary** keyword to display only summary information about active subscribers.

Action To display general subscriber information:

```
host1# show subscribers
```

```

Subscriber List
-----
User Name      Type      Addr|Endpt      Virtual
-----
fred           tst       10.10.65.86/radius  default
bert           tst       192.168.10.3/user   default
User Name      Interface
-----
fred           atm 2/1.42:100.104
bert           FastEthernet 5/2.4
User Name      Login Time      Circuit Id
-----
fred           06/05/12 10:58:42  atm 5/1.3
bert           06/05/12 10:59:08
User Name      Remote Id
-----
fred
bert           (800) 555-1212

```

To display detailed information for subscribers on the specified interface:

```
host1# show subscribers interface ethernet 5/2
```

```

Subscriber List
-----
User Name      Type      Addr|Endpt      Virtual
-----
bert           tst       192.168.10.3/user   default
User Name      Interface
-----
bert           FastEthernet 5/2.4
User Name      Login Time      Circuit Id
-----
bert           06/05/12 10:59:08
User Name      Remote Id
-----
bert           (800) 555-0000

```

To display detailed information for subscribers on the specified LAG interface:

```
host1# show subscribers interface lag lag2.1:1-1
```

```

Subscriber List
-----
User Name      Type      Addr|Endpt      Router
-----
4101DHCPLIENT@CT.NET  ip       2.0.0.3/user    default
User Name      Interface
-----
4101DHCPLIENT@CT.NET  lag lag2.1:1-1
User Name      Login Time      Circuit Id
-----

```

```
4101DHCPCLIENT@CT.NET      09/10/29 02:07:51
```

```
User Name      Remote Id
-----
4101DHCPCLIENT@CT.NET
```

To display detailed information for subscribers on the specified slot:

```
host1# show subscribers slot 5
Subscriber List
-----
User Name      Type      Addr|Endpt      Virtual
-----
fred           tst       10.10.65.86/radius default
User Name      Interface
-----
fred           atm 5/1.42:100.104
User Name      Login Time      Circuit Id
-----
fred           06/05/12 10:58:42 atm 5/1.3
User Name      Remote Id
-----
fred
```

To display the number of subscribers on each virtual router, as well as the total and peak subscribers for the chassis:

```
host1#show subscribers summary
Virtual
Router      Subscribers      Ppp      Ip      Tnl      Total
-----
default     1                 1        0        0        1
Total Subscribers : 10 (chassis-wide total)
Peak Subscribers : 15 (chassis-wide total)
```

To display the number of subscribers on each port:

```
host1#show subscribers summary port
Interface      Count
-----
3/1            5
2/1            5
Total Subscribers : 10 (chassis-wide total)
Peak Subscribers : 15 (chassis-wide total)
```

To display the number of subscribers by domain name:

```
host1#show subscribers summary domain
Domain Name      Count
-----
abc.com          5
iii.com          5
Total Subscribers : 10 (chassis-wide total)
Peak Subscribers : 15 (chassis-wide total)
```

To display the number of subscribers by interface:

```
host1#show subscribers summary interface
```



```

Interface                Count
-----
ATM 3/2.1                1
ETHERNET 5/2.1           2
LAG lag1.100             1
Total Subscribers: 4 (chassis-wide total)
Peak Subscribers: 8 (chassis-wide total)

```

To display the number of subscribers by slot:

```

host1#show subscribers summary slot
  Slot      Count
  -----
  3          1
  5          4
Total Subscribers : 5 (chassis-wide total)
Peak Subscribers : 8 (chassis-wide total)

```

To display the number of subscribers by ICR partition:

```

host1#show subscribers summary icr-partition
      ICR-Partition (location-id)      Count
-----
3/0.1.4                                5
3/0.2.5                                5
Total Subscribers: 10 (chassis-wide total)
Peak Subscribers: 15 (chassis-wide total)

```

Meaning Table 32 on page 161 lists the **show subscribers** command output fields.

Table 32: show subscribers Output Fields

Field Name	Field Description
User Name	Name of the subscriber
Type	Type of subscriber: atm, ip, ipsec, ppp, tnl (tunnel), tst (test)
Addr Endpt	IP or IPv6 address and source of the address: l2tp, local, dhcp, radius, user. For local, dhcp, radius, and user endpoints, the address is that of the user. When the endpoint is l2tp, the address is that of the LNS.
Virtual Router	Name of the virtual router context
Interface	Interface specifier over which the subscriber is connected
Login Time	Date, in YY/MM/DD format, and time the subscriber logged in
Circuit Id	User circuit ID value specified by PPPoE
Remote Id	User remote ID value specified by PPPoE
Total Subscribers	Number of active subscribers, chassis-wide

Table 32: show subscribers Output Fields (continued)

Field Name	Field Description
Peak Subscribers	Maximum value of the Total Subscriber field during the time the router has been active, chassis-wide
Subscribers	Number of subscribers; the sum of the Ppp and Ip fields
Ppp	Number of PPPoA and PPPoE users, combined
Ip	Number of DHCP and IP subscriber manager users, combined
Tnl	Number of users tunneled to an LNS
Total	Total number of users per virtual router; the sum of the Ppp, Ip, and Tnl fields
Domain Name	Domain name used by the subscriber
ICR-Partition (location-id)	A unique identifier for each ICR partition on a chassis. Note that this ID different from the partition name, which is configured using the ip vrrp vrid icr-partition <i>partitionName</i> command.
Count	Number of subscribers
Slot	Number of slot in the chassis

Related Topics ■ [show subscribers](#)

Monitoring Application Terminate Reason Mappings

Purpose Display information about the mappings for application terminate reasons.

Action To display the current terminate reasons that are mapped to a specific Acct-Terminate-Cause-Code:

This example uses the **radius** keyword to display all current terminate reasons mapped to RADIUS Acct-Terminate-Cause codes. The output lists all PPP mappings, followed by L2TP mappings, and then AAA mappings.

```
host1(config)#run show terminate-code radius
```

Apps	Terminate Reason	Description	Radius Code
ppp	authenticate-authenticator-timeout	authenticate authenticator timeout	17
ppp	authenticate-challenge-tim	authenticate challenge tim	10

```

ppp          eout
              authenticate-chap-no-resou
              rces
ppp          authenticate-chap-peer-aut
              henticator-timeout
ppp          authenticate-deny-by-peer
ppp          authenticate-inactivity-ti
              meout
ppp          authenticate-max-requests
              authenticate max requests
--More--
10
17
17
4
10

```

To display all terminate reasons that are mapped to a specific terminate code:

This example uses the **radius** keyword and a RADIUS Acct-Terminate-Cause code (**radius 4**) to display all terminate reasons mapped to the specified terminate code.

```
host1(config)#run show terminate-code radius 4
```

Apps	Terminate Reason	Description	Radius Code
ppp	authenticate-inactivity-ti meout	authenticate inactivity ti meout	4
l2tp	session-timeout-inactivity	session timeout inactivity	4

To display all current mappings for a particular application's terminate reasons:

This example uses **aaa** as the application.

```
host1(config)#run show terminate-code aaa
```

Apps	Terminate Reason	Description	Radius Code
aaa	deny-server-not-available	deny server not available	17
aaa	deny-server-request-timeou t	deny server request timed out	17
aaa	deny-authentication-failur e	deny authentication failur e from server	17
aaa	deny-address-assignment-fa ilure	deny address assignment fa ilure	17
aaa	deny-address-allocation-fa ilure	deny address allocation fa ilure	17
aaa	deny-no-address-allocation -resources	deny insufficient resource s for address allocation	17
aaa	deny-unknown-subscriber	deny no such server entry	17
aaa	deny-no-resources	deny no resources availabl e	10

--More--

To display the mapping for a specific terminate reason for an application:

This example uses **l2tp** as the application and **session-access-interface-down** as the terminate reason.

```
host1#show terminate-code l2tp session-access-interface-down
```

Terminate Reason	Description	Radius Code
session access interface down		8

Meaning Table 33 on page 164 lists the **show terminate-code** command output fields.

Table 33: show terminate-code Output Fields

Field Name	Field Description
Apps	The application generating the terminate reason; AAA, L2TP, PPP, or RADIUS client
Terminate Reason	The application's terminate reason
Description	The terminate reason
Radius Code	The RADIUS Acct-Terminate-Cause code to which the application's terminate reason is mapped

Related Topics ■ [show terminate-code](#)

Monitoring IPv6 Local Pools for DHCP Prefix Delegation By All Configured Pools

Purpose Display a summary of all the IPv6 local address pools configured on a virtual router, along with the prefix ranges in each of those pools, total number of prefixes that can be allocated to clients, and the number of prefixes that are in use by clients.

Action To display information about all the IPv6 local address pools configured on a virtual router:

```
host1#show ipv6 local pool
```

IPv6 Local Address Pools				
Pool	Start	End	Total	In Use
ipv6Pool-pppoa	2002:2002::/48	2002:2002:ffff::/48	65536	0
ipv6Pool-pppoe	3003:3003::/48	3003:3003:ffff::/48	65536	0
example	4004:4004::/48	4004:4004:ffff::/48	65536	16000

Meaning Table 34 on page 164 lists the **show ipv6 local pool** command output fields.

Table 34: show ipv6 local pool Output Fields

Field Name	Field Description
Pool	Names of IPv6 local address pools configured on the virtual router
Start	Starting prefix of the range of prefixes configured in a particular pool

Table 34: show ipv6 local pool Output Fields (continued)

Field Name	Field Description
End	Ending prefix of the range of prefixes configured in a particular pool
Total	Number of prefixes available for allocation to clients from a particular pool
In Use	Number of prefixes in a pool that are currently used by DHCPv6 clients

Related Topics ■ show ipv6 local pool

Monitoring IPv6 Local Pools for DHCP Prefix Delegation By Pool Name

Purpose Display prefix delegation details for an IPv6 local address pool configured on a virtual router.

Action To display prefix delegation information for a specific IPv6 local address pool:

host1#show ipv6 local pool example

```
Pool : example
-----
Utilization : 24
```

Start	End	Total	In Use	Exclude	Util	Preferred Lifetime	Valid Lifetime
-----	-----	-----	-----	-----	----	-----	-----
4004:4004::/48	4004:4004:ffff::/48	65536	16000	1	24	30 minutes	1 day

Exclude	4004:4004::/48
Dns Servers	5:5:5:5:5:5:5:5
	6:6:6:6:6:6:6:6
Domain Search List	example-1.com
	example-2.com
	example-3.com
	example-4.com

Meaning Table 35 on page 165 lists the `show ipv6 local pool poolName` command output fields.

Table 35: show ipv6 local pool poolName Output Fields

Field Name	Field Description
Pool	Name of the IPv6 local address pool for which prefix delegation details are displayed

Table 35: show ipv6 local pool poolName Output Fields (continued)

Field Name	Field Description
Utilization	Percentage of IPv6 prefixes currently allocated to clients from the local address pool
Start	Starting prefix of the range of prefixes configured in a particular pool
End	Ending prefix of the range of prefixes configured in a particular pool
Total	Number of prefixes available for allocation to clients from a particular pool
In Use	Number of prefixes in a pool that are currently used by DHCPv6 clients
Preferred Lifetime	Amount of time for which the prefix remains preferred for the requesting router to use
Valid Lifetime	Amount of time for which the prefix remains valid for the requesting router to use
Exclude	Prefix length or prefix range excluded from allocation to the requesting router
Util	Percentage of prefixes currently allocated to clients from a particular prefix range in the pool
Dns Servers	List of IPv6 addresses of DNS servers to be sent to clients in the DHCPv6 responses
Domain Search List	List of domain names configured in the IPv6 local pool for DNS resolution

Related Topics ■ [show ipv6 local pool](#)

Monitoring IPv6 Local Pool Statistics for DHCP Prefix Delegation

Purpose Display IPv6 local address pool statistics used for DHCP prefix delegation to requesting routers.

Action To display all IPv6 local address pool statistics for prefix delegation to clients:

```
host1#show ipv6 local pool statistics
IPv6 Local Address Pool Statistics
-----
Statistic      Value
-----
Allocations    0
```

```
Allocation Errors 0
Releases          0
Release Errors    0
```

Meaning Table 36 on page 167 lists the `show ipv6 local pool statistics` command output fields.

Table 36: show ipv6 local pool statistics Output Fields

Field Name	Field Description
Allocations	Number of prefixes allocated to DHCPv6 clients from the local address pool
Allocation Errors	Number of errors encountered during the allocation of prefixes
Releases	Number of prefixes released back to the pool
Release Errors	Number of errors encountered during the process of release of previously assigned prefixes by the requesting router

Related Topics ■ `show ipv6 local pool`

Part 2

Managing RADIUS and TACACS+

- Configuring RADIUS Attributes on page 171
- Configuring RADIUS Dynamic-Request Server on page 241
- Configuring RADIUS Relay Server on page 251
- RADIUS Attribute Descriptions on page 259
- Application Terminate Reasons on page 279
- Monitoring RADIUS on page 303
- Configuring TACACS+ on page 317
- Monitoring TACACS+ on page 329

Chapter 3

Configuring RADIUS Attributes

This chapter identifies the Remote Authentication Dial-In User Service (RADIUS) attributes that JUNOS software supports and describes the RADIUS attributes you can configure with the command-line interface (CLI). RADIUS attributes are discussed in the following sections:

- RADIUS Overview on page 171
- RADIUS Platform Considerations on page 172
- RADIUS References on page 173
- Subscriber AAA Access Messages on page 173
- Subscriber AAA Accounting Messages on page 181
- DSL Forum VSAs in AAA Access and Accounting Messages on page 188
- CLI AAA Messages on page 190
- CLI Commands Used to Modify RADIUS Attributes on page 191

RADIUS Overview

RADIUS is a distributed client/server that protects networks against unauthorized access. RADIUS clients running on a Juniper Networks E Series Broadband Services Router send authentication requests to a central RADIUS server.

You can access the RADIUS server through either a subscriber line or the CLI.



NOTE: For CLI/telnet users only—For CLI security, the router supports the RADIUS Access-Challenge message. The RADIUS server uses this message to send the user a challenge requiring a response. The router then displays the single reply message and attempts to authenticate the user with the new response as the password.

The central RADIUS server stores all the required user authentication and network access information. RADIUS informs the router of the privilege levels for which RADIUS-authenticated users have enable access. The router permits or denies enable access accordingly.

The RADIUS server is configured and managed by a RADIUS administrator. See your RADIUS server documentation for information about configuring and managing a RADIUS server.

The E Series RADIUS client uses the IP address in the router ID unless you explicitly set an IP address by using the `radius update-source-addr` command. See “Configuring RADIUS Authentication and Accounting Servers” on page 18.

To explicitly set the source address, perform the following tasks:

- Configure the RADIUS update-source address.
- Set this address on the RADIUS server if required.



NOTE: For additional RADIUS information about topics such as restricting user access, vty line authentication, or SSH, see the *Passwords and Security* chapter in *JUNOS System Basics Configuration Guide*.

RADIUS Services

RADIUS provides three distinct services:

- Authentication—Determines whether or not a user is allowed to access a specific service or resource.
- Authorization—Associates connection attributes or characteristics with a specific user.
- Accounting—Tracks service use by subscribers.

RADIUS Attributes

JUNOS software supports the RADIUS attributes and vendor-specific attributes (VSAs) listed in this chapter. These attributes define specific authentication, authorization, and accounting elements in a user’s profile. The profile is stored on the RADIUS server. RADIUS messages contain RADIUS attributes to communicate information between an E Series Broadband Services Router and the RADIUS server.

Note these guidelines about RADIUS attribute numbers:

- The number, such as [1], that appears in brackets before each attribute is the attribute’s standard number.
- Any attribute number beginning with 26, such as [26-1], identifies a vendor-specific attribute.

For a complete list of RADIUS attributes supported by JUNOS software, see “RADIUS IETF Attributes” on page 259.

RADIUS Platform Considerations

RADIUS is supported on all E Series routers.

For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the Juniper Networks E120 and E320 Broadband Services Routers.

RADIUS References

For more information about RADIUS, consult the following resources:

- RFC 2865—Remote Authentication Dial In User Service (RADIUS) (June 2000)
- RFC 2866—RADIUS Accounting (June 2000)
- RFC 2867—RADIUS Accounting Modifications for Tunnel Protocol Support (June 2000)
- RFC 2868—RADIUS Attributes for Tunnel Protocol Support (June 2000)
- RFC 2869—RADIUS Extensions (June 2000)
- RFC 4679—DSL Forum Vendor-Specific RADIUS Attributes (September 2006)
- GSMP extensions for layer2 control (L2C) Topology Discovery and Line Configuration—draft-wadhwa-gsmp-l2control-configuration-00.txt (July 2006 expiration)

Subscriber AAA Access Messages

Authorization and authentication access messages identify subscribers before the RADIUS server grants or denies them access to the network or network services. When an application requests user authentication, the request must have certain authenticating attributes, such as a user's name, password, and the particular type of service the user is requesting. This information is sent in the authentication request via the RADIUS protocol to the RADIUS server. In response, the RADIUS server grants or denies the request.

The router supports the following types of authentication and authorization messages:

- Access-Request—Requests client authentication. RADIUS responds to a client authentication request with either an Access-Accept, an Access-Reject, or an Access-Challenge message. An Access-Request message can contain a number of RADIUS attributes.
- Access-Accept—Grants the client's access request and can provide specific configuration information necessary to begin delivery of service to the user.
- Access-Reject—Sent if any value of the received attributes is not acceptable.
- Access-Challenge—Sent to the client, requesting additional authentication information.
- Change-of-Authorization-Request (CoA-Request)—Dynamically modifies session attributes, such as data filters.
- Disconnect-Request—Immediately terminates a user session.

Supported RADIUS IETF Attributes

Table 37 on page 174 lists the Access-Request, Access-Accept, Access-Reject, Access-Challenge, CoA, and Disconnect-Request attributes supported by JUNOS software. The following notes are referenced in Table 37 on page 174:

1. Attribute is used by Access-Request messages when terminating a PPP connection at the LNS or the initiating LAC.
2. Attribute is used to support pass-through exchange of EAP messages.
3. Attribute is used by Access-Challenge messages to set the PPP retransmission timeout used for EAP request packets.

Table 37 on page 174 lists the RADIUS IETF attributes supported for Access-Request, Access-Accept, Access-Reject, CoA-Request, and Disconnect-Request messages.

Table 37: AAA Access Message RADIUS IETF Attributes Supported

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	Access-Challenge	CoA-Request	Disconnect-Request
[1]	User-Name	✓	✓	–	–	✓	✓
[2]	User-Password	✓	–	–	–	–	–
[3]	CHAP-Password	✓	–	–	–	–	–
[4]	NAS-IP-Address	✓	–	–	–	–	–
[5]	NAS-Port	✓	–	–	–	–	–
[6]	Service-Type	✓	✓	–	–	–	–
[7]	Framed-Protocol	✓	✓	–	–	–	–
[8]	Framed-IP-Address	✓	✓	–	–	✓	–
[9]	Framed-IP-Netmask	–	✓	–	–	–	–
[11]	Filter-Id	–	✓	–	–	–	–
[12]	Framed-MTU (See Note 2.)	✓	✓	–	–	–	–
[18]	Reply-Message (See Note 2.)	–	✓	✓	✓	–	–
[22]	Framed-Route	–	✓	–	–	–	–
[24]	State (See Note 2.)	–	–	✓	✓	–	–
[25]	Class	–	✓	–	–	–	–

Table 37: AAA Access Message RADIUS IETF Attributes Supported *(continued)*

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	Access-Challenge	CoA-Request	Disconnect-Request
[27]	Session-Timeout (See Note 2.) (See Note 3.)	–	✓	✓	✓	–	–
[28]	Idle-Timeout	–	✓	–	–	–	–
[30]	Called-Station-Id	✓	–	–	–	–	–
[31]	Calling-Station-Id	✓	–	–	–	✓	–
[32]	NAS-Identifier	✓	–	–	–	–	–
[33]	Proxy-State	✓	–	–	–	–	–
[44]	Acct-Session-Id	✓	–	–	–	✓	–
[50]	Acct-Multi-Session-Id	✓	–	–	–	–	✓
[60]	CHAP-Challenge	✓	–	–	–	–	–
[61]	NAS-Port-Type	✓	–	–	–	–	–
[62]	Port-Limit	–	✓	–	–	–	–
[64]	Tunnel-Type (See Note 1.)	✓	✓	–	–	–	–
[65]	Tunnel-Medium-Type (See Note 1.)	✓	✓	–	–	–	–
[66]	Tunnel-Client-Endpoint (See Note 1.)	✓	✓	–	–	–	–
[67]	Tunnel-Server-Endpoint (See Note 1.)	✓	✓	–	–	–	–
[68]	Acct-Tunnel-Connection (See Note 1.)	✓	–	–	–	–	–
[69]	Tunnel-Password	–	✓	–	–	–	–
[77]	Connect-Info	✓	–	–	–	–	–
[79]	EAP-Message (See Note 2.)	✓	✓	✓	✓	–	–
[80]	Message-Authenticator (See Note 2.)	✓	✓	✓	✓	–	–
[82]	Tunnel-Assignment-Id	–	✓	–	–	–	–
[83]	Tunnel-Preference	–	✓	–	–	–	–

Table 37: AAA Access Message RADIUS IETF Attributes Supported *(continued)*

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	Access-Challenge	CoA-Request	Disconnect-Request
[85]	Acct-Interim-Interval	–	✓	–	–	–	–
[87]	NAS-Port-Id	✓	–	–	–	✓	–
[88]	Framed-Pool	–	✓	–	–	–	–
[90]	Tunnel-Client-Auth-Id (See Note 1.)	✓	✓	–	–	–	–
[91]	Tunnel-Server-Auth-Id (See Note 1.)	✓	✓	–	–	–	–
[96]	Framed-Interface-Id	–	✓	–	–	–	–
[97]	Framed-Ipv6-Prefix	–	✓	–	–	–	–
[99]	Framed-Ipv6-Route	–	✓	–	–	–	–
[100]	Framed-IPv6-Pool	–	✓	–	–	–	–
[101]	Error-Cause	–	–	–	–	✓	✓
[123]	Delegated-IPv6-Prefix	–	✓	–	–	–	–
[135]	Ascend-Primary-Dns	–	✓	–	–	–	–
[136]	Ascend-Secondary-Dns	–	✓	–	–	–	–
[188]	Ascend-Num-In-Multilink	✓	–	–	–	–	–
[242]	Ascend-Data-Filter	–	✓	–	–	–	–

Supported Juniper Networks VSAs

Table 38 on page 176 lists the Juniper Networks (Vendor ID 4874) VSAs supported for Access-Request, Access-Accept, Access-Reject, CoA-Request, and Disconnect-Request messages.

Table 38: AAA Access Message Juniper Networks (Vendor ID 4874) VSAs Supported

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	CoA-Request	Disconnect-Request
[26-1]	Virtual-Router	–	✓	–	✓	–
[26-2]	Local-Address-Pool	–	✓	–	–	–
[26-3]	Local-Loopback-Interface	–	✓	–	–	–
[26-4]	Primary-DNS	–	✓	–	–	–

Table 38: AAA Access Message Juniper Networks (Vendor ID 4874) VSAs Supported
(continued)

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	CoA-Request	Disconnect-Request
[26-5]	Secondary-DNS	–	✓	–	–	–
[26-6]	Primary-WINS (NBNS)	–	✓	–	–	–
[26-7]	Secondary-WINS (NBNS)	–	✓	–	–	–
[26-8]	Tunnel-Virtual-Router	–	✓	–	–	–
[26-9]	Tunnel-Password	–	✓	–	–	–
[26-10]	Ingress-Policy-Name	–	✓	–	–	–
[26-11]	Egress-Policy-Name	–	✓	–	–	–
[26-12]	Ingress-Statistics	–	✓	–	–	–
[26-13]	Egress-Statistics	–	✓	–	–	–
[26-14]	Service-Category	–	✓	–	–	–
[26-15]	PCR	–	✓	–	–	–
[26-16]	SCR	–	✓	–	–	–
[26-17]	Mbs	–	✓	–	–	–
[26-22]	Sa-Validate	–	✓	–	–	–
[26-23]	IGMP-Enable	–	✓	–	–	–
[26-24]	Pppoe-Description	✓	–	–	–	–
[26-25]	Redirect-Vrouter-Name	–	✓	–	–	–
[26-26]	Qos-Profile-Name	–	✓	–	–	–
[26-30]	Tunnel-Nas-Port-Method	–	✓	–	–	–
[26-31]	SSC-Service-Bundle-Name	–	✓	–	–	–
[26-33]	Tunnel-Max-Sessions	–	✓	–	–	–
[26-34]	Framed-IP-Route-Tag	–	✓	–	–	–
[26-44]	Tunnel-Interface-ID	✓	–	–	–	–
[26-45]	Ipv6-Virtual-Router	–	✓	–	–	–
[26-46]	Ipv6-Local-Interface	–	✓	–	–	–
[26-47]	Ipv6-Primary-DNS	–	✓	–	–	–

Table 38: AAA Access Message Juniper Networks (Vendor ID 4874) VSAs Supported
(continued)

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	CoA-Request	Disconnect-Request
[26-48]	Ipv6-Secondary-DNS	–	✓	–	–	–
[26-52]	RADIUS-Client-Address	✓	–	–	–	–
[26-53]	Service-Description	✓	–	–	–	–
[26-54]	L2tp-Recv-Window-Size	–	✓	–	–	–
[26-55]	DHCP-Options	✓	–	–	–	–
[26-56]	DHCP-MAC-Address	✓	–	–	–	–
[26-57]	DHCP-GI-Address	✓	–	–	–	–
[26-58]	LI-Action	–	✓	–	✓	–
[26-59]	Med-Dev-Handle	–	✓	–	✓	–
[26-60]	Med-Ip-Address	–	✓	–	✓	–
[26-61]	Med-Port-Number	–	✓	–	✓	–
[26-62]	MLPPP-Bundle-Name	✓	–	–	–	–
[26-63]	Interface-Desc	✓	–	–	–	–
[26-64]	Tunnel-Group	–	✓	–	–	–
[26-65]	Activate-Service	–	✓	–	✓	–
[26-66]	Deactivate-Service	–	✓	–	✓	–
[26-67]	Service-Volume	–	✓	–	✓	–
[26-68]	Service-Timeout	–	✓	–	✓	–
[26-69]	Service-Statistics	–	✓	–	✓	–
[26-70]	Ignore-DF-Bit	–	✓	–	–	–
[26-71]	IGMP-Access-Name	–	✓	–	–	–
[26-72]	IGMP-Access-Src-Name	–	✓	–	–	–
[26-73]	IGMP-OIF-Map-Name	–	✓	–	–	–
[26-74]	MLD-Access-Name	–	✓	–	–	–
[26-75]	MLD-Access-Src-Name	–	✓	–	–	–
[26-76]	MLD-OIF-Map-Name	–	✓	–	–	–

Table 38: AAA Access Message Juniper Networks (Vendor ID 4874) VSAs Supported
(continued)

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	CoA-Request	Disconnect-Request
[26-77]	MLD-Version	–	✓	–	–	–
[26-78]	IGMP-Version	–	✓	–	–	–
[26-79]	IP-Mcast-Adm-Bw-Limit	–	✓	–	–	–
[26-80]	IPv6-Mcast-Adm-Bw-Limit	–	✓	–	–	–
[26-81]	L2c-Information	✓	–	–	–	–
[26-82]	QoS-Parameters	–	✓	–	–	–
[26-84]	Mobile-IP-Algorithm	–	✓	–	–	–
[26-85]	Mobile-IP-SPI	–	✓	–	–	–
[26-86]	Mobile-IP-Key	–	✓	–	–	–
[26-87]	Mobile-IP-Replay	–	✓	–	–	–
[26-88]	Mobile-IP-Access-Control-List	–	✓	–	–	–
[26-89]	Mobile-IP-Lifetime	–	✓	–	–	–
[26-90]	L2TP-Resynch-Method	–	✓	–	–	–
[26-91]	Tunnel-Switch-Profile	–	✓	–	–	–
[26-92]	L2C-Up-Stream-Data	✓	–	–	–	–
[26-93]	L2C-Down-Stream-Data	✓	–	–	–	–
[26-94]	Tunnel-Tx-Speed-Method	–	✓	–	–	–
[26-95]	IGMP-Query-Interval	–	✓	–	–	–
[26-96]	IGMP-Max-Resp-Time	–	✓	–	–	–
[26-97]	IGMP-Immediate-Leave	–	✓	–	–	–
[26-98]	MLD-Query-Interval	–	✓	–	–	–
[26-99]	MLD-Max-Resp-Time	–	✓	–	–	–
[26-100]	MLD-Immediate-Leave	–	✓	–	–	–
[26-110]	Acc-Loop-Cir-Id	✓	–	–	–	–
[26-111]	Acc-Aggr-Cir-Id-Bin	✓	–	–	–	–
[26-112]	Acc-Aggr-Cir-Id-Asc	✓	–	–	–	–

Table 38: AAA Access Message Juniper Networks (Vendor ID 4874) VSAs Supported
(continued)

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Reject	CoA-Request	Disconnect-Request
[26-113]	Act-Data-Rate-Up	✓	—	—	—	—
[26-114]	Act-Data-Rate-Dn	✓	—	—	—	—
[26-115]	Min-Data-Rate-Up	✓	—	—	—	—
[26-116]	Min-Data-Rate-Dn	✓	—	—	—	—
[26-117]	Att-Data-Rate-Up	✓	—	—	—	—
[26-118]	Att-Data-Rate-Dn	✓	—	—	—	—
[26-119]	Max-Data-Rate-Up	✓	—	—	—	—
[26-120]	Max-Data-Rate-Dn	✓	—	—	—	—
[26-121]	Min-LP-Data-Rate-Up	✓	—	—	—	—
[26-122]	Min-LP-Data-Rate-Dn	✓	—	—	—	—
[26-123]	Max-Interlv-Delay-Up	✓	—	—	—	—
[26-124]	Act-Interlv-Delay-Up	✓	—	—	—	—
[26-125]	Max-Interlv-Delay-Dn	✓	—	—	—	—
[26-126]	Act-Interlv-Delay-Dn	✓	—	—	—	—
[26-127]	DSL-Line-State	✓	—	—	—	—
[26-128]	DSL-Type	✓	—	—	—	—
[26-129]	Ipv6-NdRa-Prefix	—	✓	—	—	—
[26-130]	QoS-Interfaceset-Name	—	✓	—	—	—
[26-140]	Service-Interim-Acct-Interval	—	✓	—	✓	—
[26-141]	Downstream-Calculated-Qos-Rate	✓	✓	—	✓	—
[26-142]	Upstream-Calculated-Qos-Rate	✓	✓	—	✓	—
[26-143]	Max-Clients-Per-Interface	—	✓	—	—	—
[26-144]	PPP-Monitor-Ingress-Only	—	✓	—	—	—
[26-147]	Backup-Address-Pool	—	✓	—	—	—
[26-150]	ICR-Partition-Id	✓	—	—	—	—
[26-159]	DHCP-Option 82	✓	—	—	✓	—

Subscriber AAA Accounting Messages

Accounting messages identify service provisions and use on a per-user or per-tunnel basis. These messages keep track of when a particular service is initiated and terminated for a specific user.

JUNOS software supports the Acct-On message on startup or configuration of the first accounting server. Acct-Off messages are supported when the last RADIUS accounting server in a virtual router is removed, when the router is shut down, and when a virtual router that has configured RADIUS accounting servers is deleted.

Beginning with JUNOS Release 11.0.0b1, you can configure the router to send the Partition-Accounting-On and Partition-Accounting-Off messages to the RADIUS server whenever an ICR partition toggles between the backup and master states.

The router supports the following types of accounting messages:

- Acct-Start
- Acct-Stop
- Interim-Acct
- Acct-On
- Acct-Off
- Partition-Accounting-On
- Partition-Accounting-Off

Supported RADIUS IETF Attributes

Table 39 on page 182 lists the RADIUS IETF attributes supported for Acct-Start, Acct-Stop, Interim-Acct, Acct-On, and Acct-Off messages.

The following notes are referred to in Table 39 on page 182:

1. The attribute is used when terminating a PPP connection at the LNS or the initiating LAC.
2. For this attribute to be included, an IP address must be assigned to the subscriber.
3. The attribute is not included in Acct-Stop messages that are sent when a user session does not get established in one of the following situations.
 - The **aaa accounting acct-stop on-access-deney** command is enabled and the authentication server sends an Access-Reject (deny) message.
 - The **aaa accounting acct-stop on-aaa-failure** command is enabled and the authentication server issues an Access-Accept message (grant), but the AAA configuration denies access for the user. The **aaa accounting acct-stop on-aaa-failure** is enabled by default.
 - The **aaa accounting acct-stop on-aaa-failure** command is enabled and the user terminates before AAA receives the authentication response from the authentication server.

4. For this attribute to be included, an IPv6 interface ID must be assigned to the subscriber.
5. For this attribute to be included, at least one IPv6 prefix must be assigned to the subscriber.

Table 39: AAA Accounting Message RADIUS IETF Attributes Supported

Attribute Number	Attribute Name	Acct-Start	Acct-Stop	Interim-Acct	Acct-On	Acct-Off
[1]	User-Name	✓	✓	✓	–	–
[4]	NAS-IP-Address	✓	✓	✓	✓	✓
[5]	NAS-Port	✓	✓	✓	–	–
[6]	Service-Type	✓	✓	✓	–	–
[7]	Framed-Protocol (See Note 3.)	✓	✓	✓	–	–
[8]	Framed-IP-Address (See Note 2.)	✓	✓	✓	–	–
[9]	Framed-IP-Netmask	✓	✓	✓	–	–
[13]	Framed-Compression (See Note 3.)	✓	✓	✓	–	–
[25]	Class	✓	✓	✓	–	–
[30]	Called-Station-Id	✓	✓	✓	–	–
[31]	Calling-Station-Id	✓	✓	✓	–	–
[32]	NAS-Identifier	✓	✓	✓	✓	✓
[40]	Acct-Status-Type	✓	✓	✓	✓	✓
[41]	Acct-Delay-Time	✓	✓	✓	✓	✓
[42]	Acct-Input-Octets	–	✓	✓	–	–
[43]	Acct-Output-Octets	–	✓	✓	–	–
[44]	Acct-Session-Id	✓	✓	✓	✓	✓
[45]	Acct-Authentic	✓	✓	✓	✓	✓
[46]	Acct-Session-Time	–	✓	✓	–	–
[47]	Acct-Input-Packets	–	✓	✓	–	–
[48]	Acct-Output-Packets	–	✓	✓	–	–
[49]	Acct-Terminate-Cause	–	✓	–	–	✓

Table 39: AAA Accounting Message RADIUS IETF Attributes Supported *(continued)*

Attribute Number	Attribute Name	Acct-Start	Acct-Stop	Interim-Acct	Acct-On	Acct-Off
[50]	Acct-Multi-Session-Id (See Note 3.)	✓	✓	✓	–	–
[51]	Acct-Link-Count (See Note 3.)	✓	✓	✓	–	–
[52]	Acct-Input-Gigawords	–	✓	✓	–	–
[53]	Acct-Output-Gigawords	–	✓	✓	–	–
[55]	Event-Timestamp	✓	✓	✓	✓	✓
[61]	NAS-Port-Type	✓	✓	✓	–	–
[64]	Tunnel-Type (See Note 1.)	✓	✓	✓	–	–
[65]	Tunnel-Medium-Type (See Note 1.)	✓	✓	✓	–	–
[66]	Tunnel-Client-Endpoint (See Note 1.)	✓	✓	✓	–	–
[67]	Tunnel-Server-Endpoint (See Note 1.)	✓	✓	✓	–	–
[68]	Acct-Tunnel-Connection (See Note 1.)	✓	✓	✓	–	–
[77]	Connect-Info	✓	✓	✓	–	–
[82]	Tunnel-Assignment-Id (LAC only) (See Note 1.)	✓	✓	✓	–	–
[83]	Tunnel-Preference (LAC only)	✓	✓	✓	–	–
[87]	NAS-Port-Id	✓	✓	✓	–	–
[90]	Tunnel-Client-Auth-Id (See Note 1.)	✓	✓	✓	–	–
[91]	Tunnel-Server-Auth-Id (See Note 1.)	✓	✓	✓	–	–
[96]	Framed-Interface-Id (See Note 1.)	✓	✓	✓	–	–
[97]	Framed-Ipv6-Prefix (See Note 5.)	✓	✓	✓	–	–
[99]	Framed-IPv6-Route	✓	✓	✓	–	–
[100]	Framed-IPv6-Pool	✓	✓	✓	–	–

Table 39: AAA Accounting Message RADIUS IETF Attributes Supported (continued)

Attribute Number	Attribute Name	Acct-Start	Acct-Stop	Interim-Acct	Acct-On	Acct-Off
[123]	Delegated-Ipv6-Prefix	✓	✓	✓	–	–
[188]	Ascend-Num-In-Multilink (See Note 3.)	✓	✓	✓	–	–

Supported Juniper Networks VSAs

Table 40 on page 185 lists the Juniper Networks (Vendor ID 4874) VSAs supported for Acct-Start, Acct-Stop, Interim-Acct, Acct-On, Acct-Off, Partition-Accounting-On, and Partition-Accounting-Off messages.

The following notes are referred to in Table 40 on page 185:

- The attribute is not included in Acct-Stop messages that are sent when a user session does not get established in one of the following situations.
 - The **aaa accounting acct-stop on-access-deny** command is enabled and the authentication server sends an Access-Reject (deny) message.
 - The **aaa accounting acct-stop on-aaa-failure** command is enabled and the authentication server issues an Access-Accept message (grant), but the AAA configuration denies access for the user. The **aaa accounting acct-stop on-aaa-failure** is enabled by default.
 - The **aaa accounting acct-stop on-aaa-failure** command is enabled and the user terminates before AAA receives the authentication response from the authentication server.
- ERX routers send IPv6 accounting attributes in the Acct-Stop and Interim-Acct messages (stop, interim) when they are configured to return these attributes and when the subscriber is either an IPv6 subscriber or a combined IPv4/IPv6 subscriber in a dual stack. For an IPv4 subscriber, IPv6 accounting attributes are not included in the accounting messages even if the IPv6 accounting is enabled.

In JUNOS Release 10.1.x and lower-numbered releases, the combined accounting statistics were retrieved at the layer 2. Therefore, error or discarded packets in the layer 2 itself were excluded in these statistics. Because the layer 2 cannot detect the error or discarded packets in the layer 3, the combined statistics also include the error or discarded packets of the layer 3. In this release, with the support for RADIUS VSAs for IPv6 accounting, the IPv6 statistics are retrieved at the layer 3. To be consistent with the combined statistics, the error or discarded packets of the layer 3 are also included in these IPv6 statistics.

- The ICR partition accounting messages comprise the following:
 - Partition-Accounting-On—Sent to the RADIUS server whenever an ICR partition changes to the master state from the backup state. The Partition-Accounting-On message has the same Acct-Status-Type attribute

value as the Accounting-On message, but also contains the ICR-Partition-Id VSA, which specifies the ICR partition to which this message corresponds.

- **Partition-Accounting-Off**—Sent to the RADIUS server when the partition changes from the master state to the backup state. However, in the event of a complete chassis failure, the Partition-Accounting-Off message is not sent. Partition-Accounting-Off message has the same Acct-Status-Type attribute value as the Accounting-Off message and contains the ICR-Partition-Id VSA to denote the ICR partition to which the message is associated.

For more information about how to configure and use ICR partitions, see the *Managing Interchassis Redundancy* chapter in the *JUNOS Services Availability Configuration Guide*.

Table 40: AAA Accounting Message Juniper Network (Vendor ID 4874) VSAs Supported

Attribute Number	Attribute Name	Acct-Start	Acct-Stop	Interim-Acct	Acct-On	Acct-Off	Partition-Accounting-On	Partition-Accounting-Off
[26-10]	Ingress-Policy-Name	✓	✓	✓	–	–	–	–
[26-11]	Egress-Policy-Name	✓	✓	✓	–	–	–	–
[26-24]	Pppoe-Description (See Note 1.)	✓	✓	✓	–	–	–	–
[26-42]	Acct-Input-Gigapackets	–	✓	✓	–	–	–	–
[26-43]	Acct-Output-Gigapackets	–	✓	✓	–	–	–	–
[26-44]	Tunnel-Interface-Id	✓	✓	✓	–	–	–	–
[26-45]	Ipv6-Virtual-Router	✓	✓	✓	–	–	–	–
[26-46]	Ipv6-Local-Interface	✓	✓	✓	–	–	–	–
[26-47]	Ipv6-Primary-DNS	✓	✓	✓	–	–	–	–
[26-48]	Ipv6-Secondary-DNS	✓	✓	✓	–	–	–	–
[26-51]	Disconnect-Cause	–	✓	–	–	–	–	–
[26-53]	Service-Description	✓	✓	✓	–	–	–	–
[26-55]	DHCP-Options (See Note 1.)	✓	✓	✓	–	–	–	–
[26-56]	DHCP-MAC-Address (See Note 1.)	✓	✓	✓	–	–	–	–
[26-57]	DHCP-GI-Address (See Note 1.)	✓	✓	✓	–	–	–	–
[26-62]	MLPPP-Bundle-Name	✓	✓	✓	–	–	–	–

Table 40: AAA Accounting Message Juniper Network (Vendor ID 4874) VSAs Supported *(continued)*

Attribute Number	Attribute Name	Acct-Start	Acct-Stop	Interim-Acct	Acct-On	Acct-Off	Partition-AccountingOn	Partition-AccountingOff
[26-63]	Interface-Description	✓	✓	✓	–	–	–	–
[26-92]	L2C-Up-Stream-Data	✓	✓	✓	–	–	–	–
[26-93]	L2C-Down-Stream-Data	✓	✓	✓	–	–	–	–
[26-110]	Acc-Loop-Cir-Id	✓	✓	✓	–	–	–	–
[26-111]	Acc-Aggr-Cir-Id-Bin	✓	✓	✓	–	–	–	–
[26-112]	Acc-Aggr-Cir-Id-Asc	✓	✓	✓	–	–	–	–
[26-113]	Act-Data-Rate-Up	✓	✓	✓	–	–	–	–
[26-114]	Act-Data-Rate-Dn	✓	✓	✓	–	–	–	–
[26-115]	Min-Data-Rate-Up	✓	✓	✓	–	–	–	–
[26-116]	Min-Data-Rate-Dn	✓	✓	✓	–	–	–	–
[26-117]	Att-Data-Rate-Up	✓	✓	✓	–	–	–	–
[26-118]	Att-Data-Rate-Dn	✓	✓	✓	–	–	–	–
[26-119]	Max-Data-Rate-Up	✓	✓	✓	–	–	–	–
[26-120]	Max-Data-Rate-Dn	✓	✓	✓	–	–	–	–
[26-121]	Min-LP-Data-Rate-Up	✓	✓	✓	–	–	–	–
[26-122]	Min-LP-Data-Rate-Dn	✓	✓	✓	–	–	–	–
[26-123]	Max-Interlv-Delay-Up	✓	✓	✓	–	–	–	–
[26-124]	Act-Interlv-Delay-Up	✓	✓	✓	–	–	–	–
[26-125]	Max-Interlv-Delay-Dn	✓	✓	✓	–	–	–	–
[26-126]	Act-Interlv-Delay-Dn	✓	✓	✓	–	–	–	–
[26-127]	DSL-Line-State	✓	✓	✓	–	–	–	–
[26-128]	DSL-Type	✓	✓	✓	–	–	–	–
[26-129]	Ipv6-NdRa-Prefix	✓	✓	✓	–	–	–	–
[26-150]	ICR-Partition-Id (See Note 3.)	✓	✓	✓	–	–	✓	✓
[26-151]	Ipv6-Acct-Input-Octets (See Note 2.)	–	✓	✓	–	–	–	–

Table 40: AAA Accounting Message Juniper Network (Vendor ID 4874) VSAs Supported *(continued)*

Attribute Number	Attribute Name	Acct-Start	Acct-Stop	Interim-Acct	Acct-On	Acct-Off	Partition-AccountingOn	Partition-AccountingOff
[26-152]	Ipv6-Acct-Output-Octets (See Note 2.)	–	✓	✓	–	–	–	–
[26-153]	Ipv6-Acct-Input-Packets (See Note 2.)	–	✓	✓	–	–	–	–
[26-154]	Ipv6-Acct-Output-Packets (See Note 2.)	–	✓	✓	–	–	–	–
[26-155]	Ipv6-Acct-Input-Gigawords (See Note 2.)	–	✓	✓	–	–	–	–
[26-156]	Ipv6-Acct-Output-Gigawords (See Note 2.)	–	✓	✓	–	–	–	–
[26-159]	DHCP-Option 82 (See Note 1.)	✓	✓	✓	–	–	–	–

Tunnel Accounting Messages

Table 41 on page 187 lists RADIUS attributes supported by the following tunnel-related accounting messages:

- Acct-Tunnel-Start
- Acct-Tunnel-Stop
- Acct-Tunnel-Reject
- Acct-Tunnel-Link-Start
- Acct-Tunnel-Link-Stop
- Acct-Tunnel-Link-Reject

Table 41: AAA Accounting Tunnel Message RADIUS Attributes Supported

Attribute Number	Attribute Name	Acct-Tunnel-Start	Acct-Tunnel-Stop	Acct-Tunnel-Reject	Acct-Tunnel-Link-Start	Acct-Tunnel-Link-Stop	Acct-Tunnel-Link-Reject
[1]	User-Name	–	–	–	✓	✓	–
[4]	NAS-IP-Address	✓	✓	✓	✓	✓	✓
[26-51]	Disconnect-Cause	–	–	–	–	✓	–
[32]	NAS-Identifier	✓	✓	✓	✓	✓	✓
[40]	Acct-Status-Type	✓	✓	✓	✓	✓	✓
[41]	Acct-Delay-Time	✓	✓	✓	✓	✓	✓

Table 41: AAA Accounting Tunnel Message RADIUS Attributes Supported
(continued)

Attribute Number	Attribute Name	Acct-Tunnel-Start	Acct-Tunnel-Stop	Acct-Tunnel-Reject	Acct-Tunnel-Link-Start	Acct-Tunnel-Link-Stop	Acct-Tunnel-Link-Reject
[44]	Acct-Session-Id	✓	✓	✓	✓	✓	✓
[46]	Acct-Session-Time	–	✓	–	–	✓	–
[49]	Acct-Terminate-Cause	–	✓	✓	–	✓	✓
[55]	Event-Timestamp	✓	✓	✓	✓	✓	✓
[64]	Tunnel-Type	✓	✓	✓	✓	✓	✓
[65]	Tunnel-Medium-Type	✓	✓	✓	✓	✓	✓
[66]	Tunnel-Client-Endpoint	✓	✓	✓	✓	✓	✓
[67]	Tunnel-Server-Endpoint	✓	✓	✓	✓	✓	✓
[68]	Acct-Tunnel-Connection	✓	✓	✓	✓	✓	✓
[82]	Tunnel-Assignment-Id (LAC only)	✓	✓	✓	✓	✓	✓
[83]	Tunnel-Preference (LAC only)	–	–	–	✓	✓	✓
[86]	Acct-Tunnel-Packets-Lost	–	–	–	–	✓	✓
[90]	Tunnel-Client-Auth-Id	✓	✓	✓	✓	✓	✓
[91]	Tunnel-Server-Auth-Id	✓	✓	✓	✓	✓	✓

DSL Forum VSAs in AAA Access and Accounting Messages

JUNOS Software supports the inclusion of a set of DSL Forum vendor-specific attributes (VSAs) in the following AAA access and accounting messages:

- Access-Request
- Acct-Start
- Acct-Stop
- Interim-Acct (if Acct-Stop messages are specified)
- CoA-Request

The DSL Forum VSAs convey information about the subscriber associated with the digital subscriber line (DSL) and the data rate of the DSL. When you use “radius

include dsl-forum-attributes” on page 238 to enable inclusion of the DSL Forum VSAs in these AAA messages, the router includes all of the attributes listed in Table 42 on page 189 in the specified message, provided that the VSA is available in the information that the router receives from the digital subscriber line access multiplexer (DSLAM).



NOTE: JUNOS Software also supports several Juniper Networks VSAs that you can use to include DSL-related information. See “Juniper Networks VSAs” on page 265 .

Table 42 on page 189 lists the DSL Forum VSAs supported by JUNOS Software in Access-Request, Acct-Start, Acct-Stop, (if Acct-Stop is specified) Interim-Acct, and CoA-Request messages. JUNOS Software uses the vendor ID assigned to the DSL Forum (3561, or DE9 in hexadecimal format) by the Internet Assigned Numbers Authority (IANA).

For information about configuring inclusion of the DSL Forum VSAs, see “DSL Forum Vendor-Specific Attributes” on page 237. For a detailed description of the DSL Forum VSAs supported by JUNOS Software, see “DSL Forum VSAs” on page 276 .

Table 42: DSL Forum (Vendor ID 3561) VSAs Supported in AAA Access and Accounting Messages

Attribute Number	Attribute Name	Access-Request	Acct-Start	Acct-Stop	Interim-Acct	CoA-Request
[26-1]	Agent-Circuit-Id	✓	✓	✓	✓	✓
[26-2]	Agent-Remote-Id	✓	✓	✓	✓	✓
[26-129]	Actual-Data-Rate-Upstream	✓	✓	✓	✓	–
[26-130]	Actual-Data-Rate-Downstream	✓	✓	✓	✓	–
[26-131]	Minimum-Data-Rate-Upstream	✓	✓	✓	✓	–
[26-132]	Minimum-Data-Rate-Downstream	✓	✓	✓	✓	–
[26-133]	Attainable-Data-Rate-Upstream	✓	✓	✓	✓	–
[26-134]	Attainable-Data-Rate-Downstream	✓	✓	✓	✓	–
[26-135]	Maximum-Data-Rate-Upstream	✓	✓	✓	✓	–
[26-136]	Maximum-Data-Rate-Downstream	✓	✓	✓	✓	–
[26-137]	Minimum-Data-Rate-Upstream-Low-Power	✓	✓	✓	✓	–
[26-138]	Minimum-Data-Rate-Downstream-Low-Power	✓	✓	✓	✓	–
[26-139]	Maximum-Interleaving-Delay-Upstream	✓	✓	✓	✓	–
[26-140]	Actual-Interleaving-Delay-Upstream	✓	✓	✓	✓	–
[26-141]	Maximum-Interleaving-Delay-Downstream	✓	✓	✓	✓	–

Table 42: DSL Forum (Vendor ID 3561) VSAs Supported in AAA Access and Accounting Messages (continued)

Attribute Number	Attribute Name	Access-Request	Acct-Start	Acct-Stop	Interim-Acct	CoA-Request
[26-142]	Actual-Interleaving-Delay-Downstream	✓	✓	✓	✓	–
[26-144]	Access-Loop-Encapsulation	✓	✓	✓	✓	–
[26-254]	IWF-Session	✓	✓	✓	✓	–

CLI AAA Messages

There are four types of AAA messages used by CLI users to gain administrative access to the router. Access-Challenge attributes pertain only to CLI/telnet users.

- Access-Request
- Access-Accept
- Access-Challenge
- Access-Reject

Table 43 on page 190 lists the RADIUS attributes supported for CLI AAA messages.

Table 43: CLI AAA Access Message RADIUS Attributes Supported

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Challenge	Access-Reject
[1]	User-Name	✓	–	–	–
[2]	User Password	✓	–	–	–
[4]	NAS-IP-Address	✓	–	–	–
[6]	Service-Type	✓	✓	–	–
[18]	Reply-Message	–	–	✓	✓
[24]	State (Access-Request is only in response to an Access-Challenge)	✓	–	✓	–
[25]	Class	–	✓	–	–
[26-1]	Virtual-Router	–	✓	–	–
[26-18]	Init-CLI-Access-Level	–	✓	–	–
[26-19]	Allow-All-VR-Access	–	✓	–	–
[26-20]	Alt-CLI-Access-Level	–	✓	–	–

Table 43: CLI AAA Access Message RADIUS Attributes Supported (continued)

Attribute Number	Attribute Name	Access-Request	Access-Accept	Access-Challenge	Access-Reject
[26-21]	Alt-CLI-Virtual-Router-Name	–	✓	–	–
[26-25]	Redirect-Vrouter-Name	–	✓	–	–

CLI Commands Used to Modify RADIUS Attributes

This section discusses the RADIUS Internet Engineering Task Force (IETF) attributes and the Juniper Networks vendor-specific attributes that you can configure using CLI commands.

For many attributes, you can configure the router to include the attribute in RADIUS messages. For more information, see “Including or Excluding Attributes in RADIUS Messages” on page 238.

You can also configure the router to ignore many attributes that it receives in Access-Accept messages. For more information, see “Ignoring Attributes When Receiving Access-Accept Messages” on page 239.

For a complete list of RADIUS attributes supported by JUNOS software, see “RADIUS IETF Attributes” on page 259.

RADIUS IETF Attributes

This section describes the RADIUS IETF attributes that you can configure using CLI commands. The attributes are listed numerically—each attribute is followed by a list of the commands that you can use to manage the attribute and descriptions of each command.

[4] NAS-IP-Address

Use the following commands to configure, manage, and display information for the NAS-IP-Address RADIUS attribute.

- **radius override nas-ip-addr tunnel-client-endpoint**
- **radius override nas-info**

radius override nas-ip-addr tunnel-client-endpoint

- Use to configure the RADIUS client (LNS) to use the tunnel-client-endpoint (LAC) IP address for the NAS-IP-Address attribute.
- See **radius override nas-ip-addr tunnel-client-endpoint**
- Example

```
host1(config)#radius override nas-ip-addr tunnel-client-endpoint
```

- Use the **no** version to restore the default address.

radius override nas-info

- Use in the correct virtual router context to override standard use of NAS-IP-Address and NAS-Identifier attributes for AAA broadcast accounting; specifies that the attributes for the authentication virtual router be included in accounting packets instead of the attributes for the virtual router that generates the accounting information.
- Example


```
host1(config)#virtual-router vrXyz1
host1:vrXyz1(config)#radius override nas-info
```
- Use the **no** version to restore standard use of the NAS-IP-Address and NAS-Identifier attributes.
- See radius override nas-info

Related Topics ■ Monitoring Override Settings of RADIUS IETF Attributes on page 303

[5] NAS-Port

Use the following commands to manage and display information for the NAS-Port RADIUS attribute:

- **radius include nas-port**
- **radius nas-port-format**
- **radius nas-port-format extended**
- **radius pppoe nas-port-format unique**
- **radius vlan nas-port-format stacked**



NOTE: For subscribers connected over the LAG interface in DHCP standalone authenticate mode, RADIUS derives a unique value from the subscriber's profileHandle and uses the value for the Nas-Port attribute. The **radius nas-port-format**, **radius vlan nas-port-format stacked**, and **radius pppoe nas-port-format** commands do not affect the value of the Nas-Port attribute.

For more information about subscribers connected over the LAG interface in DHCP standalone authenticate mode, see "Propagation of LAG Subscriber Information to AAA and RADIUS" on page 92.

radius include nas-port

- Use to include the NAS-Port attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You control inclusion of the attribute by enabling or disabling this command.
- Example


```
host1(config)#radius include nas-port acct-start enable
```
- Use the **no** version to restore the default, enable.
- See radius include

radius nas-port-format

- Use to set the NAS-Port format attribute for ATM and Ethernet only to either *0ssssppp* or *ssss0ppp*.
- The format is a 4-octet integer. The remaining bits are not changed (8 bits VPI and 16 bits VCI; or 12 bits S-VLAN and 12 bits VLAN).
- The *s* indicates a bit used to represent the *slot*; the *p* indicates a bit used to represent the *port* from which the authentication request originates.
- See radius nas-port-format
- Example: If the PPP user is received on a VC from the card in slot 7, port 2, then the bit pattern is either 00111010 (for *0ssssppp*) or 01110010 (for *ssss0ppp*).

```
host1(config)#radius nas-port-format 0ssssppp
```

- Use the **no** version to restore the default.

radius nas-port-format extended atm

radius nas-port-format extended ethernet

- Use to set the NAS-Port format attribute for ATM, Gigabit Ethernet, and 10-Gigabit Ethernet interfaces on the E120 and E320 routers only.
- The format attribute set using the **radius nas-port-format** command does not accommodate the number of bits required by the ATM interface specifier (*slot/adapter/port/vpi/vci*) or the Gigabit Ethernet and 10-Gigabit Ethernet interface specifier [*slot/adapter/port*] [*.vlanSubinterface*]. Issuing this command enables you to encode the interface information in the attribute by specifying the number of bits available for each field in the interface specifier.



NOTE: You must use this command with the **extended** keyword when you configure the NAS-Port format attribute on routers that have line modules that support more than seven physical ports.

- The default number of bits for each field in the interface specifier for ATM interfaces are:

- Slot—5 bits
- Adapter—0 bits
- Port—3 bits
- VPI—8 bits
- VCI—16 bits
- The default number of bits for each field in the interface specifier for Gigabit Ethernet and 10-Gigabit Ethernet interfaces are:
 - Slot—5 bits
 - Adapter—0 bits
 - Port—3 bits
 - VLAN—12 bits
 - S-VLAN—12 bits
- To set valid S-VLAN widths on Gigabit Ethernet and 10-Gigabit Ethernet interfaces, you must include S-VLAN IDs in the NAS-Port attribute by issuing the **radius vlan nas-port-format stacked** command.
- The total number of bits for all fields cannot exceed 32. When the total number of bits is less than 32, the NAS-Port attribute is right-justified and the extra bits are set to 0. If you do not specify a value for a field, the number of bits is set to 0.
- See radius nas-port-format extended
- Example 1—Sets the field widths for ATM interfaces


```
host1(config)#radius nas-port-format extended atm field-widths slot 4
adapter 1 vpi 7 vci 17
```
- Example 2—Sets the field widths for Gigabit Ethernet and 10-Gigabit Ethernet interfaces


```
host1(config)#radius nas-port-format extended ethernet field-widths slot 4
adapter 1 port 3 vlan 12
```
- Use the **no** version to restore the default behavior of the **radius nas-port-format** command.

radius pppoe nas-port-format unique

- Use to set the NAS-Port attribute to a unique value for subscribers on PPPoE interface. This unique value is derived from the subscriber's profileHandle.
- See radius pppoe nas-port-format unique
- Example


```
host1(config)#radius pppoe nas-port-format unique
```

- Use the **no** version to return to the default, in which the value is determined by the interface.

radius vlan nas-port-format stacked

- Use to include the S-VLAN ID, in addition to the VLAN ID, in the NAS-Port attribute for subscribers on Ethernet interfaces.
- The VLAN ID is always included whether the S-VLAN ID inclusion feature is enabled or disabled.
- The **radius pppoe nas-port-format unique** command overrides this command.
- See `radius vlan nas-port-format stacked`
- Example


```
host1(config)#radius vlan nas-port-format stacked
```
- Use the **no** version to return to the default, in which the S-VLAN ID is not included.

- Related Topics**
- Monitoring the NAS-Port-Format RADIUS Attribute on page 304

[8] Framed-IP-Address

Use the following command to manage the Framed-IP-Address RADIUS attribute.

- **radius include framed-ip-addr**

radius include framed-ip-addr

- Use to include the Framed-IP-Address attribute in Acct-Start and Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- For RADIUS to include this attribute, an IP address must be assigned to the subscriber.
- See `radius include`
- Example


```
host1(config)#radius include framed-ip-addr acct-start enable
```
- Use the **no** version to restore the default, enable.

[9] Framed-Ip-Netmask

Use the following commands to manage the Framed-IP-Netmask RADIUS attribute.

- **radius include framed-ip-netmask**
- **radius ignore framed-ip-netmask**

radius include framed-ip-netmask

- Use to include the Framed-Ip-Netmask attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include framed-ip-netmask acct-start enable
```

- Use the **no** version to restore the default, enable.

radius ignore framed-ip-netmask

- Use to cause the Framed-Ip-Netmask attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command.
- If the subnet mask is specified by the Frame-Ip-Netmask attribute in the RADIUS user profile, the router passes the mask and IP address to the CPE during IPCP negotiations. When this command is enabled, the default subnet mask 255.255.255.255 is provided by AAA and used for IPCP negotiations.
- Enabling the command guards against any breaks in the negotiation.
- See radius ignore

- Example

```
host1(config)#radius ignore framed-ip-netmask disable
```

- Use the **no** version to restore the default, enable.

[13] Framed-Compression

Use the following command to manage the Framed-Compression RADIUS attribute.

- **radius include framed-compression**

radius include framed-compression

- Use to include the Framed-Compression attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include framed-compression acct-start disable
```

- Use the **no** version to restore the default, enable.

[25] Class

Use the following command to manage the Class RADIUS attribute.

- **radius include class**

radius include class

- Use to include the Class attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include class acct-start disable
```

- Use the **no** version to restore the default, enable.

[30] Called-Station-Id

Use the following command to manage the Called-Station-Id RADIUS attribute.

- **radius include called-station-id**

radius include called-station-id

- Use to include the Called-Station-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Called-Station-Id attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include called-station-id acct-start enable
```

- Use the **no** version to restore the default, enable.

[31] Calling-Station-Id

Use the following commands to manage information for the Calling-Station-Id RADIUS attribute.

- **radius calling-station-format**
- **radius calling-station-delimiter**
- **radius include calling-station-id**
- **radius override calling-station-id remote-circuit-id**



NOTE: For subscribers connected over the LAG interface in DHCP standalone authenticate mode, The **radius override calling-station-id remote-circuit-id** command enables RADIUS to use the PPPoE remote circuit ID for the Calling-Station-Id attribute. By default, RADIUS uses a delimited format for the interface description. The **radius calling-station-format** command does not affect the value of the Calling-Station-Id attribute.

For more information about subscribers connected over the LAG interface in DHCP standalone authenticate mode, see “Propagation of LAG Subscriber Information to AAA and RADIUS” on page 92.

radius calling-station-format

- Use to specify the format of the Calling-Station-Id [31] attribute on a virtual router.
- For each field in angle brackets (< >) in the Calling-Station-Id formats, the virtual router supplies the actual value for your configuration, unless otherwise specified.
- To specify that the RADIUS client use the delimited format when the PPP user is terminated at the non-LNS E Series router, use the **delimited** keyword.
 - Format for ATM interfaces:
 < delimiter > < system name > < delimiter > < interface > < delimiter >
 < VPI > < delimiter > < VCI > < delimiter >
 - Format for Ethernet interfaces:
 < delimiter > < system name > < delimiter > < interface > < delimiter >
 < VLAN >

Where < interface > is one of the following items:

 - < port name > —The default setting
 - < VP description > —Appears if you use the **atm vp-description** command to assign a text description to an individual VP on an ATM interface
 - < VC description > —Appears if you use the **atm atm1483 description** command to assign a text description to VCs on an ATM 1483 subinterface and you use the **atm1483 export-subinterface-description** command to enable sending of VC interface descriptors to AAA
- To specify that the RADIUS client use a fixed format of up to 15 characters consisting of all ASCII fields, use the **fixed-format** keyword. The maximum number of characters for each field is shown in square brackets ([]).
 - Format for ATM interfaces:
 < system name [4] > < slot [2] > < port [1] > < VPI [3] > < VCI [5] >
 - Format for Ethernet interfaces:
 < system name [4] > < slot [2] > < port [1] > < VLAN [8] >
 - Format for serial interfaces:
 < system name [4] > < slot [2] > < port [1] > < 0 [8] >

Where the final 8-byte field is always 0 (zero).

- In the case of PPP terminated at the LNS, the Calling-Station-Id attribute is based on the received L2TP calling number AVP.
- To specify that the RADIUS client use a fixed format of up to 15 characters consisting of all ASCII fields with a 1-byte slot field, 1-byte adapter field, and 1-byte port field, use the **fixed-format-adapter-embedded** keyword. The maximum number of characters for each field is shown in square brackets ([]).
 - Format for ATM interfaces:
 < system name [4] > < slot [1] > < adapter [1] > < port [1] >
 < VPI [3] > < VCI [5] >
 - Format for Ethernet interfaces:
 < system name [4] > < slot [1] > < adapter [1] > < port [1] >
 < VLAN [8] >
 - Format for serial interfaces:
 < system name [4] > < slot [1] > < adapter [1] > < port [1] > < 0 [8] >

Where the final 8-byte field is always 0 (zero).

- For E120 and E320 routers, < adapter > is the number of the bay in which the I/O adapter (IOA) resides, either 0 (representing the right IOA bay on the E120 router or the upper IOA bay on the E320 router) or 1 (representing the left IOA bay on the E120 router or the lower IOA bay on the E320 router). For ERX7xx models, ERX14xx models, and ERX310 routers, < adapter > is always shown as 0 (zero).
- Slot numbers 0 through 16 are shown as ASCII characters in the 1-byte slot field according to the following translation:

Slot Number	ASCII Character	Slot Number	ASCII Character
0	0	9	9
1	1	10	A
2	2	11	B
3	3	12	C
4	4	13	D
5	5	14	E
6	6	15	F
7	7	16	G
8	8	–	–

For example, slot 16 is shown as the ASCII character uppercase G.

- To specify that the RADIUS client use a fixed format of up to 17 characters consisting of all ASCII fields with a 2-byte slot field, 1-byte adapter field, and 2-byte port field, use the **fixed-format-adapter-new-field** keyword. The maximum number of characters for each field is shown in square brackets ([]).



NOTE: You must use this command with the **fixed-format-adapter-new-field** keyword when you configure the format of the Calling-Station-ID attribute on routers that have line modules that support more than seven physical ports.

- Format for ATM interfaces:
`< system name [4] > < slot [2] > < adapter [1] > < port [2] >
< VPI [3] > < VCI [5] >`
- Format for Ethernet interfaces:
`< system name [4] > < slot [2] > < adapter [1] > < port [2] >
< VLAN [8] >`
- Format for serial interfaces:
`< system name [4] > < slot [2] > < adapter [1] > < port [2] > < 0 [8] >`
Where the final 8-byte field is always 0 (zero).
- For E120 and E320 routers, `< adapter >` is the number of the bay in which the I/O adapter (IOA) resides, either 0 or 1. For ERX7xx models, ERX14xx models, and ERX310 routers, `< adapter >` is always shown as 0 (zero).
- Slot numbers 0 through 16 are shown as integers in the 2-byte slot field.
- To specify that the format of the Calling-Station-Id [31] attribute include a 4-byte stacked VLAN (S-VLAN) ID for Ethernet interfaces when the RADIUS client uses the fixed-format, fixed-format-adapter-embedded, or fixed-format-adapter-new-field format, use the **fixed-format stacked**, **fixed-format-adapter-embedded stacked**, or **fixed-format-adapter-new-field stacked** keywords, respectively. The maximum number of characters for each field is shown in square brackets ([]).



NOTE: The use of the **stacked** keyword is not supported for VLAN subinterfaces based on agent-circuit-identifier information, otherwise known as ACI VLANs. When you issue the **radius calling-station-format fixed-format stacked**, **radius calling-station-format fixed-format-adapter-embedded stacked**, or **radius calling-station-format fixed-format-adapter-new-field stacked** command for an ACI VLAN, the values that appear in the 4-byte S-VLAN ID and 4-byte VLAN ID fields are incorrect.

- Format for Ethernet interfaces that use **fixed-format stacked**:
`< system name [4] > < slot [2] > < port [1] < S-VLAN [4] < VLAN [4] >`
- Format for Ethernet interfaces that use **fixed-format-adapter-embedded stacked**:
`< system name [4] > < slot [1] > < adapter [1] > < port [1] < S-VLAN [4]
< VLAN [4] >`

- Format for Ethernet interfaces that use **fixed-format-adapter-new-field stacked**:
 < system name [4] > < slot [2] > < adapter [1] > < port [2] < S-VLAN [4]
 < VLAN [4] >

By default, these formats do not include the S-VLAN ID unless you specify the optional **stacked** keyword. If you include the **stacked** keyword, the S-VLAN ID is displayed in decimal format in the range 0–4095.

The S-VLAN ID field in the Calling-Station-Id [31] attribute is set to 0 (zero) under the following conditions:

- You do not specify the optional **stacked** keyword.
- You specify the optional **stacked** keyword but the Ethernet interface does not have an S-VLAN ID.
- Attribute 31, Calling-Station-Id, is used with Attribute 30, Called-Station-Id, in a standard way when the router is the LNS and the LAC is a dial-up LAC (not an E Series router). When the LNS receives the Calling-Station-Id and Called-Station-Id AVPs, the router includes the values as they are, with no format changes in the RADIUS messages.
- Example 1

host1(config)#**radius calling-station-format fixed-format**

For example, when you configure this Calling-Station-Id format on an E320 router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as '14' '2' '003' '00004'. The adapter number does not appear in this format.

- Example 2

host1(config)#**radius calling-station-format fixed-format-adapter-embedded**

For example, when you configure this Calling-Station-Id format on an E320 router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as 'E' '1' '2' '003' '00004'.

- Example 3

host1(config)#**radius calling-station-format fixed-format-adapter-new-field**

For example, when you configure this Calling-Station-Id format on an E320 router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as '14' '1' '02' '003' '00004'.

- Example 4

host1(config)#**radius calling-station-format fixed-format-adapter-new-field stacked**

For example, when you configure this Calling-Station-Id format on an E320 router for an Ethernet interface on system name western, slot 4, adapter 1, port 3, S-VLAN ID 8, and VLAN ID 12, the virtual router displays the format in ASCII as 'west' '04' '1' '03' '0008' '0012'.

- Use the **no** version to restore the default Calling-Station-Id format, **delimited**.
- See radius calling-station-format

radius calling-station-delimiter

- Use to specify the Calling-Station-Id attribute's delimiter for DSL PPP users.
- The delimiter is one special character you select to set off items in the Calling-Station-Id's definition (for example, # or %).
- See radius calling-station-delimiter

- Example

```
host1(config)#radius calling-station-delimiter &
```

- Use the **no** version to remove the delimiter.

radius include calling-station-id

- Use to include the Calling-Station-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include calling-station-id acct-start disable
```

- Use the **no** version to restore the default, enable.

radius override calling-station-id remote-circuit-id

- Use to configure RADIUS to override the standard use of the Calling-Station-Id attribute and instead use the remote circuit ID transmitted from a DSLAM device.
- See radius override calling-station-id remote-circuit-id

- Example

```
host1(config)#radius override calling-station-id remote-circuit-id
```

- Use the **no** version to restore the default Calling-Station-ID value, which is the telephone number from which the call originated.

Related Topics

- Monitoring Override Settings of RADIUS IETF Attributes on page 303
- Monitoring the Calling-Station-Id RADIUS Attribute on page 305

[32] NAS-Identifier

Use the following commands to manage and display information for the NAS-Identifier RADIUS attribute.

- **radius nas-identifier**
- **radius include nas-identifier**
- **radius override nas-info**
- **radius remote-circuit-id-format**
- **radius remote-circuit-id-delimiter**

radius nas-identifier

- Use to set a value for the NAS-Identifier attribute. This value is used in the NAS-Identifier attribute for authentication and accounting requests.
- Example


```
host1(config)#radius nas-identifier fox
```
- Use the **no** version to delete the NAS-Identifier.
- See radius nas-identifier

radius include nas-identifier

- Use to include the NAS-Identifier attribute in Access-Request, Acct-Start, Acct-Stop, Acct-On, and Acct-Off messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include
- Example


```
host1(config)#radius include nas-identifier acct-start disable
```
- Use the **no** version to restore the default, enable.

radius override nas-info

- Use in the correct virtual router context to override the standard use of NAS-IP-Address and NAS-Identifier attributes for AAA broadcast accounting; specifies that the attributes for the authentication virtual router be included in accounting packets instead of the attributes for the virtual router that generates the accounting information.
- See radius override nas-info
- Example


```
host1(config)#virtual-router vrXyz1
host1:vrXyz1(config)#radius override nas-info
```

- Use the **no** version to restore the standard use of the NAS-IP-Address and NAS-Identification attributes.

radius remote-circuit-id-format

- Use to configure the format of the PPPoE remote circuit ID value captured from a DSLAM.
- You can format the PPPoE remote circuit ID value to include either or both of the agent-circuit-ID (suboption 1) and agent-remote-id (suboption 2) suboptions of the DHCP relay agent information option (option 82) or the PPPoE intermediate agent tags.
- By default, the router formats the PPPoE remote circuit ID to include only the agent-circuit-id suboption.
- You can use this command to configure the following nondefault formats for the PPPoE remote circuit ID value:
 - Include either or both of the agent-circuit-id and agent-remote-id suboptions, with or without the NAS-Identifier [32] RADIUS attribute
 - Append the agent-circuit-id suboption value to an interface specifier that is consistent with the recommended format in the DSL Forum Technical Report (TR)-101—Migration to Ethernet-Based DSL Aggregation (April 2006).
- For more information about how to use this command, see the *Using the PPPoE Remote Circuit ID to Identify Subscribers* and *Configuring PPPoE Remote Circuit ID Capture* sections in *JUNOS Link Layer Configuration Guide*.
- See radius remote-circuit-id-format
- Examples

```
host1(config)#radius remote-circuit-id-format nas-identifier agent-circuit-id
agent-remote-id
host1(config)#radius remote-circuit-id-format dsl-forum-1
```

- Use the **no** version to restore the default format, agent-circuit-id.

radius remote-circuit-id-delimiter

- Use to configure the delimiter character that the router uses to set off multiple components in the format of the PPPoE remote circuit ID value captured from a DSLAM.
- For information about how to use this command, see the *Configuring PPPoE Remote Circuit ID Capture* section in *JUNOS Link Layer Configuration Guide*.
- See radius remote-circuit-id-delimiter
- Example

```
host1(config)#radius remote-circuit-id-delimiter !
```

- Use the **no** version to restore the default delimiter character, #.

- Related Topics**
- Monitoring Override Settings of RADIUS IETF Attributes on page 303
 - Monitoring the NAS-Identifier RADIUS Attribute on page 305
 - Monitoring the Format of the Remote-Circuit-ID for RADIUS on page 306
 - Monitoring the Delimiter Character in the Remote-Circuit-ID for RADIUS on page 306

[41] Acct-Delay-Time

Use the following commands to manage and display information for the Acct-Delay-Timer RADIUS attribute.

- **radius include acct-delay-time**

radius include acct-delay-time

- Use to include the Acct-Delay-Time attribute in Acct-On or Acct-Off messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include acct-delay-time acct-on enable
```

- Use the **no** version to restore the default, enable.

[44] Acct-Session-Id

Use the following commands to manage and display information for the Acct-Session-Id RADIUS attribute.

- **radius include acct-session-id**
- **radius acct-session-id-format**



NOTE: The Acct-Session-Id VSA is used:

- In the RADIUS-initiated change-of-authorization (CoA) message to start the mirroring session when the user is already logged in
- As a trigger in user-initiated mirroring to identify the user whose traffic is to be mirrored

This VSA can be optionally included in the CoA message from the RADIUS server or in the user login request if the packet mirroring operation is required.

radius include acct-session-id

- Use to include the Acct-Session-Id attribute in Access-Request, Acct-On, or Acct-Off messages.
- You can control inclusion of the Acct-Session-Id attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include acct-session-id access-request disable
```

- Use the **no** version to restore the default, enable.

radius acct-session-id-format

- Use to set the Acct-Session-Id attribute format. Two formats are supported:
 - **description**—Configures RADIUS client to use the generic format: `erx <interface identifier> : <hex number>`. For example: **erx atm 12/1:0.3:0000ef1**



NOTE: For subscribers connected over the LAG interface in DHCP standalone authenticate mode, the LAG interface ID is used as the interface identifier. For more information about subscribers connected over the LAG interface in DHCP standalone authenticate mode, see “Propagation of LAG Subscriber Information to AAA and RADIUS” on page 92.

- **decimal**—Configures the RADIUS client to use a decimal format. For example: **435264**
- See radius acct-session-id-format
- Example


```
host1(config)#radius acct-session-id-format decimal
```
- Use the **no** version to negate the Acct-Session-Id format.

[45] Acct-Authentic

Use the following command to manage the Acct-Authentic RADIUS attribute.

- **radius include acct-authentic**

radius include acct-authentic

- Use to include the Acct-Authentic attribute in Acct-On or Acct-Off messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include acct-authentic acct-on enable
```

- Use the **no** version to restore the default, enable.

[49] Acct-Terminate-Cause

Use the following command to manage the Acct-Terminate-Cause RADIUS attribute.

- **radius include acct-terminate-cause**

radius include acct-terminate-cause

- Use to include the Acct-Terminate-Cause attribute in Acct-Off messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include.

- Example

```
host1(config)#radius include acct-terminate-cause acct-off disable
```

- Use the **no** version to restore the default, enable.

[50] Acct-Multi-Session-Id

Use the following command to manage the Acct-Multi-Session-Id RADIUS attribute.

- **radius include acct-multi-session-id**

radius include acct-multi-session-id

- Use to include the Acct-Multi-Session-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Acct-Multi-Session-Id attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include acct-multi-session-id acct-stop disable
```

- Use the **no** version to restore the default, enable for accounting messages and disable for access requests.

[51] Acct-Link-Count

Use the following command to manage the Acct-Link-Count RADIUS attribute.

- **radius include acct-link-count**

radius include acct-link-count

- Use to include the Acct-Link-Count attribute in Acct-Start and Acct-Stop messages.
- You can control inclusion of the Acct-Input-Gigawords attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include acct-link-count acct-stop disable
```

- Use the **no** version to restore the default, enable.

[52] Acct-Input-Gigawords

Use the following command to manage the Acct-Input-Gigawords RADIUS attribute.

- **radius include input-gigawords**

radius include input-gigawords

- Use to include the Acct-Input-Gigawords attribute in Acct-Stop messages.
- You can control inclusion of the Acct-Input-Gigawords attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include input-gigawords acct-stop disable
```

- Use the **no** version to restore the default, enable.

[53] Output-Gigawords

Use the following command to manage the Acct-Output-Gigawords RADIUS attribute.

- **radius include output-gigawords**

radius include output-gigawords

- Use to include the Acct-Output-Gigawords attribute in Acct-Stop messages.
- You can control inclusion of the Acct-Output-Gigawords attribute by enabling or disabling this command.
- See radius include

- Example


```
host1(config)#radius include output-gigawords acct-stop enable
```

- Use the **no** version to restore the default, enable.

[55] Event-Timestamp

Use the following command to manage the Acct-Output-Gigawords RADIUS attribute.

- **radius include event-timestamp**

radius include event-timestamp

- Use to include the Event-Timestamp attribute in Acct-Start, Acct-Stop, Acct-On, or Acct-Off messages.
- You can control inclusion of the Event-Timestamp attribute by enabling or disabling this command.
- See radius include
- Example

```
host1(config)#radius include event-timestamp acct-on enable
```

- Use the **no** version to restore the default, enable.

[61] NAS-Port-Type

Use the following commands to manage and display information for the NAS-Port-Type RADIUS attribute.

- **radius dsl-port-type**
- **radius ethernet-port-type**
- **radius include nas-port-type**



NOTE: For subscribers connected over the LAG interface in DHCP standalone authenticate mode, RADIUS calculates the value of the Nas-Port-Type attribute.

For more information about subscribers connected over the LAG interface in DHCP standalone authenticate mode, see “Propagation of LAG Subscriber Information to AAA and RADIUS” on page 92.

radius dsl-port-type

- Use to configure the NAS-Port-Type attribute for the DSL port type.
- This attribute can have several values. If the interface (port) is DSL, then the attribute can have any value listed in the command and uses the value configured. If the interface (port) is Ethernet, then it sets the attribute to Ethernet and disregards the parameter set with this command. Options include:

- **adsl-cap**—Asymmetric DSL, carrierless amplitude phase (CAP) modulation
- **adsl-dmt**—Asymmetric DSL, discrete multitone (DMT)
- **idsl**—ISDN DSL
- **sdsl**—Symmetric DSL
- **virtual**—Virtual
- **xdsl**—DSL of unknown type
- Example


```
host1(config)#radius dsl-port-type xsdl
```
- Use the **no** version to restore the default, xsdl.
- See radius dsl-port-type

radius ethernet-port-type

- Use to set the NAS-Port-Type attribute for Ethernet interfaces to **ethernet** or **virtual**.
- See radius ethernet-port-type
- Example


```
host1(config)#radius ethernet-port-type virtual
```
- Use the **no** version to restore the default, ethernet.

radius include nas-port-type

- Use to include the NAS-Port-Type attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include
- Example


```
host1(config)#radius include nas-port-type acct-start enable
```
- Use the **no** version to restore the default, enable.

- Related Topics** ■ Monitoring the DSL-Port-Type RADIUS Attribute on page 307

[64] Tunnel-Type

Use the following command to manage the Tunnel-Type RADIUS attribute.

- **radius include tunnel-type**

radius include tunnel-type

- Use to include the Tunnel-Type attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the Tunnel-Type attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include tunnel-type access-request enable
```

- Use the **no** version to restore the default, enable.

[65] Tunnel-Medium-Type

Use the following command to manage the Tunnel-Type-Medium RADIUS attribute.

- **radius include tunnel-medium-type**

radius include tunnel-medium-type

- Use to include the Tunnel-Medium-Type attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the Tunnel-Medium-Type attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include tunnel-medium-type acct-start enable
```

- Use the **no** version to restore the default, enable.

[66] Tunnel-Client-Endpoint

Use the following command to manage the Tunnel-Client-Endpoint RADIUS attribute.

- **radius include tunnel-client-endpoint**

radius include tunnel-client-endpoint

- Use to include the Tunnel-Client-Endpoint attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the Tunnel-Client-Endpoint attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include tunnel-client-endpoint acct-start enable
```

- Use the **no** version to restore the default, enable.

[67] Tunnel-Server-Endpoint

Use the following command to manage the Tunnel-Server-Endpoint RADIUS attribute.

- **radius include tunnel-server-endpoint**

radius include tunnel-server-endpoint

- Use to include the Tunnel-Server-Endpoint attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the Tunnel-Server-Endpoint attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include tunnel-server-endpoint acct-stop disable
```

- Use the **no** version to restore the default, enable.

[68] Acct-Tunnel-Connection

Use the following command to manage the Acct-Tunnel-Connection RADIUS attribute.

- **radius include acct-tunnel-connection**

radius include acct-tunnel-connection

- Use to include the Acct-Tunnel-Connection attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Acct-Tunnel-Connection attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include acct-tunnel-connection acct-stop enable
```

- Use the **no** version to restore the default, enable.

[77] Connect-Info

Use the following commands to manage and display information for the Connect-Info RADIUS attribute.

- **radius connect-info-format l2tp-connect-speed**
- **radius include connect-info**

radius connect-info-format

- Use on the LNS to enable the generation of the RADIUS Connect-Info attribute and to specify the attribute's format. The attribute is based on the L2TP connect-speed AVPs for received (RX) speed (AVP 38) and transmit (TX) speed (AVP 24). See "Configuring the RX Speed on the LAC" on page 365 for information about generating the RX and TX speed AVPs.
- The Connect-Info attribute is a string in the following format; the attribute is generated whenever the TX speed is not zero.

tx-speed [/rx-speed]

- The TX speed is always included in the attribute when the speed is not zero; however, inclusion of the RX speed depends on the keyword you use with the command.
 - Use the **l2tp-connect-speed** keyword to specify that the RX speed is only included when it is not zero and differs from the TX speed.
 - Example

host1(config)#**radius connect-info-format l2tp-connect-speed**

- Use the **l2tp-connect-speed-rx-when-equal** keyword to specify that the RX speed is always included when it is not zero.
- Example

host1(config)#**radius connect-info-format l2tp-connect-speed-rx-when-equal**

- Use the **no** version to disable the inclusion of the RX speed when it is the same as the TX speed.
- See radius connect-info-format

radius include connect-info

- Use to include the Connect-Info attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Connect-Info attribute by enabling or disabling this command.
- See radius include

- Example

host1(config)#**radius include connect-info access-request disable**

- Use the **no** version to restore the default, enable.

- Related Topics** ■ Monitoring the Connect-Info RADIUS Attribute on page 307

[82] Tunnel-Assignment-Id

Use the following command to manage the Tunnel-Assignment-Id RADIUS attribute.

- **radius include tunnel-assignment-id**

radius include tunnel-assignment-id

- Use to include the Tunnel-Assignment-Id attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the Tunnel-Assignment-Id attribute by enabling or disabling this command.
- See radius include
- Example

```
host1(config)#radius include tunnel-assignment-id acct-stop enable
```

- Use the **no** version to restore the default, enable.

[83] Tunnel-Preference

Use the following command to manage the Tunnel-Preference RADIUS attribute.

- **radius include tunnel-preference**

radius include tunnel-preference

- Use to include the Tunnel-Preference attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the Tunnel-Preference attribute by enabling or disabling this command.
- See radius include
- Example

```
host1(config)#radius include tunnel-preference acct-start enable
```

- Use the **no** version to restore the default, enable.

[87] NAS-Port-Id

Use the following commands to manage and show information for the NAS-Port-Id RADIUS attribute.

- **aaa intf-desc-format include**
- **radius include nas-port-id**

- **radius override nas-port-id remote-circuit-id**



NOTE: For subscribers connected over the LAG interface in DHCP standalone authenticate mode, RADIUS uses the LAG interface ID for the Nas-Port-Id attribute.

For more information about subscribers connected over the LAG interface in DHCP standalone authenticate mode, see “Propagation of LAG Subscriber Information to AAA and RADIUS” on page 92.

aaa intf-desc-format include

- Use to specify whether the router includes the subinterface number or adapter in the interface description it passes to RADIUS for inclusion in the NAS-Port-Id attribute. By default, the subinterface and adapter are sent (the commands are enabled).
- Examples


```
host1#aaa intf-desc-format include sub-intf disable
host1#aaa intf-desc-format include adapter enable
```
- Use the **no** version to remove the configuration.
- See `aaa intf-desc-format include`

radius include nas-port-id

- Use to include the NAS-Port-Id attribute in the Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the NAS-Port-Id attribute by enabling or disabling this command.
- See `radius include`
- Example


```
host1(config)#radius include nas-port-id access-request enable
```
- Use the **no** version to restore the default, enable.

radius override nas-port-id remote-circuit-id

- Use to configure RADIUS to override the standard use of the NAS-Port-Id attribute and instead use the remote circuit ID transmitted from a DSLAM device.
- See `radius override nas-port-id remote-circuit-id`
- Example


```
host1(config)#radius override nas-port-id remote-circuit-id
```

- Use the **no** version to restore the default NAS-Port-ID value, which is the physical interface of the NAS that is authenticating the user.

- Related Topics**
- Monitoring Override Settings of RADIUS IETF Attributes on page 303
 - Monitoring the NAS-Port-ID RADIUS Attribute on page 307

[90] Tunnel-Client-Auth-Id

Use the following command to manage the Tunnel-Client-Auth-Id RADIUS attribute.

- **radius include tunnel-client-auth-id**

radius include tunnel-client-auth-id

- Use to include the Tunnel-Client-Auth-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Tunnel-Client-Auth-Id attribute by enabling or disabling this command.
- See radius include
- Example

```
host1(config)#radius include tunnel-client-auth-id access-request disable
```

- Use the **no** version to restore the default, enable.

[91] Tunnel-Server-Auth-Id

Use the following command to manage the Tunnel-Server-Auth-Id RADIUS attribute.

- **radius include tunnel-server-auth-id**

radius include tunnel-server-auth-id

- Use to include the Tunnel-Server-Auth-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Tunnel-Server-Auth-Id attribute by enabling or disabling this command.
- See radius include
- Example

```
host1(config)#radius include tunnel-server-auth-id acct-start enable
```

- Use the **no** version to restore the default, enable.

[96] Framed-Interface-Id

Use the following command to manage the Framed-Interface-Id RADIUS attribute.

- **radius include framed-interface-id**

radius include framed-interface-id

- Use to include the Framed-Interface-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Framed-Interface-Id attribute by enabling or disabling this command.
- For RADIUS to include this attribute, an IPv6 interface ID must be assigned to the subscriber.
- See radius include

- Example

```
host1(config)#radius include framed-interface-id acct-start enable
```

- Use the **no** version to restore the default, disable.

[97] Framed-Ipv6-Prefix

Use the following command to manage the Framed-Ipv6-Prefix RADIUS attribute.

- **radius include framed-ipv6-prefix**

radius include framed-ipv6-prefix

- Use to include the Framed-Ipv6-Prefix attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Framed-Ipv6-Prefix attribute by enabling or disabling this command.
- For RADIUS to include this attribute, at least one IPv6 prefix must be assigned to the subscriber.
- See radius include

- Example

```
host1(config)#radius include framed-ipv6-prefix acct-start enable
```

- Use the **no** version to restore the default, disable.

[99] Framed-Ipv6-Route

Use the following command to manage the Framed-Ipv6-Route RADIUS attribute.

- **radius include framed-ipv6-route**

radius include framed-ipv6-route

- Use to include the Framed-Ipv6-Route attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the Framed-Ipv6-Route attribute by enabling or disabling this command.
- For this attribute, the value received from the RADIUS server in the Access-Accept message is used in the accounting messages.
- When the Framed-Ipv6-Route attribute is not returned from the RADIUS server in the Access-Accept message, the immediate accounting, Acct-Stop, or Interim-Acct messages do not report this attribute.
- See radius include

- Example

```
host1(config)#radius include framed- ipv6-route acct-start enable
```

- Use the **no** version to restore the default, disable.

[100] Framed-Ipv6-Pool

Use the following command to manage the Framed-Ipv6-Pool RADIUS attribute.

- **radius include framed-ipv6-pool**

radius include framed-ipv6-pool

- Use to include the Framed-Ipv6-Pool attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the Framed-Ipv6-Pool attribute by enabling or disabling this command.
- For this attribute, the value received from the RADIUS server in the Access-Accept message is used in the accounting messages.
- If the IPv6 pool name is configured in the AAA domain map using the CLI and is not returned from RADIUS server, the Acct-Start, Acct-Stop, or Interim-Acct messages report the value configured in the domain map.
- See radius include

- Example

```
host1(config)#radius include framed- ipv6-pool acct-start enable
```

- Use the **no** version to restore the default, disable.

[123] Delegated-Ipv6-Prefix

Use the following command to manage the Delegated-Ipv6-Prefix RADIUS attribute.

- **radius include delegated-ipv6-prefix**

radius include delegated-ipv6-prefix

- Use to include the Delegated-Ipv6-Prefix attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the Delegated-Ipv6-Prefix attribute by enabling or disabling this command.
- For this attribute, the value received from the RADIUS server in the Access-Accept message is used in the accounting messages.
- When prefix delegation occurs, an immediate-update (if enabled) message, which contains the delegated prefix information, is sent to the RADIUS server.
- When the prefix to be delegated to clients is obtained from the IPv6 local address server than the RADIUS server and the **aaa dhcpv6-delegated-prefix delegated-ipv6-prefix** command is configured, the delegated prefix is sent to the RADIUS server in the Delegated-Ipv6-Prefix attribute in the immediate accounting, Acct-Stop, or Interim-Acct messages.
- When the prefix to be delegated to clients is allocated from the IPv6 local address server and the **aaa dhcpv6-delegated-prefix delegated-ipv6-prefix** command is not configured, the delegated prefix is sent to the RADIUS server in the Framed-Ipv6-Prefix attribute in the immediate accounting, Acct-Stop, or Interim-Acct messages.
- For static interfaces, although the prefix configured using the CLI command is used for DHCPv6 Prefix Delegation instead of the value returned by the RADIUS server, the immediate accounting, Acct-Stop, or Interim-Acct messages contain the prefix returned from the RADIUS server. If this attribute is not returned from the RADIUS server, the immediate accounting, Acct-Stop, or Interim-Acct messages do not report this attribute.
- See radius include
- Example


```
host1(config)#radius include delegated-ipv6-prefix acct-start enable
```
- Use the **no** version to restore the default, disable.

[188] Ascend-Num-In-Multilink

Use the following command to manage the Ascend-Num-In-Multilink attribute.

- **radius include ascend-num-in-multilink**

radius include ascend-num-in-multilink

- Use to include the Ascend-Num-In-Multilink attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Ascend-Num-In-Multilink attribute by enabling or disabling this command.

- See radius include

- Example

```
host1(config)#radius include ascend-num-in-multilink acct-start enable
```

- Use the **no** version to restore the default, disable.

All Tunnel Server Attributes

Use the following command to manage all tunnel server RADIUS attributes.

- **radius include tunnel-server-attributes**

radius include tunnel-server-attributes

- Use to include all supported tunnel server attributes in Access-Request, Acct-Start, or Acct-Stop messages.
- When the router functions as an LNS with a terminating PPP, then the LAC tunnel attributes are included.
- You can control inclusion of all tunnel server attributes by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include tunnel-server-attributes access-request enable
```

- Use the **no** version to restore the default, disable.

Juniper Networks Vendor-Specific Attributes

This section describes the Juniper Networks vendor-specific attributes (VSAs) that you can configure using CLI commands. The attributes are listed numerically and are followed by descriptions about the commands that you can use to manage the attribute.

[26-1] Virtual-Router

Use the following command to manage the Virtual-Router RADIUS attribute.

- **radius ignore virtual-router**

radius ignore virtual-router

- Use to cause the Virtual-Router attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command.
- See radius ignore

- Example

```
host1(config)#radius ignore virtual-router enable
```

- Use the **no** version to restore the default, disable.

[26-10] Ingress-Policy-Name

Use the following commands to manage the Ingress-Policy-Name RADIUS attribute.

- **radius include ingress-policy-name**
- **radius ignore ingress-policy-name**

radius include ingress-policy-name

- Use to include the Ingress-Policy-Name attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include ingress-policy-name acct-start enable
```

- Use the **no** version to restore the default.

radius ignore ingress-policy-name

- Use to cause the Ingress-Policy-Name attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command. The default is **disable**.
- See radius ignore

- Example

```
host1(config)#radius ignore ingress-policy-name enable
```

- Use the **no** version to restore the default, enable.

[26-11] Egress-Policy-Name

Use the following commands to manage the Egress-Policy-Name RADIUS attribute.

- **radius include egress-policy-name**
- **radius ignore egress-policy-name**

radius include egress-policy-name

- Use to include the Egress-Policy-Name attribute in Acct-Start or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include
- Example


```
host1(config)#radius include egress-policy-name acct-start enable
```
- Use the **no** version to restore the default, enable.

radius ignore egress-policy-name

- Use to cause the Egress-Policy-Name attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command.
- See radius ignore
- Example


```
host1(config)#radius ignore egress-policy-name enable
```
- Use the **no** version to restore the default, disable.

[26-14] Service-Category

Use the following command to manage the Service-Category RADIUS attribute.

- **radius ignore atm-service-category**

radius ignore atm-service-category

- Use to cause the Service-Category attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command.
- See radius ignore
- Example


```
host1(config)#radius ignore atm-service-category enable
```
- Use the **no** version to restore the default, disable.

[26-15] PCR

Use the following command to manage the PCR RADIUS attribute.

- **radius ignore atm-pcr**

radius ignore atm-pcr

- Use to cause the PCR attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command.
- See radius ignore

- Example

```
host1(config)#radius ignore atm-pcr enable
```

- Use the **no** version to restore the default, disable.

[26-16] SCR

Use the following command to manage the SCR RADIUS attribute.

- **radius ignore atm-scr**

radius ignore atm-scr

- Use to cause the SCR attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command.
- See radius ignore

- Example

```
host1(config)#radius ignore atm-scr enable
```

- Use the **no** version to restore the default, disable.

[26-17] MBS

Use the following command to manage the MBS RADIUS attribute.

- **radius ignore atm-mbs**

radius ignore atm-mbs

- Use to cause the MBS attribute to be ignored in Access-Accept messages.
- You can control this behavior by enabling or disabling this command.
- See radius ignore

- Example

```
host1(config)#radius ignore atm-mbs enable
```

- Use the **no** version to restore the default, disable.

[26-24] Pppoe-Description

Use the following command to manage the Pppoe-Description RADIUS attribute.

- **radius include pppoe-description**

radius include pppoe-description

- Use to include the Pppoe-Description attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the Pppoe-Description attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include pppoe-description acct-start enable
```

- Use the **no** version to restore the default, enable.

[26-35] Acct-Input-Gigapackets

Use the following command to manage the Acct-Input-Gigapackets RADIUS attribute.

- **radius include input-gigapkts**

radius include input-gigapkts

- Use to include Acct-Input-Gigapackets in Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- see radius include

- Example

```
host1(config)#radius include input-gigapkts acct-stop disable
```

- Use the **no** version to restore the default, enable.

[26-36] Acct-Output-Gigapackets

Use the following command to manage the Acct-Output-Gigapackets RADIUS attribute.

- **radius include output-gigapkts**

radius include output-gigapkts

- Use to include the Acct-Output-Gigapackets attribute in Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

host1(config)#**radius include output-gigapkts acct-stop disable**

- Use the **no** version to restore the default, enable.

[26-44] Tunnel-Interface-Id

Use the following command to manage the Tunnel-Interface-Id RADIUS attribute.

- **radius include tunnel-interface-id**

radius include tunnel-interface-id

- Use to include the Tunnel-Interface-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

host1(config)#**radius include tunnel-interface-id enable**

- Use the **no** version to restore the default, disable.

[26-45] Ipv6-Virtual-Router

Use the following command to manage the IPv6-Virtual-Router RADIUS attribute.

- **radius include ipv6-virtual-router**

radius include ipv6-virtual-router

- Use to include the Ipv6-Virtual-Router attribute in Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- For this attribute, the value received from the RADIUS server in the Access-Accept message is used in the accounting messages.
- If the IPv6 virtual router is configured in the AAA domain map and is not returned from the RADIUS server, the Acct-Start, Acct-Stop, or Interim-Acct messages report the value configured in the domain map.
- If IPv6 virtual router is not configured in the AAA domain map and is not returned from the RADIUS server, it is not included in the Acct-Start message because the value is not yet known. If the IPv6 virtual router context is configured from the profile, it is reported in the immediate-update message for DHCPv6 prefix delegation.
- See radius include

- Example

```
host1(config)#radius include ipv6-virtual-router acct-start enable
```

- Use the **no** version to restore the default, disable.

[26-46] Ipv6-Local-Interface

Use the following command to manage the Ipv6-Local-Interface RADIUS attribute.

- **radius include ipv6-local-interface**

radius include ipv6-local-interface

- Use to include the Ipv6-Local-Interface attribute in Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- For this attribute, the value received from the RADIUS server in the Access-Accept message is used in the accounting messages.
- If IPv6 local interface is configured in the AAA domain map and is not returned from the RADIUS server, the Acct-Start, Acct-Stop, or Interim-Acct messages report the value configured in the domain map.
- See radius include

- Example

```
host1(config)#radius include ipv6-local-interface acct-start enable
```

- Use the **no** version to restore the default, disable.

[26-47] Ipv6-Primary-DNS

Use the following command to manage the IPv6-Primary-DNS RADIUS attribute.

- **radius include ipv6-primary-dns**

radius include ipv6-primary-dns

- Use to include the IPv6-Primary-DNS attribute in Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- For this attribute, the value received from the RADIUS server in the Access-Accept message is used in the accounting messages.
- If the IPv6 primary DNS server is configured in the AAA domain map and is not returned from the RADIUS server, the Acct-Start, Acct-Stop, or Interim-Acct messages report the value configured in the AAA domain map.
- See radius include

- Example

```
host1(config)#radius include ipv6-primary-dns acct-start enable
```

- Use the **no** version to restore the default, disable.

[26-48] Ipv6-Secondary-DNS

Use the following command to manage the Ipv6-Secondary-DNS RADIUS attribute.

- **radius include ipv6-secondary-dns**

radius include ipv6-secondary-dns

- Use to include the Ipv6-Secondary-DNS attribute in Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- For this attribute, the value received from the RADIUS server in the Access-Accept message is used in the accounting messages.
- If the IPv6 secondary DNS server is configured in the AAA domain map and is not returned from the RADIUS server, the Acct-Start, Acct-Stop, or Interim-Acct messages report the value configured in the AAA domain map.
- See radius include

- Example

```
host1(config)#radius include ipv6-secondary-dns acct-start enable
```

- Use the **no** version to restore the default, disable.

[26-51] Disconnect-Cause

Use the following command to manage the Disconnect-Cause RADIUS attribute.

- **radius include l2tp-ppp-disconnect-cause**

radius include l2tp-ppp-disconnect-cause

- Use to include the Disconnect-Cause attribute in Acct-Stop and Acct-Tunnel-Link-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include l2tp-ppp-disconnect-cause acct-stop-enable
```

- Use the **no** version to restore the default, disable.

[26-53] Service-Description

Use the following command to manage the Service-Description RADIUS attribute.

- **radius include profile-service-description**

radius include profile-service-description

- Use to include the Service-Description attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include profile-service-description acct-stop enable
```

- Use the **no** version to restore the default, disable.

[26-55] DHCP-Options

Use the following command to manage the DHCP-Options RADIUS attribute.

- **radius include dhcp-options**

radius include dhcp-options

- Use to include the DHCP-Options attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include

- Example

```
host1(config)#radius include dhcp-options acct-stop enable
```

- Use the **no** version to restore the default, disable.

[26-56] DHCP-MAC-Address

Use the following command to manage the DHCP-MAC-Address RADIUS attribute.

- **radius include dhcp-mac-address**

radius include dhcp-mac-address

- Use to include the DHCP-MAC-Address attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.

- See radius include

- Example

```
host1(config)#radius include dhcp-mac-address acct-stop enable
```

- Use the **no** version to restore the default, disable.

[26-57] DHCP-GI-Address

Use the following command to manage the DHCP-GI-Address RADIUS attribute.

- **radius include dhcp-gi-address**

radius include dhcp-gi-address

- Use to include the DHCP-GI-Address attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- See radius include
- Example

```
host1(config)#radius include dhcp-gi-address acct-stop enable
```

- Use the **no** version to restore the default, disable.

[26-62] MLPPP-Bundle-Name

Use the following command to manage the MLPPP-Bundle-Name RADIUS attribute.

- **radius include mlppp-bundle-name**

radius include mlppp-bundle-name

- Use to include the MLPPP-Bundle-Name attribute in Access-Request, Acct-Start, Interim-Acct, or Acct-Stop messages.
- You can control inclusion of the MLPPP-Bundle-Name attribute by enabling or disabling this command.
- There is no explicit command to include the MLPPP-Bundle-Name attribute in Interim-Acct messages; however, the attribute is automatically included in Interim-Acct messages when the attribute is enabled for Acct-Stop messages.
- See radius include
- Example

```
host1(config)#radius include mlppp-bundle-name acct-start enable
```

- Use the **no** version to restore the default, disable.

[26-63] Interface-Desc

Use the following command to manage the Interface-Desc RADIUS attribute.

- **radius include interface-description**

radius include interface-description

- Use to include the Interface-Desc attribute, with the subscriber's access interface description, in Access-Request, Acct-Start, Interim-Acct, or Acct-Stop messages.
- You can control inclusion of the Interface-Desc attribute by enabling or disabling this command. Inclusion is disabled by default.
- There is no explicit command to include the Interface-Desc attribute in Interim-Acct messages; however, the attribute is automatically included in Interim-Acct messages when the attribute is enabled for Acct-Stop messages.
- See radius include
- Example


```
host1(config)#radius include interface-description acct-start enable
```
- Use the **no** version to restore the default, disable.

[26-81] L2C-Information

Use the following command to manage the L2C-Information RADIUS attribute.

- **radius include access-loop-parameters**

radius include access-loop-parameters

- Use to include the L2C-Information attribute in Access-Request messages.
- You can control inclusion of the L2C-Information attribute by enabling or disabling this command. Inclusion is disabled by default.
- See radius include
- Example


```
host1(config)#radius include access-loop-parameters access-request enable
```
- Use the **no** version to restore the default, disable.

[26-92] L2C-Up-Stream-Data

Use the following command to manage the L2C-Up-Stream-Data RADIUS attribute.

- **radius include l2c-upstream-data**

radius include l2c-upstream-data

- Use to include the L2C-Up-Stream-Data attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the L2C-Up-Stream-Data attribute by enabling or disabling this command. Inclusion is disabled by default.
- See radius include

- Example

```
host1(config)#radius include l2c-upstream-data access-request enable
```

- Use the **no** version to restore the default, disable.

[26-93] L2C-Down-Stream-Data

Use the following command to manage the L2C-Down-Stream-Data RADIUS attribute.

- **radius include l2c-downstream-data**

radius include l2c-downstream-data

- Use to include the L2C-Down-Stream-Data attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the L2C-Down-Stream-Data attribute by enabling or disabling this command. Inclusion is disabled by default.
- Example

```
host1(config)#radius include l2c-downstream-data access-request enable
```

- Use the **no** version to restore the default, disable.
- See radius include

[26-129] Ipv6-NdRa-Prefix

Use the following command to manage the Ipv6-NdRa-Prefix RADIUS attribute.

- **radius include ipv6-nd-ra-prefix**

radius include ipv6-nd-ra-prefix

- Use to include the IPv6-NdRa-Prefix attribute in Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- The value of this attribute received from the RADIUS server in the Access-Accept message is included in the accounting messages.
- For dynamic interfaces, if the Ipv6-NdRa-Prefix attribute is configured in the profile and is not returned from RADIUS server, this attribute is not included in the Acct-Start, Acct-Stop, and Interim-Acct messages.
- See radius include

- Example

```
host1(config)#radius include ipv6-nd-ra-prefix acct-start enable
```

- Use the **no** version to restore the default, disable.

[26-141] Downstream-Calculated-Qos-Rate

The Downstream-Calculated-Qos-Rate RADIUS attribute enables RADIUS to receive calculated QoS rates from ANCP.

Use the following command to manage the Downstream-Calculated-Qos-Rate RADIUS attribute.

- **radius include downstream-calculated-qos-rate access-request**
- **radius include downstream-calculated-qos-rate acct-start**
- **radius include downstream-calculated-qos-rate acct-stop**

radius include downstream-calculated-qos-rate

- Use to include the Downstream-Calculated-Qos-Rate attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the Downstream-Calculated-Qos-Rate attribute by enabling or disabling this command. Inclusion is disabled by default.
- Example

```
host1(config)#radius include downstream-calculated-qos-rate access-request enable
```

- Use the **no** version to restore the default, disable.
- See radius include

[26-142] Upstream-Calculated-Qos-Rate

The Upstream-Calculated-Qos-Rate RADIUS attribute enables RADIUS to receive calculated QoS rates from ANCP.

Use the following commands to manage the Upstream-Calculated-Qos-Rate RADIUS attribute.

- **radius include upstream-calculated-qos-rate access-request**
- **radius include upstream-calculated-qos-rate acct-start**
- **radius include upstream-calculated-qos-rate acct-stop**

radius include upstream-calculated-qos-rate

- Use to include the Upstream-Calculated-Qos-Rate attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can control inclusion of the Upstream-Calculated-Qos-Rate attribute by enabling or disabling this command. Inclusion is disabled by default.
- Example

```
host1(config)#radius include upstream-calculated-qos-rate access-request
enable
```

- Use the **no** version to restore the default, disable.
- See radius include

[26-143] Max-Clients-Per-Interface

The Max-Clients-Per-Interface RADIUS attribute is the maximum number of PPPoE client sessions supported per interface. For DHCP clients, this value is the maximum number of PPPoE sessions per logical interface. For PPPoE, this value is the maximum number of PPPoE subinterfaces per PPPoE major interface. See *JUNOS Release Notes, Appendix A, System Maximums* corresponding to your software release for information about the maximum number of PPPoE subinterfaces per PPPoE major interface supported for each line module.

Use the following command to manage the Max-Clients-Per-Interface RADIUS attribute.

- **radius ignore pppoe-max-session**

radius ignore pppoe-max-session

- Use to cause the Max-Clients-Per-Interface attribute to be ignored in Access-Accept messages returned by the RADIUS server.
- You can control this behavior by enabling or disabling this command. Ignoring the Max-Clients-Per-Interface attribute is enabled by default.
- Example 1—Ignores the Max-Clients-Per-Interface attribute returned by the RADIUS server; this is the default behavior

```
host1(config)#radius ignore pppoe-max-session enable
```

- Example 2—Accepts the Max-Clients-Per-Interface attribute returned by the RADIUS server

```
host1(config)#radius ignore pppoe-max-session disable
```

When you issue this command, the router passes the value of the Max-Clients-Per-Interface attribute to the PPP application. PPP, in turn, sends this value to the PPPoE application, which determines whether or not to tear down the PPPoE interface based on the maximum session limit for this subscriber.

- Use the **no** version to restore the default, enable.

[26-150] ICR-Partition-Id

Use the following commands to manage the ICR-Partition-Id RADIUS attribute.

- **radius include icr-partition-id**
- **radius icr-partition-accounting**

radius include icr-partition-id

- Use to include the ICR-Partition-Id attribute in Access-Request, Acct-Start, or Acct-Stop messages.
- You can control inclusion of the attribute by enabling or disabling this command.
- Example

```
host1(config)#radius include icr-partition-id acct-start enable
```

- Use the **no** version to restore the default, disable.

radius icr-partition-accounting

- Use to enable or disable sending of the ICR Partition-Accounting-On or Partition-Accounting-Off messages to the RADIUS servers
- Both Partition-Accounting messages include the ICR-Partition-Id VSA. Also, both these messages are sent to the RADIUS accounting server configured on the virtual router where the ICR partition is configured or the virtual router on which the ICR control interface is set up.
- You can configure ICR partition accounting per virtual router.
- Example

```
host1(config)#radius icr-partition-accounting enable
```

- Use the **no** version to restore the default, disable.

All IPv6 Accounting Attributes

Use the following command to manage all IPv6 accounting attributes:

- **radius include ipv6-accounting**

radius include ipv6-accounting

- Use to include the following supported IPv6 accounting attributes in Acct-Stop messages:
 - IPv6-Acct-Input-Octets [26-151]
 - IPv6-Acct-Output-Octets [26-152]
 - IPv6-Acct-Input-Packets [26-153]
 - IPv6-Acct-Output-Packets [26-154]

- IPv6-Acct-Input-Gigawords [26-155]
- IPv6-Acct-Output-Gigawords [26-156]

If you enable inclusion of the IPv6 accounting-related VSAs in Acct-Stop messages, the router also includes the VSAs in Interim-Acct messages.

- You can control inclusion of the IPv6 accounting attributes by enabling or disabling this command.
- See radius include

■ Example

```
host1(config)#radius include ipv6-accounting acct-stop enable
```

- Use the **no** version to restore the default, disable.

[26-159] DHCP-Option 82

Use the following command to manage the DHCP Option 82 RADIUS attribute.

- **radius include dhcp-option-82**

radius include dhcp-option-82

- Use to include the DHCP Option 82 attribute in Access-Request, Acct-Start, and Acct-Stop messages.
- You can configure RADIUS to include the dhcp-option-82 attribute
- See radius include

■ Example

```
host1(config)#radius include dhcp-option-82
```

- Use the **no** version to restore the default, disable.

ANCP-Related Juniper Networks VSAs

You use the **radius include** command to specify information about Access Node Control Protocol (ANCP), also known as Layer 2 Control (L2C), that you want to include in the RADIUS Access-Request, Acct-Start, and Acct-Stop messages. Also, if you specify Acct-Stop messages, the router includes ANCP information in Interim-Acct messages that the router sends to RADIUS. By default, the router does not include the ANCP-related information provided by the Juniper Networks VSAs in RADIUS messages.

These Juniper Networks ANCP-related VSAs are based on definitions in GSMP extensions for layer2 control (L2C) Topology Discovery and Line Configuration—draft-wadhwa-gsmp-l2control-configuration-00.txt (July 2006 expiration).

radius include l2cd-keyword

- Use to include ANCP-related Juniper Networks VSAs in Access-Request, Acct-Start, and Acct-Stop messages that the router sends to RADIUS. If you enable inclusion of the ANCP-related VSAs in Acct-Stop messages, the router also includes the VSAs in Interim-Acct messages. Inclusion is disabled by default.
- You must enable ANCP discovery with the **discovery-mode** command prior to configuring the **radius include** command with the ANCP-related VSAs. Configuring discovery mode enables the RADIUS authentication server to retrieve ANCP information.
- Table 44 on page 236 lists the ANCP (L2C)-related keywords that you can use in the **radius include** command and the associated Juniper Networks VSAs. The table also indicates the mappings between ANCP parameters and the VSAs.

Table 44: ANCP (L2C)-Related Keywords for radius include Command

Command Keyword	Juniper Networks VSA Number	Juniper Networks VSA Name	ANCP Type	ANCP Subtype
l2cd-acc-loop-cir-id	[26-110]	Acc-Loop-Cir-Id	1	–
l2cd-acc-aggr-cir-id-bin	[26-111]	Acc-Aggr-Cir-Id-Bin	2	–
l2cd-acc-aggr-cir-id-asc	[26-112]	Acc-Aggr-Cir-Id-Asc	3	–
l2cd-act-data-rate-up	[26-113]	Act-Data-Rate-Up	4	129
l2cd-act-data-rate-dn	[26-114]	Act-Data-Rate-Dn	4	130
l2cd-min-data-rate-up	[26-115]	Min-Data-Rate-Up	4	131
l2cd-min-data-rate-dn	[26-116]	Min-Data-Rate-Dn	4	132
l2cd-att-data-rate-up	[26-117]	Att-Data-Rate-Up	4	133
l2cd-att-data-rate-dn	[26-118]	Att-Data-Rate-Dn	4	134
l2cd-max-data-rate-up	[26-119]	Max-Data-Rate-Up	4	135
l2cd-max-data-rate-dn	[26-120]	Max-Data-Rate-Dn	4	136
l2cd-min-lp-data-rate-up	[26-121]	Min-LP-Data-Rate-Up	4	137
l2cd-min-lp-data-rate-dn	[26-122]	Min-LP-Data-Rate-Dn	4	138
l2cd-max-interlv-delay-up	[26-123]	Max-Interlv-Delay-Up	4	139
l2cd-act-interlv-delay-up	[26-124]	Act-Interlv-Delay-Up	4	140
l2cd-max-interlv-delay-dn	[26-125]	Max-Interlv-Delay-Dn	4	141
l2cd-act-interlv-delay-dn	[26-126]	Act-Interlv-Delay-Dn	4	142
l2cd-dsl-line-state	[26-127]	DSL-Line-State	4	143
l2cd-dsl-type	[26-128]	DSL-Type	4	144

- Example

```
host1(config)#radius include l2cd-acc-loop-cir-id acct-start enable
```

- Use the **no** version to restore the default behavior, disable.



NOTE: JUNOS software continues to support DSL Forum VSAs (vendor ID 3561) that you can use to include DSL-related information in RADIUS messages. See “DSL Forum VSAs” on page 276.

- See radius include

- Related Topics**
- To display a list of attributes that are included in RADIUS messages, see Monitoring Included RADIUS Attributes on page 308

DSL Forum Vendor-Specific Attributes

You can use the **radius include dsl-forum-attributes** command to control the inclusion of a set of DSL Forum VSAs in Access-Request, Acct-Start, Acct-Stop, and (if Acct-Stop messages are specified) Interim-Acct messages that the router sends to RADIUS.

The DSL Forum VSAs, as defined in RFC 4679—DSL Forum Vendor-Specific RADIUS Attributes (September 2006), convey information about the associated subscriber for and data rate of the DSL. A service provider might find it useful to enable inclusion of the DSL Forum VSAs in RADIUS messages in order to bill subscribers for different classes of service based on the data rate of their DSL connection.



NOTE: JUNOS software also supports several Juniper Networks VSAs that you can use to include DSL-related information. See “ANCP-Related Juniper Networks VSAs” on page 235 and “Juniper Networks VSAs” on page 265 .

The router receives data containing one or more of the DSL Forum VSAs from a DSLAM connected to the router via a PPPoE interface. When you enable the inclusion of the DSL Forum VSAs in these RADIUS messages, the router includes all of the following attributes in the specified message type, provided that the VSA is available in the information that the router receives from the DSLAM.



NOTE: The router uses the vendor ID assigned to the DSL Forum (3561, or DE9 in hexadecimal format) by the Internet Assigned Numbers Authority (IANA) for the DSL Forum VSAs.

Agent-Circuit-Id [26-1]

Maximum-Data-Rate-Downstream [26-136]

Agent-Remote-Id [26-2]	Minimum-Data-Rate-Upstream-Low-Power [26-137]
Actual-Data-Rate-Upstream [26-129]	Minimum-Data-Rate-Downstream-Low-Power [26-138]
Actual-Data-Rate-Downstream [26-130]	Maximum-Interleaving-Delay-Upstream [26-139]
Minimum-Data-Rate-Upstream [26-131]	Actual-Interleaving-Delay-Upstream [26-140]
Minimum-Data-Rate-Downstream [26-132]	Maximum-Interleaving-Delay-Downstream [26-141]
Attainable-Data-Rate-Upstream [26-133]	Actual-Interleaving-Delay-Downstream [26-142]
Attainable-Data-Rate-Downstream [26-134]	Access-Loop-Encapsulation [26-144]
Maximum-Data-Rate-Upstream [26-135]	IWF-Session [26-254]

For information about enabling the QoS downstream rate application to obtain downstream rates from the Actual-Data-Rate-Downstream [26-130] DSL Forum VSA, see the *Configuring the Downstream Rate Using QoS Parameters* chapter in *JUNOS Quality of Service Configuration Guide*.

For a more detailed description of the DSL Forum VSAs, see “DSL Forum VSAs” on page 276 .

radius include dsl-forum-attributes

- Use to include the set of DSL Forum VSAs in Access-Request, Acct-Start, and Acct-Stop messages that the router sends to RADIUS. If you enable inclusion of the DSL Forum VSAs in Acct-Stop messages, the router also includes the VSAs in Interim-Acct messages.
- You can control inclusion of the DSL Forum VSAs in the specified message type by enabling or disabling this command. Inclusion is disabled by default.
- When you enable inclusion of the DSL Forum VSAs for a specified message type, the router includes in that message all of the DSL Forum attributes that it receives from the DSLAM.
- Example

```
host1(config)#radius include dsl-forum-attributes access-request enable
```

- Use the **no** version to restore the default behavior, disable.
- See radius include dsl-forum-attributes

Including or Excluding Attributes in RADIUS Messages

For many attributes, you can configure the router to include or exclude the attribute in RADIUS messages.

radius include

- Use to enable or disable the inclusion of RADIUS attributes in Acct-On, Acct-Off, Access-Request, Acct-Start, and Acct-Stop messages.

- Examples

```
host1(config)#radius include ingress-policy-name acct-start enable
host1(config)#radius include tunnel-type access-request disable
```

- Use the **no** version to restore the default, disable.
- See radius include

- Related Topics**
- To see a list of the attributes that you can include or exclude, see Monitoring Included RADIUS Attributes on page 308

Ignoring Attributes When Receiving Access-Accept Messages

You can configure the router to ignore or use many attributes that it receives in Access-Accept messages.

radius ignore

- Use to specify that a RADIUS attribute be ignored or be accepted from Access-Accept messages.
- Use the **enable** keyword to specify that the RADIUS client ignore the attribute from the RADIUS server or the **disable** keyword to use the attribute.
- Examples

```
host1(config)#radius ignore atm-scr enable
host1(config)#radius ignore framed-ip-netmask disable
```

- Use the **no** version to restore the default, enable.
- See radius include

- Related Topics**
- To see the list of attributes that the router uses or ignores, see Monitoring Ignored RADIUS Attributes on page 310

Chapter 4

Configuring RADIUS Dynamic-Request Server

This chapter describes the RADIUS dynamic-request server feature on E Series routers. The following topics describe this feature:

- RADIUS Dynamic-Request Server Overview on page 241
- RADIUS Dynamic-Request Server Platform Considerations on page 242
- RADIUS Dynamic-Request Server References on page 242
- How RADIUS Dynamic-Request Server Works on page 243
- RADIUS-Initiated Disconnect on page 243
- Message Exchange on page 243
- Configuring RADIUS-Initiated Disconnect on page 245
- RADIUS-Initiated Change of Authorization on page 245
- Configuring RADIUS-Initiated Change of Authorization on page 247
- RADIUS Dynamic-Request Server Commands on page 248
- Monitoring RADIUS Dynamic-Request Servers on page 250

RADIUS Dynamic-Request Server Overview

The E Series router's RADIUS dynamic-request server feature provides an efficient way for you to use RADIUS servers to centrally manage user sessions. The RADIUS dynamic-request server enables the router to receive the following types of messages from RADIUS servers:

- Disconnect messages—Immediately terminate specific user sessions.
- Change-of-Authorization (CoA) messages—Dynamically modify session authorization attributes, such as data filters.




NOTE: The RADIUS dynamic-request server's support for CoA messages is used by the Service Manager and by the E Series router's packet mirroring feature. For information about using the Service Manager, see "Configuring Service Manager" on page 641 in this guide. For specific information about using the dynamic-request server with packet mirroring, see the Configuring RADIUS-Based Mirroring chapter in *JUNOS Policy Management Configuration Guide*

For example, you might use the RADIUS dynamic-request server to terminate specific user sessions. Without the RADIUS dynamic-request server, the only way to disconnect a RADIUS user is from the E Series router. This disconnect method is cumbersome when a network has many systems. The RADIUS dynamic-request server allows RADIUS servers to initiate user-related operations, such as a termination operation, by sending unsolicited request messages to an E Series router.

Figure 5 on page 242 shows a network that would benefit from the RADIUS dynamic-request server functionality. In Figure 5 on page 242, instead of disconnecting users on each E Series router, the RADIUS servers can initiate the disconnection. Although the network has multiple RADIUS servers, the servers share a common database that contains authorization and accounting information. Having a common database allows any server to view who is currently valid and connected, and allows service providers to manage the disconnection of users.

Figure 5: Sample Remote Access Network Using RADIUS

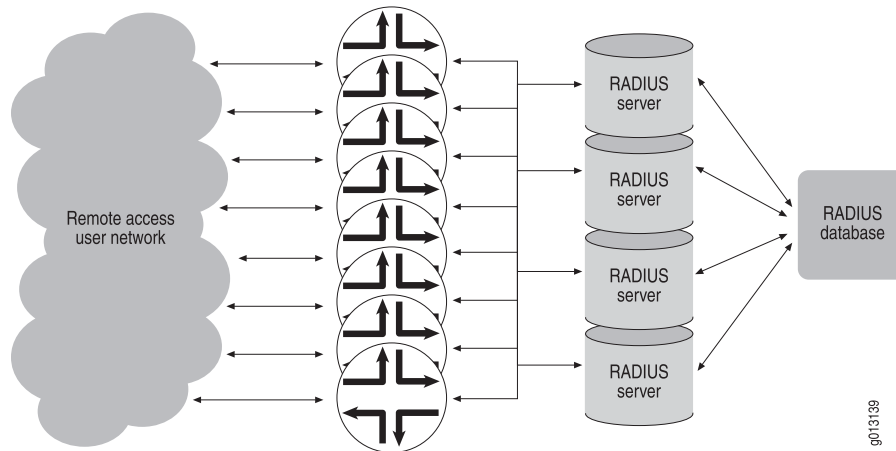

RADIUS Dynamic-Request Server Platform Considerations

RADIUS dynamic-request server is supported on all E Series routers. For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the E120 and E320 Broadband Services Routers.

RADIUS Dynamic-Request Server References

For more information about the RADIUS dynamic-request server feature, see the following references:

- RFC 2865—Remote Authentication Dial In User Service (RADIUS) (June 2000)
- RFC 2866—RADIUS Accounting (June 2000)

- RFC 5176—Dynamic Authorization Extensions to Remote Authentication Dial In User Service (RADIUS) (January 2008)

How RADIUS Dynamic-Request Server Works

In a typical client-server RADIUS environment, the E Series router functions as the client and the RADIUS server functions as the server. However, when using the RADIUS dynamic-request server feature, the roles are reversed. For example, during a RADIUS-initiated disconnect operation, the E Series router's RADIUS dynamic-request server functions as the server, and the RADIUS server functions as the disconnect client.

RADIUS-Initiated Disconnect

This section describes the RADIUS dynamic-request server's RADIUS-initiated disconnect feature.

Disconnect Messages

To centrally control the disconnection of remote access users, the RADIUS dynamic-request server on the router must receive and process unsolicited messages from RADIUS servers.

The RADIUS-initiated disconnect feature uses the existing format of RADIUS disconnect request and response messages. The RADIUS-initiated disconnect feature uses the following codes in its RADIUS request and response messages:

- Disconnect-Request (40)
- Disconnect-ACK (41)
- Disconnect-NAK (42)

Message Exchange

The RADIUS server and the router's RADIUS dynamic-request server exchange messages using User Datagram Protocol (UDP). The Disconnect-Request message sent by the RADIUS server has the same format as the CoA-Request packet that is sent for a change of authorization operation.

The disconnect response is either a Disconnect-ACK or a Disconnect-NAK message:

- If AAA successfully disconnects the user, the response is a RADIUS-formatted packet with a Disconnect-ACK message.
- If AAA cannot disconnect the user, the request is malformed, or attributes are missing from the request, the response is a RADIUS-formatted packet with a Disconnect-NAK message.

Supported Error-Cause Codes (RADIUS Attribute 101)

When a disconnect request fails, the RADIUS dynamic-request server includes an error-cause attribute (RADIUS attribute 101) in the Disconnect-NAK message that it sends back to the RADIUS server. If the detected error does not map to one of the supported error-cause attributes, the router sends the Disconnect-NAK without an error-cause attribute. Table 45 on page 244 lists the supported error-cause codes.

Table 45: Error-Cause Codes (RADIUS Attribute 101)

Code	Value	Description
401	Unsupported attribute	The request contains an attribute that is not supported (for example, a third-party attribute).
402	Missing attribute	A critical attribute (for example, the session identification attribute) is missing from a request.
404	Invalid request	Some other aspect of the request is invalid, such as if one or more attributes (for example, the packet mirroring Mirror Identifier value) are not formatted properly.
503	Session context not found	The session context identified in the request does not exist on the NAS.
504	Session context not removable	The subscriber identified by attributes in the disconnect request is owned by a component that does not support RADIUS-initiated disconnect (for example, IP LAC subscribers cannot be disconnected).
506	Resources unavailable	A request could not be honored due to lack of available NAS resources (such as memory).

Qualifications for Disconnect

For the server to disconnect a user, the Disconnect-Request message must contain an attribute with a session ID. The Disconnect-Request message can contain an Acct-Session-Id (44) attribute or a Acct-Multi-Session-Id (50) attribute for the session ID or both. If both the Acct-Session-Id and Acct-Multi-Session-Id attributes are present in the request, the router uses both attributes. If the User-Name (1) attribute is also present in the request, the username and session ID are used to perform the disconnection. Authentication, authorization, and accounting (AAA) services handle the actual request.



NOTE: To enable the disconnection of L2TP LAC user sessions, the RADIUS Disconnect-Request message must not include the Acct-Multi-Session-Id (50) attribute. The Acct-Multi-Session-Id attribute does not apply to LAC L2TP user sessions and including this attribute causes the disconnect operation to fail.

Security/Authentication

The RADIUS server (the disconnect client) must calculate the authenticator as specified for an Accounting-Request message in RFC 2866. The router's RADIUS dynamic-request server verifies the request using authenticator calculation as specified for an Accounting-Request message in RFC 2866. A key (secret), as specified in RFC 2865, must be configured and used in the calculation of the authenticator. The response authenticator is calculated as specified for an Accounting-Response message in RFC 2866.

Configuring RADIUS-Initiated Disconnect

To configure RADIUS-initiated disconnect feature, perform the following steps to set up the RADIUS dynamic-request server that will perform the disconnect operation:

1. Configure the RADIUS dynamic-request server, and enter RADIUS Configuration mode.

```
host1(config)#radius dynamic-request server 10.10.5.10
host1(config-radius)#
```

2. Enable the RADIUS-initiated disconnect capability on the RADIUS dynamic-request server.

```
host1(config-radius)#subscriber disconnect
```

3. Define the secret used in the RADIUS Authenticator field during exchanges between the RADIUS dynamic-request server and the RADIUS server.

```
host1(config-radius)#key Secret3Clientkey
```

4. (Optional) Specify the UDP port on which the RADIUS dynamic-request server listens for messages from the RADIUS server. The default is 1700.

```
host1(config-radius)#udp-port 1770
```

RADIUS-Initiated Change of Authorization

This section describes the RADIUS dynamic-request server's support for CoA messages. CoA messages are used by the E Series router's RADIUS-initiated packet mirroring feature, which is described in the *Configuring RADIUS-Based Mirroring* chapter in *JUNOS Policy Management Configuration Guide*, and by Service Manager, which is described in "Configuring Service Manager" on page 641 of this guide.

Change-of-Authorization Messages

The RADIUS dynamic-request server receives and processes the unsolicited CoA messages from RADIUS servers. The RADIUS-initiated CoA feature uses the following codes in its RADIUS request and response messages:

- CoA-Request (43)

- CoA-ACK (44)
- CoA-NAK (45)

Message Exchange

The RADIUS server and the router's RADIUS dynamic-request server exchange messages using UDP. The CoA-Request message sent by the RADIUS server has the same format as the Disconnect-Request packet that is sent for a disconnect operation.

The response is either a CoA-ACK or a CoA-NAK message:

- If AAA successfully changes the authorization, the response is a RADIUS-formatted packet with a CoA-ACK message, and the data filter is applied to the session.
- If AAA is unsuccessful, the request is malformed, or attributes are missing, the response is a RADIUS-formatted packet with a CoA-NAK message.

Supported Error-Cause Codes (RADIUS Attribute 101)

When AAA is unsuccessful, the RADIUS dynamic-request server includes an error-cause attribute (RADIUS attribute 101) in the CoA-NAK message that it sends back to the RADIUS server. If the detected error does not map to one of the supported error-cause attributes, the router sends the CoA-NAK without an error-cause attribute. Table 46 on page 246 lists the supported error-cause codes.

Table 46: Error-Cause Codes (RADIUS Attribute 101)

Code	Value	Description
401	Unsupported attribute	The request contains an attribute that is not supported (for example, a third-party attribute).
402	Missing attribute	A critical attribute (for example, the session identification attribute) is missing from a request.
404	Invalid request	Some other aspect of the request is invalid, such as if one or more attributes (for example, the packet mirroring Mirror Identifier value) are not formatted properly.
503	Session context not found	The session context identified in the request does not exist on the NAS.
504	Session context not removable	The subscriber identified by attributes in the disconnect request is owned by a component that does not support RADIUS-initiated disconnect (for example, IP LAC subscribers cannot be disconnected).
506	Resources unavailable	A request could not be honored due to lack of available NAS resources (such as memory).

Qualifications for Change of Authorization

To complete the change of authorization for a user, the CoA-Request must contain one of the following RADIUS attributes or pairs of attributes. AAA services handle the actual request.

- User-Name [attribute 1] with Virtual-Router [attribute 26–1] to identify the user per virtual router context
- Framed-IP-Address [attribute 8] with Virtual-Router [attribute 26–1] to identify the address per virtual router context
- Calling-Station-ID [attribute 31]
- Acct-Session-ID [attribute 44] (mandatory for all CoA requests, except when the request is for packet mirroring)
- Nas-Port-ID [attribute 5]
- DHCP-Option-82 [attribute 26–159], Vendor ID 4874
- Agent-Circuit-ID [attribute 26–1], Vendor ID 3561
- Agent-Remote-ID [attribute 26–2], Vendor ID 3561



NOTE: The Calling-Station-ID attribute is valid only for the tunneled subscribers and on the LNS. Additionally, the Calling-Station-ID and Nas-Port-ID attributes are valid only if there is no RADIUS override setting.

Security/Authentication

For change-of-authorization operations, the RADIUS server calculates the authenticator as specified for an Accounting-Request message in RFC 2866. The RADIUS dynamic-request server verifies the request using authenticator calculation as specified for an Accounting-Request in RFC 2866. A key (secret), as specified in RFC 2865, must be configured and used in the calculation of the authenticator. The response authenticator is calculated as specified for an Accounting-Response message in RFC 2866.

Configuring RADIUS-Initiated Change of Authorization

To configure the RADIUS dynamic-request change of authorization feature, perform the following steps to set up the RADIUS dynamic-request server that will perform the CoA operation:

1. Configure the RADIUS dynamic-request server, and enter RADIUS Configuration mode.

```
host1(config)#radius dynamic-request server 10.10.5.10
```

2. Enable the CoA capability on the RADIUS dynamic-request server.

```
host1(config-radius)#authorization change
```

3. Define the key (secret) used in the RADIUS Authenticator field during exchanges between the RADIUS dynamic-request server and the RADIUS server.

```
host1(config-radius)#key Secret21Clientkey
```

4. (Optional) Specify the UDP port on which the router listens for messages from the RADIUS server. The default is 1700.

```
host1(config-radius)#udp-port 1770
```

RADIUS Dynamic-Request Server Commands

This section describes commands used to configure RADIUS dynamic-request servers.

authorization change

- Use to enable the RADIUS dynamic-request server to receive CoA messages, such as packet mirroring attributes and Service Manager attributes, from the RADIUS server.

- Example

```
host1(config)#radius dynamic-request server 192.168.5.3
host1(config-radius)#authorization change
```

- Use the **no** version to disable receipt of the messages; any currently configured operations will continue.
- See authorization change

key

- Use to define the key (secret) that is used to calculate the RADIUS Authenticator field during exchanges between the RADIUS dynamic-request server and the RADIUS server.

- If no key is specified, the router drops all requests from the RADIUS server.

- Example

```
host1(config-radius)#key Secret3Clientkey
```

- Use the **no** version to set the default, no Authenticator.
- See key

radius disconnect client

- Use to configure a RADIUS disconnect client and enter RADIUS Configuration mode. Include the IP address of the RADIUS server that is acting as the disconnect client.

- Example

```
host1(config)#radius disconnect client 10.10.5.10
host1(config-radius)#
```


- Use the **no** version to remove the RADIUS disconnect client.



NOTE: The function of this command has been replaced by a combination of the RADIUS dynamic-request server feature and the **subscriber disconnect** command. This command might be removed completely in a future release.

- See radius disconnect client

radius dynamic-request server

- Use to configure a RADIUS dynamic-request server and enter RADIUS Configuration mode. Specify the IP address of the RADIUS server that exchanges messages with the RADIUS dynamic-request server.

- Example

```
host1(config)#radius dynamic-request server 10.10.5.10
host1(config-radius)#
```

- Use the **no** version to unconfigure the RADIUS dynamic-request server.
- See radius dynamic-request server

subscriber disconnect

- Use to enable the RADIUS dynamic-request server to receive RADIUS disconnect messages from a RADIUS server.

- Example

```
host1(config-radius)#subscriber disconnect
```

- Use the **no** version to disable processing of disconnect packets.



NOTE: This command and the RADIUS dynamic-request server feature replace the radius disconnect client command, which may be removed completely in a future release. The RADIUS Disconnect Configuration mode is also deprecated.

- See subscriber disconnect

udp-port

- Use to specify the UDP port on which the RADIUS dynamic-request server listens to receive messages from the RADIUS server.

- Example

```
host1(config-radius)#udp-port 1770
```

- Use the **no** version to return to the default, port 1700.
- See udp-port

Monitoring RADIUS Dynamic-Request Servers

To monitor RADIUS dynamic-request servers, see:

- “Setting the Baseline for RADIUS Dynamic-Request Server Statistics” on page 310
- “Monitoring RADIUS Dynamic-Request Server Statistics” on page 311
- “Monitoring the Configuration of the RADIUS Dynamic-Request Server” on page 312

Chapter 5

Configuring RADIUS Relay Server

This chapter describes the E Series router's RADIUS relay server feature. The RADIUS relay server provides authentication, authorization, accounting, and addressing services to wireless subscribers in public areas, such as airports and coffee shops. This chapter has the following sections:


- RADIUS Relay Server Overview on page 251
- RADIUS Relay Server Platform Considerations on page 252
- RADIUS Relay Server References on page 252
- How RADIUS Relay Server Works on page 252
- RADIUS Relay Server and the SRC Software on page 254
- Configuring RADIUS Relay Server Support on page 255
- Monitoring RADIUS Relay Server on page 257

RADIUS Relay Server Overview

The JUNOSe RADIUS relay server provides authentication, authorization, accounting, and addressing services in an 802.1x-based wireless environment.

The IEEE 802.1x standard is an authentication standard for wireless LANs; it enables a wireless subscriber to be authenticated by a central authority. The standard uses the Extensible Authentication Protocol (EAP) for message exchange during the authentication process. The E Series router's RADIUS relay server enhances the 802.1x environment by including authorization, accounting, and addressing support for wireless subscribers.

Figure 6 on page 252 illustrates a typical 802.1x-based wireless environment. In the figure, wireless subscribers connect to wireless access points (WAPs) for authentication. The WAPs in turn connect to the E Series router's RADIUS relay server. The RADIUS relay server passes the request on to the authentication server, which might be a RADIUS or TACACS+ server. The RADIUS server authenticates the subscriber, who is then granted access. After authentication, the RADIUS relay server obtains an IP address for the subscriber from the Dynamic Host Configuration Protocol (DHCP) local or external server. The RADIUS relay server can also use the RADIUS server or the optional Session and Resource Control (SRC) software (formerly the SDX software), to provide the accounting support.

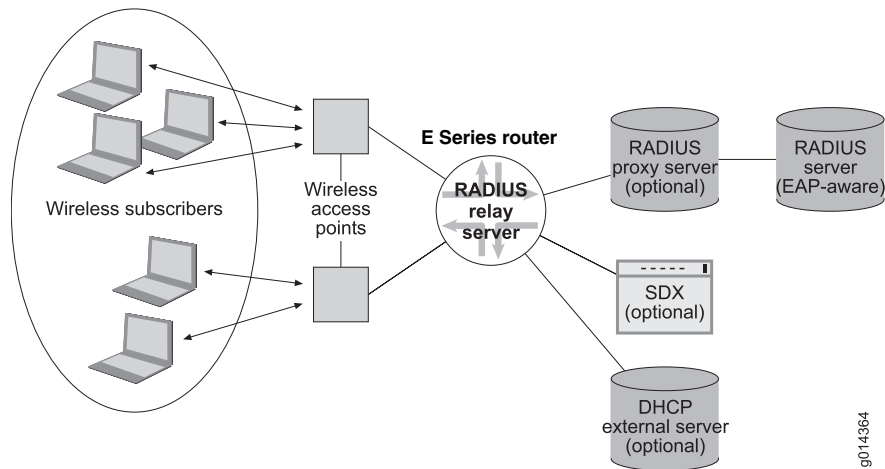Figure 6: RADIUS Relay Server

RADIUS Relay Server Platform Considerations

RADIUS relay is supported on all E Series routers.

For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the E120 and E320 Broadband Services Routers.

RADIUS Relay Server References

For more information about RADIUS relay server, see the following resources:

- IEEE 802.1x-2001—Port-Based Network Access Control
- RFC 2869—RADIUS Extensions (June 2000)
- RFC 2284—PPP Extensible Authentication Protocol (EAP) (March 1998)
- RFC 3539—Authentication, Authorization and Accounting (AAA) Transport Profile (June 2003)

How RADIUS Relay Server Works

When a wireless subscriber starts a session, the WAP encapsulates EAP attributes into a RADIUS Access-Request message and sends the request to the E Series router, which the WAP views as the RADIUS server. The encapsulated message uses the RADIUS EAP-Message (79) attribute. The RADIUS relay server does not process any of the EAP attributes in the RADIUS Access-Request message; the encrypted message is simply passed through the router to the actual RADIUS server. The RADIUS server must be EAP aware.

You can also use an optional RADIUS proxy server to provide additional enhancements to the 802.1x-based environment. For example, the RADIUS proxy server enables subscribers to be multiplexed to multiple Internet service providers (ISPs) that are customers of the same carrier. The server performs one of the following actions:

- If the ISP's RADIUS server supports EAP, the RADIUS proxy server extends the EAP session to the RADIUS server.
- If the ISP's RADIUS server does not support EAP, the RADIUS proxy server translates the EAP session into a legacy RADIUS session for the RADIUS server.

Authentication and Addressing

The WAP initiates the authentication and authorization request by sending a standard RADIUS Access-Request to the RADIUS relay server. The Access-Request must include the attributes listed in Table 47 on page 253. The attributes uniquely identify the wireless subscriber.

Table 47: Required RADIUS Access-Request Attributes

Attribute Name	Description
Called-Station-id [30]	Subscriber's WAP
Calling-Station-id [31]	Subscriber's media access control (MAC) address

When the RADIUS server authenticates the subscriber, the router's RADIUS relay server creates a RADIUS Access-Accept message and sends the message back to the subscriber. The router's DHCP server (either the router's DHCP local server or an external DHCP server) assigns an IP address to the subscriber and creates the subscriber interface.

For information about using the optional SRC software with the RADIUS relay server to assign IP addresses, see "RADIUS Relay Server and the SRC Software" on page 254.

The WAP might periodically reauthenticate a subscriber. For example, reauthentication is necessary to renegotiate a new Wired Equivalent Privacy (WEP) key. The RADIUS relay server ignores any new RADIUS attributes that are sent during a renegotiation operation.

Accounting

The RADIUS relay server's clients (the WAPs) send standard accounting request messages to the RADIUS relay server. The accounting server processes the request and sends the results back to the RADIUS relay server, which then creates a RADIUS accounting response message and forwards the information to the client WAP.

For tracking purposes, the forwarding RADIUS relay server adds the Radius-Client-Address vendor-specific attribute (VSA 26-52) to the forwarded accounting request messages. The VSA indicates the RADIUS relay server's IP address.

For information about using the SRC software with the RADIUS relay server to provide accounting, see “RADIUS Relay Server and the SRC Software” on page 254.

Table 48 on page 254 shows the RADIUS attributes that must be included in accounting requests. The attributes uniquely identify subscribers.

Table 48: Required RADIUS Accounting Attributes

For RADIUS Acct-Start and Acct-Stop Messages	Description
Called-Station-id [30]	Subscriber's WAP
Calling-Station-id [31]	Subscriber's MAC address
For RADIUS Acct-On and Acct-Off Messages	
Called-Station-id [30]	Subscriber's WAP

Terminating the Wireless Subscriber's Connection

The RADIUS relay server terminates the wireless subscriber's session when one of the following events occurs. When a subscriber session is terminated, the subscriber's IP address is released back into the available address pool.

- The RADIUS relay server receives a RADIUS accounting stop request.
- No RADIUS accounting messages are received for this subscriber for more than 24 hours.

RADIUS Relay Server and the SRC Software

The SRC software is an advanced subscriber configuration and management service. The RADIUS relay server can optionally use the SRC software to perform addressing and accounting services for the subscriber and WAP.

The RADIUS relay server uses the E Series router's DHCP local server or DHCP external server and SRC client process to communicate with the SRC software.

Using the SRC Software for Addressing

If you integrate the SAE software into the RADIUS relay server configuration, the application can contribute to the address pool selection used to lease an address to the subscriber. The SRC software only contributes to address pool selection when the DHCP local server is used; it is not supported when a DHCP external server is used.

Using the SRC Application for Accounting

If you use the SRC software with the RADIUS relay server feature, two accounting domains might actually be created. The first domain is established by the WAP, when

the subscriber is authenticated. The second domain is created for the connection between the E Series router and the SRC software.

If you want to continue to use the SRC software’s user session and problem-tracking features, you should *not* configure the SRC software to generate RADIUS accounting records. Also, the following attributes must be configured on the RADIUS server used by the WAP:

- Service-Bundle [26-31]
- Class [25]
- User-Name [1]

Configuring RADIUS Relay Server Support

To configure the RADIUS relay server feature, you enable support for the feature on the E Series router and identify the key (secret) used for the connection between the WAP and the RADIUS relay server. The following example configures a RADIUS relay authentication server. Use similar steps to configure a RADIUS relay accounting server.



NOTE: The E Series router supports one instance of the RADIUS relay server per virtual router. The instance can provide authentication, authorization, and accounting support.

1. Enable RADIUS relay server support on the E Series router, and enter RADIUS Relay Configuration mode.

```
host1(config)#radius relay authentication server
host1(config-radius-relay)#
```

2. Specify the IP address and mask of the network that will use the relay authentication server, and the secret used during exchanges between the relay authentication server and clients (the WAPs).

```
host1(config-radius-relay)#key 192.168.25.9 255.255.255.255 mysecret
```

3. Specify the router’s User Datagram Protocol (UDP) port on which the RADIUS relay server listens.

```
host1(config-radius-relay)#udp-port 1812
```

4. (Optional) Verify the configuration.

```
host1(config-radius-relay)#exit
host1(config)#exit
host1#show radius relay servers
```

RADIUS Relay Authentication Server Configuration		
IP Address	IP Mask	Secret
-----	-----	-----

```

10.10.15.0      255.255.255.0      secret
10.10.8.15     255.255.255.255    newsecret
192.168.25.9   255.255.255.255    mysecret
192.168.102.5  255.255.255.255    999Y2K
Udp Port: 1812

```

RADIUS Relay Accounting Server Configuration

```

-----
IP Address      IP Mask      Secret
-----
10.10.1.0       255.255.255.0  N08pxq
192.168.102.5   255.255.255.255  12BE$56
Udp Port: 1813

```

key

- Use to enter the IP address and mask of the network that will use the RADIUS relay server, and to specify the key (secret) used during exchanges between the RADIUS relay server and client.
- Example


```
host1(config-radius-relay)#key 10.10.15.25 255.255.255.0 Secret3Clientkey
```
- Use the **no** version to delete the secret.
- See key

radius relay server

- Use to configure a RADIUS relay authentication or accounting server and enter RADIUS Relay Configuration mode.
- Example


```
host1(config)#radius relay authentication server
host1(config-radius-relay)#
```
- Use the **no** version to unconfigure the RADIUS relay server.
- See radius relay server

radius relay udp-checksum

- Use to enable or disable UDP checksum for RADIUS relay packets.
- Example


```
host1(config)#radius relay udp-checksum enable
```
- Use the **no** version to restore the default, enable.
- See radius relay udp-checksum

udp-port

- Use to specify the router's UDP port on which the RADIUS relay server resides.
- Example

host1(config-radius-relay)#**udp-port 1850**

- Use the **no** version to return to the default, port 1812 for authentication servers or port 1813 for accounting servers.
- See udp-port

Monitoring RADIUS Relay Server

To monitor RADIUS relay server, see:

- “Setting the Baseline for RADIUS Dynamic-Request Server Statistics” on page 310
- “Monitoring RADIUS Dynamic-Request Server Statistics” on page 311
- “Monitoring the Configuration of the RADIUS Dynamic-Request Server” on page 312

Chapter 6

RADIUS Attribute Descriptions

This chapter lists the RADIUS attributes that are supported by JUNOS software. Table 49 on page 259 describes the supported RADIUS IETF attributes. Table 50 on page 265 describes the supported Juniper Networks vendor-specific attributes (VSAs). Table 51 on page 276 describes the DSL Forum VSA formats supported by JUNOS software. Table 52 on page 278 describes RADIUS attributes that are simply passed to their destination by the router.

RADIUS attributes are discussed in the following sections:

- RADIUS IETF Attributes on page 259
- Juniper Networks VSAs on page 265
- DSL Forum VSAs on page 276
- Pass Through RADIUS Attributes on page 277
- RADIUS Attributes References on page 278

RADIUS IETF Attributes

Table 49 on page 259 describes the RADIUS IETF attributes supported by JUNOS software. The attributes are sorted by standard number.

Table 49: RADIUS IETF Attributes Supported by JUNOS Software

Attribute Number	Attribute Name	Description
[1]	User-Name	<ul style="list-style-type: none">■ Name of user to be authenticated■ Configurable username override
[2]	User-Password	<ul style="list-style-type: none">■ Password of user to be authenticated■ Configurable password override■ Password Authentication Protocol (PAP)
[3]	CHAP-Password	Response value provided by a Point-to-Point Protocol (PPP) Challenge Handshake Authorization Protocol (CHAP) user in the response to an access challenge
[4]	NAS-IP-Address	<ul style="list-style-type: none">■ IP address of the network access server (NAS) that is requesting authentication of the user■ You can use the radius update-source-addr command to override this behavior; see “Configuring Remote Access” on page 3.

Table 49: RADIUS IETF Attributes Supported by JUNOS Software (continued)

Attribute Number	Attribute Name	Description
[5]	NAS-Port	<ul style="list-style-type: none"> Physical port number of the NAS that is authenticating the user See the radius nas-port-format, radius pppoe nas-port-format unique, and radius vlan nas-port-format stacked commands in “Configuring RADIUS Attributes” on page 171.
[6]	Service-Type	<ul style="list-style-type: none"> Type of service the user has requested or the type of service to be provided Admin, Login, NAS Prompt, or Framed only
[7]	Framed-Protocol	<ul style="list-style-type: none"> Framing protocol used for framed access Standard value of 1 set for PPP Nonstandard value of 1008 set for dynamic ATM
[8]	Framed-IP-Address	<ul style="list-style-type: none"> IP address to be configured for the user 0.0.0.0 or absence is interpreted as 255.255.255.254 See the radius include framed-ip-add acct-start command in “Configuring RADIUS Attributes” on page 171.
[9]	Framed-IP-Netmask	<ul style="list-style-type: none"> IP network to be configured for the user when the user is a router to a network Absence implies 255.255.255.255
[11]	Filter-Id	<ul style="list-style-type: none"> Name of the filter list for the user Interpreted as input policy name
[12]	Framed-MTU	<ul style="list-style-type: none"> The maximum transmission unit to be configured for the user, when it is not negotiated by some other means (such as PPP). When sent in an Access-Request with an EAP-Message, indicates the maximum size of the EAP-Message string that the external server supports.
[13]	Framed-Compression	Always set to none.
[18]	Reply-Message	<ul style="list-style-type: none"> Text that may be displayed to the user Only the first instance of this attribute is used
[22]	Framed-Route	<p>String that provides routing information to be configured for the user on the NAS; in the format:</p> <p>< addr > [/ < maskLen >] [< nexthop > [< cost >]] [tag < tagValue >] [distance < distValue >]</p>
[24]	State	<ul style="list-style-type: none"> An arbitrary value that the router includes in new Access-Request packets from the previous Accept-Challenge Applicable for CLI, telnet, or EAP message exchange
[25]	Class	An arbitrary value that the NAS includes in all accounting packets for the user if supplied by the RADIUS server
[26]	Vendor-Specific	Juniper Networks Enterprise number 0x0000130A

Table 49: RADIUS IETF Attributes Supported by JUNOS Software (continued)

Attribute Number	Attribute Name	Description
[27]	Session-Timeout	Maximum number of consecutive seconds of service to be provided to the user before termination of the session
[28]	Idle-Timeout	Maximum number of consecutive seconds of idle connection provided to the user before termination of the session
[30]	Called-Station-Id	<ul style="list-style-type: none"> ■ Allows the NAS to send the phone number that the user called ■ Not supported for nontunneled or LAC session side ■ For the LNS, the format is the string passed in the Called Number AVP ■ For RADIUS relay server, indicates the subscriber's wireless access point
[31]	Calling-Station-Id	<ul style="list-style-type: none"> ■ Allows the NAS to send the phone number from which the call originated ■ See the radius calling-station-format and the radius calling-station-delimiter commands in “Configuring RADIUS Attributes” on page 171. ■ For RADIUS relay server, indicates the subscriber's MAC address
[32]	NAS-Identifier	<ul style="list-style-type: none"> ■ Identifies the NAS originating the request ■ System-wide configurable hostname or VR-sensitive configurable NAS-identifier name
[33]	Proxy-State	E Series router's port ID and IP address
[40]	Acct-Status-Type	Indicates whether this Accounting-Request marks the beginning of the user service (Start), the end (Stop), or the interim (Interim-Update)
[41]	Acct-Delay-Time	Indicates how many seconds the client has been trying to send a particular record
[42]	Acct-Input-Octets	<ul style="list-style-type: none"> ■ Indicates how many octets have been received from the port during the time this service has been provided ■ IP subscriber manager—Statistics are reported ■ PPP—Statistics are counted according to the rules of the generic interface MIB
[43]	Acct-Output-Octets	<ul style="list-style-type: none"> ■ Indicates how many octets have been sent to the port during the time this service has been provided ■ IP subscriber manager—Statistics are reported ■ PPP—Statistics are counted according to the rules of the generic interface MIB
[44]	Acct-Session-Id	<ul style="list-style-type: none"> ■ Unique accounting identifier that makes it easy to match start and stop records in a log file ■ See the radius acct-session-id-format and the radius include acct-session-id access-request commands in “Configuring RADIUS Attributes” on page 171.
[45]	Acct-Authentic	<ul style="list-style-type: none"> ■ Indicates how the user was authenticated: whether by RADIUS, the NAS itself, or another remote authentication protocol ■ Always 1

Table 49: RADIUS IETF Attributes Supported by JUNOS Software *(continued)*

Attribute Number	Attribute Name	Description
[46]	Acct-Session-Time	Indicates how long in seconds that the user has received service
[47]	Acct-Input-Packets	<ul style="list-style-type: none"> ■ Indicates how many packets have been received from the port during the time this service has been provided to a framed user ■ IP subscriber manager—Statistics are reported ■ PPP—Statistics are counted according to the rules of the generic interface MIB
[48]	Acct-Output-Packets	<ul style="list-style-type: none"> ■ Indicates how many packets have been sent to the port in the course of delivering this service to a framed user ■ IP subscriber manager—Statistics are reported ■ PPP—Statistics are counted according to the rules of the generic interface MIB
[49]	Acct-Terminate-Cause	<p>Contains the reason the service (a PPP session) was terminated. The service can be terminated for the following reasons:</p> <ul style="list-style-type: none"> ■ User Request (1)—User initiated the disconnect (log out) ■ Idle Timeout (4)—Idle timer has expired ■ Session Timeout (5)—Client reached the maximum continuous time allowed on the service or session ■ Admin Reset (6)—System administrator terminated the session ■ Port Error (8)—PVC failed; no hardware or no interface ■ NAS Error (9)—Negotiation failures, connection failures, or address lease expiration ■ NAS Request (10)—PPP challenge timeout, PPP request timeout, tunnel establishment failure, PPP bundle failure, IP address lease expiration, PPP keep-alive failure, Tunnel disconnect, or an unaccounted-for error
[50]	Acct-Multi-Session-Id	<ul style="list-style-type: none"> ■ String constructed from the Acct-Session-ID of the first PPP link established for the Multilink PPP bundle and the internal Multilink PPP bundle ID. ■ This string is the hexadecimal ASCII characters for two 4-octet unsigned integers. Example: 0a34331200001249.
[51]	Acct-Link-Count	A value that increments with each link that joins the MLPPP bundle. This attribute does not indicate the number of active links. For more details, see RFC 2866—RADIUS Accounting (June 2000).
[52]	Acct-Input-Gigawords	<ul style="list-style-type: none"> ■ Indicates how many times the Acct-Input-Octets counter has wrapped around 2^{32} during the time this service has been provided, and can be present in Accounting-Request records only where the Acct-Status-Type is set to Stop or Interim-Update ■ IP subscriber manager—Statistics are reported ■ PPP—Statistics are counted according to the rules of the generic interface MIB

Table 49: RADIUS IETF Attributes Supported by JUNOS Software (continued)

Attribute Number	Attribute Name	Description
[53]	Acct-Output-Gigawords	<ul style="list-style-type: none"> ■ Indicates how many times the Acct-Output-Octets counter has wrapped around 2³² in the course of delivering this service, and can be present in Accounting-Request records only where the Acct-Status-Type is set to Stop or Interim-Update ■ IP subscriber manager—Statistics are reported ■ PPP—Statistics are counted according to the rules of the generic interface MIB
[55]	Event-Timestamp	Records the time that this event occurred on the NAS, in seconds, since January 1, 1970 00:00 UTC
[60]	CHAP-Challenge	Contains the CHAP challenge sent by the NAS to a PPP CHAP user
[61]	NAS-Port-Type	<ul style="list-style-type: none"> ■ Indicates the type of physical port the NAS is using to authenticate the user ■ See the radius dsl-port-type and the radius ethernet-port-type commands in “Configuring RADIUS Attributes” on page 171.
[62]	Port-Limit	Specifies the maximum number of MLPPP member links allowed for the subscriber
[64]	Tunnel-Type	<ul style="list-style-type: none"> ■ Which tunneling protocol to use (in the case of a tunnel initiator) or the tunneling protocol in use (in the case of a tunnel terminator) ■ Only L2TP tunnels supported at this time
[65]	Tunnel-Medium-Type	<ul style="list-style-type: none"> ■ Transport medium to use when creating a tunnel for those protocols (such as L2TP) that can operate over multiple transports ■ Only IPv4 supported at this time
[66]	Tunnel-Client-Endpoint	Address of the initiator end of the tunnel
[67]	Tunnel-Server-Endpoint	Address of the server end of the tunnel
[68]	Acct-Tunnel-Connection	<ul style="list-style-type: none"> ■ Indicates the identifier assigned to the tunnel session ■ Value is L2TP call-serial number
[69]	Tunnel-Password	Password to be used to authenticate to a remote server
[77]	Connect-Info	Sent from the NAS to indicate the nature of the user’s connection
[79]	EAP-Message	Encapsulates EAP packets, which allows the NAS to authenticate users through EAP without having to understand the EAP protocol
[80]	Message-Authenticator	Must be used in any Access-Request, Access-Accept, Access-Reject or Access-Challenge messages that include EAP-Message attributes
[82]	Tunnel-Assignment-Id	Indicates to the tunnel initiator the particular tunnel to which a session is to be assigned

Table 49: RADIUS IETF Attributes Supported by JUNOS Software (continued)

Attribute Number	Attribute Name	Description
[83]	Tunnel-Preference	<ul style="list-style-type: none"> ■ If more than one set of tunneling attributes is returned by the RADIUS server to the tunnel initiator, this attribute is included in each set to indicate the relative preference assigned to each tunnel. ■ Included in the Tunnel-Link-Start, the Tunnel-Link-Reject, and the Tunnel-Link-Stop packets (LAC only)
[85]	Acct-Interim-Interval	Number of seconds between each interim accounting update for this session
[86]	Acct-Tunnel-Packets-Lost	Number of packets lost on a given link
[87]	NAS-Port-Id	<ul style="list-style-type: none"> ■ Text string that identifies the physical interface of the NAS that is authenticating the user ■ If the PPP user connects via ATM slot 12, port 2, subinterface 3, vpi 100, vci 101, then the NAS-Port-Id value in the RADIUS packets will be atm 12/2.3:100.101 ■ If the user is a PPP user that started as a result of the E Series LNS feature (that is, no physical port), then the NAS-Port-Id value is as follows: <i>media:local address:peer address:local tunnel id:peer tunnel id:local session id:peer session id:call serial number</i> <ul style="list-style-type: none"> ■ For example: ip:172.81.1.98:172.81.1.99:18d:cb8:ce6:9f4:6 ■ In this case, the local information refers to the LNS, and the peer information refers to the LAC ■ NAS-Port-Id usually contains one of the following: <ul style="list-style-type: none"> ■ atm <slot> / <port> <.subinterface> : <vpi> . <vci> ■ FastEthernet <slot> / <port> <.subinterface> [: <vlan>] ■ GigabitEthernet <slot> / <port> <.subinterface> [<vlan>] ■ serial <slot> / <port> [: <sonetPath> [/<sonetTributary (x/x/x)> [/<fractionalInterface>]]] ■ from LNS—ip:local ip:peer ip:local tid:peer tid:local sid:peer sid:call serial number tid—tunnel id sid—session id <p>NOTE: Releases before 4.0.0 did not pass the subinterface number to RADIUS for inclusion in the NAS-Port-Id. If you do not want the subinterface number to be included, you must enter the aaa intf-desc-format include sub-intf disable command to omit the subinterface.</p>
[88]	Framed-Pool	Name of an assigned address pool that should be used to assign an address for the user
[90]	Tunnel-Client-Auth-Id	Name used by the tunnel initiator during the authentication phase of tunnel establishment
[91]	Tunnel-Server-Auth-Id	Name used by the tunnel terminator during the authentication phase of tunnel establishment
[96]	Framed-Interface-Id	IPv6 interface identifier configured by the user
[97]	Framed-Ipv6-Prefix	Provides the IPv6 prefix that is delegated to a downstream CPE

Table 49: RADIUS IETF Attributes Supported by JUNOS Software (continued)

Attribute Number	Attribute Name	Description
[99]	Framed-Ipv6-Route	Provides routing information to be configured for the user on the NAS
[100]	Framed-Ipv6-Pool	Name of the local address pool from which an IPv6 prefix is assigned to the requesting router
[101]	Error-Cause	4-octet field that contains an integer that specifies the cause of the error
[123]	Delegated-Ipv6-Prefix	IPv6 prefix to be delegated to clients using the DHCPv6 Prefix Delegation mechanism
[135]	Ascend-Primary-DNS	<ul style="list-style-type: none"> ■ Indicates the IP address of the primary DNS ■ The format is 1 byte of type (135), 1 byte of length (length = 6), 4 bytes of value (IPv4 address)
[136]	Ascend-Secondary-DNS	<ul style="list-style-type: none"> ■ Indicates the IP address of the secondary DNS ■ The format is 1 byte of type (136), 1 byte of length (length = 6), 4 bytes of value (IPv4 address)
[188]	Ascend-Num-In-Multilink	Current number of links in a multilink bundle
[242]	Ascend-Data-Filter	RADIUS policy definitions used to configure a policy to classify packet flows and perform filter, forward, packet marking, rate-limit profile, and traffic class actions

Juniper Networks VSAs

Table 50 on page 265 lists Juniper Networks VSA formats for RADIUS. JUNOS software uses the vendor ID assigned to Juniper Networks (vendor ID 4874) by the Internet Assigned Numbers Authority (IANA).

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-1]	Virtual-Router	<ul style="list-style-type: none"> ■ Virtual router name for the Broadband Remote Access Server (B-RAS) user's IP interface. ■ Allowed only from RADIUS server in default virtual router context. ■ For restricted users, specifies the only virtual router that the user can access. ■ For nonrestricted users, specifies the initial virtual router that the user accesses. ■ See the enable command in the <i>Passwords and Security</i> chapter in <i>JUNOS System Basics Configuration Guide</i>. 	len	sublen	string: virtual-router-name

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats *(continued)*

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-2]	Local-Address-Pool	<ul style="list-style-type: none"> Name of an assigned address pool that should be used to assign an address for the user Same as RADIUS attribute 88, Framed-Pool 	len	sublen	string: address-pool-name
[26-3]	Local-Interface	<p>Interface to apply to the E Series side of the connection</p> <p>The interface value can be one of the following:</p> <ul style="list-style-type: none"> The IP address (with subnet mask) The loopback interface 	len	sublen	string: local-interface
[26-4]	Primary-DNS	<ul style="list-style-type: none"> B-RAS user's DNS address negotiated during IPCP 4-octet IP address 	12	6	integer: 4-byte primary-dns-address
[26-5]	Secondary-DNS	<ul style="list-style-type: none"> B-RAS user's DNS address negotiated during IPCP 4-octet IP address 	12	6	integer: 4-byte secondary-dns-address
[26-6]	Primary-WINS (NBNS)	<ul style="list-style-type: none"> B-RAS user's WINS (NBNS) address negotiated during IPCP 4-octet IP address 	12	6	integer: 4-byte primary-wins-address
[26-7]	Secondary-WINS (NBNS)	<ul style="list-style-type: none"> B-RAS user's WINS (NBNS) address negotiated during IPCP 4-octet IP address 	12	6	integer: 4-byte secondary-wins-address
[26-8]	Tunnel-Virtual-Router	Virtual router name for tunnel connection	len	sublen	string: tunnel-virtual-router
[26-9]	Tunnel-Password	Tunnel password in cleartext	len	sublen	string: tunnel-password
[26-10]	Ingress-Policy-Name	Input policy name to apply to B-RAS user's interface	len	sublen	string: input-policy-name
[26-11]	Egress-Policy-Name	Output policy name to apply to B-RAS user's interface	len	sublen	string: output-policy-name
[26-12]	Ingress-Statistics	Enable or disable input statistics on B-RAS user's interface	12	6	integer: 0 = disable, 1 = enable
[26-13]	Egress-Statistics	Enable or disable output statistics on B-RAS user's interface	12	6	integer: 0 = disable, 1 = enable

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats (continued)

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-14]	Service-Category	ATM service category to apply to B-RAS user's interface	12	6	integer: 1 = UBR, 2 = UBR PCR, 3 = NRT VBR, 4 = CBR 5 = RT VBR,
[26-15]	PCR	<ul style="list-style-type: none"> ■ Peak cell rate ■ 4-octet integer 	12	6	integer: 4-octet
[26-16]	SCR	<ul style="list-style-type: none"> ■ Sustained cell rate ■ 4-octet integer 	12	6	integer: 4-octet
[26-17]	Mbs	<ul style="list-style-type: none"> ■ Maximum burst rate ■ 4-octet integer 	12	6	integer: 4-octet
[26-18]	Init-CLI-Access-Level	<ul style="list-style-type: none"> ■ Specifies the initial level of access to CLI commands ■ See the enable command in the <i>Passwords and Security</i> chapter in <i>JUNOS System Basics Configuration Guide</i>. 	len	sublen	single attribute: enter 0, 1, 5, 10, or 15
[26-19]	Allow-All-VR-Access	<ul style="list-style-type: none"> ■ Specifies user access to all virtual routers ■ See the enable command in the <i>Passwords and Security</i> chapter in <i>JUNOS System Basics Configuration Guide</i>. 	len	sublen	integer: 0 = disable, 1 = enable
[26-20]	Alt-CLI-Access-Level	<ul style="list-style-type: none"> ■ Specifies other levels of access to CLI commands ■ See the enable command in chapter <i>Passwords and Security</i> in <i>JUNOS System Basics Configuration Guide</i>. 	len	sublen	single attribute; enter 0, 1, 5, 10, or 15
[26-21]	Alt-CLI-Vrouter-Name	<ul style="list-style-type: none"> ■ For restricted users, specifies other VRs that the user may access. ■ See the enable command in chapter <i>Passwords and Security</i> in <i>JUNOS System Basics Configuration Guide</i>. 	len	sublen	string: virtual-router-name
[26-22]	Sa-Validate	<ul style="list-style-type: none"> ■ Enable or disable source address validation on a user's interface ■ 4-octet integer 	len	sublen	integer: 0 = disable, 1 = enable
[26-23]	Igmp-Enable	<ul style="list-style-type: none"> ■ Enable or disable IGMP on a user's interface ■ Allows the end user to register for the reception of multicast services ■ 4-octet integer 	len	sublen	integer: 0 = disable, 1 = enable

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats (continued)

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-24]	Pppoe-Description	The string <i>pppoe <mac addr></i> sent to the RADIUS server supplied by PPPoE	len	sublen	string: pppoe < mac addr >
[26-25]	Redirect-Vrouter-Name	<ul style="list-style-type: none"> Virtual router name indicating the VR context in which to authenticate the user Behavior is similar to that of a remote domain-map lookup. 	len	sublen	authentication-redirection
[26-26]	QoS-Profile-Name	Name of the QoS profile to attach to the user's interface	len	sublen	string: qos-profile-name
[26-28]	Pppoe-Url	PPPoE URL that is passed to PPPoE subscribers	len	sublen	string:URL
[26-30]	Tunnel-Nas-Port-Method	Conveys nasPort and nasPort type in tunnel	12	6	4-octet integer: 0 = none, 1 = Cisco CLID
[26-31]	Service-Bundle	Specifies the SRC service bundle	len	sublen	string
[26-33]	Tunnel-Max-Sessions	Maximum number of sessions allowed in a tunnel	12	6	integer: 4-octet
[26-34]	Framed-Ip-Route-Tag	Route tag to apply to returned framed-ip-address	12	6	integer: 4-octet
[26-35]	Tunnel-Dialout-Number	Dial number in L2TP dial-out	len	sublen	string:dial-out-number
[26-36]	PPP-Username	Username used in PPP L2TP dial-out sessions at the LNS for L2TP dial-out	len	sublen	string: ppp-username
[26-37]	PPP-Password	Password used in PPP L2TP dial-out sessions at the LNS for L2TP dial-out	len	sublen	string: ppp-password
[26-38]	PPP-Protocol	PPP authentication protocol used for L2TP dial-out sessions at the LNS	12	6	integer: 0 = none; 1 = PAP; 2 = CHAP; 3 = PAP-CHAP; 4 = CHAP-PAP
[26-39]	Tunnel-Min-Bps	Minimum line speed for L2TP dial-out	12	6	integer
[26-40]	Tunnel-Max-Bps	Maximum line speed for L2TP dial-out	12	6	integer
[26-41]	Tunnel-Bearer-Type	Bearer capability required for L2TP dial-out	12	6	integer: 0 = none; 1 = analog; 2 = digital
[26-42]	Input-GigaPkts	Number of times input-packets attribute rolls over its 4-octet field	12	6	integer
[26-43]	Output-GigaPkts	Number of times output-packets attribute rolls over its 4-octet field	12	6	integer

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats *(continued)*

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-44]	Tunnel-Interface-Id	Tunnel interface selector that AAA caches as part of the tunnel-session profile and the user's profile. This attribute is available to the RADIUS authentication and accounting servers.	len	sublen	string: tunnel selector
[26-45]	Ipv6-Virtual-Router	Virtual router name for B-RAS user's IPv6 interface	len	sublen	string: virtual-router-name
[26-46]	Ipv6-Local-Interface	Local IPv6 interface to apply to the E Series side of the connection	len	sublen	string: ipv6-local-interface
[26-47]	Ipv6-Primary-DNS	B-RAS user's primary IPv6 DNS address negotiated by DHCP	len	sublen	hexadecimal string: ipv6-primary-dns-address
[26-48]	Ipv6-Secondary-DNS	B-RAS user's secondary IPv6 DNS address negotiated by DHCP	len	sublen	hexadecimal string: ipv6-secondary-dns-address
[26-51]	Disconnect-Cause	L2TP PPP disconnect cause information received by the LAC	len	sublen	string:l2tp-ppp-disconnect-cause
[26-52]	Radius-Client-Address	RADIUS relay server's IP address	12	6	integer:4-octet
[26-53]	Service-Description	AAA profile service description string	len	sublen	string:profile-service-description
[26-54]	L2tp-Recv-Window-Size	<ul style="list-style-type: none"> ■ L2TP receive window size (RWS) for a tunnel on the LAC ■ Number of packets that the peer can transmit without receiving an acknowledgment from the router ■ 4-octet integer 	12	6	integer:4-octet
[26-55]	DHCP-Options	Client's DHCP options	len	sublen	string:dhcp-options
[26-56]	DHCP-MAC-Address	Client's MAC address	len	sublen	string:mac-address
[26-57]	DHCP-GI-Address	DHCP relay agent's IP address	12	6	integer:4-octet
[26-58]	LI-Action	Packet mirroring action	len	sublen	Salt encrypted integer: 0 = stop monitoring; 1 = start monitoring; 2 = no action
[26-59]	Med-Dev-Handle	Link to which packet mirroring is applied	len	sublen	Salt encrypted string; contains an ASCII-encoded unsigned integer

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats *(continued)*

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-60]	Med-Ip-Address	IP address of analyzer device to which mirrored packets are forwarded	len	sublen	Salt encrypted IP address
[26-61]	Med-Port-Number	UDP port in the analyzer device to which mirrored packets are forwarded	len	sublen	Salt encrypted integer
[26-62]	MLPPP-Bundle-Name	Text string that identifies the Multilink PPP bundle name	len	sublen	string:mlppp-bundle-name
[26-63]	Interface-Desc	Text string that identifies the subscriber's access interface	len	sublen	string:interface-description
[26-64]	Tunnel-Group	Name of the tunnel group assigned to a domain map	len	sublen	string:tunnel-group-name
[26-65]	Activate-Service	Service to activate for the subscriber	len	sublen	string:service-name
[26-66]	Deactivate-Service	Service to deactivate for the subscriber	len	sublen	string:service-name
[26-67]	Service-Volume-tagX	Amount of traffic, in MB, that can use the service; service is deactivated when the volume is exceeded	12	6	integer: volume in MB; 0 = infinite volume
[26-68]	Service-Timeout-tagX	Number of seconds that the service can be active; service is deactivated when the timeout expires	12	6	integer: time in seconds; 0 = no timeout
[26-69]	Service-Statistics-tagX	Enable or disable statistics for the service	12	6	integer: 0 = disable; 1 = enable time statistics; 2 = enable time and volume statistics
[26-70]	Ignore-DF-Bit	Enable or disable the ignore don't fragment (DF) bit feature on a B-RAS user's interface	12	6	integer: 0 = disable; 1 = enable
[26-71]	IGMP-Access-Name	Access List to use for the group (G) filter	len	sublen	string:32-octet
[26-72]	IGMP-Access-Src-Name	Access List to use for the source-group (S,G) filter	len	sublen	string:32-octet
[26-73]	IGMP-OIF-Map-Name	Multicast OIF (outgoing interface) mapping	len	sublen	string:32-octet
[26-74]	MLD-Access-Name	Access List to use for the group (G) filter	len	sublen	string:32-octet
[26-75]	MLD-Access-Src-Name	Access List to use for the source-group (S,G) filter	len	sublen	string:32-octet
[26-76]	MLD-OIF-Map-Name	Multicast OIF (outgoing interface) mapping	len	sublen	string:32-octet
[26-77]	MLD-Version	MLD Protocol Version (MLD Version 1 = 1; MLD Version 2 = 2)	12	6	integer: 1-octet

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats (continued)

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-78]	IGMP-Version	IGMP Protocol Version (IGMP Version 1 = 1; IGMP Version 2 = 2; IGMP Version 3 = 3)	12	6	integer: 1-octet
[26-79]	IP-Mcast-Adm-Bw-Limit	The maximum multicast bandwidth that will be admitted on an IP interface, in Kbps	12	6	integer: 4-octet
[26-80]	IPv6-Mcast-Adm-Bw-Limit	The maximum multicast bandwidth that will be admitted on an IPv6 interface, in Kbps	12	6	integer: 4-octet
[26-81]	L2c-Information	Series of type length value (tlv) fields (binary) representing the access loop parameters as defined in GSMP extensions for layer2 control (L2C) Topology Discovery and Line Configuration—draft-wadhwa-gsmp-l2control-configuration-00.txt (July 2006 expiration)	len	sublen	string: format is a series of type length value (tlv) fields (binary) representing the access loop parameters
[26-82]	Qos-Parameters	Name of the QoS parameter instance to create on the user's interface, followed by the value of the parameter. For example, the max-bandwidth 4000000 parameter instance represents the parameter name that was defined using the qos-parameter-define command (max-bandwidth) and the value to assign to the parameter (4000000). Multiple instances of this VSA can be returned from RADIUS using this format.	len	sublen	string: format is <i>parameter name parameter value</i> , where <i>parameter name</i> is ASCII name of a parameter name found in the QoS parameter definition and <i>parameter value</i> is the ASCII representation of 0–21474836470; multiple instances of this VSA can be returned from RADIUS using this format
[26-83]	Service-Session	Name of the service (including parameter values) that is associated with service manager statistics	len	sublen	string: service-name
[26-84]	Mobile-IP-Algorithm	Authentication algorithm used for Mobile IP registration	12	6	integer: 4-octet
[26-85]	Mobile-IP-SPI	Security parameter index for Mobile IP registration	12	6	integer: 4-octet
[26-86]	Mobile-IP-Key	Security association MD-5 key for Mobile IP registration	len	sublen	string: 32-octet
[26-87]	Mobile-IP-Replay	Replay time stamp for Mobile IP registration	12	6	integer: 4-octet
[26-88]	Mobile-IP-Access-Control-List	Access control list to filter on basis of care-of address	len	sublen	string: 32-octet

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats *(continued)*

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-89]	Mobile-IP-Lifetime	Registration lifetime for Mobile IP registration	12	6	integer: 4-octet
[26-90]	L2TP-Resynch-Method	L2TP peer resynchronization method	12	6	integer: 0 = disabled; 1 = failover protocol; 2 = silent failover; 3 = failover protocol with silent failover as backup
[26-91]	Tunnel-Switch-Profile	<ul style="list-style-type: none"> Name of the L2TP tunnel switch profile The L2TP tunnel switch profile defines the L2TP tunnel switching behavior for the interfaces to which this profile is assigned 	len	sublen	string: tunnel-switch-profile
[26-92]	L2C-Up-Stream-Data	Actual upstream rate access loop parameter (ASCII encoded) as defined in GSMP extensions for layer2 control (L2C) Topology Discovery and Line Configuration—draft-wadhwa-gsmp-l2control-configuration-00.txt (July 2006 expiration).	len	sublen	string: actual upstream rate access loop parameter (ASCII encoded)
[26-93]	L2C-Down-Stream-Data	Actual downstream rate access loop parameter (ASCII encoded) as defined in GSMP extensions for layer2 control (L2C) Topology Discovery and Line Configuration—draft-wadhwa-gsmp-l2control-configuration-00.txt (July 2006 expiration).	len	sublen	string: actual downstream rate access loop parameter (ASCII encoded)
[26-94]	Tunnel-Tx-Speed-Method	The method that the router uses to calculate the transmit connect speed of the subscriber's access interface. This speed is reported in L2TP Transmit (TX) Speed AVP 24. During the establishment of an L2TP tunnel session, the LAC sends AVP 24 to the LNS to convey the transmit speed of the subscriber's access interface.	12	6	integer: 1 = static-layer2, TX speed based on static layer 2 settings; 2 = dynamic-layer2, TX speed based on dynamic layer 2 settings; 3 = qos, TX speed based on QoS settings; 4 = actual, TX speed that is the lesser of the dynamic-layer2 value or the qos value
[26-95]	IGMP-Query-Interval	IGMP Query Interval	12	6	integer: 4-octet
[26-96]	IGMP-Max-Resp-Time	IGMP Maximum Response Time	12	6	integer: 4-octet

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats (continued)

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-97]	IGMP-Immediate-Leave	IGMP Immediate Leave	12	6	4-octet integer: 0 = disabled 1 = enabled
[26-98]	MLD-Query-Interval	MLD Query Interval	12	6	integer: 4-octet
[26-99]	MLD-Max-Resp-Time	MLD Maximum Response Time	12	6	integer: 4-octet
[26-100]	MLD-Immediate-Leave	MLD Immediate Leave	12	6	4-octet integer: 0 = disabled 1 = enabled
[26-110]	Acc-Loop-Cir-Id	Identification of the subscriber node connection to the access node	len	sublen	string: up to 63 ASCII characters
[26-111]	Acc-Aggr-Cir-Id-Bin	Unique identification of the DSL line	len	sublen	integer: 8-octet
[26-112]	Acc-Aggr-Cir-Id-Asc	Identification of the uplink on the access node. For example: <ul style="list-style-type: none"> ■ For Ethernet access aggregation: <i>ethernet slot/port [:inner-vlan-id] [:outer-vlan-id]</i> ■ For ATM aggregation: <i>atm slot/port:vpi.vci</i> 	len	sublen	string: up to 63 ASCII characters
[26-113]	Act-Data-Rate-Up	Actual upstream data rate of the subscriber's synchronized DSL link	12	6	integer: 4-octet
[26-114]	Act-Data-Rate-Dn	Actual downstream data rate of the subscriber's synchronized DSL link	12	6	integer: 4-octet
[26-115]	Min-Data-Rate-Up	Minimum upstream data rate configured for the subscriber	12	6	integer: 4-octet
[26-116]	Min-Data-Rate-Dn	Minimum downstream data rate configured for the subscriber	12	6	integer: 4-octet
[26-117]	Att-Data-Rate-Up	Upstream data rate that the subscriber can attain	12	6	integer: 4-octet
[26-118]	Att-Data-Rate-Dn	Downstream data rate that the subscriber can attain	12	6	integer: 4-octet
[26-119]	Max-Data-Rate-Up	Maximum upstream data rate configured for the subscriber	12	6	integer: 4-octet
[26-120]	Max-Data-Rate-Dn	Maximum downstream data rate configured for the subscriber	12	6	integer: 4-octet
[26-121]	Min-LP-Data-Rate-Up	Minimum upstream data rate in low power state configured for the subscriber	12	6	integer: 4-octet

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats *(continued)*

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-122]	Min-LP-Data-Rate-Dn	Minimum downstream data rate in low power state configured for the subscriber	12	6	integer: 4-octet
[26-123]	Max-Interlv-Delay-Up	Maximum one-way upstream interleaving delay configured for the subscriber	12	6	integer: 4-octet
[26-124]	Act-Interlv-Delay-Up	Subscriber's actual one-way upstream interleaving delay	12	6	integer: 4-octet
[26-125]	Max-Interlv-Delay-Dn	Maximum one-way downstream interleaving delay configured for the subscriber	12	6	integer: 4-octet
[26-126]	Act-Interlv-Delay-Dn	Subscriber's actual one-way downstream interleaving delay	12	6	integer: 4-octet
[26-127]	DSL-Line-State	State of the DSL line	12	6	4-octet integer 1 = Show uptime 2 = Idle 3 = Silent
[26-128]	DSL-Type	Encapsulation used by the subscriber associated with the DSLAM interface from which requests are initiated	11	5	string: 3-byte
[26-129]	Ipv6-NdRa-Prefix	Prefix value in IPv6 Neighbor Discovery route advertisements	len	sublen	hexadecimal string
[26-130]	QoS-Interfaceset-Name	Name of the QoS interface set to attach to the subscriber interface	len	sublen	string: qos-interfaceset-name
[26-140]	Service-Interim-Acct-Interval	Amount of time between interim accounting updates for this service.	12	6	integer: time in the range 600–86400 seconds; 0 = disabled
[26-141]	Downstream-Calculated-Qos-Rate	Calculated downstream QoS rate in Kbps as set by the ANCP configuration	12	6	integer: 4-octet
[26-142]	Upstream-Calculated-Qos-Rate	Calculated downstream QoS rate in Kbps as set by the ANCP configuration	12	6	integer: 4-octet

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats (continued)

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-143]	Max-Clients-Per-Interface	Maximum number of PPPoE client sessions supported per interface. For DHCP clients, this value is the maximum number of PPPoE sessions per logical interface. For PPPoE, this value is the maximum number of PPPoE subinterfaces per a PPPoE major interface. <i>See JUNOS Release Notes, Appendix A, System Maximums</i> corresponding to your software release for information about the maximum number of PPPoE subinterfaces supported for each line module.	12	6	integer: 4-octet
[26-144]	PPP-Monitor-Ingress-Only	Enable or disable monitoring of only ingress traffic to determine inactivity of a PPP session and subsequent disconnection of an inactive session. If this option is disabled or not configured, the router monitors both ingress traffic and egress traffic to determine session inactivity.	12	6	integer: 0 = disable, 1 = enable
[26-147]	Backup-Address-Pool	Name of the backup local address pool that can be used to assign addresses to users being authenticated by a RADIUS server, when the existing addresses in the primary local address pool are fully exhausted. The authentication server overrides the backup local address pool name configured using this attribute with the backup local address pool name received in the RADIUS-Access-Accept message.	len	sublen	string: Backup-address-pool-name
[26-150]	ICR-Partition-Id	Used in all the RADIUS authentication and accounting (Acct-Start, Acct-Stop, and Interim-Acct messages for both user and service accounting) messages corresponding to a subscriber to determine the partition in which the subscriber has logged in	len	sublen	string:icr-partition-id
[26-151]	Ipv6-Acct-Input-Octets	Number of times that IPv6 octets have been received from the port during the time this service has been provided	12	6	4-octet integer
[26-152]	Ipv6-Acct-Output-Octets	Number of times that IPv6 octets have been sent to the port during the time this service has been provided	12	6	4-octet integer
[26-153]	Ipv6-Acct-Input-Packets	Number of times that IPv6 packets have been received from the port during the time this service has been provided to a framed user	12	6	4-octet integer

Table 50: Juniper Networks (Vendor ID 4874) VSA Formats *(continued)*

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-154]	Ipv6-Acct-Output-Packets	Number of times that IPv6 packets have been sent to the port in the course of delivering this service to a framed user	12	6	4-octet integer
[26-155]	Ipv6-Acct-Input-Gigawords	Number of times that the IPv6-Acct-Input-Octets counter has wrapped around 2^{32} during the time this service has been provided, and can be present in Accounting-Request records only where the Acct-Status-Type is set to Stop or Interim-Update	12	6	4-octet integer
[26-156]	Ipv6-Acct-Output-Gigawords	Number of times that the IPv6-Acct-Output-Octets counter has wrapped around 2^{32} in the course of delivering this service, and can be present in Accounting-Request records only where the Acct-Status-Type is set to Stop or Interim-Update	12	6	4-octet integer

DSL Forum VSAs

Table 51 on page 276 describes the DSL Forum VSAs supported by JUNOS software for RADIUS. JUNOS software uses the vendor ID assigned to the DSL Forum (3561, or DE9 in hexadecimal format) by the Internet Assigned Numbers Authority (IANA).

Table 51: JUNOS Software DSL Forum (Vendor ID 3561) VSA Formats

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-1]	Agent-Circuit-Id	Identifier for the subscriber agent circuit ID that corresponds to the DSLAM interface from which subscriber requests are initiated	len	sublen	string: agent-circuit-id
[26-2]	Agent-Remote-Id	Unique identifier for the subscriber associated with the DSLAM interface from which requests are initiated	len	sublen	string: agent-remote-id
[26-129]	Actual-Data-Rate-Upstream	Actual upstream data rate of the subscriber's synchronized DSL link	12	6	integer: 4-octet
[26-130]	Actual-Data-Rate-Downstream	Actual downstream data rate of the subscriber's synchronized DSL link	12	6	integer: 4-octet
[26-131]	Minimum-Data-Rate-Upstream	Minimum upstream data rate configured for the subscriber	12	6	integer: 4-octet
[26-132]	Minimum-Data-Rate-Downstream	Minimum downstream data rate configured for the subscriber	12	6	integer: 4-octet

Table 51: JUNOS Software DSL Forum (Vendor ID 3561) VSA Formats *(continued)*

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-133]	Attainable-Data-Rate-Upstream	Upstream data rate that the subscriber can attain	12	6	integer: 4-octet
[26-134]	Attainable-Data-Rate-Downstream	Downstream data rate that the subscriber can attain	12	6	integer: 4-octet
[26-135]	Maximum-Data-Rate-Upstream	Maximum upstream data rate configured for the subscriber	12	6	integer: 4-octet
[26-136]	Maximum-Data-Rate-Downstream	Maximum downstream data rate configured for the subscriber	12	6	integer: 4-octet
[26-137]	Minimum-Data-Rate-Upstream-Low-Power	Minimum upstream data rate in low power state configured for the subscriber	12	6	integer: 4-octet
[26-138]	Minimum-Data-Rate-Downstream-Low-Power	Minimum downstream data rate in low power state configured for the subscriber	12	6	integer: 4-octet
[26-139]	Maximum-Interleaving-Delay-Upstream	Maximum one-way upstream interleaving delay configured for the subscriber	12	6	integer: 4-octet
[26-140]	Actual-Interleaving-Delay-Upstream	Subscriber's actual one-way upstream interleaving delay	12	6	integer: 4-octet
[26-141]	Maximum-Interleaving-Delay-Downstream	Maximum one-way downstream interleaving delay configured for the subscriber	12	6	integer: 4-octet
[26-142]	Actual-Interleaving-Delay-Downstream	Subscriber's actual one-way downstream interleaving delay	12	6	integer: 4-octet
[26-144]	Access-Loop-Encapsulation	Encapsulation used by the subscriber associated with the DSLAM interface from which requests are initiated	11	5	string: 3-byte
[26-254]	IWF-Session	Indication that the interworking function (IWF) has been performed for the subscriber's session to enable the transport of PPP over ATM traffic on a PPPoE interface	8	2	No data field required

Pass Through RADIUS Attributes

Table 52 on page 278 describes the RADIUS attribute that is not processed by JUNOS software. The router simply passes this attribute to its destination.

Table 52: RADIUS Attribute Passed Through by JUNOS Software

Standard Number	Attribute Name	Description
[79]	EAP-Message	<ul style="list-style-type: none"> ■ Used by RADIUS relay servers ■ Passed through to the RADIUS server

RADIUS Attributes References

For more information about RADIUS attributes, see the following RFCs:

- RFC 2661—Layer Two Tunneling Protocol “L2TP” (August 1999)
- RFC 2865—Remote Authentication Dial In User Service (RADIUS) (June 2000)
- RFC 2866—RADIUS Accounting (June 2000)
- RFC 2867—RADIUS Accounting Modifications for Tunnel Protocol Support (June 2000)
- RFC 2868—RADIUS Attributes for Tunnel Protocol Support (June 2000)
- RFC 2869—RADIUS Extensions (June 2000)
- RFC 3748—Extensible Authentication Protocol (EAP) (June 2004)
- RFC 4679—DSL Forum Vendor-Specific RADIUS Attributes (September 2006)



NOTE: IETF drafts are valid for only 6 months from the date of issuance. They must be considered as works in progress. Please refer to the IETF Web site at <http://www.ietf.org> for the latest drafts.

Chapter 7

Application Terminate Reasons

This chapter lists the default mappings for application terminate reasons to RADIUS Acct-Terminate-Cause attributes. Table 53 on page 279 lists the default mappings for AAA, Table 54 on page 280 lists default mappings for L2TP, Table 55 on page 295 lists the default mappings for PPP, and Table 56 on page 301 lists default mappings for RADIUS client. See “Mapping Application Terminate Reasons to RADIUS Terminate Codes” on page 84 in “Configuring Remote Access” on page 3 for information about configuring custom mappings for application terminate reasons to RADIUS Acct-Terminate-Cause attributes.

- AAA Terminate Reasons on page 279
- L2TP Terminate Reasons on page 280
- PPP Terminate Reasons on page 295
- RADIUS Client Terminate Reasons on page 301

AAA Terminate Reasons

Table 53 on page 279 lists the default AAA terminate mappings. The table indicates the supported AAA terminate and deny reasons and the RADIUS Acct-Terminate-Cause attributes they are mapped to by default.

Table 53: Default AAA Mappings

AAA Shutdown or Deny Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
deny address allocation failure	17	user error
deny address assignment failure	17	user error
deny application error	17	user error
deny authentication denied	17	user error
deny authentication failure	17	user error
deny authorization failure	17	user error
deny incompatible request	17	user error

Table 53: Default AAA Mappings *(continued)*

AAA Shutdown or Deny Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
deny invalid tunnel configuration	17	user error
deny limit exceeded	17	user error
deny mixed user types	10	nas request
deny no access challenge support	17	user error
deny no address allocation resources	17	user error
deny no resources	10	nas request
deny redirected authentication failure	17	user error
deny server not available	17	user error
deny server request timeout	17	user error
deny terminating user	10	nas request
deny unknown subscriber	17	user error
deny user termination	17	user error
shutdown address lease expiration	10	nas request
shutdown administrative reset	6	admin reset

L2TP Terminate Reasons

Table 54 on page 280 lists the default L2TP terminate mappings. The table indicates the supported L2TP terminate reasons and the RADIUS Acct-Terminate-Cause attributes they are mapped to by default.

Table 54: Default L2TP Mappings

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
session access interface down	8	port error
session admin close	6	admin reset
session admin drain	6	admin reset
session call down	10	nas request
session call failed	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
session create failed limit reached	9	nas error
session create failed no resources	9	nas error
session create failed single shot tunnel already fired	9	nas error
session create failed too busy	9	nas error
session failover protocol resync disconnect	6	admin reset
session hardware unavailable	8	port error
session no resources server port	9	nas error
session not ready	9	nas error
session rx cdn	10	nas request
session rx cdn avp bad hidden	10	nas request
session rx cdn avp bad value assigned session id	10	nas request
session rx cdn avp duplicate value assigned session id	10	nas request
session rx cdn avp malformed bad length	10	nas request
session rx cdn avp malformed truncated	10	nas request
session rx cdn avp missing mandatory assigned session id	10	nas request
session rx cdn avp missing mandatory result code	10	nas request
session rx cdn avp missing random vector	10	nas request
session rx cdn avp missing secret	10	nas request
session rx cdn avp unknown	10	nas request
session rx cdn no resources	10	nas request
session rx iccn avp bad hidden	10	nas request
session rx iccn avp bad value framing type	10	nas request
session rx iccn avp bad value proxy authen type	10	nas request
session rx iccn avp bad value unsupported proxy authen type	10	nas request
session rx iccn avp malformed bad length	10	nas request
session rx iccn avp malformed truncated	10	nas request

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
session rx iccn avp missing mandatory connect speed	10	nas request
session rx iccn avp missing mandatory framing type	10	nas request
session rx iccn avp missing mandatory proxy authen challenge	10	nas request
session rx iccn avp missing mandatory proxy authen id	10	nas request
session rx iccn avp missing mandatory proxy authen name	10	nas request
session rx iccn avp missing mandatory proxy authen response	10	nas request
session rx iccn avp missing random vector	10	nas request
session rx iccn avp missing secret	10	nas request
session rx iccn avp unknown	10	nas request
session rx iccn no resources	10	nas request
session rx iccn unexpected	10	nas request
session rx icrp avp bad hidden	10	nas request
session rx icrp avp bad value assigned session id	10	nas request
session rx icrp avp duplicate value assigned session id	10	nas request
session rx icrp avp malformed bad length	10	nas request
session rx icrp avp malformed truncated	10	nas request
session rx icrp avp missing mandatory assigned session id	10	nas request
session rx icrp avp missing random vector	10	nas request
session rx icrp avp missing secret	10	nas request
session rx icrp avp unknown	10	nas request
session rx icrp no resources	10	nas request
session rx icrp unexpected	10	nas request
session rx icrq admin close	6	admin reset
session rx icrq authenticate failed host	10	nas request
session rx icrq avp bad hidden	10	nas request

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
session rx icrq avp bad value assigned session id	10	nas request
session rx icrq avp bad value bearer type	10	nas request
session rx icrq avp bad value cisco nas port	10	nas request
session rx icrq avp duplicate value assigned session id	10	nas request
session rx icrq avp malformed bad length	10	nas request
session rx icrq avp malformed truncated	10	nas request
session rx icrq avp missing mandatory assigned session id	10	nas request
session rx icrq avp missing mandatory call serial number	10	nas request
session rx icrq avp missing random vector	10	nas request
session rx icrq avp missing secret	10	nas request
session rx icrq avp unknown	10	nas request
session rx icrq no resources	10	nas request
session rx icrq unexpected	10	nas request
session rx occn avp bad hidden	10	nas request
session rx occn avp bad value framing type	10	nas request
session rx occn avp malformed bad length	10	nas request
session rx occn avp malformed truncated	10	nas request
session rx occn avp missing mandatory connect speed	10	nas request
session rx occn avp missing mandatory framing type	10	nas request
session rx occn avp missing random vector	10	nas request
session rx occn avp missing secret	10	nas request
session rx occn avp unknown	10	nas request
session rx occn no resources	10	nas request
session rx occn unexpected	10	nas request
session rx ocrp avp bad hidden	10	nas request
session rx ocrp avp bad value assigned session id	10	nas request

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
session rx ocrp avp duplicate value assigned session id	10	nas request
session rx ocrp avp malformed bad length	10	nas request
session rx ocrp avp malformed truncated	10	nas request
session rx ocrp avp missing mandatory assigned session id	10	nas request
session rx ocrp avp missing random vector	10	nas request
session rx ocrp avp missing secret	10	nas request
session rx ocrp avp unknown	10	nas request
session rx ocrp no resources	10	nas request
session rx ocrp unexpected	10	nas request
session rx ocrq admin close	10	admin reset
session rx ocrq authenticate failed host	10	nas request
session rx ocrq avp bad hidden	10	nas request
session rx ocrq avp bad value assigned session id	10	nas request
session rx ocrq avp bad value bearer type	10	nas request
session rx ocrq avp bad value framing type	10	nas request
session rx ocrq avp duplicate value assigned session id	10	nas request
session rx ocrq avp malformed bad length	10	nas request
session rx ocrq avp malformed truncated	10	nas request
session rx ocrq avp missing mandatory assigned session id	10	nas request
session rx ocrq avp missing mandatory bearer type	10	nas request
session rx ocrq avp missing mandatory call serial number	10	nas request
session rx ocrq avp missing mandatory called number	10	nas request
session rx ocrq avp missing mandatory framing type	10	nas request
session rx ocrq avp missing mandatory maximum bps	10	nas request
session rx ocrq avp missing mandatory minimum bps	10	nas request
session rx ocrq avp missing random vector	10	nas request

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
session rx ocrq avp missing secret	10	nas request
session rx ocrq avp unknown	10	nas request
session rx ocrq no resources	10	nas request
session rx ocrq unexpected	10	nas request
session rx ocrq unsupported	9	nas error
session rx sli avp bad hidden	10	nas request
session rx sli avp bad value accm	10	nas request
session rx sli avp malformed bad length	10	nas request
session rx sli avp malformed truncated	10	nas request
session rx sli avp missing mandatory accm	10	nas request
session rx sli avp missing random vector	10	nas request
session rx sli avp missing secret	10	nas request
session rx sli avp unknown	10	nas request
session rx sli no resources	10	nas request
session rx unexpected packet lac incoming	10	nas request
session rx unexpected packet lac outgoing	10	nas request
session rx unexpected packet lns incoming	10	nas request
session rx unexpected packet lns outgoing	10	nas request
session rx unknown session id	10	nas request
session rx wen avp bad hidden	10	nas request
session rx wen avp malformed bad length	10	nas request
session rx wen avp malformed truncated	10	nas request
session rx wen avp missing mandatory call errors	10	nas request
session rx wen avp missing random vector	10	nas request
session rx wen avp missing secret	10	nas request
session rx wen avp unknown	10	nas request

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
session rx wen no resources	10	nas request
session timeout connection	10	nas request
session timeout inactivity	4	idle timeout
session timeout session	5	session timeout
session timeout upper create	9	nas error
session transmit speed unavailable	9	nas error
session tunnel down	15	service unavailable
session tunnel failed	15	service unavailable
session tunnel switch profile deleted	6	admin reset
session tunneled interface down	8	port error
session unknown cause	9	nas error
session upper create failed	9	nas error
session upper removed	15	service unavailable
session warmstart not operational	15	service unavailable
session warmstart recovery error	15	service unavailable
session warmstart upper not restacked	10	nas request
tunnel admin close	6	admin reset
tunnel admin drain	6	admin reset
tunnel control channel failed	15	service unavailable
tunnel created no sessions	1	user request
tunnel destination address changed	6	admin reset
tunnel destination down	10	nas request
tunnel failover protocol no resources for recovery tunnel	15	service unavailable
tunnel failover protocol no resources for session resync	15	service unavailable
tunnel failover protocol not supported	15	service unavailable
tunnel failover protocol not supported by peer	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel failover protocol recovery control channel failed	15	service unavailable
tunnel failover protocol recovery tunnel failed	15	service unavailable
tunnel failover protocol recovery tunnel finished	1	user request
tunnel failover protocol recovery tunnel primary down	1	user request
tunnel failover protocol session resync failed	15	service unavailable
tunnel host profile changed	6	admin reset
tunnel host profile deleted	6	admin reset
tunnel rx sccn authenticate failed challenge	17	user error
tunnel rx sccn avp bad hidden	15	service unavailable
tunnel rx sccn avp bad value challenge response	15	service unavailable
tunnel rx sccn avp malformed bad length	15	service unavailable
tunnel rx sccn avp malformed truncated	15	service unavailable
tunnel rx sccn avp missing challenge response	17	user error
tunnel rx sccn avp missing random vector	15	service unavailable
tunnel rx sccn avp missing secret	15	service unavailable
tunnel rx sccn avp unexpected challenge response	15	service unavailable
tunnel rx sccn avp unknown	15	service unavailable
tunnel rx sccn no resources	15	service unavailable
tunnel rx sccn session id not null	15	service unavailable
tunnel rx sccn unexpected	15	service unavailable
tunnel rx sccrp authenticate failed challenge	17	user error
tunnel rx sccrp authenticate failed host	17	user error
tunnel rx sccrp avp bad hidden	15	service unavailable
tunnel rx sccrp avp bad value assigned tunnel id	15	service unavailable
tunnel rx sccrp avp bad value bearer capabilities	15	service unavailable
tunnel rx sccrp avp bad value challenge	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel rx sccrp avp bad value challenge response	15	service unavailable
tunnel rx sccrp avp bad value failover capability	15	service unavailable
tunnel rx sccrp avp bad value framing capabilities	15	service unavailable
tunnel rx sccrp avp bad value protocol version	15	service unavailable
tunnel rx sccrp avp bad value receive window size	15	service unavailable
tunnel rx sccrp avp duplicate value assigned tunnel id	15	service unavailable
tunnel rx sccrp avp malformed bad length	15	service unavailable
tunnel rx sccrp avp malformed truncated	15	service unavailable
tunnel rx sccrp avp missing challenge response	17	user error
tunnel rx sccrp avp missing mandatory assigned tunnel id	15	service unavailable
tunnel rx sccrp avp missing mandatory framing capabilities	15	service unavailable
tunnel rx sccrp avp missing mandatory host name	15	service unavailable
tunnel rx sccrp avp missing mandatory protocol version	15	service unavailable
tunnel rx sccrp avp missing random vector	15	service unavailable
tunnel rx sccrp avp missing secret	15	service unavailable
tunnel rx sccrp avp unexpected challenge response	15	service unavailable
tunnel rx sccrp avp unexpected challenge without secret	15	service unavailable
tunnel rx sccrp avp unknown	15	service unavailable
tunnel rx sccrp no resources	15	service unavailable
tunnel rx sccrp session id not null	15	service unavailable
tunnel rx sccrp unexpected	15	service unavailable
tunnel rx sccrq admin close	6	admin reset
tunnel rx sccrq authenticate failed host	17	user error
tunnel rx sccrq avp bad hidden	15	service unavailable
tunnel rx sccrq avp bad value assigned tunnel id	15	service unavailable
tunnel rx sccrq avp bad value bearer capabilities	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel rx sccrq avp bad value challenge	15	service unavailable
tunnel rx sccrq avp bad value failover capability	15	service unavailable
tunnel rx sccrq avp bad value framing capabilities	15	service unavailable
tunnel rx sccrq avp bad value protocol version	15	service unavailable
tunnel rx sccrq avp bad value receive window size	15	service unavailable
tunnel rx sccrq avp duplicate value assigned tunnel id	15	service unavailable
tunnel rx sccrq avp malformed bad length	15	service unavailable
tunnel rx sccrq avp malformed truncated	15	service unavailable
tunnel rx sccrq avp missing mandatory assigned tunnel id	15	service unavailable
tunnel rx sccrq avp missing mandatory framing capabilities	15	service unavailable
tunnel rx sccrq avp missing mandatory host name	15	service unavailable
tunnel rx sccrq avp missing mandatory protocol version	15	service unavailable
tunnel rx sccrq avp missing random vector	15	service unavailable
tunnel rx sccrq avp missing secret	15	service unavailable
tunnel rx sccrq avp unexpected challenge without secret	15	service unavailable
tunnel rx sccrq avp unknown	15	service unavailable
tunnel rx sccrq bad address	15	service unavailable
tunnel rx sccrq no resources	15	service unavailable
tunnel rx sccrq no resources max tunnels	15	service unavailable
tunnel rx sccrq session id not null	15	service unavailable
tunnel rx sccrq unexpected	15	service unavailable
tunnel rx stopccn	1	user request
tunnel rx stopccn avp bad hidden	15	service unavailable
tunnel rx stopccn avp bad value assigned tunnel id	15	service unavailable
tunnel rx stopccn avp duplicate value assigned tunnel id	15	service unavailable
tunnel rx stopccn avp malformed bad length	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel rx stopccn avp malformed truncated	15	service unavailable
tunnel rx stopccn avp missing mandatory assigned tunnel id	15	service unavailable
tunnel rx stopccn avp missing mandatory result code	15	service unavailable
tunnel rx stopccn avp missing random vector	15	service unavailable
tunnel rx stopccn avp missing secret	15	service unavailable
tunnel rx stopccn avp unknown	15	service unavailable
tunnel rx stopccn no resources	15	service unavailable
tunnel rx stopccn session id not null	15	service unavailable
tunnel rx frs avp malformed truncated	15	service unavailable
tunnel rx frs avp missing mandatory failover session state	15	service unavailable
tunnel rx frs avp missing random vector	15	service unavailable
tunnel rx frs avp missing secret	15	service unavailable
tunnel rx frs avp unknown	15	service unavailable
tunnel rx frs no resources	15	service unavailable
tunnel rx frs session id not null	15	service unavailable
tunnel rx fsq avp bad hidden	15	service unavailable
tunnel rx fsq avp malformed bad length	15	service unavailable
tunnel rx fsq avp malformed truncated	15	service unavailable
tunnel rx fsq avp missing mandatory failover session state	15	service unavailable
tunnel rx fsq avp missing random vector	15	service unavailable
tunnel rx fsq avp missing secret	15	service unavailable
tunnel rx fsq avp unknown	15	service unavailable
tunnel rx fsq no resources	15	service unavailable
tunnel rx fsq session id not null	15	service unavailable
tunnel rx fsr avp bad hidden	15	service unavailable
tunnel rx fsr avp malformed bad length	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel rx unexpected packet	15	service unavailable
tunnel rx unexpected packet for session	15	service unavailable
tunnel rx unknown packet message type indecipherable	15	service unavailable
tunnel rx unknown packet message type unrecognized	15	service unavailable
tunnel rx recovery sccn authenticate failed challenge	17	user error
tunnel rx recovery sccn avp bad hidden	15	service unavailable
tunnel rx recovery sccn avp bad value challenge response	15	service unavailable
tunnel rx recovery sccn avp malformed bad length	15	service unavailable
tunnel rx recovery sccn avp malformed truncated	15	service unavailable
tunnel rx recovery sccn avp missing challenge response	17	user error
tunnel rx recovery sccn avp missing random vector	15	service unavailable
tunnel rx recovery sccn avp missing secret	15	service unavailable
tunnel rx recovery sccn avp unexpected challenge response	15	service unavailable
tunnel rx recovery sccn avp unknown	15	service unavailable
tunnel rx recovery sccn no resources	15	service unavailable
tunnel rx recovery sccn session id not null	15	service unavailable
tunnel rx recovery sccrp authenticate failed challenge	17	user error
tunnel rx recovery sccrp avp bad hidden	15	service unavailable
tunnel rx recovery sccrp avp bad value assigned tunnel id	15	service unavailable
tunnel rx recovery sccrp avp bad value bearer capabilities	15	service unavailable
tunnel rx recovery sccrp avp bad value challenge	15	service unavailable
tunnel rx recovery sccrp avp bad value challenge response	15	service unavailable
tunnel rx recovery sccrp avp bad value framing capabilities	15	service unavailable
tunnel rx recovery sccrp avp bad value protocol version	15	service unavailable
tunnel rx recovery sccrp avp bad value receive window size	15	service unavailable
tunnel rx recovery sccrp avp bad value suggested control sequence	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel rx recovery sccrp avp duplicate value assigned tunnel id	15	service unavailable
tunnel rx recovery sccrp avp malformed bad length	15	service unavailable
tunnel rx recovery sccrp avp malformed truncated	15	service unavailable
tunnel rx recovery sccrp avp mismatched host name	15	service unavailable
tunnel rx recovery sccrp avp mismatched vendor name	15	service unavailable
tunnel rx recovery sccrp avp missing challenge response	17	user error
tunnel rx recovery sccrp avp missing mandatory assigned tunnel id	15	service unavailable
tunnel rx recovery sccrp avp missing mandatory framing capabilities	15	service unavailable
tunnel rx recovery sccrp avp missing mandatory host name	15	service unavailable
tunnel rx recovery sccrp avp missing mandatory protocol version	15	service unavailable
tunnel rx recovery sccrp avp missing random vector	15	service unavailable
tunnel rx recovery sccrp avp missing secret	15	service unavailable
tunnel rx recovery sccrp avp unexpected challenge response	15	service unavailable
tunnel rx recovery sccrp avp unexpected challenge without secret	15	service unavailable
tunnel rx recovery sccrp avp unknown	15	service unavailable
tunnel rx recovery sccrp no resources	15	service unavailable
tunnel rx recovery sccrp session id not null	15	service unavailable
tunnel rx recovery sccrq admin close	6	admin reset
tunnel rx recovery sccrq avp bad hidden	15	service unavailable
tunnel rx recovery sccrq avp bad value assigned tunnel id	15	service unavailable
tunnel rx recovery sccrq avp bad value bearer capabilities	15	service unavailable
tunnel rx recovery sccrq avp bad value challenge	15	service unavailable
tunnel rx recovery sccrq avp bad value framing capabilities	15	service unavailable
tunnel rx recovery sccrq avp bad value protocol version	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel rx recovery sccrq avp bad value receive window size	15	service unavailable
tunnel rx recovery sccrq avp bad value tunnel recovery	15	service unavailable
tunnel rx recovery sccrq avp duplicate value assigned tunnel id	15	service unavailable
tunnel rx recovery sccrq avp duplicate value tie breaker	15	service unavailable
tunnel rx recovery sccrq avp malformed bad length	15	service unavailable
tunnel rx recovery sccrq avp malformed truncated	15	service unavailable
tunnel rx recovery sccrq avp mismatched host name	15	service unavailable
tunnel rx recovery sccrq avp mismatched vendor name	15	service unavailable
tunnel rx recovery sccrq avp missing mandatory assigned tunnel id	15	service unavailable
tunnel rx recovery sccrq avp missing mandatory framing capabilities	15	service unavailable
tunnel rx recovery sccrq avp missing mandatory host name	15	service unavailable
tunnel rx recovery sccrq avp missing mandatory protocol version	15	service unavailable
tunnel rx recovery sccrq avp missing mandatory tunnel recovery	15	service unavailable
tunnel rx recovery sccrq avp missing random vector	15	service unavailable
tunnel rx recovery sccrq avp missing secret	15	service unavailable
tunnel rx recovery sccrq avp missing tie breaker	15	service unavailable
tunnel rx recovery sccrq avp unexpected challenge without secret	15	service unavailable
tunnel rx recovery sccrq avp unknown	15	service unavailable
tunnel rx recovery sccrq no resources	15	service unavailable
tunnel rx recovery sccrq session id not null	15	service unavailable
tunnel rx recovery sccrq tunnel id not null	15	service unavailable
tunnel rx recovery stopccn avp bad hidden	15	service unavailable
tunnel rx recovery stopccn avp bad value assigned tunnel id	15	service unavailable

Table 54: Default L2TP Mappings *(continued)*

L2TP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
tunnel rx recovery stopccn avp duplicate value assigned tunnel id	15	service unavailable
tunnel rx recovery stopccn avp malformed bad length	15	service unavailable
tunnel rx recovery stopccn avp malformed truncated	15	service unavailable
tunnel rx recovery stopccn avp missing mandatory assigned tunnel id	15	service unavailable
tunnel rx recovery stopccn avp missing mandatory result code	15	service unavailable
tunnel rx recovery stopccn avp missing random vector	15	service unavailable
tunnel rx recovery stopccn avp missing secret	15	service unavailable
tunnel rx recovery stopccn avp unknown	15	service unavailable
tunnel rx recovery stopccn no resources	15	service unavailable
tunnel rx recovery stopccn session id not null	15	service unavailable
tunnel rx recovery unexpected packet	15	service unavailable
tunnel rx recovery unknown packet message type indecipherable	15	service unavailable
tunnel rx recovery unknown packet message type unrecognized	15	service unavailable
tunnel rx session packet null sid invalid	15	service unavailable
tunnel rx session packet null sid without assigned session id	15	service unavailable
tunnel timeout connection	15	service unavailable
tunnel timeout connection recovery tunnel	15	service unavailable
tunnel timeout idle	1	user request
tunnel unknown cause	9	nas error
tunnel warmstart not operational	15	service unavailable
tunnel warmstart recovery error	15	service unavailable

PPP Terminate Reasons

Table 55 on page 295 lists the default PPP terminate mappings. The table indicates the supported PPP terminate reasons and the RADIUS Acct-Terminate-Cause attributes they are mapped to by default.

Table 55: Default PPP Mappings

PPP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
authenticate authenticator timeout	17	user error
authenticate challenge timeout	10	nas request
authenticate chap no resources	10	nas request
authenticate chap peer authenticator timeout	17	user error
authenticate deny by peer	17	user error
authenticate inactivity timeout	4	idle timeout
authenticate max requests	10	nas request
authenticate no authenticator	10	nas request
authenticate pap peer authenticator timeout	17	user error
authenticate pap request timeout	10	nas request
authenticate session timeout	5	session timeout
authenticate too many requests	10	nas request
authenticate tunnel fail immediate	10	nas request
authenticate tunnel unsupported tunnel type	10	nas request
bundle fail create	10	nas request
bundle fail engine add	10	nas request
bundle fail fragment size mismatch	10	nas request
bundle fail fragmentation location	10	nas request
bundle fail fragmentation mismatch	10	nas request
bundle fail join	10	nas request
bundle fail link selection mismatch	10	nas request
bundle fail local mpd not set yet	10	nas request

Table 55: Default PPP Mappings *(continued)*

PPP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
bundle fail local mrru mismatch	10	nas request
bundle fail local mru mismatch	10	nas request
bundle fail peer mrru mismatch	10	nas request
bundle fail reassembly location	10	nas request
bundle fail reassembly mismatch	10	nas request
bundle fail record network	10	nas request
bundle fail server location mismatch	10	nas request
bundle fail static link	10	nas request
failover during authentication	6	admin reset
interface admin disable	6	admin reset
interface down	2	lost carrier
interface no hardware	8	port error
ip admin disable	10	nas request
ip inhibited by authentication	10	nas request
ip link down	10	nas request
ip max configure exceeded	10	nas request
ip no local ip address	10	nas request
ip no local ip address mask	10	nas request
ip no local primary dns address	10	nas request
ip no local primary nbns address	10	nas request
ip no local secondary dns address	10	nas request
ip no local secondary nbns address	10	nas request
ip no peer ip address	10	nas request
ip no peer ip address mask	10	nas request
ip no peer primary dns address	10	nas request
ip no peer primary nbns address	10	nas request

Table 55: Default PPP Mappings *(continued)*

PPP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
ip no peer secondary dns address	10	nas request
ip no peer secondary nbns address	10	nas request
ip no service	10	nas request
ip peer renegotiate rx conf ack	10	nas request
ip peer renegotiate rx conf nak	10	nas request
ip peer renegotiate rx conf rej	10	nas request
ip peer renegotiate rx conf req	10	nas request
ip peer terminate term ack	10	nas request
ip peer terminate code rej	10	nas request
ip peer terminate term req	10	nas request
ip service disable	10	nas request
ip stale stacking	10	nas request
ipv6 admin disable	10	nas request
ipv6 inhibited by authentication	10	nas request
ipv6 link down	10	nas request
ipv6 local and peer interface ids identical	10	nas request
ipv6 max configure exceeded	10	nas request
ipv6 no local ipv6 interface id	10	nas request
ipv6 no peer ipv6 interface id	10	nas request
ipv6 no service	10	nas request
ipv6 peer renegotiate rx conf ack	10	nas request
ipv6 peer renegotiate rx conf nak	10	nas request
ipv6 peer renegotiate rx conf rej	10	nas request
ipv6 peer renegotiate rx conf req	10	nas request
ipv6 peer terminate code rej	10	nas request
ipv6 peer terminate term ack	10	nas request

Table 55: Default PPP Mappings *(continued)*

PPP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
ipv6 peer terminate term req	10	nas request
ipv6 service disable	10	nas request
ipv6 stale stacking	10	nas request
lcp authenticate terminate hold	10	nas request
lcp configured mrru too small	10	nas request
lcp configured mru invalid	10	nas request
lcp configured mru too small	10	nas request
lcp dynamic interface hold	10	nas request
lcp keepalive failure	10	nas request
lcp loopback rx conf req	10	nas request
lcp loopback rx echo reply	10	nas request
lcp loopback rx echo req	10	nas request
lcp max configure exceeded	10	nas request
lcp mru changed	10	nas request
lcp negotiation timeout	10	nas request
lcp no localacm	10	nas request
lcp no localafc	10	nas request
lcp no local authentication	10	nas request
lcp no local endpoint discriminator	10	nas request
lcp no local magic number	10	nas request
lcp no local mrru	10	nas request
lcp no local mru	10	nas request
lcp no localpfc	10	nas request
lcp no peer accm	10	nas request
lcp no peer authentication	10	nas request
lcp no peer endpoint discriminator	10	nas request

Table 55: Default PPP Mappings *(continued)*

PPP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
lcp no peer magicnumber	10	nas request
lcp no peer mrru	10	nas request
lcp no peer mru	10	nas request
lcp no peer pfc	10	nas request
lcp peer terminate code rej	1	user request
lcp peer terminate term ack	1	user request
lcp peer terminate term req	1	user request
lcp peer terminate protocol reject	1	user request
lcp peer renegotiate rx conf ack	1	user request
lcp peer renegotiate rx conf nak	1	user request
lcp peer renegotiate rx conf rej	1	user request
lcp peer renegotiate rx conf req	1	user request
lcp tunnel disconnected	10	nas request
lcp tunnel failed	10	nas request
link interface no hardware	8	port error
lower interface attach failed	2	lost carrier
lower interface teardown	2	lost carrier
mpls admin disable	10	nas request
mpls link down	10	nas request
mpls max configure exceeded	10	nas request
mpls no service	10	nas request
mpls peer renegotiate rx conf ack	10	nas request
mpls peer renegotiate rx conf nak	10	nas request
mpls peer renegotiate rx conf rej	10	nas request
mpls peer renegotiate rx conf req	10	nas request
mpls peer terminate code rej	10	nas request

Table 55: Default PPP Mappings *(continued)*

PPP Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
mpls peer terminate term ack	10	nas request
mpls peer terminate term req	10	nas request
mpls service disable	10	nas request
mpls stale stacking	10	nas request
network interface admin disable	6	admin reset
no bundle	10	nas request
no interface	8	port error
no link interface	8	port error
no ncps available	10	nas request
no network interface	10	nas request
no upper interface	9	nas error
osi admin disable	10	nas request
osi link down	10	nas request
osi max configure exceeded	10	nas request
osi no local align npdu	10	nas request
osi no peer align npdu	10	nas request
osi no service	10	nas request
osi peer renegotiate rx conf ack	10	nas request
osi peer renegotiate rx conf nak	10	nas request
osi peer renegotiate rx conf rej	10	nas request
osi peer renegotiate rx conf req	10	nas request
osi peer terminate code rej	10	nas request
osi peer terminate term ack	10	nas request
osi peer terminate term req	10	nas request
osi service disable	10	nas request
osi stale stacking	10	nas request

RADIUS Client Terminate Reasons

Table 56 on page 301 lists the default RADIUS client terminate mappings. The table indicates the supported RADIUS client terminate reasons and the RADIUS Acct-Terminate-Cause attributes they are mapped to by default.

Table 56: Default RADIUS Client Mappings

RADIUS Client Terminate Reason	RADIUS Acct-Terminate-Cause	
	Code	Description
no-acct-server	10	nas request
system-reboot	10	nas request
virtual-router-deletion	10	nas request

Chapter 8

Monitoring RADIUS

This chapter describes how to monitor the RADIUS attributes, RADIUS dynamic-request server, and RADIUS relay.

RADIUS topics are described in the following sections:

- Monitoring Override Settings of RADIUS IETF Attributes on page 303
- Monitoring the NAS-Port-Format RADIUS Attribute on page 304
- Monitoring the Calling-Station-Id RADIUS Attribute on page 305
- Monitoring the NAS-Identifier RADIUS Attribute on page 305
- Monitoring the Format of the Remote-Circuit-ID for RADIUS on page 306
- Monitoring the Delimiter Character in the Remote-Circuit-ID for RADIUS on page 306
- Monitoring the Acct-Session-Id RADIUS Attribute on page 306
- Monitoring the DSL-Port-Type RADIUS Attribute on page 307
- Monitoring the Connect-Info RADIUS Attribute on page 307
- Monitoring the NAS-Port-ID RADIUS Attribute on page 307
- Monitoring Included RADIUS Attributes on page 308
- Monitoring Ignored RADIUS Attributes on page 310
- Setting the Baseline for RADIUS Dynamic-Request Server Statistics on page 310
- Monitoring RADIUS Dynamic-Request Server Statistics on page 311
- Monitoring the Configuration of the RADIUS Dynamic-Request Server on page 312
- Setting a Baseline for RADIUS Relay Statistics on page 313
- Monitoring RADIUS Relay Server Statistics on page 313
- Monitoring the Configuration of the RADIUS Relay Server on page 315
- Monitoring the Status of RADIUS Relay UDP Checksums on page 316
- Monitoring the Status of ICR Partition Accounting on page 316

Monitoring Override Settings of RADIUS IETF Attributes

Purpose Display the current override setting for RADIUS IETF attributes. You can monitor the NAS-IP-Address [4], NAS-Port-Id [87], Calling-Station-Id [31], and NAS-Identifier [32] attributes.

Action To display the current setting for all configured RADIUS attributes:

```
host1#show radius override
nas-ip-addr:      nas-ip-addr
nas-port-id:      nas-port-id
calling-station-id: calling-station-id
nas-info:         from current virtual router
host1#show radius override
nas-ip-addr: nas-ip-addr
nas-info:     from authentication virtual router
```

Meaning Table 57 on page 304 lists the **show radius override** command output fields.

Table 57: show radius override Output Fields

Field Name	Field Description
nas-ip-addr	Displays the current setting for the NAS-IP-Address [4] attribute. These settings can be changed with the radius override nas-ip-addr tunnel-client-endpoint and radius override nas-info commands.
nas-port-id	Displays the current setting for the NAS-Port-Id [87] attribute. Use the radius override nas-port-id remote-circuit-id command to override the standard NAS-Port-Id attribute with the PPPoE remote circuit ID transmitted from the DSLAM.
calling-station-id	Displays the current setting for the Calling-Station-Id [31] attribute. Use the radius override calling-station-id remote-circuit-id command to override the standard Calling-Station-Id attribute with the PPPoE remote circuit ID transmitted from the DSLAM.
nas-info	Displays the current setting for the NAS-Identifier [32] attribute. This setting can be changed with the radius override nas-info command, which is used for AAA broadcast accounting.

Related Topics ■ show radius override

Monitoring the NAS-Port-Format RADIUS Attribute

Purpose Display information for the NAS-Port attribute.

Action To display the setting for the NAS-Port attribute:

```
host1#show radius nas-port-format
0ssssppp
```


To display information about the NAS-Port attribute on an ATM interface on an E320 Broadband Services Router:

```
host1#show radius nas-port-format extended atm
extended atm field-width slot 5 adapter 0 port 4 vpi 4 vci 12
```

To display the status of NAS-Port attribute settings for PPPoE interfaces:

```
host1#show radius pppoe nas-port-format
unique
```

To display the status of the S-VLAN ID setting for the NAS-Port attribute for VLAN interfaces:

```
host1#show radius vlan nas-port-format
vlan stacked
```

- Related Topics**
- show radius nas-port-format
 - show radius nas-port-format extended
 - show radius pppoe nas-port-format
 - show radius vlan nas-port-format

Monitoring the Calling-Station-Id RADIUS Attribute

Purpose Display the format and delimiter used for the Calling-Station-Id [31] attribute.

Action To display the format configured for the Calling-Station-Id [31] attribute:

```
host1#show radius calling-station-format
fixed-format-adapter-new-field (includes SVLAN ID)
```

To display the delimiter used in the Calling-Station-Id for authenticated ATM PPP users:

```
host1#show radius calling-station-delimiter
&
```

- Related Topics**
- show radius calling-station-format
 - show radius calling-station-delimiter

Monitoring the NAS-Identifier RADIUS Attribute

Purpose Display information about the NAS-Identifier value.

Action To display information about the NAS-Identifier value:

```
host1#show radius nas-identifier
fox
```

Related Topics ■ show radius nas-identifier

Monitoring the Format of the Remote-Circuit-ID for RADIUS

Purpose Display the format configured for the PPPoE remote circuit ID value captured from a DSLAM.

The default format is agent-circuit-ID. If the PPPoE remote circuit ID value is configured to include any or all of the agent-circuit-id, agent-remote-id, and nas-identifier components, the display lists the components included and the order in which they appear.

If the PPPoE remote circuit ID value is configured to use the format for the **dsl-forum-1** keyword of “radius remote-circuit-id-format” on page 204 , the display indicates that this format is in effect.

Action To display the format configured for the PPPoE remote circuit ID value captured from a DSLAM:

```
host1#show radius remote-circuit-id-format
nas-identifier agent-circuit-id agent-remote-id
```

Related Topics ■ [32] NAS-Identifier on page 203
■ show radius remote-circuit-id-format

Monitoring the Delimiter Character in the Remote-Circuit-ID for RADIUS

Purpose Display the delimiter character configured to set off components in the PPPoE remote circuit ID value captured from a DSLAM. The default delimiter character is #.

Action To display the delimiter character:

```
host1#show radius remote-circuit-id-delimiter
!
```

Related Topics ■ show radius remote-circuit-id-delimiter

Monitoring the Acct-Session-Id RADIUS Attribute

Purpose Display the format used for the Acct-Session-Id attribute.

Action To display the format used for the Acct-Session-Id attribute:

```
host1#show radius acct-session-id-format
decimal
```

Related Topics ■ show radius acct-session-id-format

Monitoring the DSL-Port-Type RADIUS Attribute

Purpose Display the DSL port type for NAS-Port-Type attribute for ATM and Ethernet users.

Action To display the DSL port type for NAS-Port-Type attribute for ATM users:

```
host1#show radius dsl-port-type
xds1
```

To display the NAS-Port-Type attribute for Ethernet interfaces:

```
host1#show radius ethernet-port-type
virtual
```

Related Topics ■ show radius dsl-port-type
■ show radius ethernet-port-type

Monitoring the Connect-Info RADIUS Attribute

Purpose Display the format for the Connect-Info attribute.

Action To display the format for the Connect-Info attribute:

```
host1(config)#show radius connect-info-format
12tp-connect-speed-rx-when-equal
```

Related Topics ■ show radius connect-info-format

Monitoring the NAS-Port-ID RADIUS Attribute

Purpose Display whether the router includes or excludes the subinterface number or adapter in the interface description that the router passes to RADIUS for inclusion in the NAS-Port-Id attribute.

Action To display information about the interface description for the NAS-Port-ID:

```

host1#show aaa intf-desc-format
exclude sub-interface
include adapter

```

Related Topics ■ show aaa intf-desc-format

Monitoring Included RADIUS Attributes

Purpose Display the RADIUS attributes that are included in and excluded from Acct-On, Acct-Off, Access-Request, Acct-Start, and Acct-Stop messages.

Action To display the list of included RADIUS attributes:

```
host1# show radius attributes-included
```

Attribute Name	Account On	Account Off	Access Request	Account Start	Account Stop
-----	-----	-----	-----	-----	-----
acct-authentic	enabled	enabled	n/c	n/c	n/c
acct-delay-time	enabled	enabled	n/c	n/c	n/c
acct-link-count	n/c	n/c	n/c	enabled	enabled
acct-multi-session-id	n/c	n/c	disabled	enabled	enabled
acct-session-id	enabled	enabled	enabled	n/c	n/c
acct-terminate-cause	n/c	enabled	n/c	n/c	n/c
acct-tunnel-connection	n/c	n/c	enabled	enabled	enabled
ascend-num-in-multilink	n/c	n/c	disabled	disabled	disabled
called-station-id	n/c	n/c	enabled	enabled	enabled
calling-station-id	n/c	n/c	enabled	enabled	enabled
class	n/c	n/c	n/c	enabled	enabled
connect-info	n/c	n/c	enabled	enabled	enabled
delegated-ipv6-prefix	n/c	n/c	n/c	disabled	disabled
dhcp-options	n/c	n/c	disabled	disabled	disabled
dhcp-option-82(vsa)	n/c	n/c	disabled	disabled	disabled
dhcp-mac-address	n/c	n/c	disabled	disabled	disabled
dhcp-gi-address	n/c	n/c	disabled	disabled	disabled
dsl-forum-attributes	n/c	n/c	disabled	disabled	disabled
egress-policy-name(vsa)	n/c	n/c	n/c	enabled	enabled
event-timestamp	enabled	enabled	n/c	enabled	enabled
framed-compression	n/c	n/c	n/c	enabled	enabled
framed-interface-id	n/c	n/c	n/c	disabled	disabled
framed-ip-address	n/c	n/c	n/c	enabled	enabled
framed-ip-netmask	n/c	n/c	n/c	enabled	enabled
framed-ipv6-pool	n/c	n/c	n/c	disabled	disabled
framed-ipv6-prefix	n/c	n/c	n/c	disabled	disabled
framed-ipv6-route	n/c	n/c	n/c	disabled	disabled
ingress-policy-name(vsa)	n/c	n/c	n/c	enabled	enabled
input-gigapbts(vsa)	n/c	n/c	n/c	n/c	enabled
input-gigawords	n/c	n/c	n/c	n/c	enabled
interface-description	n/c	n/c	enabled	enabled	enabled
ipv6-acct-input-octets(vsa)	n/c	n/c	n/c	n/c	enabled
ipv6-acct-output-octets(vsa)	n/c	n/c	n/c	n/c	enabled
ipv6-acct-input-packets(vsa)	n/c	n/c	n/c	n/c	enabled
ipv6-acct-output-packets(vsa)	n/c	n/c	n/c	n/c	enabled
ipv6-acct-input-gigawords(vsa)	n/c	n/c	n/c	n/c	enabled

ipv6-acct-output-gigawords(vsa)	n/c	n/c	n/c	n/c	enabled
ipv6-local-interface(vsa)	n/c	n/c	n/c	disabled	disabled
ipv6-nd-ra-prefix(vsa)	n/c	n/c	n/c	disabled	disabled
ipv6-primary-dns(vsa)	n/c	n/c	n/c	disabled	disabled
ipv6-secondary-dns(vsa)	n/c	n/c	n/c	disabled	disabled
ipv6-virtual-router(vsa)	n/c	n/c	n/c	disabled	disabled
l2c-downstream-data(vsa)	n/c	n/c	disabled	disabled	disabled
l2c-upstream-data(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-acc-loop-cir-id(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-acc-aggr-cir-id-bin(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-acc-aggr-cir-id-asc(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-act-data-rate-up(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-act-data-rate-dn(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-min-data-rate-up(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-min-data-rate-dn(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-att-data-rate-up(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-att-data-rate-dn(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-max-data-rate-up(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-max-data-rate-dn(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-min-lp-data-rate-up(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-min-lp-data-rate-dn(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-max-interlv-delay-up(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-act-interlv-delay-up(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-max-interlv-delay-dn(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-act-interlv-delay-dn(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-dsl-line-state(vsa)	n/c	n/c	disabled	disabled	disabled
l2cd-dsl-type(vsa)	n/c	n/c	disabled	disabled	disabled
l2tp-ppp-disconnect-cause	n/c	n/c	n/c	n/c	disabled
mlppp-bundle-name	n/c	n/c	enabled	enabled	enabled
nas-identifier	enabled	enabled	enabled	enabled	enabled
nas-port	n/c	n/c	enabled	enabled	enabled
nas-port-id	n/c	n/c	enabled	enabled	enabled
nas-port-type	n/c	n/c	enabled	enabled	enabled
output-gigapkts(vsa)	n/c	n/c	n/c	n/c	enabled
output-gigawords	n/c	n/c	n/c	n/c	enabled
pppoe-description(vsa)	n/c	n/c	enabled	enabled	enabled
profile-service-descr(vsa)	n/c	n/c	disabled	disabled	disabled
tunnel-assignment-id	n/c	n/c	n/c	enabled	enabled
tunnel-client-auth-id	n/c	n/c	enabled	enabled	enabled
tunnel-client-endpoint	n/c	n/c	enabled	enabled	enabled
tunnel-interface-id	n/c	n/c	disabled	disabled	disabled
tunnel-medium-type	n/c	n/c	enabled	enabled	enabled
tunnel-preference	n/c	n/c	n/c	enabled	enabled
tunnel-server-attributes	n/c	n/c	disabled	disabled	disabled
tunnel-server-auth-id	n/c	n/c	enabled	enabled	enabled
tunnel-server-endpoint	n/c	n/c	enabled	enabled	enabled
tunnel-type	n/c	n/c	enabled	enabled	enabled

Meaning Table 58 on page 309 lists the **show radius attributes-included** command output fields.

Table 58: show radius attributes-included Output Fields

Field Name	Field Description
Attribute Name	Name of the RADIUS attribute

Table 58: show radius attributes-included Output Fields (*continued*)

Field Name	Field Description
Account On	Include status of the attribute in Acct-On messages: enabled, disabled, not configurable (n/c)
Account Off	Include status of the attribute in Acct-Off messages: enabled, disabled, n/c
Access Request	Include status of the attribute in Access Request messages: enabled, disabled, n/c
Account Start	Include status of the attribute in Acct-Start messages: enabled, disabled, n/c
Account Stop	Include status of the attribute in Acct-Stop messages: enabled, disabled, n/c

Related Topics ■ show radius attributes-included

Monitoring Ignored RADIUS Attributes

Purpose Display the RADIUS attributes that are ignored in Access-Accept messages.

Action To display the RADIUS attributes that are ignored:

```
host1#show radius attributes-ignored
attribute framed-ip-netmask ignored from RADIUS server
attribute atm-service-category (vsa) accepted from RADIUS server
attribute atm-mbs (vsa) accepted from RADIUS server
attribute atm-pcr (vsa) accepted from RADIUS server
attribute atm-scr (vsa) accepted from RADIUS server
attribute egress-policy-name (vsa) accepted from RADIUS server
attribute ingress-policy-name (vsa) accepted from RADIUS server
attribute virtual-router (vsa) accepted from RADIUS server
attribute pppoe-max-session (vsa) ignored from RADIUS server
```

Related Topics ■ show radius attributes-ignored

Setting the Baseline for RADIUS Dynamic-Request Server Statistics

You can set a statistics baseline for packet mirroring-related RADIUS statistics. To show baseline statistics, use the **delta** keyword with the **show radius dynamic-request statistics** command.

To set a baseline for RADIUS statistics for packet mirroring:

- Issue the **baseline radius dynamic-request** command:

```
host1#baseline radius dynamic-request
```

There is no **no** version.

- Related Topics**
- Monitoring RADIUS Dynamic-Request Server Statistics on page 311
 - baseline radius dynamic-request

Monitoring RADIUS Dynamic-Request Server Statistics

Purpose Display RADIUS dynamic-request server statistics.

Action To display RADIUS dynamic-request statistics:

```
host1#show radius dynamic-request statistics
RADIUS Request Statistics
-----
Statistic                               10.10.3.4
-----
UDP Port                               1700
Disconnect Requests                    0
Disconnect Accepts                     0
Disconnect Rejects                     0
Disconnect No Session ID               0
Disconnect Bad Authenticators          0
Disconnect Packets Dropped             0
CoA Requests                           0
CoA Accepts                            0
CoA Rejects                            0
CoA No Session ID                     0
CoA Bad Authenticators                 0
CoA Packets Dropped                    0
No Secret                             0
Unknown Request                        0
Invalid Addresses Received :0
```

Meaning Table 59 on page 311 lists the **show radius dynamic-request statistics** command output fields.

Table 59: show radius dynamic-request statistics Output Fields

Field Name	Field Description
Udp Port	Port on which the router listens for RADIUS server
Disconnect or CoA Requests	RADIUS-initiated disconnect or CoA requests received
Disconnect or CoA Accepts	RADIUS-initiated disconnect or CoA requests accepted
Disconnect or CoA Rejects	RADIUS-initiated disconnect or CoA requests rejected

Table 59: show radius dynamic-request statistics Output Fields (continued)

Field Name	Field Description
Disconnect or CoA No Session ID	RADIUS-initiated disconnect or CoA messages rejected because the request did not include a session ID attribute
Disconnect or CoA Bad Authenticators	RADIUS-initiated disconnect or CoA messages rejected because the calculated authenticator in the authenticator field of the request did not match
Disconnect or CoA Packets Dropped	RADIUS-initiated disconnect or CoA packets dropped because of queue overflow
No Secret	Messages rejected because a secret was not present in the authenticator field
Unknown Requests	Packets received with an invalid RADIUS code for RADIUS disconnect or change of authorization
Invalid Addresses Received	Number of invalid addresses received

- Related Topics**
- Setting the Baseline for RADIUS Dynamic-Request Server Statistics on page 310
 - show radius statistics

Monitoring the Configuration of the RADIUS Dynamic-Request Server

Purpose Display the configuration of the RADIUS dynamic-request server.

Action To display the configuration of the RADIUS dynamic-request server:

```
host1#show radius dynamic-request servers
      RADIUS Request Configuration
      -----
      Change
      Of
      IP Address      Udp      Disconnect  Authorization  Secret
      -----
      192.168.2.3      1700      disabled    disabled         <NULL>
      10.10.120.104    1700      disabled    disabled         mysecret
```

Meaning Table 60 on page 312 lists the **show radius dynamic-request servers** command output fields.

Table 60: show radius dynamic-request servers Output Fields

Field Name	Field Description
IP address	IP address of the RADIUS server

Table 60: show radius dynamic-request servers Output Fields (continued)

Field Name	Field Description
Udp Port	Port on which the router listens for RADIUS server
Disconnect	Status of RADIUS-initiated disconnect feature
Change of Authorization	Status of change of authorization feature
Secret	Secret used to connect to RADIUS server

Related Topics ■ show radius servers

Setting a Baseline for RADIUS Relay Statistics

You can set a baseline for RADIUS relay statistics. To show baseline statistics, use the **delta** keyword with the **show radius relay** command.

To set a baseline for RADIUS relay statistics:

- Issue the **baseline radius relay** command:

```
host1#baseline radius relay
```

There is no **no** version.

Related Topics ■ Monitoring RADIUS Relay Server Statistics on page 313
 ■ baseline radius relay

Monitoring RADIUS Relay Server Statistics

Purpose Display RADIUS relay server statistics.

Action To show RADIUS relay server statistics that were baselined:

```
host1#show radius relay statistics delta
RADIUS Relay Authentication Server Statistics
-----
Statistic      Total
-----
Access Requests 1000
Access Accepts  1000
Access Challenges 0
Access Rejects  0
Pending Requests 0
```

```

Duplicate Requests 0
Malformed Requests 0
Bad Authenticators 0
Unknown Requests 0
Dropped Packets 0
Invalid Requests 0
Statistics baseline set FRI APR 02 2004 19:01:52 UTC
RADIUS Relay Accounting Server Statistics
-----
Statistic          Total
-----
Accounting Requests 1000
  Start             1000
  Stop              0
  Interim           0
Accounting Responses 1000
  Start             1000
  Stop              0
  Interim           0
Pending Requests    0
Duplicate Requests  0
Malformed Requests  0
Bad Authenticators  0
Unknown Requests    0
Dropped Packets     0
Invalid Requests     0
Statistics baseline set FRI APR 02 2004 19:01:52 UTC

```

Meaning Table 61 on page 314 lists the **show radius relay statistics** command output fields.

Table 61: show radius relay statistics Output Fields

Field Name	Field Description
Access Requests	Number of access requests received
Access Accepts	Number of access accepts received
Access Challenges	Number of access challenges received
Access Rejects	Number of access rejects received
Pending Requests	Number of access requests waiting for a response
Duplicate Requests	Number of duplicate requests received while the previous request is pending
Malformed Requests	Requests with attributes having an invalid length or unexpected attributes
Bad Authenticators	Authenticator in the response is incorrect for the matching request; can occur if the secret for the RADIUS relay server and the WAP does not match
Unknown Requests	Packets received from nonconfigured clients
Dropped Packets	Packets dropped because of queue overflow
Invalid Requests	Number of invalid requests received

Table 61: show radius relay statistics Output Fields *(continued)*

Field Name	Field Description
Accounting Requests	Number of accounting requests received, broken down by type of request
Accounting Responses	Number of accounting responses, broken down by type of request

- Related Topics**
- Setting a Baseline for RADIUS Relay Statistics on page 313
 - show radius relay statistics

Monitoring the Configuration of the RADIUS Relay Server

Purpose Display information about the RADIUS relay server configuration.

Action To display the RADIUS relay server configuration:

```
host1#show radius relay servers
RADIUS Relay Authentication Server Configuration
-----
  IP Address      IP Mask      Secret
  -----
10.10.8.15       255.255.255.255  newsecret
192.168.102.5    255.255.255.255  999Y2K
Udp Port: 1812
RADIUS Relay Accounting Server Configuration
-----
  IP Address      IP Mask      Secret
  -----
10.10.1.0        255.255.255.0   N08pxq
192.168.102.5    255.255.255.255  12BE$56
Udp Port: 1813
```

Meaning Table 62 on page 315 lists the **show radius relay servers** command output fields.

Table 62: show radius relay servers Output Fields

Field Name	Field Description
IP Address	Address of the RADIUS relay server
IP Mask	Mask of the RADIUS relay server
Secret	Secret used for exchanges between the RADIUS relay server and client
Udp Port	Router's port on which the RADIUS relay server listens

Related Topics ■ show radius relay servers

Monitoring the Status of RADIUS Relay UDP Checksums

Purpose Display status of RADIUS relay UDP checksums.

Action To display the status of UDP checksums:

```
host1(config)#show radius relay udp-checksum
udp-checksums enabled
```

Meaning Table 63 on page 316 lists the **show radius relay udp-checksum** command output fields.

Table 63: show radius relay udp-checksum Output Fields

Field Name	Field Description
udp-checksums	Status of UDP checksums: enabled or disabled

Related Topics ■ show radius relay udp-checksum

Monitoring the Status of ICR Partition Accounting

Purpose Display the status of ICR partition accounting.

Action To display the status of ICR partition accounting:

```
host1#show radius icr-partition-accounting
enabled
```

Meaning ICR partition accounting status is either enabled or disabled.

Related Topics ■ show radius icr-partition-accounting

Chapter 9

Configuring TACACS+

This chapter explains how to enable and configure TACACS + in your E Series router. It has the following sections:

- TACACS + Overview on page 317
- TACACS + Platform Considerations on page 321
- TACACS + References on page 321
- Before You Configure TACACS + on page 322
- Configuring TACACS + Support on page 322

TACACS+ Overview

With the increased use of remote access, the need for managing more network access servers (NAS) has increased. Additionally, the need for control access on a per-user basis has escalated, as has the need for central administration of users and passwords.

Terminal Access Controller Access Control System (TACACS) is a security protocol that provides centralized validation of users who are attempting to gain access to a router or NAS. TACACS + , a more recent version of the original TACACS protocol, provides separate authentication, authorization, and accounting (AAA) services.



NOTE: TACACS + is a completely new protocol and is not compatible with TACACS or XTACACS.

The TACACS + protocol provides detailed accounting information and flexible administrative control over the authentication, authorization, and accounting process. The protocol allows a TACACS + client to request detailed access control and allows the TACACS + process to respond to each component of that request. TACACS + uses Transmission Control Protocol (TCP) for its transport.

TACACS + provides security by encrypting all traffic between the NAS and the process. Encryption relies on a secret key that is known to both the client and the TACACS + process.

Table 64 on page 318 describes terms that are frequently used in this chapter.

Table 64: TACACS-Related Terms

Term	Description
NAS	Network access server. A device that provides connections to a single user, to a network or subnetwork, and to interconnected networks. In reference to TACACS + , the NAS is the E Series router.
TACACS + process	A program or software running on a security server that provides AAA services using the TACACS + protocol. The program processes authentication, authorization, and accounting requests from an NAS. When processing authentication requests, the process might respond to the NAS with a request for additional information, such as a password.
TACACS + host	The security server on which the TACACS + process is running. Also referred to as a TACACS + server.

AAA Overview

TACACS + allows effective communication of AAA information between NASs and a central server. The separation of the AAA functions is a fundamental feature of the TACACS + design:

- **Authentication**—Determines who a user is, then determines whether that user should be granted access to the network. The primary purpose is to prevent intruders from entering your networks. Authentication uses a database of users and passwords.
- **Authorization**—Determines what an authenticated user is allowed to do. Authorization gives the network manager the ability to limit network services to different users. Also, the network manager can limit the use of certain commands to various users. Authorization cannot occur without authentication.
- **Accounting**—Tracks what a user did and when it was done. Accounting can be used for an audit trail or for billing for connection time or resources used. Accounting can occur independent of authentication and authorization.

Central management of AAA means that the information is in a single, centralized, secure database, which is much easier to administer than information distributed across numerous devices. Both RADIUS and TACACS + protocols are client-server systems that allow effective communication of AAA information.

For information about RADIUS, see “Configuring Remote Access” on page 3.

Administrative Login Authentication

Fundamentally, TACACS + provides the same services as RADIUS. Every authentication login attempt on an NAS is verified by a remote TACACS + process.

TACACS + authentication uses three packet types. Start packets and Continue packets are always sent by the user. Reply packets are always sent by the TACACS + process.

TACACS+ sets up a TCP connection to the TACACS+ host and sends a Start packet. The TACACS+ host responds with a Reply packet, which either grants or denies access, reports an error, or challenges the user.

TACACS+ might challenge the user to provide username, password, passcode, or other information. Once the requested information is entered, TACACS+ sends a Continue packet over the existing connection. The TACACS+ host sends a Reply packet. Once the authentication is complete, the connection is closed. Only three login retries are allowed.

To enable login authentication through both TACACS+ and RADIUS servers, use the **aaa new-model** command to specify AAA authentication for Telnet sessions.

Privilege Authentication

The privilege authentication process determines whether a user is allowed to use commands at a particular privilege level. This authentication process is handled similarly to login authentication, except that the user is limited to one authentication attempt. An empty reply to the challenge forces an immediate access denial. The **aaa authentication enable default** command allows you to set privilege authentication for users.

Login Authorization

To allow login authorization through the TACACS+ server, you can use the following commands: **aaa authorization**, **aaa authorization config-commands**, and **authorization**. For information about using these commands, see the *Passwords and Security* chapter in *JUNOS System Basics Configuration Guide*.

Accounting

The TACACS+ accounting service enables you to create an audit trail of User Exec sessions and command-line interface (CLI) commands that have been executed within these sessions. For example, you can track user CLI connects and disconnects, when configuration modes have been entered and exited, and which configuration and operational commands have been executed.

You configure TACACS+ accounting in the JUNOS software by defining accounting method lists and then associating consoles and lines with the method lists. You define an accounting method list with a service type, name, accounting mode, and method:

- service type—Specifies the type of information being recorded
- name—Uniquely identifies an accounting method list within a service type
- accounting mode—Specifies what type of accounting records will be generated
- method—Specifies the protocol for sending the accounting records to a security server

You can then configure consoles and lines with an accounting method list name for each service type:

- **Method list**—A specified configuration that defines how the NAS performs the AAA accounting service. A service type can be configured with multiple method lists with different names, and a method list name can be used for different service types. Initially, no accounting method list is defined; therefore TACACS + accounting is disabled.
 - **Default method list**—Configuration used by consoles and lines when no named method list is assigned. You enable TACACS + accounting by defining default accounting method lists for each service type.
 - **Named method list**—Assigned to a console, specific line, or group of lines; overrides the default method list.
- **Service type**—Specifies the type of information provided by the TACACS + accounting service:
 - **Exec**—Provides information about User Exec terminal sessions, such as telnet, Local Area Transport (LAT), and rlogin, on the NAS.
 - **Commands < 0-15 >**—Provides information about User Exec mode CLI commands for a specified privilege level that are being executed on the NAS. Each of the sixteen command privilege levels is a separate service type. Accounting records are generated for commands executed by users, CLI scripts, and macros.
- **Accounting mode**—Specifies the type of accounting records that are recorded on the TACACS + server. Accounting records track user actions and resource usage. You can analyze and use the records for network management, billing, and auditing purposes.
 - **start-stop**—A start accounting record is generated just before a process begins, and a stop accounting record is generated after a process successfully completes. This mode is supported only for the Exec service type.
 - **stop-only**—A stop accounting record is generated after a process successfully completes. This mode is supported only for the Commands service types.

The NAS sends TACACS + accounting packets to the TACACS + host. The accounting packets contain data in the packet header, packet body, and attribute-value pairs (AVPs). Table 65 on page 320 provides descriptions of the TACACS + accounting data.

Table 65: TACACS+ Accounting Information

Field/Attribute	Location	Description
major_version	Packet header	Major TACACS + version number
minor_version	Packet header	Minor TACACS + version number
type	Packet header	Type of the AAA service: Accounting
flags	Packet body	Bitmapped flags representing the record type: start accounting record or stop accounting record
priv-level	Packet body	Privilege level of the user executing the Exec session or CLI command: 0 - 15

Table 65: TACACS+ Accounting Information (*continued*)

Field/Attribute	Location	Description
user	Packet body	Name of user running the Exec session or CLI command
port	Packet body	NAS port used by the Exec session or CLI command
rem-addr	Packet body	User's remote location; either an IP address or the caller ID
service	AVP	User's primary service: Shell
cmd	AVP	CLI command that is to be executed: specified for Command-level accounting only
task_id	AVP	Unique sequential identifier used to match start and stop records for a task
elapsed_time	AVP	Elapsed time in seconds for the task execution: specified for Exec-level accounting stop records only
timezone	AVP	Time zone abbreviation used for all timestamps

TACACS+ Platform Considerations

TACACS+ is supported on all E Series routers. For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the E120 and E320 Broadband Services Routers.

TACACS+ References

For additional information about the TACACS+ protocol, see the following resources:

- The TACACS+ Protocol, Version 1.78—draft-grant-tacacs-02.txt (January 1997 expiration)
- RFC 2865—Remote Authentication Dial In User Service (RADIUS) (June 2000)



NOTE: IETF drafts are valid for only 6 months from the date of issuance. They must be considered as works in progress. Please refer to the IETF Web site at <http://www.ietf.org> for the latest drafts.

Before You Configure TACACS+

Before you begin to configure TACACS+, you must determine the following for the TACACS+ authentication and accounting servers:

- IP addresses
- TCP port numbers
- Secret keys

Configuring TACACS+ Support

To use TACACS+, you must enable AAA. To configure your router to support TACACS+, perform the following tasks. Some of the tasks are optional. Once you configure TACACS+ support on the router, you can configure TACACS+ authentication, authorization, and accounting independent of each other.

1. Specify the names of the IP host or hosts maintaining a TACACS+ server. Optionally, you can specify other parameters, such as port number, timeout interval, and key.

```
host1(config)#tacacs-server host 192.168.1.27 port 10 timeout 3 key
your_secret primary
```

2. (Optional) Set the authentication and encryption key value shared by all TACACS+ servers that do not have a server-specific key set up by the **tacacs-server host** command.

```
host1(config)#tacacs-server key "&#889P^"
```

3. (Optional) Set alternative source address(es) to be used for TACACS+ server communications.

```
host1(config)#tacacs-server source-address 192.168.134.63
```

4. (Optional) Set the timeout value for all TACACS+ servers that do not have a server-specific timeout set up by the **tacacs-server host** command.

```
host1(config)#tacacs-server timeout 15
```

Configuring Authentication

Once TACACS+ support is enabled on the router, you can configure TACACS+ authentication. Perform the following steps:

1. Specify AAA new model as the authentication method for the vty lines on your router.

```
host1(config)#aaa new-model
```

2. Specify AAA authentication by defining an authorization methods list.

```
host1(config)#aaa authentication login tac tacacs+ radius enable
```

3. Specify the privilege level by defining a methods list that uses TACACS + for authentication.

```
host1(config)#aaa authentication enable default tacacs+ radius enable
```

4. Configure vty lines.

```
host1(config)#line vty 0 4
```

5. Apply an authentication list to the vty lines you specified on your router.

```
host1(config-line)#login authentication tac
```

Configuring Accounting

Once TACACS + support is enabled on the router, you can configure TACACS + accounting. Perform the following steps:

1. Specify AAA new model as the accounting method for your router.

```
host1(config)#aaa new-model
```

2. Enable TACACS + accounting on the router, and configure accounting method lists. For example:

```
host1(config)#aaa accounting exec default start-stop tacacs+
host1(config)#aaa accounting commands 0 listX stop-only tacacs+
host1(config)#aaa accounting commands 1 listX stop-only tacacs+
host1(config)#aaa accounting commands 13 listY stop-only tacacs+
host1(config)#aaa accounting commands 14 default stop-only tacacs+
host1(config)#aaa accounting commands 15 default stop-only tacacs+
```

3. (Optional) Specify that accounting records are not generated for users without explicit user names.

```
host1(config)#aaa accounting suppress null-username
```

4. Apply accounting method lists to a console or lines. For example:

```
host1(config)#line console 0
host1(config-line)#accounting commands 0 listX
host1(config-line)#accounting commands 1 listX
host1(config-line)#accounting commands 13 listY
host1(config-line)#exit
host1(config)#line vty 0 4
host1(config-line)#accounting commands 13 listY
```

Note that Exec accounting and User Exec mode commands accounting for privilege levels 14 and 15 are now enabled for all lines and consoles with the creation of their default method list, as shown in Step 2.

aaa accounting commands

- Use to enable TACACS+ accounting and capture accounting information for a specific JUNOS privilege level on the router and to create accounting method lists.
- Specify the JUNOS privilege level (0 through 15) for which to capture accounting information.
- Specify **default** to configure the default method list, or configure a named method list. The default method list is used by lines and consoles unless a named method list is configured for them.
- Specify **stop-only** to send a stop accounting notice at the end of a process and **tacacs+** as the accounting protocol.
- Example


```
host1(config)#aaa accounting commands 12 listX stop-only tacacs+
```
- Use the **no** version to delete the accounting method list.
- See aaa accounting commands

aaa accounting exec

- Use to enable TACACS+ accounting and capture accounting information for User Exec terminal session on the router and to create accounting method lists.
- Specify **default** to configure the default method list, or configure a named method list. The default method list is used by lines and consoles unless a named method list is configured for them.
- Specify **start-stop** to send a start accounting notice at the beginning of a process and a stop accounting notice at the end of a successful process. Specify **tacacs+** as the accounting protocol.
- Example


```
host1(config)#aaa accounting exec default start-stop tacacs+
```
- Use the **no** version to delete the accounting method list.
- See aaa accounting exec

aaa accounting suppress null-username

- Use to prevent JUNOS software from generating accounting records for users who do not have explicit usernames.
- Example


```
host1(config)#aaa accounting suppress null-username
```
- Use the **no** version to generate accounting records for users with null usernames.
- See aaa accounting suppress null-username

aaa authentication enable default

- Use to allow privilege determination to be authenticated through the TACACS+ server. This command specifies a list of authentication methods that are used to determine whether a user is granted access to the privilege command level.
- The authentication methods that you can use in a list include these options: **radius**, **line**, **tacacs +**, **none**, and **enable**.
- To specify that the authentication should succeed even if all methods return an error, specify **none** as the final method in the command line.
- Requests sent to a TACACS+ server include the username that is entered for login authentication.
- If a default authentication routine is not set for a function, the default is **none**, and no authentication is performed.
- If the authentication method list is empty, the local **enable** password is used.
- Example

```
host1(config)#aaa authentication enable default tacacs+ radius
```

- Use the **no** version to empty the list.
- See aaa authentication enable default

aaa authentication login

- Use to set AAA authentication at login. This command creates a list that specifies the methods of authentication.
- Once you specify **aaa new-model** as the authentication method for vty lines, an authentication list called “default” is automatically assigned to the vty lines. To allow users to access the vty lines, you must create an authentication list and either:
 - Name the list “default.”
 - Assign a different name to the authentication list, and assign the new list to the vty line using the **login authentication** command.
- The authentication methods that you can use in a list include these options: **radius**, **line**, **tacacs +**, **none**, and **enable**.
- The router traverses the list of authentication methods to determine whether a user is allowed to start a Telnet session. If a specific method is available but the user information is not valid (such as an incorrect password), the router does not continue to traverse the list and denies the user a session.
- If a specific method is unavailable, the router continues to traverse the list. For example, if **tactacs +** is the first authentication type element on the list and the TACACS+ server is unreachable, the router attempts to authenticate with the next authentication type on the list, such as **radius**.
- The router assumes an implicit denial of service if it reaches the end of the authentication list without finding an available method.
- Example

```
host1(config)#aaa authentication login my_auth_list tacacs+ radius line none
```

- Use the **no** version to remove the authentication list from your configuration.
- See aaa authentication login

aaa new-model

- Use to specify AAA new model as the authentication method for the vty lines on your router.
- If you specify AAA new model and you do not create an authentication list, users will not be able to access the router through a vty line.

- Example

```
host1(config)#aaa new-model
```

- Use the **no** version to restore simple authentication (login and password).
- See aaa new-model

accounting

- Use to specify accounting method lists used on a console or vty line. Consoles and lines are initially configured with the default method list for all accounting service types (for example, Exec, Commands).
- Specify **exec** to capture accounting information for User Exec terminal sessions or **commands** to capture accounting information for User Exec mode commands at the indicated JUNOS privilege level (0 through 15).
- Specify the name of the method list to be applied to the line or console.
- To disable accounting for a line or console, specify a nonexistent accounting method list name (for example, noAccounting).
- Example

```
host1(config)#accounting commands 12 listY
```

- Use the **no** version to restore the default method list.
- See accounting

line

- Use to open or configure console or vty lines.
- You can specify a single line or a range of lines. The range is 0 through 29 for vty lines, 0 for the console line.
- Example

```
host1(config)#line vty 6 10
host1(config-line)#
```

- Use the **no** version to remove a line or a range of lines from the configuration. Lines that you remove will no longer be available for use by telnet, FTP, or SSH. When you remove a vty line, the router removes all lines above that line. For

example, **no line vty 6** causes the router to remove lines 6 through 19. You cannot remove lines 0 through 4.

- See line

login authentication

- Use to apply an authentication list to the vty lines you specified on your router.
- Example

```
host1(config-line)#login authentication my_auth_list
```

- Use the **no** version to specify that the router should use the default authentication list.
- See login authentication

tacacs-server host

- Use to add or delete a host to or from the list of TACACS + servers.
- You can optionally specify a nondefault port number, a host-specific key, a single connection and a timeout interval.
- Use the **primary** keyword to assign the host as the primary host.
- If a timeout value is specified, it overrides the global timeout value set with the **tacacs-server timeout** command for this server only.
- You can configure additional hosts by using this command. The designated primary host is always the first in the search order; the remaining hosts are contacted in the order in which they were created. If the primary host is deleted, or if you modify the primary host without specifying the **primary** keyword, the next host in the search order becomes the primary host. The search order is maintained when the NAS is reloaded.
- Example

```
host1(config)#tacacs-server host 192.168.1.27 port 10 timeout 3 key
your_secret primary
```

```
host1(config)#no tacacs-server host 192.168.1.27
```

- Use the **no** version to delete the host from the list of TACACS + servers.
- See tacacs-server host

tacacs-server key

- Use to set or reset the authentication encryption key value shared by all TACACS + servers that do not have a server-specific key set up by the **tacacs-server host** command.
- This key must match the key configured on the TACACS + process.
- Leading spaces are ignored; however, spaces at the end of the key are recognized. If you use spaces in the key, do not enclose the key in quotation marks.
- Example

```
host1(config)#tacacs-server key &# 889khj
```

- Use the **no** version to reset a key value shared by all TACACS+ servers.
- See tacacs-server key

tacacs-server source-address

- Use to set or reset an alternative source address to be used for TACACS+ server communications.
- Existing connections are not affected by this command.
- Example

```
host1(config)#tacacs-server source-address 192.168.134.63
```

- Use the **no** version to remove the address.
- See tacacs-server source-address

tacacs-server timeout

- Use to set the interval in seconds that the server waits for the server host to reply. The specified interval is shared by all TACACS+ servers that do not have a server-specific timeout set up by **tacacs-server host** command.
- The timeout interval is between 1 and 300. The default is 5 seconds.
- Example

```
host1(config)#tacacs-server timeout 15
```

- Use the **no** version to reset the timeout to the default.
- See tacacs-server timeout

Chapter 10

Monitoring TACACS+

This chapter describes how to monitor the current TACACS+ configurations.

TACACS+ topics are described in the following sections:

- Setting Baseline TACACS+ Statistics on page 329
- Monitoring TACACS+ Statistics on page 329
- Monitoring TACACS+ Information on page 331

Setting Baseline TACACS+ Statistics

You can set a baseline for TACACS+ statistics.

To set the baseline:

- Issue the **baseline tacacs** command:

```
host1#baseline tacacs
```

There is no **no** version.

Related Topics ■ baseline tacacs

Monitoring TACACS+ Statistics

Purpose Display TACACS+ statistics.

Action To display TACACS+ statistics:

```
host1#show statistics tacacs
TACACSPUS Statistics
-----
Statistic      10.5.0.174  10.5.1.199
-----
Search Order   1           2
TCP Port       3049        4049
Auth Requests   140         0
Auth Replies    85          0
Auth Pending    43          0
```

Auth Timeouts	12	0
Author Requests	6399	97
Author Replies	6301	0
Author Pending	0	0
Author Timeouts	98	97
Acct Requests	6321	37
Acct Replies	6280	0
Acct Pending	4	0
Acct Timeouts	37	37

Meaning Table 66 on page 330 lists the **show statistics tacacs** command output fields.

Table 66: show statistics tacacs Output Fields

Field Name	Field Description
Statistic	IP address of the host
Search Order	The order in which requests are sent to hosts until a response is received
TCP Port	TCP port of the host
Auth Requests	Number of authentication requests sent to the host
Auth Replies	Number of authentication replies received from the host
Auth Pending	Number of expected but not received authentication replies from the host
Auth Timeouts	Number of authentication timeouts for the host
Author Requests	Number of authorization requests sent to the host
Author Replies	Number of authorization replies received from the host
Author Pending	Number of expected but not received authorization replies from the host
Author Timeouts	Number of authorization timeouts for the host
Acct Requests	Number of accounting requests sent to the host
Acct Replies	Number of accounting replies received from the host
Acct Pending	Number of expected but not received accounting replies from the host
Acct Timeouts	Number of accounting timeouts for the host

Related Topics ■ show statistics tacacs

Monitoring TACACS+ Information

Purpose Display TACACS + information.

Action To display TACACS + information.

```
host1#show tacacs
Key = hippo
Timeout = <NOTSET>, built-in timeout of 5 will be used
Source-address = <NOTSET>
TACACS+ Configuration, (*) denotes inherited
-----
```

IP Address	Tcp Port	Timeout	Primary	Key	Search Order
10.5.0.174	3049	5 (*)	y	hippo (*)	1
10.5.1.199	1049	5 (*)	n	hippo (*)	2

To display overall statistics:

```
host1#show tacacs statistics
```

To display statistics since they were baselined; deltas are not calculated for the pending statistics:

```
host1#show tacacs delta
```

Meaning Table 67 on page 331 lists the **show tacacs** command output fields.

Table 67: show tacacs Output Fields

Field Name	Field Description
Key	Authentication and encryption key
Timeout	TACACS + host response timeout in seconds
Source-address	Alternative source IP address configured
TACACSPLUS Configuration	Table contains statistics for each host
IP Address	IP address of the host
TCP Port	TCP port of the host for each IP address
Timeout	Timeout interval in seconds for each IP address
Primary	This IP address's primary host; options: y = yes, n = no
Key	Authentication and encryption key for this IP address

Table 67: show tacacs Output Fields *(continued)*

Field Name	Field Description
Search Order	The order in which requests are sent to hosts until a response is received

Related Topics ■ show tacacs

Part 3

Managing L2TP

- L2TP Overview on page 335
- Configuring an L2TP LAC on page 343
- Configuring an L2TP LNS on page 375
- Configuring L2TP Dial-Out on page 411
- L2TP Disconnect Cause Codes on page 423
- Monitoring L2TP and L2TP Dial-Out on page 427

Chapter 11

L2TP Overview

Layer 2 Tunneling Protocol (L2TP) is a client-server protocol that allows Point-to-Point Protocol (PPP) to be tunneled across a network. This chapter includes the following topics that provide information for configuring L2TP on the Juniper Networks E Series Broadband Services Routers.



- L2TP Overview on page 335
- L2TP Terminology on page 336
- Implementing L2TP on page 337
- Packet Fragmentation on page 339
- L2TP Platform Considerations on page 340
- L2TP Module Requirements on page 340
- Sessions and Tunnels Supported on page 341
- L2TP References on page 342

L2TP Overview

L2TP encapsulates layer 2 packets, such as PPP, for transmission across a network. An L2TP access concentrator (LAC), configured on an access device, such as an E Series router, receives packets from a remote client and forwards them to an L2TP network server (LNS), on a remote network.

You can configure your router to act as an LAC in pass-through mode in which the LAC receives packets from a remote client and then forwards them at layer 2 directly to the LNS.

The E Series router creates tunnels dynamically by using authentication, authorization, and accounting (AAA) authentication parameters and transmits L2TP packets to the LNS via IP/User Datagram Protocol (UDP). Traffic travels in an L2TP *session*. A tunnel is an aggregation of one or more sessions. Figure 7 on page 336 and Figure 8 on page 336 show the E Series router in typical LAC and LNS arrangements.

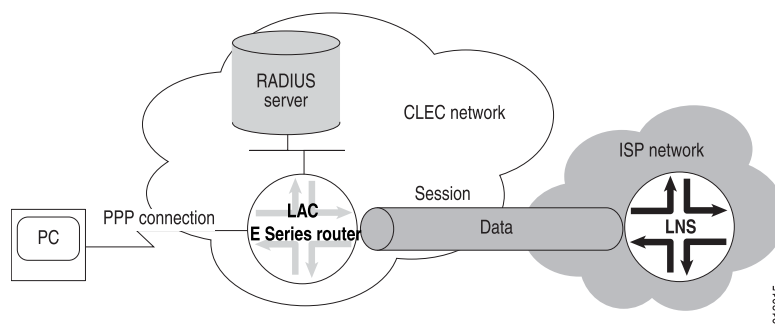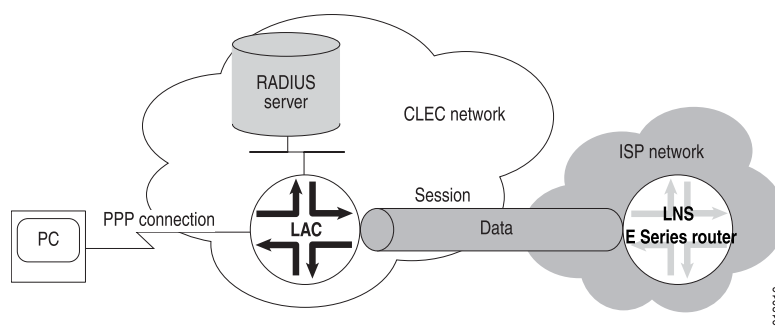Figure 7: Using the E Series Router as an LAC**Figure 8: Using the E Series Router as an LNS**

NOTE: The E Series router does not support terminating both ends of a tunnel or session in the same router.

L2TP Terminology

Table 68 on page 336 describes the basic terms for L2TP.

Table 68: L2TP Terms

Term	Description
Attribute value pair (AVP)	Combination of a unique attribute—represented by an integer—and a value containing the actual value identified by the attribute.
LAC	L2TP access concentrator (LAC)—a node that acts as one side of an L2TP tunnel endpoint and is a peer to the LNS. An LAC sits between an LNS and a remote system and forwards packets to and from each.
Call	A connection (or attempted connection) between a remote system and an LAC.

Table 68: L2TP Terms *(continued)*

Term	Description
LNS	L2TP network server (LNS)—a node that acts as one side of an L2TP tunnel endpoint and is a peer to the LAC. An LNS is the logical termination point of a PPP connection that is being tunneled from the remote system by the LAC.
Peer	In the L2TP context, refers to either the LAC or LNS. An LAC's peer is an LNS, and vice versa.
Proxy authentication	Authentication data from the PPP client that is sent from the LNS as part of a proxy LCP. Data might include attributes such as authentication type, authentication name, and authentication challenge.
Proxy LCP	LCP (Link Control Protocol) negotiation that is performed by the LAC on behalf of the LNS. Proxy sent by the LAC to the LNS containing attributes such as the last configuration attributes sent and received from the client.
Remote system	An end-system or router attached to a remote access network, which is either the initiator or recipient of a call.
Session	A logical connection created between the LAC and the LNS when an end-to-end PPP connection is established between a remote system and the LNS. NOTE: There is a one-to-one relationship between established L2TP sessions and their associated PPP connections.
Tunnel	A connection between an LAC-LNS pair consisting of a control connection and 0 or more L2TP sessions.

Implementing L2TP

The implementation of L2TP for the E Series router uses four levels:

- System—The router
- Destination—The remote L2TP system
- Tunnel—A direct path between the LAC and the LNS
- Session—A PPP connection in a tunnel

When the router has established destinations, tunnels, and sessions, you can control the L2TP traffic. Making a change to a destination affects all tunnels and sessions to that destination; making a change to a tunnel affects all sessions in that tunnel. For example, closing a destination closes all tunnels and sessions to that destination.

Sequence of Events on the LAC

The E Series router creates destinations, tunnels, and sessions dynamically, as follows:

1. The client initiates a PPP connection with the router.
2. The router and the client exchange Link Control Protocol (LCP) packets. For details about negotiating PPP connections, see the *Configuring Point-to-Point Protocol* chapter in *JUNOS Link Layer Configuration Guide*.
3. By using either a local database related to the domain name or RADIUS authentication, the router determines either to terminate or to tunnel the PPP connection.
4. If the router discovers that it should tunnel the session, it does the following:
 - a. Sets up a new destination or selects an existing destination.
 - b. Sets up a new tunnel or selects an existing tunnel.
 - c. Opens a new session.
5. The router forwards the results of the LCP negotiations and authentication to the LNS.

A PPP connection now exists between the client and the LNS.



NOTE: The router discards received packets if the size of the variable-length, optional offset pad field in the L2TP header is too large. The router always supports packets that have an offset pad field of up to 16 bytes, and may support larger offset pad fields, depending on other information in the header. This restriction is a possible, although unlikely, cause of excessive discarding of L2TP packets.

Sequence of Events on the LNS

The E Series router sets up an LNS as follows:

1. An LAC initiates a tunnel with the router.
2. The router verifies that a tunnel with this LAC is valid—destination configured, hostname and tunnel password correct.
3. The router completes the tunnel setup with the LAC.
4. The LAC sets up a session with the router.
5. The router creates a dynamic PPP interface on top of the session.
6. If they are enabled and present, the router takes the proxy LCP and the proxy authentication data and passes them to PPP.
7. The E Series PPP processes the proxy LCP, if it is present, and, if acceptable, places LCP on the router in opened state without renegotiation of LCP.



NOTE: If proxy LCP is not present or not acceptable, the router negotiates LCP with the remote system.

8. The E Series PPP processes the proxy authentication data, if it is present, and passes the data to AAA for verification. (If the data is not present, E Series PPP requests the data from the remote system.)
9. The router passes the authentication results to the remote system.

Packet Fragmentation

The E Series router supports the reassembly of IP-fragmented L2TP packets. (For more information, see the *IP Reassembly for Tunnels* chapter in *JUNOS IP Services Configuration Guide*.) However, it is preferable to prevent fragmentation within L2TP tunnels because of the effects of fragmentation and reassembly on performance.

To prevent fragmentation, PPP LCP negotiation of the maximum receive unit (MRU) may be used to determine a proper maximum transmission unit (MTU). However, the normal automatic method of determining the proper MRU to negotiate (by evaluating the MRU of all lower layers in the interface stack) is not adequate for L2TP. The initial LCP negotiation between PPP in the client and the LAC is inadequate because it does not cover the entire extent of the eventual PPP session that travels all the way from the client to the LNS. Furthermore, even if PPP in the LNS chooses to renegotiate the MRU, it has no way to determine the proper MRU, since it does not know the minimum MRU on all of the intervening links between it and the LAC.

To overcome the inadequacy of normal determination of the MRU under such circumstances, you can configure the PPP MRU size by using the **ppp mru** command in Profile Configuration mode, Interface Configuration mode, or Subinterface Configuration mode. Use Profile Configuration mode for dynamic PPP interfaces, and Interface Configuration mode or Subinterface Configuration mode for static PPP interfaces.

When you specify the size, you need to take into account the MRU for all possible links between the LAC and the LNS. You must also take into account the L2TP encapsulation that is added to all packets entering the tunnel.

For example, if the link between the LAC and LNS with the lowest MRU were an Ethernet link, the following calculation applies:

Minimum link MRU	1500
L2TP encapsulating IP header	-20
L2TP encapsulating UDP header	-8
Maximum L2TP header (assumes a maximum of 16 bytes of Offset Pad)	-30
MRU size to specify	1442

If the smallest intervening link is an Ethernet link, specifying **ppp mru 1442** at either the LAC or LNS guarantees that no fragmentation will occur within the L2TP tunnel.

L2TP Platform Considerations

For information about modules that support LNS and LAC on the ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router:

- See *ERX Module Guide, Table 1, ERX Module Combinations* for detailed module specifications.
- See *ERX Module Guide, Appendix A, Module Protocol Support* for information about the modules that support LNS and LAC.

For information about modules that support LNS and LAC on the E120 and E320 Broadband Services Routers:

- See *E120 and E320 Module Guide, Table 1, Modules and IOAs* for detailed module specifications.
- See *E120 and E320 Module Guide, Appendix A, IOA Protocol Support* for information about the modules that support LNS and LAC.

L2TP Module Requirements

The supported modules for LNS depends on the type of E Series router that you have.

ERX7xx Models, ERX14xx Models, and the ERX310 Router

To use an LNS on ERX7xx models, ERX14xx models, and the ERX310 router, at least one Service line module (SM) or a module that supports the use of shared tunnel-server ports must be installed in the ERX router. For information about installing modules in the ERX router, see the *ERX Hardware Guide*.

SMs provide dedicated tunnel-server ports that are always configured on the module. Unlike other line modules, SMs do not pair with corresponding I/O modules that contain ingress and egress ports. Instead, they receive data from and transmit data to other line modules with access to ingress and egress ports on their own associated I/O modules.

You can also create tunnels on E Series modules that support shared tunnel-server ports. You can configure (provision) a shared tunnel-server port to use a portion of the module's bandwidth to provide tunnel services. For a list of the modules that support shared tunnel-server ports, see the *ERX Module Guide*.

For information about configuring tunnel services on dedicated and shared tunnel-server ports, see the *Managing Tunnel-Service and IPSec-Service Interfaces* chapter in *JUNOS Physical Layer Configuration Guide*.

For information about line modules supported by the LAC and LNS and the type of support each module type receives, see *ERX Module Guide, Appendix A, Module Protocol Support*.

E120 Router and E320 Router

To use an LNS on an E120 router or an E320 router, you must install an ES2 4G line module (LM) with an ES2-S1 Service I/O adapter (IOA), or an IOA that supports the use of shared tunnel-server ports. For information about installing modules in these routers, see the *E120 and E320 Hardware Guide*.

The ES2 4G LM and ES2-S1 Service IOA combination provides a dedicated tunnel-server port that is always configured on the IOA. Unlike SMs, the ES2 4G LM requires the ES2-S1 Service IOA to condition it to receive and transmit data to other line modules. The ES2-S1 Service IOA also does not have ingress or egress ports.

You can also create tunnels on IOAs that support shared tunnel-server ports. You can configure (provision) a shared tunnel-server port to use a portion of the IOA's bandwidth to provide tunnel services. For a list of the IOAs that support shared tunnel-server ports, see the *E120 and E320 Module Guide*.

For information about IOAs supported by the LAC and LNS and the type of support each module type receives, see *E120 and E320 Module Guide, Appendix A, IOA Protocol Support*.

Sessions and Tunnels Supported

The E120 and E320 routers support 60,000 L2TP sessions, the ERX1440 router supports 32,000 L2TP sessions, and all other E Series routers support a maximum of 16,000 L2TP sessions. The following guidelines apply:

- On all E Series routers

The SM and the ES2-S1 Service IOA both support the termination of 16,000 LNS sessions per module. Therefore, if you want to apply input or output policies to all of the available LNS sessions, you can only terminate a maximum of 8000 sessions per module.

- On the E120 router, E320 router, and the ERX1440 router

You can create a systemwide maximum of 60,000 sessions per E120 or E320 router or 32,000 sessions per ERX1440 router. The maximum session limit is spread in any combination across a maximum of 8000 tunnels. For a router that is operating as an LAC for some tunnels and as an LNS for others, the 8000 tunnels and the router's applicable maximum sessions limits apply to the combined total of LAC and LNS tunnels and sessions.

- On all E Series routers except the ERX1440 router, E120 router, and the E320 router

You can create a systemwide maximum of 16,000 sessions spread in any combination across a maximum of 8000 tunnels shared between an LAC and an LNS. For a router that is operating as an LAC for some tunnels and as an LNS for others, the 8000 tunnels and 16,000 sessions limits apply to the combined total of LAC and LNS tunnels and sessions.



NOTE: In previous releases, the JUNOS software required that you use the **license l2tp-session** command to configure a license to enable support for the maximum allowable L2TP sessions on ERX1440 routers, E120 routers, and E320 routers. The **license l2tp-session** command still appears in the CLI, but it has no effect on the actual enforced limit. The reported license limit is 60,000. The **show license l2tp-session** command also still appears in the CLI.

- To obtain the maximum number of ingress and egress policy attachments supported for L2TP sessions, see *JUNOS Release Notes, Appendix A, System Maximums*.

L2TP References

For more information about L2TP, see the following resources:

- RFC 2661—Layer Two Tunneling Protocol “L2TP” (August 1999)
- RFC 3145—L2TP Disconnect Cause Information (July 2001)
- Fail Over extensions for L2TP “failover” —draft-ietf-l2tpext-failover-06.txt (April 2006 expiration)
- RFC 4951—Fail Over Extensions for Layer 2 Tunneling Protocol (L2TP) “failover” (August 2007)

For information about L2TP high availability support, see the *Managing High Availability* chapter in *JUNOS System Basics Configuration Guide*.

For information about setting up policy-based routing features for L2TP, such as rate limit profiles, classifier control lists, and policy lists, see the *JUNOS Policy Management Configuration Guide*.

For information about creating and attaching QoS profiles to L2TP sessions, see the *JUNOS Quality of Service Configuration Guide*.

For information about how to secure Layer 2 Tunneling Protocol (L2TP) tunnels with IP Security (IPSec) on your E Series router, see the *Securing L2TP and IP Tunnels with IPSec* chapter in *JUNOS IP Services Configuration Guide*.

Chapter 12

Configuring an L2TP LAC

An L2TP access concentrator (LAC) receives packets from a remote client and forwards them to an L2TP network server (LNS), on a remote network. You can configure your E Series router to function as an LAC.

This chapter includes the following topics that provide information for configuring an L2TP LAC on the E Series router:

- LAC Configuration Prerequisites on page 343
- Modifying L2TP LAC Default Settings for Managing Destinations, Tunnels, and Sessions on page 344
- Generating UDP Checksums in Packets to L2TP Peers on page 345
- Specifying a Destruct Timeout for L2TP Tunnels and Sessions on page 345
- Preventing Creation of New Destinations, Tunnels, and Sessions on page 346
- Shutting Down Destinations, Tunnels, and Sessions on page 348
- Specifying the Number of Retransmission Attempts on page 349
- Configuring Calling Number AVP Formats on page 349
- Mapping a User Domain Name to an L2TP Tunnel Overview on page 358
- Mapping User Domain Names to L2TP Tunnels from Domain Map Tunnel Mode on page 359
- Mapping User Domain Names to L2TP Tunnels from Tunnel Group Tunnel Mode on page 363
- Configuring the RX Speed on the LAC on page 365
- Managing the L2TP Destination Lockout Process on page 366
- Managing Address Changes Received from Remote Endpoints on page 369
- Configuring LAC Tunnel Selection Parameters on page 370

LAC Configuration Prerequisites

Before you begin configuring the router as a LAC, perform the following steps:

1. Create a virtual router.

```
host1(config)#virtual-router west
```

2. Assign a router ID IP address, such as that for a loopback interface, to the virtual router. This address must be reachable by the L2TP peer.

host1:west(config)#**ip router-id 10.10.45.3**



CAUTION: You must explicitly assign a router ID to a virtual router rather than using a dynamically assigned router ID. A fixed ID is required because every time the ID changes, L2TP must disconnect all existing tunnels and sessions that use the old ID. If you use a dynamically assigned router ID, the value can change without warning, leading to failure of all L2TP tunnels and sessions. Also, the router could dynamically assign a router ID that is not reachable by the L2TP peer, causing a complete failure of L2TP. You must set the router ID even if you specified a source address in the domain map or a local address in the host profile.

3. When configuring the router as a LAC, configure the router or virtual router for Broadband Remote Access Server (B-RAS).



NOTE: If you are using shared tunnel-server ports, you must configure the shared tunnel-server ports before you configure Layer 2 Tunneling Protocol (L2TP) network server (LNS) support. You use the **tunnel-server** command in Global Configuration mode to specify the physical location of the shared tunnel-server port that you want to configure.

See *JUNOS Physical Layer Configuration Guide* for additional information about the **tunnel-server** command and shared tunnel-server ports.

- Related Topics**
- virtual-router
 - ip router-id

Modifying L2TP LAC Default Settings for Managing Destinations, Tunnels, and Sessions

Configuring an E Series router for B-RAS enables the router to operate as an LAC with default settings. You can modify the default settings as follows:

- Enable the verification of data integrity via UDP.
- Specify the time period for which the router maintains dynamic destinations, tunnels, or sessions after termination.



NOTE: The previous two operations also apply to an LNS, however there is no default configuration that enables the LNS.

When the router is established as an LAC or LNS and is creating destinations, tunnels, and sessions, you can manage them as follows:

- Prevent the creation of new sessions, tunnels, and destinations.
- Close and reopen all or selected destinations, tunnels, and sessions.
- Configure drain timeout operations, which control the amount of time a disconnected LAC tunnel waits before restarting after receiving a restart request.
- Configure how many times the router retries a transmission if the initial attempt is unsuccessful.



NOTE: All the commands in this section apply to both the LAC and the LNS.

- Related Topics**
- Generating UDP Checksums in Packets to L2TP Peers on page 345
 - Specifying a Destruct Timeout for L2TP Tunnels and Sessions on page 345
 - Preventing Creation of New Destinations, Tunnels, and Sessions on page 346
 - Shutting Down Destinations, Tunnels, and Sessions on page 348
 - Specifying the Number of Retransmission Attempts on page 349

Generating UDP Checksums in Packets to L2TP Peers

You can configure the router to generate a UDP data integrity checksum in data packets sent to an L2TP peer. The router always uses UDP checksums during transmission and reception of L2TP control packets. Generation of checksums is disabled by default.

- To enable generation of UDP checksums:

```
host1(config)#l2tp checksum
```



NOTE: This command does not affect the way the router checks the UDP data integrity checksum in L2TP data packets that are received from an L2TP peer. The router checks all non-zero received checksums and discards the packet if a data integrity problem is detected.

- Related Topics**
- l2tp checksum

Specifying a Destruct Timeout for L2TP Tunnels and Sessions

You can specify the maximum time period, in the range 10–3600 seconds

(1 hour), for which the router attempts to maintain dynamic destinations, tunnels, and sessions after they have been destroyed. The router uses a timeout of 600 seconds by default.

This command facilitates debugging and other analysis by saving underlying memory structures after the destination, tunnel, or session is terminated.

Any specific dynamic destination, tunnel, or session may not be maintained for this entire time period if the resources must be reclaimed early to allow new tunnels to be established.



TIP: If you use the **l2tp destination lockout timeout** command to configure an optional lockout timeout, always configure the destruct timeout to be longer than the lockout timeout. The destruct timeout overrides the lockout timeout—when the destruct timeout expires, all information about the locked out destination is deleted, including the lockout timeout and lockout test settings. See “Managing the L2TP Destination Lockout Process” on page 366.

- To specify a destruct timeout:

```
host1(config)#l2tp destruct-timeout 1200
```

Related Topics ■ l2tp destruct-timeout

Preventing Creation of New Destinations, Tunnels, and Sessions

You can configure several L2TP drain operations, which determine how the router creates new L2TP destinations, tunnels, and sessions. You can manage the following features:

1. Preventing Creation of New Destinations, Tunnels, and Sessions on the Router on page 346
2. Preventing Creation of New Tunnels and Sessions at a Destination on page 347
3. Preventing Creation of New Sessions for a Tunnel on page 347
4. Specifying a Drain Timeout for a Disconnected Tunnel on page 347

Preventing Creation of New Destinations, Tunnels, and Sessions on the Router

You use the **l2tp drain** command to prevent the creation of new destinations, tunnels, and sessions on the router.

The **l2tp drain** command and the **l2tp shutdown** command both affect the administrative state of L2TP on the router. Although each command has a different effect, the **no** version of each command is equivalent. Each command's **no** version leaves L2TP in the enabled state.

- To prevent the creation of new destinations, tunnels, and sessions:

```
host1(config)#l2tp drain
```

Preventing Creation of New Tunnels and Sessions at a Destination

You use the **l2tp drain destination** command to prevent the creation of new tunnels and sessions at a specific destination.

The **l2tp drain destination** command and the **l2tp shutdown destination** command both affect the administrative state of L2TP for the destination. Although each command has a different effect, the **no** version of each command is equivalent. Each command's **no** version leaves L2TP in the enabled state.

- To prevent the creation of new tunnels and sessions at the specified destination:

```
host1(config)#l2tp drain destination ip 172.31.1.98
```

Preventing Creation of New Sessions for a Tunnel

Use the **l2tp drain tunnel** command to prevent the creation of new sessions for a tunnel.

The **l2tp drain tunnel** command and the **l2tp shutdown tunnel** command both affect the administrative state of L2TP for the tunnel. Although each command has a different effect, the **no** version of each command is equivalent. Each command's **no** version leaves L2TP in the enabled state.

- To prevent the creation of new sessions for a specific tunnel:

```
host1(config)#l2tp drain tunnel virtual-router default ip 172.31.1.98 isp.com
```

Specifying a Drain Timeout for a Disconnected Tunnel

Use the **l2tp tunnel short-drain-timeout** command to specify the amount of time a disconnected LAC L2TP tunnel waits before restarting after it receives a restart request.

You can specify a drain timeout in the range 0–31 seconds. This feature enables the router to restart tunnels more quickly than the standard 31-second drain time specified by RFC-2661. By default, the router uses a short-drain timeout of 2 seconds.

- To specify the short-drain timeout:

```
host1(config)#l2tp tunnel short-drain-timeout 12
```

Shutting Down Destinations, Tunnels, and Sessions

You can configure how the router shuts down L2TP destinations, tunnels, and sessions. You can specify the following shut down methods, which also prevent the creation of new tunnels:

1. Closing Existing and Preventing New Destinations, Tunnels, and Sessions on the Router on page 348
2. Closing Existing and Preventing New Tunnels and Sessions for a Destination on page 348
3. Closing Existing and Preventing New Sessions in a Specific Tunnel on page 348
4. Closing a Specific Session on page 349

Closing Existing and Preventing New Destinations, Tunnels, and Sessions on the Router

You use the **l2tp shutdown** command to close all existing destinations, tunnels, and sessions, and to prevent the creation of new destinations, tunnels, and sessions on the router.

The **l2tp shutdown** command and the **l2tp drain** command both affect the administrative state of L2TP on the router. Although each command has a different effect, the **no** version of each command is equivalent. Each command's **no** version leaves L2TP in the enabled state.

- To close all destinations, tunnels, and sessions on the router:

```
host1(config)#l2tp shutdown
```

Closing Existing and Preventing New Tunnels and Sessions for a Destination

You use the **l2tp shutdown destination** command to close all existing tunnels and sessions for a destination and to prevent the creation of tunnels and sessions for that destination.

The **l2tp shutdown destination** command and the **l2tp drain destination** command both affect the administrative state of L2TP for the destination. Although each command has a different effect, the **no** version of each command is equivalent. Each command's **no** version leaves L2TP in the enabled state.

- To close tunnels and sessions, and prevent creation of new tunnels and sessions for the specified destination:

```
host1(config)#l2tp shutdown destination 1
```

Closing Existing and Preventing New Sessions in a Specific Tunnel

You use the **l2tp shutdown tunnel** command to close all sessions in a tunnel and to prevent the creation of sessions in a tunnel.

The **l2tp shutdown tunnel** command and the **l2tp drain tunnel** command both affect the administrative state of L2TP for the tunnel. Although each command has a different effect, the **no** version of each command is equivalent. Each command's **no** version leaves L2TP in the enabled state.

- To close all existing sessions in a specific tunnel and prevent creation of new sessions:

```
host1(config)#l2tp shutdown tunnel 1/isp.com
```

Closing a Specific Session

You use the **l2tp shutdown session** command to close the specified session.

- To close a specific session:

```
host1(config)#l2tp shutdown session 1/1/1
```

Specifying the Number of Retransmission Attempts

You can specify the number of retransmission attempts the router uses for tunnels, in the range 2–30. By default, the router uses a retry count of 5.

Use the **established** keyword to apply the retry count only to established tunnels. Use the **not-established** keyword to apply the retry count only to tunnels that are not established. If you do not include a keyword, the router applies the retry count to both established and nonestablished tunnels.

- To configure the number of retransmission attempts:

```
host1(config)#l2tp retransmission 4 established
```

Related Topics ■ l2tp retransmission

Configuring Calling Number AVP Formats

The E Series LAC generates L2TP Calling Number AVP 22 for incoming-call request (ICRQ) packets that the LAC sends to the LNS. By default, the E Series LAC generates the Calling Number AVP 22 in descriptive format.

You can also prevent the E Series LAC from sending the Calling Number AVP in ICRQ packets.



NOTE: You cannot change the L2TP Calling Number AVP on tunnel switched interfaces.

You use the **aaa tunnel calling-number-format** command to configure the router to generate AVP 22 in any of the following formats. Agent-circuit-id is suboption 1 of the tags supplied by the PPPoE intermediate agent from the DSLAM. Agent-remote-id is suboption 2.

- **descriptive**—This is the default format, and includes the following elements:
 < interface ID > < delimiter > < UID > < delimiter > < interface description >
 < delimiter > < connect info > < delimiter > < PPPoE description >
- **descriptive include-agent-circuit-id**—This format includes the following elements:
 < interface ID > < delimiter > < UID > < delimiter > < interface description >
 < delimiter > < connect info > < delimiter > < PPPoE description > < delimiter >
 < agent-circuit-id >
- **descriptive include-agent-circuit-id include-agent-remote-id**—This format includes the following elements:
 < interface ID > < delimiter > < UID > < delimiter > < interface description >
 < delimiter > < connect info > < delimiter > < PPPoE description > < delimiter >
 < agent-circuit-id > < delimiter > < agent-remote-id >
- **descriptive include-agent-remote-id**—This format includes the following elements:
 < interface ID > < delimiter > < UID > < delimiter > < interface description >
 < delimiter > < connect info > < delimiter > < PPPoE description > < delimiter >
 < agent-remote-id >
- **fixed**—This format is similar to the fixed format of RADIUS attribute 31 (Calling-Station-Id). If you set up the router to generate the Calling Number AVP in fixed format, the router formats the AVP to use a fixed format of up to 15 characters consisting of all ASCII fields, as follows (the maximum number of characters for each field is shown in brackets):
 - For ATM interfaces:
 < system name [4] > < slot [2] > < port [1] > < VPI [3] > < VCI [5] >
 - For Ethernet interfaces:
 < system name [4] > < slot [2] > < port [1] > < VLAN [8] >
 - Format for serial interfaces:
 < system name [4] > < slot [2] > < port [1] > < 0 [8] >
 - Example—The following command configures the L2TP Calling Number AVP in fixed format:

```
host1(config)#aaa tunnel calling-number-format fixed
```

For example, when you configure this L2TP Calling Number AVP format on an E320 Broadband Services Router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as '14' '2' '003' '00004'. The adapter number does not appear in this format.

- **fixed-adapter-embedded**—If you set up the router to generate the L2TP Calling Number AVP in fixed-adapter-embedded format, the router formats the AVP to use a fixed format of up to 15 characters consisting of all ASCII fields with a 1-byte *slot* field, 1-byte *adapter* field, and 1-byte *port* field:

- Format for ATM interfaces:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte)
port (1 byte) *VPI* (3 bytes) *VCI* (5 bytes)
- Format for Ethernet interfaces:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte)
port (1 byte) *VLAN* (8 bytes)
- Format for serial interfaces:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte)
port (1 byte) 0 (8 bytes)
- For E120 and E320 Broadband Services Routers, *adapter* is the number of the bay in which the I/O adapter (IOA) resides, either 0 (representing the right IOA bay on the E120 router and the upper IOA bay on the E320 router) or 1 (representing the left IOA bay on the E120 router or the lower IOA bay on the E320 router). For ERX7xx models, ERX14xx models, and ERX310 Broadband Services Routers, which do not use IOAs, *adapter* is always shown as 0.
- Slot numbers 0 through 16 are shown as ASCII characters in the 1-byte slot field according to the following translation:

Slot Number	ASCII Character	Slot Number	ASCII Character
0	0	9	9
1	1	10	A
2	2	11	B
3	3	12	C
4	4	13	D
5	5	14	E
6	6	15	F
7	7	16	G
8	8	–	–

For example, slot 16 is shown as the ASCII character uppercase G.

- Example—The following command configures the L2TP Calling Number AVP in fixed-adapter-embedded format:

```
host1(config)#aaa tunnel calling-number-format fixed-adapter-embedded
```

For example, when you configure this L2TP Calling Number AVP format on an E320 router for an ATM interface on system name eastern, slot 14,

adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as 'E' '1' '2' '003' '00004'.

- **fixed-adapter-new-field**—If you set up the router to generate the L2TP Calling Number AVP in fixed-adapter-embedded-new-field format, the router formats the AVP to use a fixed format of up to 17 characters consisting of all ASCII fields with a 2-byte *slot* field, 1-byte *adapter* field, and 2-byte *port* field:
 - Format for ATM interfaces:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte)
port (2 bytes) *VPI* (3 bytes) *VCI* (5 bytes)
 - Format for Ethernet interfaces:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte)
port (2 bytes) *VLAN* (8 bytes)
 - Format for serial interfaces:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte)
port (2 bytes) 0 (8 bytes)
 - Slot numbers 0 through 16 are shown as integers in the 2-byte *slot* field.
 - Example—The following command configures the L2TP Calling Number AVP in fixed-adapter-new-field format:

```
host1(config)#aaa tunnel calling-number-format fixed-adapter-new-field
```

For example, when you configure this L2TP Calling Number AVP format on an E320 router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as '14' '1' '02' '003' '00004'.

- **include-agent-circuit-id** format—This format includes the following element:
 < agent-circuit-id >
- **include-agent-circuit-id include-agent-remote-id** format—This format includes the following elements:
 < agent-circuit-id > < delimit > < agent-remote-id >
- **include-agent-remote-id** format—This format includes the following element:
 < agent-remote-id >
- **stacked**—This format includes a 4-byte stacked VLAN (S-VLAN) ID in the fixed, fixed-adapter-embedded, and fixed-adapter-new-field Calling Number AVP formats for Ethernet interfaces. The S-VLAN ID is displayed in decimal format in the range 0–4095. By default, these formats do not include the S-VLAN ID unless you specify the optional **stacked** keyword.



NOTE: The use of the **stacked** keyword is not supported for VLAN subinterfaces based on agent-circuit-identifier information, otherwise known as ACI VLANs. When you issue the **aaa tunnel calling-number-format fixed stacked**, **aaa tunnel calling-number-format fixed-adapter-embedded stacked**, or **aaa tunnel calling-number-format fixed-adapter-new-field stacked** command for an ACI VLAN, the values that appear in the 4-byte S-VLAN ID and 4-byte VLAN ID fields are incorrect.

- Format for Ethernet interfaces that use **fixed**:
systemName (up to 4 bytes) *slot* (2 bytes) *port* (1 byte) *S-VLAN* (4 bytes) *VLAN* (4 bytes)
- Format for Ethernet interfaces that use **fixed-adapter-embedded**:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte) *port* (1 byte) *S-VLAN* (4 bytes) *VLAN* (4 bytes)
- Format for Ethernet interfaces that use **fixed-adapter-new-field**:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte) *port* (2 bytes) *S-VLAN* (4 bytes) *VLAN* (4 bytes)
- The S-VLAN ID field in the Calling Number AVP is set to 0 (zero) if you do not specify the optional **stacked** keyword, or if you specify the optional **stacked** keyword but the Ethernet interface does not have an S-VLAN ID.
- Example—The following command configures the L2TP Calling Number AVP in fixed-adapter-new-field format for an Ethernet interface with an S-VLAN ID:

```
host1(config)#aaa tunnel calling-number-format fixed-adapter-new-field
stacked
```

For example, when you configure this Calling-Station-Id format on an E320 router for an Ethernet interface on system name western, slot 4, adapter 1, port 3, S-VLAN ID 8, and VLAN ID 12, the virtual router displays the format in ASCII as 'west' '04' '1' '03' '0008' '0012'.

Tasks for configuring the L2TP Calling Number AVP 22 include:

- Calling Number AVP 22 Configuration Tasks on page 353
- Configuring the Fallback Format on page 354
- Disabling the Calling Number AVP on page 357

Calling Number AVP 22 Configuration Tasks

To set up the router to generate Calling Number AVP 22 for an Ethernet interface in fixed format that includes both an S-VLAN ID and a VLAN ID:

1. Set the calling number format of the tunnel to **fixed**, and specify the optional **stacked** keyword to include the S-VLAN ID.

```
host1(config)#aaa tunnel calling-number-format fixed stacked
```

- Set the format of the RADIUS Calling-Station-Id to **fixed-format**, and specify the optional **stacked** keyword to include the S-VLAN ID.

```
host1(config)#radius calling-station-format fixed-format stacked
```

If you use a RADIUS server to authenticate the L2TP tunnel parameters, you must configure the format for both the L2TP Calling Number AVP 22 (by using the **aaa tunnel calling-number-format** command) and the RADIUS Calling-Station-ID [31] attribute (by using the **radius calling-station-format** command).

However, if you use an AAA domain map to authenticate the L2TP tunnel parameters, you need configure only the L2TP Calling Number AVP 22 format by using the **aaa tunnel calling-number-format** command. You need not configure the format of the RADIUS Calling-Station-ID [31] attribute in this case.

Configuring the Fallback Format

You can configure a fallback AVP 22 format. The E Series LAC uses the fallback format to generate the L2TP Calling Number AVP 22 in the event that the PPPoE agent ID is null or unavailable. The LAC uses the fallback format only when the configured calling number format includes either or both of the agent-circuit-id and agent-remote-id suboptions.

The calling number format determines what element triggers use of the fallback format, as shown in the following table:

Calling Number Format	Fallback Trigger
agent-circuit-id	agent-circuit-id is empty
agent-circuit-id include-agent-remote-id	Both agent-circuit-id and agent-remote-id are empty.
agent-remote-id	agent-remote-id is empty
descriptive include-agent-circuit-id	agent-circuit-id is empty
descriptive include-agent-circuit-id include-agent-remote-id	Both agent-circuit-id and agent-remote-id are empty.
descriptive include-agent-remote-id	agent-remote-id is empty

You use the **aaa tunnel calling-number-format-fallback** command to configure the router to generate any of the following fallback AVP 22 formats:

- descriptive**—This is the default fallback AVP 22 format, and includes the following elements:

```
< interface ID > < delimiter > < UID > < delimiter > < interface description >
< delimiter > < connect info > < delimiter > < PPPoE description >
```
- fixed**—This format is similar to the fixed format of RADIUS attribute 31 (Calling-Station-Id). If you set up the router to generate the fallback AVP 22 in

fixed format, the router formats the AVP to use a fixed format of up to 15 characters consisting of all ASCII fields, as follows (the maximum number of characters for each field is shown in brackets):

- Fallback format for ATM interfaces:
< system name [4] > < slot [2] > < port [1] > < VPI [3] > < VCI [5] >
- Fallback format for Ethernet interfaces:
< system name [4] > < slot [2] > < port [1] > < VLAN [8] >
- Fallback format for serial interfaces:
< system name [4] > < slot [2] > < port [1] > < 0 [8] >
- Example—The following command configures the fallback AVP 22 in fixed format:

```
host1(config)#aaa tunnel calling-number-format-fallback fixed
```

For example, when you configure this fallback format on an E320 router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as '14' '2' '003' '00004'. The adapter number does not appear in this format.

- fixed-adapter-embedded—If you set up the router to generate the fallback AVP 22 in fixed-adapter-embedded format, the router formats the AVP to use a fixed format of up to 15 characters consisting of all ASCII fields with a 1-byte *slot* field, 1-byte *adapter* field, and 1-byte *port* field:
 - Fallback format for ATM interfaces:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte)
port (1 byte) *VPI* (3 bytes) *VCI* (5 bytes)
 - Fallback format for Ethernet interfaces:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte)
port (1 byte) *VLAN* (8 bytes)
 - Fallback format for serial interfaces:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte)
port (1 byte) 0 (8 bytes)
 - For E120 routers and E320 routers, *adapter* is the number of the bay in which the I/O adapter (IOA) resides, either 0 (representing the right IOA bay on the E120 router and the upper IOA bay on the E320 router) or 1 (representing the left IOA bay on the E120 router or the lower IOA bay on the E320 router). For ERX7xx models, ERX14xx models, and ERX310 routers, which do not use IOAs, *adapter* is always shown as 0.
 - Slot numbers 0 through 16 are shown as ASCII characters in the 1-byte slot field according to the following translation:

Slot Number	ASCII Character	Slot Number	ASCII Character
0	0	9	9
1	1	10	A

Slot Number	ASCII Character	Slot Number	ASCII Character
2	2	11	B
3	3	12	C
4	4	13	D
5	5	14	E
6	6	15	F
7	7	16	G
8	8	–	–

For example, slot 16 is shown as the ASCII character uppercase G.

- Example—The following command configures the fallback AVP 22 in fixed-adapter-embedded format:

```
host1(config)#aaa tunnel calling-number-format-fallback
fixed-adapter-embedded
```

For example, when you configure this fallback format on an E320 router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as 'E' '1' '2' '003' '00004'.

- fixed-adapter-new-field—If you set up the router to generate the fallback AVP 22 in fixed-adapter-embedded-new-field format, the router formats the AVP to use a fixed format of up to 17 characters consisting of all ASCII fields with a 2-byte *slot* field, 1-byte *adapter* field, and 2-byte *port* field:
 - Fallback format for ATM interfaces:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte)
port (2 bytes) *VPI* (3 bytes) *VCI* (5 bytes)
 - Fallback format for Ethernet interfaces:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte)
port (2 bytes) *VLAN* (8 bytes)
 - Fallback format for serial interfaces:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte)
port (2 bytes) 0 (8 bytes)
 - Slot numbers 0 through 16 are shown as integers in the 2-byte *slot* field.
 - Example—The following command configures the fallback AVP 22 in fixed-adapter-new-field format:

```
host1(config)#aaa tunnel calling-number-format-fallback
fixed-adapter-new-field
```

For example, when you configure this fallback format on an E320 router for an ATM interface on system name eastern, slot 14, adapter 1, port 2, VCI 3, and VPI 4, the virtual router displays the format in ASCII as '14' '1' '02' '003' '00004'.

- stacked—This format includes a 4-byte stacked VLAN (S-VLAN) ID in the fixed, fixed-adapter-embedded, and fixed-adapter-new-field fallback AVP 22 formats for Ethernet interfaces. The S-VLAN ID is displayed in decimal format in the range 0–4095. By default, these formats do not include the S-VLAN ID unless you specify the optional **stacked** keyword.



NOTE: The use of the **stacked** keyword is not supported for VLAN subinterfaces based on agent-circuit-identifier information, otherwise known as ACI VLANs. When you issue the **aaa tunnel calling-number-format-fallback fixed stacked**, **aaa tunnel calling-number-format-fallback fixed-adapter-embedded stacked**, or **aaa tunnel calling-number-format-fallback fixed-adapter-new-field stacked** command for an ACI VLAN, the values that appear in the 4-byte S-VLAN ID and 4-byte VLAN ID fields are incorrect.

- Fallback format for Ethernet interfaces that use **fixed**:
systemName (up to 4 bytes) *slot* (2 bytes) *port* (1 byte) *S-VLAN* (4 bytes) *VLAN* (4 bytes)
- Fallback format for Ethernet interfaces that use **fixed-adapter-embedded**:
systemName (up to 4 bytes) *slot* (1 byte) *adapter* (1 byte) *port* (1 byte) *S-VLAN* (4 bytes) *VLAN* (4 bytes)
- Fallback format for Ethernet interfaces that use **fixed-adapter-new-field**:
systemName (up to 4 bytes) *slot* (2 bytes) *adapter* (1 byte) *port* (2 bytes) *S-VLAN* (4 bytes) *VLAN* (4 bytes)
- The S-VLAN ID field in the fallback AVP 22 is set to 0 (zero) if you do not specify the optional **stacked** keyword, or if you specify the optional **stacked** keyword but the Ethernet interface does not have an S-VLAN ID.
- Example—The following command configures the fallback AVP 22 in fixed-adapter-new-field format for an Ethernet interface with an S-VLAN ID:

```
host1(config)#aaa tunnel calling-number-format-fallback
fixed-adapter-new-field stacked
```

For example, when you configure this fallback format on an E320 router for an Ethernet interface on system name western, slot 4, adapter 1, port 3, S-VLAN ID 8, and VLAN ID 12, the virtual router displays the format in ASCII as 'west' '04' '1' '03' '0008' '0012'.

Disabling the Calling Number AVP

You can use the **l2tp disable calling-number-avp** command to prevent the E Series LAC from sending the Calling Number AVP in ICRQ packets. You use this command in special situations where you do not want the LAC to send this AVP.

- To prevent the LAC from sending the Calling Number AVP:

```
host1(config)#l2tp disable calling-number-avp
```

For more information about setting up the router to generate Calling Number AVP 22 in a format that includes either or both of the agent-circuit-id and agent-remote-id suboptions of the tags supplied by the PPPoE intermediate agent, see *Configuring PPPoE Remote Circuit ID Capture* in the *JUNOS Link Layer Configuration Guide*.

Calling Number AVP 22 Configuration Examples

The following examples show how you can synchronize the contents of RADIUS Calling-Station-Id (Attribute 31) and L2TP Calling-Number (AVP 22).

To send the PPPoE agent-circuit-id in RADIUS Attribute 31 and L2TP AVP 22 and specify that the fixed format is used when the PPPoE agent-circuit-id is unavailable, issue the following commands:

```
host1(config)#radius calling-station-format fixed-format
host1(config)#radius remote-circuit-id-delimiter #
host1(config)#radius override calling-station-id remote-circuit-id
host1(config)#radius remote-circuit-id-format agent-circuit-id
host1(config)#aaa tunnel calling-number-format include-agent-circuit-id
host1(config)#aaa tunnel calling-number-format-fallback fixed
```

To send the PPPoE agent-circuit-id and agent-remote-id in RADIUS Attribute 31 and L2TP AVP 22 and specify that the fixed format is used when both PPPoE agent-circuit-id and agent-remote-id are unavailable, issue the following commands:

```
host1(config)#radius calling-station-format fixed-format
host1(config)#radius remote-circuit-id-delimiter #
host1(config)#radius override calling-station-id remote-circuit-id
host1(config)#radius remote-circuit-id-format agent-circuit-id agent-remote-id
host1(config)#aaa tunnel calling-number-format include-agent-circuit-id
include-agent-remote-id
host1(config)#aaa tunnel calling-number-format-fallback fixed
```

Mapping a User Domain Name to an L2TP Tunnel Overview

The router uses either the local database related to the domain name or a RADIUS server to determine whether to terminate or tunnel PPP connections.

For information about setting up RADIUS to provide this mapping, see “Configuring Remote Access” on page 3.

For a given domain map, you can choose one of two methods to map the domain to an L2TP tunnel locally on the router:

- Configure tunnels for a domain map and then define tunnel attributes from Domain Map Tunnel configuration mode.
- Configure a tunnel group and then define the attributes for its tunnels from Tunnel Group Tunnel Configuration mode. Use this method only when no tunnels are currently defined for the domain map from Domain Map Tunnel configuration mode. By default, tunnel groups are not assigned to the domain map.

After configuring a tunnel group and the attributes for its tunnels, you can assign the tunnel group to the domain map from Domain Map mode. The tunnel group reference in the domain map is used instead of tunnel definitions configured from Domain Map Tunnel configuration mode.

The RADIUS server can reference tunnel groups through the RADIUS Tunnel Group [26-64] attribute. The advantages of RADIUS support for tunnel groups are:

- The RADIUS server can maintain a single tunnel group attribute associated with each user instead of sets of tunnel attributes for each user.
- The RADIUS server can authenticate users before attempting to establish tunnels.

- Related Topics**
- Mapping User Domain Names to L2TP Tunnels from Domain Map Tunnel Mode on page 359
 - Mapping User Domain Names to L2TP Tunnels from Tunnel Group Tunnel Mode on page 363

Mapping User Domain Names to L2TP Tunnels from Domain Map Tunnel Mode

To map a domain to an L2TP tunnel locally on the router from Domain Map Tunnel mode, perform the following steps:

1. Specify a domain name and enter Domain Map Configuration mode:

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#
```

2. Specify a virtual router; in this case, the *default* router is specified.

```
host1(config-domain-map)#router-name default
```

3. Specify a tunnel to configure and enter Domain Map Tunnel Configuration mode:

```
host1(config-domain-map)#tunnel 3
```

4. Specify the LNS endpoint address of a tunnel.

```
host1(config-domain-map-tunnel)#address 192.0.2.13
```

5. (Optional) Assign a tunnel group to the domain map. You can assign a tunnel group only when no tunnels are currently defined for the domain map from AAA Domain Map Tunnel mode.

```
host1(config-domain-map)#tunnel group storm
```

6. Specify a preference for the tunnel.

You can specify up to eight levels of preference, and you can assign the same preference to a maximum of 31 tunnels. When you define multiple preferences for a destination, you increase the probability of a successful connection.

```
host1(config-domain-map-tunnel)#preference 5
```

7. (Optional) Specify an authentication password for the tunnel.

```
host1(config-domain-map-tunnel)#password temporary
```



NOTE: If you specify a password for the LAC, the router requires that the peer (the LNS) authenticate itself to the router. In this case, if the peer fails to authenticate itself, the tunnel terminates.

8. (Optional) Specify a hostname for the LAC end of the tunnel.

The LAC sends the hostname to the LNS when communicating to the LNS about the tunnel. The hostname can be up to 64 characters (no spaces).

```
host1(config-domain-map-tunnel)#client-name host4
```



NOTE: If the LNS does not accept tunnels from unknown hosts, and if no hostname is specified, the LAC uses the router name as the hostname.

9. (Optional) Specify a server name for the LNS.

This name specifies the hostname expected from the peer (the LNS) when you set up a tunnel. When this name is specified, the peer must identify itself with this name during tunnel startup. Otherwise, the tunnel is terminated. The server name can be up to 64 characters (no spaces).

```
host1(config-domain-map-tunnel)#server-name boston
```

10. (Optional) Specify a source IP address for the LAC tunnel endpoint. All L2TP packets sent to the peer use this source address.

```
host1(config-domain-map-tunnel)#source-address 192.0.3.3
```

By default, the router uses the virtual router's router ID as the source address. You can override this behavior for an L2TP tunnel by specifying a source address. If you do specify a source address, use the address of a stable IP interface (for example, a loopback interface). Make sure that the address is configured in the virtual router for this domain map, and that the address is reachable by the peer.

11. Specify a tunnel identification. (The router groups L2TP sessions with the same tunnel identification into the same tunnel.)

```
host1(config-domain-map-tunnel)#identification acton
```

The router groups L2TP sessions with the same tunnel identification into the same tunnel. This occurs only when both the destination (virtual router, IP address) and the ID are the same.

12. Specify the L2TP tunnel type (RADIUS attribute 64, Tunnel-Type). Currently, the only supported value is L2TP.

```
host1(config-domain-map-tunnel)#type l2tp
```


13. Specify a medium type for the tunnel. (L2TP supports only IP version 4 [IPv4].)

```
host1(config-domain-map-tunnel)#medium ipv4
```

14. (Optional) Specify a default tunnel client name.

```
host1(config-domain-map-tunnel)#exit  
host1(config-domain-map)#exit  
host1(config)#aaa tunnel client-name boxford
```

If the tunnel client name is not included in the tunnel attributes that are returned from the domain map or authentication server, the router uses the default name.

15. (Optional) Specify a default tunnel password.

```
host1(config)#aaa tunnel password 3&92k%b#q4  
host1(config)#exit
```

If the tunnel password is not included in the tunnel attributes that are returned from the domain map or authentication server, the router uses the default password.

16. (Optional) Set the format for the tunnel assignment ID that is passed to PPP/L2TP.

The tunnel assignment ID format can be either only assignmentID or clientAuthId + serverAuthId + assignmentId.

```
host1(config)#aaa tunnel assignment-id-format assignmentID
```

If you do not set a tunnel assignment ID, the software sets it to the default (assignmentID). This parameter is only generated and used by the L2TP LAC device.

17. (Optional) Specify whether or not to use the tunnel peer's Nas-Port [5] and Nas-Port-Type [61] attributes.

When enabled, the attribute is supplied by the tunnel peer. When disabled, the attribute is not supplied. Use the **no** version of the command to restore the default, enable.

```
host1(config)#aaa tunnel ignore nas-port enable  
host1(config)#aaa tunnel ignore nas-port-type disable
```

18. (Optional) Set up the router to ignore sequence numbers in data packets received on L2TP tunnels.

```
host1(config)#l2tp ignore-receive-data-sequencing
```

This command does not affect the insertion of sequence numbers in packets *sent* from the router.



BEST PRACTICE: We recommend that you set up the router to ignore sequence numbers in received data packets if you are using IP reassembly. Because IP reassembly might reorder L2TP packets, out-of-order packets might be dropped when sequence numbers are being used on L2TP data packets.

19. (Optional) Disable the generation of authentication challenges by the local tunnel, so that the tunnel does not send a challenge during negotiation. However, the tunnel does accept and respond to challenges it receives from the peer.

host1(config)#**l2tp disable challenge**

20. Verify the L2TP tunnel configuration.

host1(config)# **show aaa domain-map**

Domain: westford.com; router-name: default; ipv6-router-name: default

Tunnel Tag	Tunnel Peer	Tunnel Source	Tunnel Type	Tunnel Medium	Tunnel Password	Tunnel Id	Tunnel Client Name
3	192.168.2.13	192.168.3.3	l2tp	ipv4	temporary	acton	host4
Tunnel Tag	Tunnel Server Name	Tunnel Preference	Tunnel Max Sessions	Tunnel RWS	Tunnel Virtual Router		
3	boston	5	0	system chooses	vr2		

host1#**show aaa tunnel-parameters**

Tunnel password is 3&92k%b#q4

Tunnel client-name is <NULL>

Tunnel nas-port-method is none

Tunnel nas-port ignore disabled

Tunnel nas-port-type ignore disabled

Tunnel assignmentId format is assignmentId

Tunnel calling number format is descriptive

- Related Topics**
- Mapping User Domain Names to L2TP Tunnels from Tunnel Group Tunnel Mode on page 363
 - aaa domain-map
 - aaa tunnel assignment-id-format
 - aaa tunnel client-name
 - aaa tunnel ignore
 - aaa tunnel password
 - address
 - client-name command
 - identification command
 - l2tp disable challenge
 - l2tp ignore-receive-data-sequencing
 - medium ipv4 command
 - password command
 - preference command
 - router-name

- server-name
- source-address
- tunnel
- tunnel group
- type

Mapping User Domain Names to L2TP Tunnels from Tunnel Group Tunnel Mode

To map a domain to an L2TP tunnel locally on the router from Tunnel Group Tunnel Configuration mode, perform the following steps:

1. Specify an AAA tunnel group and change the mode to Tunnel Group Tunnel Configuration mode. From Tunnel Group Tunnel Configuration mode, you can add up to 31 tunnel definitions.

```
host1(config)#aaa tunnel-group westford
host1(config-tunnel-group)#
```

2. Specify a tunnel to configure and enter Tunnel Group Tunnel Configuration mode:

```
host1(config-tunnel-group)#tunnel 3
host1(config-tunnel-group-tunnel)#
```

3. Specify a virtual router; in this case, the *default* router is specified.

```
host1(config-tunnel-group-tunnel)#router-name default
```

4. Specify the LNS endpoint address of a tunnel.

```
host1(config-tunnel-group-tunnel)#address 192.0.2.13
```

5. Specify a preference for the tunnel.

You can specify up to eight levels of preference, and you can assign the same preference to a maximum of 31 tunnels. When you define multiple preferences for a destination, you increase the probability of a successful connection.

```
host1(config-tunnel-group-tunnel)#preference 5
```

6. (Optional) Specify an authentication password for the tunnel.

```
host1(config-tunnel-group-tunnel)#password temporary
```



NOTE: If you specify a password for the LAC, the router requires that the peer (the LNS) authenticate itself to the router. In this case, if the peer fails to authenticate itself, the tunnel terminates.

7. (Optional) Specify a hostname for the LAC end of the tunnel.

The LAC sends the hostname to the LNS when communicating to the LNS about the tunnel. The hostname can be up to 64 characters (no spaces).

```
host1(config-tunnel-group-tunnel)#client-name host4.
```



NOTE: If the LNS does not accept tunnels from unknown hosts, and if no hostname is specified, the LAC uses the router name as the hostname.

8. (Optional) Specify a server name for the LNS.

This name specifies the hostname expected from the peer (the LNS) when you set up a tunnel. When this name is specified, the peer must identify itself with this name during tunnel startup. Otherwise, the tunnel is terminated. The server name can be up to 64 characters (no spaces).

```
host1(config-tunnel-group-tunnel)#server-name boston
```

9. (Optional) Specify a source IP address for the LAC tunnel endpoint. All L2TP packets sent to the peer use this source address.

By default, the router uses the virtual router's router ID as the source address. You can override this behavior for an L2TP tunnel by specifying a source address. If you do specify a source address, use the address of a stable IP interface (for example, a loopback interface). Make sure that the address is configured in the virtual router for this domain map, and that the address is reachable by the peer.

```
host1(config-tunnel-group-tunnel)#source-address 192.0.3.3
```

10. Specify a tunnel identification.

```
host1(config-tunnel-group-tunnel)#identification acton
```

The router groups L2TP sessions with the same tunnel identification into the same tunnel. This occurs only when both the destination (virtual router, IP address) and the ID are the same.

11. Specify a medium type for the tunnel. (L2TP supports only IP version 4 [IPv4].)

```
host1(config-tunnel-group-tunnel)#medium ipv4
```

12. Specify the L2TP tunnel type (RADIUS attribute 64, Tunnel-Type). Currently, the only supported value is L2TP.

```
host1(config-tunnel-group-tunnel)#type l2tp
```

13. Verify the L2TP tunnel configuration.

```
host1(config)# show aaa domain-map
```

```
Domain: westford.com; router-name: default; ipv6-router-name: default
```

Tunnel Tag	Tunnel Peer	Tunnel Source	Tunnel Type	Tunnel Medium	Tunnel Password	Tunnel Id	Tunnel Client Name
3	192.168.2.13	192.168.3.3	l2tp	ipv4	temporary	acton	host4
	Tunnel	Tunnel			Tunnel		

Tunnel Tag	Server Name	Tunnel Preference	Max Sessions	Tunnel RWS	Virtual Router
3	boston	5	0	system chooses	vr2

```

host1#show aaa tunnel-parameters
Tunnel password is 3&92k%b#q4
Tunnel client-name is <NULL>
Tunnel nas-port-method is none
Tunnel nas-port ignore disabled
Tunnel nas-port-type ignore disabled
tunnel assignmentId format is assignmentId
aaa tunnel calling number format is descriptive

```

- Related Topics**
- Mapping User Domain Names to L2TP Tunnels from Domain Map Tunnel Mode on page 359
 - aaa tunnel-group
 - address
 - client-name command
 - identification command
 - medium ipv4 command
 - password command
 - preference command
 - router-name
 - server-name
 - source-address
 - tunnel
 - type

Configuring the RX Speed on the LAC

You can configure the E Series LAC to always generate L2TP Receive (RX) Speed AVP 38. If you do not specify this command, the RX Speed AVP is generated only when the RX speed differs from the TX speed. The AVPs can be used to generate the RADIUS Connect-Info attribute [77] on the LNS.

To set up the router to always generate the Receive Speed (AVP 38), complete the following steps:

1. On the ATM subinterface, configure the advisory receive speed. See *Configuring ATM* in the *JUNOS Link Layer Configuration Guide* for information about configuring the advisory speed.

```
host1(config-subif)#atm atm1483 advisory-rx-speed 2000
```

2. Specify that the RX Speed AVP is always generated. If you do not specify this command, the RX Speed AVP is generated only when the RX speed differs from the TX speed.

```
host1(config)#l2tp rx-connect-speed-when-equal
```

- Related Topics**
- atm atm1483 advisory-rx-speed
 - l2tp rx-connect-speed-when-equal command

Managing the L2TP Destination Lockout Process

When multiple sets of tunneling parameters are available, L2TP uses a selection algorithm to choose the best tunnel for subscriber traffic. As part of this selection process, the JUNOS software's L2TP implementation includes a lockout feature in which the router locks out, or disregards, destinations that are assumed to be unavailable.

By default, when a destination becomes unavailable, L2TP locks out that destination for a lockout timeout of 300 seconds (5 minutes). After the lockout timeout expires, L2TP assumes that the destination is now available and includes the destination when performing the selection algorithm.

Tasks to manage the L2TP lockout process include:

1. Modifying the Lockout Procedure on page 366
2. Verifying That a Locked-Out Destination Is Available on page 368
3. Configuring a Lockout Timeout on page 368
4. Unlocking a Destination that is Currently Locked Out on page 368
5. Starting an Immediate Lockout Test on page 369

Modifying the Lockout Procedure

You can optionally configure your own lockout procedure by specifying the lockout timeout you want to use or enabling a lockout test, or both. When the lockout timeout expires, the destination is either immediately unlocked (if lockout testing is not enabled) or begins the lockout test to verify that the destination is available.


L2TP performs the lockout test by attempting to establish a tunnel to the unavailable destination. For the test, L2TP must first obtain the parameters for a tunnel to the destination. If no such tunnel currently exists, L2TP must wait until it receives a new session request that has tunnel parameters for the locked out destination. The destination remains locked out while L2TP waits for the tunnel parameters and becomes available only after successful completion of the lockout test. Therefore, if lockout testing is enabled, the destination is actually locked out longer than the lockout timer you specify.



NOTE: Always configure the lockout timeout to be shorter than the destruct timeout. The destruct timeout (as described in “Specifying a Destruct Timeout for L2TP Tunnels and Sessions” on page 345) overrides the lockout timeout—when the destruct timeout expires, all information about the locked out destination is deleted, including the time remaining on the destination’s lockout timeout and the requirement to run a lockout test prior to returning the destination to service. As a result, the locked out destination might be returned to service prior to expiration of your configured lockout timeout and without completion of the lockout test you specified.

Figure 9 on page 367 shows how locked-out destinations transition from a locked-out state to available status when using the default lockout configuration, a configuration that includes a modified lockout timer, and a configuration with both a modified timer and the lockout test.

Figure 9: Lockout States

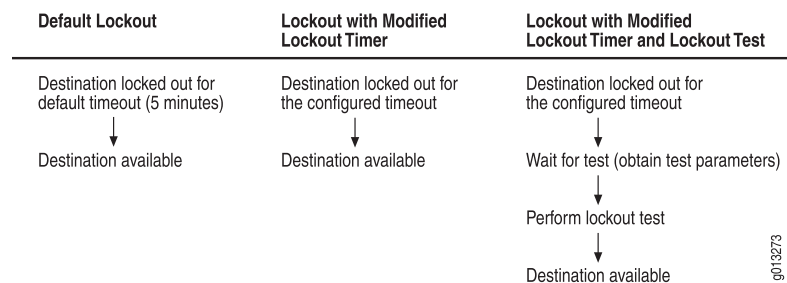

You can use the following commands to manage L2TP destination lockout and configure a lockout process that meets the needs of your network environment:

- Use the **`I2tp destination lockout-timeout`** command to modify the default lockout timeout period.
- Use the **`I2tp destination lockout-test`** command to configure L2TP to perform a lockout test, which verifies that a currently locked out destination is now available and to include it in the selection algorithm.
- Use the **`I2tp unlock destination`** command to force L2TP to immediately unlock the specified locked out destination; the destination is then considered to be available by the selection algorithm. L2TP disregards any time remaining in the existing lockout timeout and also disregards the lockout test (if configured).
- Use the **`I2tp unlock-test destination`** command to force L2TP to immediately begin the lockout testing procedure for the specified destination; any time remaining in the existing lockout timeout is not taken into account.
- Use the **`show I2tp`** and **`show I2tp destination lockout`** commands to view information about the L2TP configuration and statistics.

Verifying That a Locked-Out Destination Is Available

You can use the **l2tp destination lockdown-test** command to configure L2TP to test locked-out destinations; this verifies that a previously locked-out destination is available before the router changes the destination's status.

- To verify the availability of locked out destinations:

```
host1(config)#l2tp destination lockdown-test
```

Configuring a Lockout Timeout

You use the **l2tp destination lockdown-timeout** command to configure the amount of time (in seconds) between when an L2TP destination is found to be unavailable and when it is eligible for unlocking. When the timeout period expires, L2TP either begins the lockdown test procedure (if configured to do so) or immediately returns the destination to available state.



BEST PRACTICE: Always configure the lockdown timeout to be shorter than the destruct timeout. The destruct timeout (as described in “Specifying a Destruct Timeout for L2TP Tunnels and Sessions” on page 345) overrides the lockdown timeout—when the destruct timeout expires, all information about the locked out destination is deleted, including the time remaining on the destination's lockdown timeout and the requirement to run a lockdown test prior to returning the destination to service.

You can specify a lockdown timeout in the range 60–3600 seconds (1 minute–1 hour). The router uses a timeout value of 300 seconds by default.

- To configure an L2TP lockdown timeout:

```
host1(config)#l2tp destination lockdown-timeout 500
```

The new lockdown timeout only affects future locked-out destinations; it does not affect destinations that are currently locked out.

Unlocking a Destination that is Currently Locked Out

You use the **l2tp unlock destination** command to force L2TP to immediately unlock the specified L2TP destination, which is currently locked out and unavailable. L2TP then considers the destination to be available. Any remaining lockdown time and the lockdown test setting (if configured) are not taken into account.

You must be at privilege level 10 or higher to use this command.

- To unlock a currently locked-out destination:

```
host1(config)#l2tp unlock destination ip 192.168.1.98
```


Starting an Immediate Lockout Test

You use the **`l2tp unlock-test destination`** command to force L2TP to immediately start the lockout test for the specified destination—any remaining lockout time for the destination is ignored.

You must be at privilege level 10 or higher to use this command.



NOTE: If lockout testing is not configured, this command immediately unlocks the destination and L2TP then considers the destination to be available

- To force an immediate lockout test for a specific destination:

```
host1(config)#l2tp unlock-test destination ip 192.169.110.8
```

Managing Address Changes Received from Remote Endpoints

A remote endpoint can use the Start-Control-Connection-Reply (SCCRP) packets that it sends to the E Series LAC to change the address that the LAC uses to communicate with the endpoint. By default, the LAC accepts the change and uses the new address to communicate with the endpoint. However, you can configure the LAC to ignore or reject the requested change. Setting up the LAC to ignore address changes in SCCRPs enables the router to construct tunnels with separate receive and transmit addresses and to avoid problems due to a misconfiguration. Three possible configurations are available:

- Default configuration—The E Series LAC accepts the change from the endpoint. The LAC then sends all subsequent packets to, and accepts packets from, the new address.
- Ignore configuration (specified by the **`l2tp ignore-transmit-address-change`** command)—The LAC continues to send packets to the original address but accepts packets from the new address.

```
host1(config)#l2tp ignore-transmit-address-change
```

Use the **`ip-address`** or **`udp-port`** keyword to ignore the specific address component. Omit the keywords to ignore the entire address change in the SCCRPs packet.

- Reject configuration (specified by the **`l2tp reject-transmit-address-change`** command)—The LAC sends a Stop-Control-Connection-Notification (StopCCN) to the original address, then terminates the connection to the endpoint.

```
host1(config)#l2tp reject-transmit-address-change ip-address
```

Use the **`ip-address`** or **`udp-port`** keyword to reject the specific address component. Omit the keywords to reject the entire address change in the SCCRPs packet.

The reject specification takes precedence over the ignore specification.

The router accepts a change in receive address only once, during the tunnel establishment phase, and only on an SCCRP packet. Subsequent changes result in the router dropping packets. Any changes do not affect established tunnels.

Use the **show l2tp** command to display the SCCRP address change configuration.

- Related Topics**
- l2tp ignore-transmit-address-change
 - l2tp reject-transmit-address-change

Configuring LAC Tunnel Selection Parameters

This section presents the capabilities of the LAC's tunnel selection process. L2TP allows you to specify:

- Up to 31 destinations for a domain.
- Up to eight levels of preference. Preference indicates the order in which the router attempts to connect to the destinations specified for a domain. Zero (0) is the highest level of preference.
- Up to 31 destinations for a single preference level.

For information about setting up destinations and preference levels for a domain, see “Mapping a User Domain Name to an L2TP Tunnel Overview” on page 358.

When the E Series LAC determines that a PPP session should be tunneled, it selects a tunnel from a set of tunnels associated with either the PPP user or the PPP user's domain. The router provides the following methods for selecting tunnels:

- Tunnel selection failover between preference levels (the default behavior)
 - Tunnel selection failover within a preference level
 - Maximum sessions per tunnel
 - Weighted load balancing
1. Configuring the Failover Between Preference Levels Method on page 370
 2. Configuring the Failover Within a Preference Level Method on page 371
 3. Configuring the Maximum Sessions per Tunnel on page 372
 4. Configuring the Weighted Load Balancing Method on page 372

Configuring the Failover Between Preference Levels Method

When a user tries to log into a domain, in the default method, the router attempts to connect to a destination in that domain with the highest preference level. If more than one destination in the preference level is considered reachable, the router randomly selects a destination and attempts to contact it. If the router is unsuccessful, it marks the destination as unreachable and does not try to connect to that destination for five minutes. The router then moves to the next lower preference level and repeats

the process. The router makes up to eight attempts to connect to a destination for a domain—one attempt for each preference level.

If all destinations at a preference level are marked as unreachable, the router chooses the destination that failed first and tries to make a connection. The key is to understand that the router chooses a single destination at each level of preference, even if all destinations have recently failed. Thus the 5-minute timer normally used to reinstate failed destinations is ignored under certain conditions.

For example, suppose you have three destinations for a domain: A, B, and C. You assign the following preferences:

- A, B, and C at preference 0
- A, B, and C at preference 1
- A, B, and C at preference 2

A, B, and C are all considered reachable.

If a PPP user tries to connect to the domain, suppose the router randomly selects destination A from preference 0. If this connection attempt fails, the router excludes destination A for 5 minutes and goes to the next level (preference 1). From here, it randomly selects destination B, one of the two remaining choices. If the second connection attempt also fails, the router excludes destination B, as well as destination A, and attempts to connect to destination C, the only destination available with preference 2. The router has had an opportunity to connect to every destination available for the domain.

Support for multiple destinations affects the procedure for mapping a user domain name to an L2TP tunnel. To learn how to complete this mapping, see “Mapping a User Domain Name to an L2TP Tunnel Overview” on page 358.

- To enable tunnel selection failover between preference levels:
This tunnel selection method is the default method. If you do not set any tunnel selection parameters, the router uses this method.

Configuring the Failover Within a Preference Level Method

You use the **l2tp fail-over-within-preference** command to enable tunnel selection failover within a preference level. In this selection method, if the router tries to connect to a destination and is unsuccessful, it selects a new destination at the same preference level. If all destinations at a preference level are marked as unreachable, the router does not attempt to connect to a destination at that level. It drops to the next lower preference level to select a destination.

If all destinations at all preference levels are marked as unreachable, the router chooses the destination that failed first and tries to make a connection. If the connection fails, the router rejects the PPP user session without attempting to contact the remote router.

For example, suppose there are four tunnels for a domain: A, B, C, and D. All tunnels are considered reachable, and the preference levels are assigned as follows:

- A and B at preference 0
- C and D at preference 1

When the router attempts to connect to the domain, suppose it randomly selects tunnel B from preference 0. If it fails to connect to tunnel B, the router excludes tunnel B for five minutes and attempts to connect to tunnel A. If this attempt also fails, the router drops to preference 1. Then suppose the router selects tunnel C. If it also fails to connect to tunnel C, the router excludes tunnel C for five minutes and attempts to connect to tunnel D.

- To enable tunnel selection failover within a preference level:

```
host1(config)#l2tp fail-over-within-preference
```

Configuring the Maximum Sessions per Tunnel

You can configure the maximum number of sessions per tunnel, either through a RADIUS server or the command-line interface. If you set the maximum sessions per tunnel parameter, the router takes the setting into consideration when it selects a tunnel. If a randomly selected tunnel has a current session count equal to its maximum session count, the router does not attempt to contact that tunnel. Instead, it makes an alternate tunnel selection from the set of reachable tunnels at the same preference level. If no additional reachable tunnels exist at the current preference level, the router drops to the next lower preference level to make the next selection. This process is consistent, regardless of which fail-over scheme is currently running on the router. A tunnel without a configured maximum sessions value has no upper limit on the number of sessions it can support.

The router uses a default value of 0 (zero), which allows unlimited sessions in the tunnel.

- To configure the maximum sessions per tunnel.

```
host1(config)#aaa domain-map lacOne  
host1(config-domain-map)#tunnel 1  
host1(config-domain-map-tunnel)#max-sessions 1500
```

Configuring the Weighted Load Balancing Method

With the weighted load-balancing method, the router uses the maximum sessions per tunnel to choose among multiple tunnels that share the same preference level.

The weight of a tunnel is proportional to its maximum session limit and the maximum session limits of the other tunnels at the same preference level. The tunnel with the largest maximum session value has the largest weight; the tunnel with the next largest maximum session value has the next largest weight, down to the tunnel with the smallest maximum session value that has the smallest weight. The router uses a round-robin tunnel selection method by default.

- To configure the router to base tunnel selection within a preference level on the maximum sessions per tunnel.

```
host1(config)#l2tp weighted-load-balancing
```


Chapter 13

Configuring an L2TP LNS

An L2TP network server (LNS) is a node that acts as one side of an L2TP tunnel endpoint and is a peer to the LAC. An LNS is the logical termination point of a PPP connection that is being tunneled from the remote system by the LAC. You can configure your E Series router to function as an LNS.

This chapter includes the following topics that provide information for configuring an L2TP LNS on the E Series router:

- LNS Configuration Prerequisites on page 375
- Configuring an LNS on page 376
- Creating an L2TP Destination Profile on page 378
- Creating an L2TP Host Profile on page 379
- Configuring the Maximum Number of LNS Sessions on page 380
- Configuring the RADIUS Connect-Info Attribute on the LNS on page 380
- Overriding LNS Out-of-Resource Result Codes 4 and 5 on page 381
- Selecting Service Modules for LNS Sessions Using MLPPP on page 382
- Enabling Tunnel Switching on page 384
- Creating Persistent Tunnels on page 385
- Testing Tunnel Configuration on page 385
- Managing L2TP Destinations, Tunnels, and Sessions on page 385
- Configuring Disconnect Cause Information on page 386
- Configuring the Receive Window Size on page 388
- Configuring Peer Resynchronization on page 391
- Configuring L2TP Tunnel Switch Profiles on page 394
- Configuring the Transmit Connect Speed Calculation Method on page 400
- PPP Accounting Statistics on page 408

LNS Configuration Prerequisites

Before you begin configuring the router as an LNS, perform the following steps:

1. Create a virtual router.

```
host1(config)#virtual-router west
```

2. Assign a router ID IP address, such as that for a loopback interface, to the virtual router. This address must be reachable by the L2TP peer.

```
host1:west(config)#ip router-id 10.10.45.3
```



CAUTION: You must explicitly assign a router ID to a virtual router rather than using a dynamically assigned router ID. A fixed ID is required because every time the ID changes, L2TP must disconnect all existing tunnels and sessions that use the old ID. If you use a dynamically assigned router ID, the value can change without warning, leading to failure of all L2TP tunnels and sessions. Also, the router could dynamically assign a router ID that is not reachable by the L2TP peer, causing a complete failure of L2TP. You must set the router ID even if you specified a source address in the domain map or a local address in the host profile.

- Related Topics**
- virtual-router
 - ip router-id command

Configuring an LNS

When you configure an LNS, you can configure it to accept calls from any LAC.



NOTE: If there is no explicit LNS configuration on the router, the UDP port used for L2TP traffic is closed, and no tunnels or sessions can be established.

To enable an LAC to connect to the LNS, you must create the following profiles:

- An L2TP destination profile—Defines the location of each LAC
- An L2TP host profile—Defines the attributes used when communicating with an LAC



NOTE: If you remove a destination profile or modify attributes of a host profile, all tunnels and sessions using the profile will be dropped.



NOTE: If you are using shared tunnel-server ports, you must configure the shared tunnel-server ports before you configure Layer 2 Tunneling Protocol (L2TP) network server (LNS) support. You use the **tunnel-server** command in Global Configuration mode to specify the physical location of the shared tunnel-server port that you want to configure.

See virtual-router for additional information about the **tunnel-server** command and shared tunnel-server ports.

To configure an LNS, perform the following steps:

1. Create a destination profile that defines the location of the LAC, and access L2TP Destination Profile Configuration mode. See “Creating an L2TP Destination Profile” on page 378 .

```
host1:boston(config)#l2tp destination profile boston4 ip address 192.168.76.20
host1:boston(config-l2tp-dest-profile)#
```

2. Define the L2TP host profile and enter L2TP Destination Profile Host Configuration mode. See “Creating an L2TP Host Profile” on page 379 .

```
host1:boston(config-l2tp-dest-profile)#remote host default
host1:boston(config-l2tp-dest-profile-host)#
```

3. (Optional) Assign a profile name for a remote host.

```
host1:boston(config-l2tp-dest-profile-host)#profile georgeProfile1
```

4. (Optional) Disable the use of proxy LCP when connecting to the selected host.

```
host1(config-l2tp-dest-profile-host)#disable proxy lcp
```

5. (Optional) Enable the use of proxy authentication when connecting to the selected host.

```
host1(config-l2tp-dest-profile-host)#enable proxy authenticate
```

6. (Optional) Specify the local hostname to be used in any hostname AVP sends to the LAC. By default, the router name is used as the local hostname.

```
host1(config-l2tp-dest-profile-host)#local host andy
```

7. (Optional) Specify the local IP address to be used in any packets sent to the LAC. By default, the router ID is used.

```
host1(config-l2tp-dest-profile-host)#local ip address 192.168.23.1
```

8. (Optional) Specify the shared secret used to authenticate the tunnel. By default, there is no tunnel authentication.

```
host1:boston(config-l2tp-dest-profile-host)#tunnel password sacco
```

9. (Optional) Specify that the LNS override out-of-resource result codes 4 and 5 with code 2 for interoperation with third-party implementations that do not support codes 4 and 5.

```
host1:boston(config-l2tp-dest-profile-host)#session-out-of-resource-result-code-override
```

10. (Optional) Specify that L2TP create an MLPPP interface when LCP proxy data is not forwarded from the LAC.

For example, the MLPPP interface is created if the LAC does not send the initial received or last received LCP configuration request. If full LCP proxy data is available, this command is ignored.

```
host1:boston(config-l2tp-dest-profile-host)#default-upper-type mlppp
```



NOTE: When acting as the LNS, the E Series router supports dialed number identification service (DNIS). With DNIS, if users have a called number associated with them, the router searches the domain map for the called number. If it finds a match, the router uses the matching domain map entry information to authenticate the user. If the router does not find a match, it searches the domain map using normal processing. See “Using DNIS” on page 9 in “Configuring Remote Access” on page 3.

- Related Topics**
- Creating an L2TP Destination Profile on page 378
 - Creating an L2TP Host Profile on page 379
 - Configuring the Maximum Number of LNS Sessions on page 380
 - Configuring the RADIUS Connect-Info Attribute on the LNS on page 380
 - Overriding LNS Out-of-Resource Result Codes 4 and 5 on page 381
 - Selecting Service Modules for LNS Sessions Using MLPPP on page 382
 - `bundled-group-id`
 - `bundled-group-id-overrides-mlppp-ed`
 - `default-upper-type mlppp` command
 - `disable proxy lcp`
 - `enable proxy authenticate`
 - `l2tp destination profile`
 - `local host`
 - `local ip address` command
 - `max-sessions`
 - `radius connect-info-format`
 - `remote host`
 - `session-out-of-resource-result-code-override`
 - `tunnel password`

Creating an L2TP Destination Profile

You use the **`l2tp destination profile`** command to create the destination profile that defines the location of the LAC, and to access L2TP Destination Profile Configuration mode.

If no virtual router is specified with the command, the current virtual router context is used.

If the destination address is 0.0.0.0, then any LAC that can be reached via the specified virtual router is allowed to access the LNS. If the destination address is nonzero, then it must be a host-specific IP address.

- To create a destination profile:

```
host1:boston(config)#l2tp destination profile boston ip address 10.10.76.12
host1:boston(config-l2tp-dest-profile)#
```



NOTE: When you change an L2TP destination profile, you must wait for the router to delete all L2TP tunnels associated with the deleted profile before you create the new profile.

If you remove a destination profile, all tunnels and sessions using that profile will be dropped.

- Related Topics**
- Creating an L2TP Host Profile on page 379
 - remote host

Creating an L2TP Host Profile

Use the **remote host** command to define the L2TP host profile and access L2TP Destination Profile Host Configuration mode.

- Each L2TP destination profile can have multiple L2TP host profiles.
- For an LAC to connect to an LNS, the appropriate L2TP destination profile *must* have at least one L2TP host profile.
- If you specify any name other than *default* for the remote host, then the LAC must supply the specified hostname in order for the tunnel to be set up. The remote hostname is matched against the hostname AVP in the received Start-Control-Connection-Request (SCCRQ).
- The remote hostname can be up to 64 characters (no spaces).
- Example

```
host1:boston(config)#l2tp destination profile boston1 ip address 192.168.76.12
host1:boston(config-l2tp-dest-profile)#remote host default
host1(config-l2tp-dest-profile-host)#
```

- Use the **no** version to remove the L2TP host profile.



NOTE: If you modify any attributes of a host profile, all tunnels and sessions using that profile will be dropped.

- Related Topics**
- Creating an L2TP Destination Profile on page 378
 - l2tp destination profile

Configuring the Maximum Number of LNS Sessions

You can use the **max-sessions** command in both L2TP Destination Profile Configuration mode and L2TP Destination Profile Host Configuration mode to configure the number of sessions allowed by the L2TP network server (LNS).

The LNS uses a two-step process to ensure that the maximum number of allowed sessions is not exceeded. When a session is requested, the LNS first checks the maximum sessions set for the L2TP destination profile. If no limit is set, or if the current count is less than the configured limit, the LNS then performs the same check on the L2TP destination host profile limit. If the current count is also less than the L2TP destination host profile limit, then the new session can be established. If a session request exceeds either of the max-sessions settings, the LNS rejects the session.



NOTE: New sessions are rejected once the chassis-wide session limit is exceeded, even if the destination profile or host profile maximum session limit is not exceeded. For information about the maximum number of L2TP sessions supported per chassis, see *JUNOS Release Notes, Appendix A, System Maximums*.

- To set the maximum sessions allowed for the specified destination, use the **max-sessions** command in L2TP Destination Profile Configuration mode:


```
host1(config)#l2tp destination profile westford ip address 10.10.21.2
host1(config-l2tp-destination-profile)#max-sessions 20000
```
- To set the maximum session allowed for the specified host, use the **max-sessions** command in L2TP Destination Profile Host Configuration mode:


```
host1(config-dest-profile)#remote host default
host1(config-l2tp-destination-profile-host)#max-sessions 20000
```

- Related Topics**
- max-sessions

Configuring the RADIUS Connect-Info Attribute on the LNS

You can configure the LNS to generate the RADIUS Connect-Info attribute [77]. Service providers can then use the information in the RADIUS attribute to identify a customer's service.

On the LNS, the Connect-Info attribute is based on the L2TP connect-speed AVPs received from the LAC. The LNS does not generate the attribute by default. The format

of the Connect-Info attribute is as follows, where the TX speed and RX speed are equal to the respective L2TP AVPs:

```
tx-speed [ /rx-speed ]
```

The TX speed is always included in the attribute when the speed is not zero; however, inclusion of the RX speed depends on the keyword you use with the command.

- Use the **l2tp-connect-speed** keyword to specify that the RX speed is only included when it is not zero and also is different than the TX speed.

```
host1(config)#radius connect-info-format l2tp-connect-speed
```

- Use the **l2tp-connect-speed-rx-when-equal** keyword to specify that the RX speed is always included when it is not zero.

```
host1(config)#radius connect-info-format l2tp-connect-speed-rx-when-equal
```

Related Topics ■ radius connect-info-format

Overriding LNS Out-of-Resource Result Codes 4 and 5

When the number of L2TP sessions reaches the configured maximum value, the LNS sends an out-of-resource result code (4 or 5) in a CDN (Call-Disconnect-Notify) message to the LAC. This signals the LAC to fail over to another LNS that has the resources for more sessions.

Some third-party LAC implementations fail over only when they receive result code 2 sent in the CDN from the LNS. You can override result codes 4 and 5 with result code 2 on the LNS to enable such routers to fail over to another LNS. These codes have the following meanings:

- 2—Call disconnected for the reason indicated in error code
- 4—Call failed due to lack of appropriate facilities being available (temporary condition)
- 5—Call failed due to lack of appropriate facilities being available (permanent condition)

The following sections describe how to override the result codes and how to display the current code values.

- Overriding the Result Codes on page 381
- Displaying the Current Override Setting on page 382

Overriding the Result Codes

You can override the out-of-resource result codes 4 and 5 by issuing the **session-out-of-resource-result-code-override** command on the LNS.

- To override result codes 4 and 5:

```
host1:boston(config-l2tp-dest-profile-host)#session-out-of-resource-result-code-override
```

Displaying the Current Override Setting

You can view the current override setting for the LNS result codes in the L2TP destination profile.

- To display the current override setting:

```
ERX(config)#show l2tp destination profile boston
L2TP destination profile boston
Configuration
  Destination address
    Transport ipUdp
    Virtual router default
    Peer address 10.10.76.12
Statistics
  Destination profile current session count is 0
Host profile attributes
  Remote host is LAC
  Configuration
    Tunnel password is TunnelPass
    Local host name is LNS
    Local ip address is 46.1.1.2
    Disconnect-cause avp is enabled
    Tunnels are single-shot
    Override out-of-resource-result-code is enabled
Statistics
  Current session count is 0
1 L2TP host profile found
```

- Related Topics**
- session-out-of-resource-result-code-override
 - show l2tp destination profile

Selecting Service Modules for LNS Sessions Using MLPPP

You can install multiple service modules in an E Series router deployed as an LNS where the tunnel sessions carry MLPPP. To use an LNS, at least one Service line module (SM), ES2-S1 Service IOA, or a module that supports the use of shared tunnel-server ports must be installed in the E Series router.

The router selects service modules based on the LNS sessions that underlie the PPP link interfaces of an MLPPP bundle, also known as *bundled sessions*. To determine the appropriate SM where it places the first bundled session for an MLPPP bundle, the router uses a load-balancing mechanism. After the router determines the appropriate SM, it places all sessions for the same bundle on the same SM. By default, the router determines *bundled membership* based on the endpoint discriminator that the LNS receives from the LAC in the proxy LCP information.

For example, an ERX1440 Broadband Services Router has service modules installed in slots 4, 9, and 12. Using the load-balancing mechanism, the router determines that the SM in slot 4 can accommodate the first bundled session for MLPPP bundle A, and places it there. The first bundled session for bundle A has an endpoint discriminator of 5. The router subsequently places all bundled sessions for bundle A (which have an endpoint discriminator of 5) on the SM in slot 4.

When the SM on which the bundled sessions reside has no more space for additional sessions, the router refuses the L2TP session. This can happen even when other service modules installed in the router have available space.

For more information about endpoint discriminators, see the *Configuring Multilink PPP* chapter in *JUNOS Link Layer Configuration Guide*.

Assigning Bundled Group Identifiers

In some cases, an endpoint discriminator is not available for the LNS to use to identify the links in a bundled session.

This situation might occur when:

- PPP clients provide endpoint discriminators with null values.
- PPP clients do not provide an endpoint discriminator option when negotiating LCP with the LAC.
- The LAC does not include a endpoint discriminator option in the LCP proxy AVPs.

The router places all bundled sessions without endpoint discriminators on the same SM. However, if there are many such bundled sessions, the load-balanced distribution of LNS sessions across the service modules can deteriorate because the router places all bundled sessions on the same SM without evenly distributing the load.

The **bundled-group-id** command enables you to correct this situation by assigning a numeric bundled group identifier for the router to use when the endpoint discriminator is unavailable to identify the bundled membership. The router places bundled sessions with the same bundled group identifier on the same SM in the same way that it does with endpoint discriminators.

The bundled group identifier applies to the entire router; therefore, if you assign the same bundled group identifier for different L2TP destination host profiles, the router places all of the bundled sessions with the same bundled group identifier on the same SM.



NOTE: We recommend that you assign bundled group identifiers only when you are certain that endpoint discriminators are unavailable to identify bundle membership.

- To assign a numeric bundled group identifier:

```
host1:boston(config-l2tp-dest-profile-host)#bundled-group-id 4
```

Overriding All Endpoint Discriminators



NOTE: We strongly recommend that you use this feature only with the support of JTAC.

You can also configure the router to ignore the value of all endpoint discriminators when it selects a SM and to use only the bundled group identifier that you assigned by issuing the **bundled-group-overrides-mlppp-ed** command.

Issuing the **bundled-group-id** and **bundled-group-id-overrides-mlppp-ed** commands together forces the router to place the bundled sessions on the same SM when a PPP client incorrectly specifies different endpoint discriminators for links in the same bundle.

- To configure the router to ignore the value of all endpoint discriminators:

```
host1:boston(config-l2tp-dest-profile-host)#bundled-group-id-overrides-mlppp-ed
```

Related Topics

- [bundled-group-id](#)
- [bundled-group-id-overrides-mlppp-ed](#)

Enabling Tunnel Switching

L2TP tunnel switching allows you to switch packets between one session terminating at an L2TP LNS and another session originating at an L2TP LAC. What distinguishes a tunnel-switched LAC from a conventional one is that there are two interface columns: one for the incoming session (LNS) and one for the outgoing session (LAC). The router forwards traffic from the incoming session to the outgoing session and vice versa.

You can select tunnel switching on a per-chassis basis. By default, tunnel switching is disabled. This preserves current behavior and prevents inadvertent attempts to switch tunnels.



NOTE: Each individual L2TP session involved in tunnel switching is counted toward the maximum number of sessions supported on an E Series router.

- To enable tunnel switching:

```
host1(config)#l2tp tunnel-switching
```


Related Topics ■ l2tp tunnel-switching

Creating Persistent Tunnels

The E Series router supports persistent tunnels. A persistent tunnel is one that is configured to remain available. Persistent tunnels have only local significance; that is, they apply only to the end of the tunnel where they are set. If the other end of the tunnel chooses to terminate the tunnel, the tunnel is removed.

- To create a persistent tunnel, you configure an idle-timeout value of zero.

```
host1(config)#l2tp tunnel idle-timeout 0
```

Related Topics ■ l2tp tunnel idle-timeout

Testing Tunnel Configuration

You can use the **l2tp tunnel test** command to force the establishment of a tunnel—this enables you to verify both the tunnel configuration and connectivity.

This command supports tunnel initiation: incoming calls on the LAC; outgoing calls on the LNS. The command does not support tunnel respondent: outgoing calls on the LAC; incoming calls on the LNS.

- To test a tunnel configuration:

```
host1#l2tp tunnel test portland.com gold
```

Related Topics ■ l2tp tunnel test

Managing L2TP Destinations, Tunnels, and Sessions

When the router is established as an LNS you can manage the destinations, tunnels and sessions.

- Enable the verification of data integrity via UDP.
- Specify the time period for which the router maintains dynamic destinations, tunnels, or sessions after termination.
- Prevent the creation of new sessions, tunnels, and destinations.
- Close and reopen all or selected destinations, tunnels, and sessions.

- Configure drain timeout operations, which control the amount of time a disconnected LAC tunnel waits before restarting after receiving a restart request.
- Configure how many times the router retries a transmission if the initial attempt is unsuccessful.

Related Topics

- Generating UDP Checksums in Packets to L2TP Peers on page 345
- Specifying a Destruct Timeout for L2TP Tunnels and Sessions on page 345
- Preventing Creation of New Destinations, Tunnels, and Sessions on page 346
- Shutting Down Destinations, Tunnels, and Sessions on page 348
- Specifying the Number of Retransmission Attempts on page 349

Configuring Disconnect Cause Information

You can configure an E Series LNS to convey PPP-related disconnect cause information to its L2TP peer. Enabling an LNS to send disconnect cause information to an LAC is particularly useful in an environment where the LAC initiates tunnels without a client's request, knowledge, or approval. In this type of environment, all PPP signaling for the tunnel session takes place between the LNS and the client, without active participation of the LAC. As a result, the LAC is not aware of the reason that a session has disconnected.



NOTE: An E Series LAC does not send PPP Disconnect Case Code AVPs to an LNS. In the event that a third-party LAC does send the AVP to an E Series LNS, the LNS discards the AVP.

1. Generating the Disconnect Cause AVP Globally on page 386
2. Generating the Disconnect Cause AVP with a Host Profile on page 387
3. Enabling RADIUS Accounting for Disconnect Cause on page 387
4. Displaying Disconnect Cause Statistics on page 387

Generating the Disconnect Cause AVP Globally

You use the **l2tp disconnect-cause** command to specify that the LNS include the PPP Disconnect Cause Code AVP in all L2TP Call-Disconnect-Notify (CDN) messages that it sends to the LAC. For example, this feature enables the LAC to obtain information about the cause of a session disconnection,

- To enable disconnect cause generation chassis-wide on the LNS:

```
host1(config)#l2tp disconnect-cause
```



NOTE: Sessions for which the AVP generation is enabled by the host-profile-specific **disconnect-cause** command continue to generate the AVP.

Generating the Disconnect Cause AVP with a Host Profile

You use the **disconnect-cause** command in L2TP Destination Profile Host Configuration mode to specify that the E Series LNS generate PPP Disconnect Cause Code AVPs. This command pertains only to L2TP sessions to which the L2TP destination host profile applies. The AVP is included in all L2TP CDN messages that the LNS sends to an LAC for covered sessions.



NOTE: This command is used only for dial-in sessions; use the **l2tp disconnect-cause** command in Global Configuration mode to generate PPP Disconnect Cause Code AVPs for dial-out sessions.

- To enable disconnect cause generation for all tunnels that use a particular host profile on the LNS:

```
host1(config-l2tp-dest-profile-host)#disconnect-cause
```

Enabling RADIUS Accounting for Disconnect Cause

You use the **radius include l2tp-ppp-disconnect-cause acct-stop enable** command to specify that the Disconnect-Cause RADIUS attribute (VSA 26-51) is generated and included in RADIUS acct-stop and acct-tunnel-link-stop records. RADIUS VSA 26-51 is not included in the accounting records by default.

At the LAC, this accounting reports remotely generated disconnect cause information received from the LNS. At the LNS, the accounting reports locally generated disconnect cause information.

- To enable disconnect cause accounting:

```
host1(config)#radius include l2tp-ppp-disconnect-cause acct-stop enable
```

Displaying Disconnect Cause Statistics

You can display chassis-wide summary statistics for all disconnect cause information received by the LAC, sorted by code number.

- To display summary statistics for disconnect cause information:

```
host1(config)#show l2tp received-disconnect-cause-summary
```

Configuring the Receive Window Size

You can configure the L2TP receive window size (RWS) for an L2TP tunnel. L2TP uses the RWS to implement a sliding window mechanism for the transmission of control messages.

When you configure the RWS, you specify the number of packets that the L2TP peer can transmit without receiving an acknowledgment from the router. If the RWS is not configured, the router determines the RWS and uses this value for all new tunnels on both the LAC and the LNS.

You can configure the L2TP RWS in the following ways:

- Configure the systemwide default RWS setting for a tunnel on both the LAC and the LNS by using the **l2tp tunnel default-receive-window** command (in global Configuration mode).
 - Configure the RWS for a tunnel on the LAC by using either the **receive-window** command (in Domain Map Tunnel Configuration mode) or by including the L2tp-Recv-Window-Size RADIUS attribute (VSA 26-54) in RADIUS Access-Accept messages.
 - Configure the RWS for all tunnels that use a particular host profile on the LNS by using the **receive-window** command (in L2TP Destination Profile Host Configuration mode).
1. Configuring the Default Receive Window Size on page 388
 2. Configuring the Receive Window Size on the LAC on page 389
 3. Configuring the Receive Window Size on the LNS on page 390

Configuring the Default Receive Window Size

Use the **l2tp tunnel default-receive-window** command to configure the default L2TP RWS for a tunnel on both the LAC and the LNS. The default L2TP RWS is the number of packets that the L2TP peer can transmit without receiving an acknowledgment from the router. The only supported value is 4.

To configure the default RWS setting:

1. From Global Configuration mode, set the L2TP default RWS. The only value supported for the default RWS is 4.

```
host1(config)#l2tp tunnel default-receive-window 4
```

The router uses this RWS value for all new tunnels on both the LAC and the LNS. The new command has no effect on previously configured tunnels.

2. (Optional) Use the **show l2tp** command to verify the default RWS configuration.

```
host1#show l2tp
Configuration
  L2TP administrative state is enabled
  Dynamic interface destruct timeout is 600 seconds
  Data packet checksums are disabled
```

```

Receive data sequencing is not ignored
Tunnel switching is disabled
Retransmission retries for established tunnels is 5
Retransmission retries for not-established tunnels is 5
Tunnel idle timeout is 60 seconds
Failover within a preference level is disabled
Weighted load balancing is disabled
Tunnel authentication challenge is enabled
Calling number avp is enabled
Ignore remote transmit address change is disabled
Disconnect cause avp is disabled
Default receive window size is 4

```

Sub-interfaces	total	active	failed	auth-errors
Destinations	0	0	0	n/a
Tunnels	0	0	0	0
Sessions	0	0	0	n/a
Switched-sessions	0	0	0	n/a

Configuring the Receive Window Size on the LAC

Use the **receive-window** command to configure the L2TP RWS for a tunnel on the LAC. Use the **no** version of the command to revert to the systemwide RWS setting configured with the **l2tp tunnel default-receive-window** command.



TIP: The RWS setting must be the same for all users of the same tunnel.

If you modify the RWS setting for an existing tunnel, subsequent tunnel users might be not be able to log in if their RWS setting conflicts with the new RWS setting for the tunnel.

To configure the RWS for a tunnel on the LAC:

1. Access Domain Map Tunnel Configuration mode as described in “Mapping a User Domain Name to an L2TP Tunnel Overview” on page 358 . For example:

```

host1(config)#aaa domain-map fms.com
host1(config-domain-map)#router-name westford
host1(config-domain-map)#tunnel 3
host1(config-domain-map-tunnel)#

```

2. From Domain Map Tunnel Configuration mode, set the tunnel RWS. The only value supported for the tunnel RWS is 4, and it must be the same for all users of the same tunnel.

```

host1(config-domain-map-tunnel)#receive-window 4

```

3. (Optional) Use the **show aaa domain-map** command to verify the RWS configuration.

```

host1#show aaa domain-map

```

```

Domain: fms.com; router-name: westford; ipv6-router-name: default
Tunnel

```

Tunnel Tag	Tunnel Peer	Tunnel Source	Tunnel Type	Tunnel Medium	Tunnel Password	Tunnel Id	Client Name
3	<null>	<null>	l2tp	ipv4	<null>	<null>	<null>
Tunnel Tag	Server Name	Tunnel Preference	Tunnel Max Sessions	Tunnel RWS			
3	<null>	2000	0	4			

You can also configure the RWS for a tunnel on the LAC by including the L2tp-Recv-Window-Size RADIUS attribute (VSA 26-54) in RADIUS Access-Accept messages. For more information about RADIUS Access-Accept messages, see “Configuring RADIUS Attributes” on page 171. For more information about the L2tp-Recv-Window-Size attribute, see “RADIUS IETF Attributes” on page 259.

Configuring the Receive Window Size on the LNS

Use the **receive-window** command to configure the L2TP RWS for a tunnel on the LNS. Use the **no** version of the command to revert to the systemwide RWS setting configured with the **l2tp tunnel default-receive-window** command.

To configure the RWS for a tunnel on the LNS:

1. Access L2TP Destination Profile Host Configuration mode. For example:

```
host1(config)#virtual-router fms02
host1:fms02(config)#l2tp destination profile fms02 ip address 192.168.5.61
host1:fms02(config-l2tp-dest-profile)#remote host fms03
host1:fms02(config-l2tp-dest-profile-host)#
```

2. From Destination Profile Host Configuration mode, set the tunnel RWS. The only value supported for the tunnel RWS is 4.

```
host1:fms02(config-l2tp-dest-profile-host)#receive-window 4
```



TIP: If you modify the RWS setting of a host profile for an existing tunnel, the router drops the tunnel. This action is consistent with router behavior when you modify an L2TP host profile.

3. (Optional) Use the **show l2tp destination profile** command to verify the RWS configuration.

```
host1:fms02#show l2tp destination profile fms02
L2TP destination profile fms02
Destination address
  Transport ipUdp
  Virtual router fms02
  Peer address 192.168.5.61
Host profile attributes
  Remote host is fms03
  Receive window size is 4
1 L2TP host profile found
```

Configuring Peer Resynchronization

The JUNOS software enables you to configure the peer resynchronization method you want the router to use. Peer resynchronization enables L2TP to recover from a router warm start and to allow an L2TP failed endpoint to resynchronize with its peer non-failed endpoint.

L2TP peer resynchronization:

- Prevents the non-failed endpoint from prematurely terminating a tunnel while the failed endpoint is recovering
- Reestablishes the sequence numbers required for the operation of the L2TP control protocol
- Resolves inconsistencies in the tunnel and session databases of the failed endpoint and the non-failed endpoint

To ensure successful peer resynchronization between endpoints, the non-failed endpoint must support a complete RFC-compliant L2TP implementation.

JUNOS software supports both the L2TP silent failover method and the L2TP failover protocol method, which is described in Fail Over extensions for L2TP “failover” draft-ietf-l2tpext-failover-06.txt. You can configure L2TP to use the failover protocol method as the primary peer resynchronization method, but then fall back to the silent failover method if the peer does not support the failover protocol method.

The following list highlights differences between the failover protocol and silent failover peer resynchronization methods:

- With the L2TP failover protocol method, both endpoints must support the method or recovery always fails. The L2TP failover protocol method also requires a non-failed endpoint to wait an additional recovery time period while the failed endpoint is recovering to prevent the non-failed endpoint from prematurely disconnecting the tunnel. The additional recovery period makes L2TP less responsive to the loss of tunnel connectivity.
- Silent failover operates entirely within the failed endpoint and does not require non-failed endpoint support—this improves interoperability between peers. Silent failover does not require additional recovery time by the non-failed endpoint, which also eliminates the potential for degraded responsiveness to the loss of tunnel connectivity.



NOTE: L2TP silent failover is not supported on E3 ATM and CT1 line modules in peer-facing configurations.

You can use the CLI or RADIUS to configure the resynchronization method for your router.

1. Configuring Peer Resynchronization for L2TP Host Profiles and AAA Domain Map Tunnels on page 392
2. Configuring the Global L2TP Peer Resynchronization Method on page 393
3. Using RADIUS to Configure Peer Resynchronization on page 394

Configuring Peer Resynchronization for L2TP Host Profiles and AAA Domain Map Tunnels

The JUNOS CLI enables you to configure the peer resynchronization method globally, for a host profile, or for a domain map tunnel. A host profile or domain map tunnel configuration takes precedence over the global peer resynchronization configuration.

When you change the peer resynchronization method, the change is not immediately applied to existing tunnels. Tunnels continue using their current resynchronization method until the next time the tunnel is reestablished.

Use the **failover-resync** command to configure the L2TP peer resynchronization method for L2TP host profiles and AAA domain map tunnels. This command takes precedence over the global peer resynchronization configuration.

Choose one of the following keywords to specify the peer resynchronization method:

- **failover-protocol**—The tunnel uses the L2TP failover protocol method. If the peer non-failed endpoint does not support the L2TP failover protocol, a failover forces disconnection of the tunnel and all of its sessions.
- **failover-protocol-fallback-to-silent-failover**—The tunnel uses the L2TP failover protocol method; however, if the peer non-failed endpoint does not support the L2TP failover protocol method, the tunnel falls back to using the silent failover method.
- **silent-failover**—The tunnel uses the silent failover method. The tunnel also informs its peer that it supports the failover protocol method for the peer's failovers.
- **disable**—The tunnel does not use any peer resynchronization method for its own failovers. The tunnel informs its peer that it supports the failover protocol method for the peer's failovers. A failover forces the disconnection of the tunnel and all of its sessions.
- **not-configured**—Peer resynchronization is not configured for L2TP host profiles and AAA domain map tunnels. L2TP uses the global failover method.

By default, peer resynchronization is not configured at the L2TP profile-level or the domain map-level—therefore, the global configuration is used. This is different than using the **disable** keyword, which specifies that no peer synchronization method is used.

Use the **show l2tp destination profile** command to display a host profile's peer resynchronization configuration and the **show aaa domain-map** command to display a domain map's configuration.

- To configure peer resynchronization for an L2TP host profile:


```
host1(config)#l2tp destination profile lac-dest ip address 192.168.20.2
host1(config-l2tp-dest-profile)#remote host lac-host
host1(config-l2tp-dest-host-profile-host)#failover-resync silent-failover
```

- To configure peer resynchronization for an AAA domain map tunnel:

```
host1(config)#aaa domain-map lac-tunnel
host1(config-domain-map)#tunnel 10
host1(config-domain-map-tunnel)#failover-resync silent-failover
```

Configuring the Global L2TP Peer Resynchronization Method

You can configure the peer resynchronization method globally, or for L2TP host profiles or domain map tunnels—a host profile or domain map tunnel configuration takes precedence over the global peer resynchronization configuration.

When you change the peer resynchronization method, the change is not immediately applied to existing tunnels. Tunnels continue using their current resynchronization method until the next time the tunnel is reestablished.

Use the **l2tp failover-resync** command to configure the global L2TP peer resynchronization method that L2TP failed endpoints use to resynchronize with a peer non-failed endpoint.

Choose one of the following keywords to specify the peer resynchronization method. All tunnels in the chassis use the specified method unless it is overridden by an L2TP host profile configuration or an AAA domain map configuration.

- **failover-protocol**—Tunnels use the L2TP failover protocol method. If the peer non-failed endpoint does not support the L2TP failover protocol, a failover forces disconnection of all tunnels and their sessions.
- **failover-protocol-fallback-to-silent-failover**—Tunnels use the L2TP failover protocol method; however, if the peer non-failed endpoint does not support the L2TP failover protocol method, the tunnel falls back to using the silent failover method.
- **silent-failover**—Tunnels use the silent failover method. The tunnels also inform their peers that they support the failover protocol method for peer failovers.
- **disable**—Tunnels do not use any peer resynchronization method for their own failovers. Tunnels inform their peers that they support the failover protocol method for peer failovers. A failover forces the disconnection of all tunnels and sessions.

Use the **show l2tp** command to display the global peer resynchronization configuration.

- To configure peer resynchronization for an L2TP host profile or AAA domain map tunnel:

```
host1(config)#l2tp failover-resync silent-failover
```

- To restore the global default setting, which uses the **failover-protocol-fallback-to-silent-failover** method:

```
host1(config)#default l2tp failover-resync
```

- To disable peer resynchronization, use the **no** version of the command—this is the same as using the **disable** keyword:

```
host1(config)#no l2tp failover-resync
```

Using RADIUS to Configure Peer Resynchronization

The JUNOS software supports the use of RADIUS to configure the L2TP peer resynchronization method used by your L2TP tunnels. You use the L2TP-Resynch-Method RADIUS attribute (VSA 26-90) in RADIUS Access-Accept messages to specify the L2TP peer resynchronization method.

Table 69 on page 394 describes the L2TP-Resynch-Method RADIUS attribute. For more information about RADIUS Access-Accept messages, see “Configuring RADIUS Attributes” on page 171. For more information about the L2TP-Resynch-Method attribute, see “RADIUS IETF Attributes” on page 259.

Table 69: L2TP-Resynch-Method RADIUS Attribute

Standard Number	Attribute Name	Description	Length	Subtype Length	Value
[26-90]	L2TP-Resynch-Method	L2TP peer resynchronization method	12	6	integer: <ul style="list-style-type: none"> ■ 0 = disabled ■ 1 = failover protocol ■ 2 = silent failover ■ 3 = failover protocol with silent failover as backup

Configuring L2TP Tunnel Switch Profiles

You can use the **l2tp switch-profile** command to create an L2TP tunnel switch profile. An *L2TP tunnel switch profile* is a set of characteristics that defines the behavior of L2TP tunnel switching for the interfaces to which the profile is assigned.

Within the L2TP tunnel switch profile, you configure a particular tunnel switching behavior for a specified L2TP AVP. For example, you can configure the router to preserve the value of (relay) a specified AVP type across the LNS/LAC boundary in an L2TP tunnel-switched network.

Applying the L2TP Tunnel Switch Profile

Configuring an L2TP tunnel switch profile has no effect by itself. To use the tunnel switch profile in an L2TP tunnel-switched network, you must apply it to an L2TP outbound LAC session by using one of the following methods:

- Authentication, authorization, and accounting (AAA) domain maps

- AAA tunnel groups
- RADIUS Access-Accept messages

If none of these methods are used, you can apply the L2TP tunnel switch profile as an AAA default tunnel parameter. The default tunnel switch profile has lower precedence than the other methods for applying the tunnel switch profile.

For more information about the methods for applying L2TP tunnel switch profiles, see “Configuration Tasks” on page 396 .

Configuration Guidelines

The following rules apply when you configure L2TP tunnel switch profiles:

- L2TP tunnel switching must be enabled for tunnel switch profiles to take effect. For information, see “Enabling Tunnel Switching” on page 384
- L2TP tunnel switch profiles have no effect when they are assigned to a LAC session that is not tunnel switched.
- The router can relay only those AVPs that are accepted at the LNS. Malformed AVPs are never relayed.
- If a tunnel grant response specifies a named tunnel switch profile that has not been configured on the router, the router prohibits connection of the L2TP tunnel-switched session.
- If you remove a tunnel switch profile, the router also disconnects all associated L2TP switched sessions using that profile.
- In some cases, attributes configured in a tunnel switch profile take precedence over similar attributes configured globally on the router.

For example, configuring L2TP Calling Number AVP 22 for relay overrides the **l2tp disable calling-number-avp** command issued from Global Configuration mode to prevent the router from sending AVP 22 in incoming-call-request (ICRQ) packets. In this scenario, the router relays the Calling Number AVP.

Configuring L2TP AVPs for Relay

Previously, the router did not preserve the values of incoming L2TP AVPs across the LNS/LAC boundary in an L2TP tunnel-switched network. The router regenerated most incoming AVPs, such as L2TP Calling Number AVP 22, based on the local policy in effect. However, some AVPs, such as Cisco NAS Port Info AVP 100, were dropped.

In an L2TP tunnel switch profile, you can define the types of AVPs that the router can relay unchanged across the LNS/LAC boundary. You can specify that the router relay one or more of the following AVP types:

- L2TP Bearer Type AVP 18
- L2TP Calling Number AVP 22
- Cisco NAS Port Info AVP 100

When you configure any of these AVP types for relay in an L2TP tunnel-switched network, the router preserves the value of an incoming AVP of this type when packets are switched between the inbound LNS session and the outbound LAC session.

Configuration Tasks

To configure and use an L2TP tunnel switch profile in an L2TP tunnel-switched network:

1. Ensure that L2TP tunnel switching is enabled on the router.
2. Configure the L2TP tunnel switch profile.
3. Apply the L2TP tunnel switch profile to the tunnel in one of the following ways:
 - To apply a named tunnel switch profile through an AAA domain map, use the **switch-profile** command from Domain Map Tunnel Configuration mode. For details, see “Applying L2TP Tunnel Switch Profiles by Using AAA Domain Maps” on page 397 .
 - To apply a named tunnel switch profile through an AAA tunnel group, use the **switch-profile** command from Tunnel Group Tunnel Configuration mode. For details, see “Applying L2TP Tunnel Switch Profiles by Using AAA Tunnel Groups” on page 398 .
 - To apply a named tunnel switch profile through RADIUS, include the Tunnel-Switch-Profile RADIUS attribute (VSA 26-91) in RADIUS Access-Accept messages. For details, see “Applying L2TP Tunnel Switch Profiles by Using RADIUS” on page 399 .
 - To apply a default tunnel switch profile to a virtual router, use the **aaa tunnel switch-profile** command from Global Configuration mode. For details, see “Applying Default L2TP Tunnel Switch Profiles” on page 399 .

The following sections describe how to perform each of these tasks.

Enabling Tunnel Switching on the Router

To enable L2TP tunnel switching on the router, use the **l2tp tunnel-switching** command. By default, tunnel switching is disabled.

- To enable L2TP tunnel switching:


```
host1(config)#l2tp tunnel-switching
```

For more information, see “Enabling Tunnel Switching” on page 384.

Configuring L2TP Tunnel Switch Profiles

To configure an L2TP tunnel switch profile:

1. Create the L2TP tunnel switch profile and assign it a name. The **l2tp switch-profile** command accesses L2TP Tunnel Switch Profile Configuration mode.

```
host1(config)#l2tp switch-profile concord
host1(config-l2tp-tunnel-switch-profile)#
```

2. Configure the L2TP tunnel switching behavior for the interfaces to which this profile is assigned. Use the **avp** command with the **relay** keyword to cause the router to preserve the value of an incoming AVP of this type when packets are switched between an inbound LNS session and an outbound LAC session.

You can use any of the following keywords to specify the AVPs for the router to relay:

- **bearer-type**—L2TP Bearer Type AVP 18; by default, the router regenerates this AVP at the outbound LAC session, based on the local policy in effect
- **calling-number**—L2TP Calling Number AVP 22; by default, the router regenerates this AVP at the outbound LAC session, based on the local policy in effect
- **cisco-nas-port**—Cisco NAS Port Info AVP 100; by default, the router drops this AVP

Use the **no** version to restore the default L2TP tunnel switching behavior (regenerate or drop) for incoming AVPs of the specified type.

The following commands configure the router to relay the Bearer Type, Calling Number, and Cisco NAS Port Info AVP types across the LNS/LAC boundary.

```
host1(config-l2tp-tunnel-switch-profile)#avp bearer-type relay
host1(config-l2tp-tunnel-switch-profile)#avp calling-number relay
host1(config-l2tp-tunnel-switch-profile)#avp cisco-nas-port relay
```

3. (Optional) Use the **show l2tp switch-profile** command to verify configuration of the tunnel switch profile.

```
host1(config-l2tp-tunnel-switch-profile)# run show l2tp switch-profile
L2TP tunnel switch profile concord
L2TP tunnel switch profile myProfile
2 L2TP tunnel switch profiles found
host1(config-l2tp-tunnel-switch-profile)# run show l2tp switch-profile
concord
L2TP tunnel switch profile concord
  AVP bearer type action is relay
  AVP calling number action is relay
  AVP Cisco nas port info action is relay
```

Applying L2TP Tunnel Switch Profiles by Using AAA Domain Maps

To apply an L2TP tunnel switch profile to sessions associated with an AAA domain map:

1. Access Domain Map Tunnel Configuration mode.

```
host1(config)#aaa domain-map westford.com
host1(config-domain-map)#router-name default
host1(config-domain-map)#tunnel 3
host1(config-domain-map-tunnel)#
```

For more information about how to map a domain to an L2TP tunnel from Domain Map Tunnel Configuration mode, see “Mapping a User Domain Name to an L2TP Tunnel Overview” on page 358 .

- From Domain Map Tunnel Configuration mode, issue the **switch-profile** command to apply the specified L2TP switch profile to the sessions associated with this domain map.

```
host1(config-domain-map-tunnel)#switch-profile concord
```

- (Optional) Use the **show aaa domain-map** command to verify application of the tunnel switch profile.

```
host1(config-domain-map-tunnel)#run show aaa domain-map
```

```
Domain: westford.com; router-name: default; ipv6-router-name: default
```

Tunnel Tag	Tunnel Peer	Tunnel Source	Tunnel Type	Tunnel Medium	Tunnel Password	Tunnel Id	Tunnel Client Name
3	<null>	<null>	l2tp	ipv4	<null>	<null>	<null>

Tunnel Tag	Tunnel Server Name	Tunnel Preference	Tunnel Max Sessions	Tunnel RWS	Tunnel Virtual Router	Tunnel Switch Profile
3	<null>	2000	0	system chooses	<null>	concord

Applying L2TP Tunnel Switch Profiles by Using AAA Tunnel Groups

To apply an L2TP tunnel switch profile to sessions associated with an AAA tunnel group:

- Access Tunnel Group Tunnel Configuration mode.

```
host1(config)#aaa tunnel-group sunnyvale
host1(config-tunnel-group)#tunnel 3
host1(config-tunnel-group-tunnel)#
```

For more information about how to map a domain to an L2TP tunnel from Tunnel Group Tunnel Configuration mode, see “Mapping a User Domain Name to an L2TP Tunnel Overview” on page 358 .

- From Tunnel Group Tunnel Configuration mode, issue the **switch-profile** command to apply the specified L2TP switch profile to the sessions associated with this tunnel group.

```
host1(config-tunnel-group-tunnel)#switch-profile sanjose
```

- (Optional) Use the **show aaa tunnel-group** command to verify application of the tunnel switch profile.

```
host1(config-tunnel-group-tunnel)#run show aaa tunnel-group
```

```
Tunnel Group: sunnyvale
```

```
Tunnel
```

Tunnel Tag	Tunnel Peer	Tunnel Source	Tunnel Type	Tunnel Medium	Tunnel Password	Tunnel Id	Client Name
3	<null>	<null>	l2tp	ipv4	<null>	<null>	<null>
Tunnel Tag	Tunnel Server Name	Tunnel Preference	Tunnel Max Sessions	Tunnel RWS	Tunnel Virtual Router	Tunnel Switch Profile	
3	<null>	2000	0	system chooses	<null>	sanjose	

Applying Default L2TP Tunnel Switch Profiles

You can apply a default L2TP tunnel switch profile to a virtual router by issuing the **aaa tunnel switch-profile** command from Global Configuration mode. The router uses the default tunnel switch profile if the tunnel attributes returned from an AAA domain map or tunnel group or from a RADIUS authentication server *do not include* a named tunnel switch profile. The router ignores the default tunnel switch profile if the tunnel attributes returned from an AAA domain map or tunnel group or from a RADIUS authentication server *do include* a named tunnel switch profile.

The default L2TP tunnel switch profile applies to a specific virtual router. You can apply a different default tunnel switch profile to each virtual router configured.

To apply a default L2TP tunnel switch profile to a virtual router:

1. Create the virtual router to which you want to apply the default tunnel switch profile.

```
host1(config)#virtual-router east
host1:east(config)#
```

2. Issue the **aaa tunnel switch-profile** command to apply the default L2TP tunnel switch profile in the context of this virtual router.

```
host1:east(config)#aaa tunnel switch-profile boston
```

3. (Optional) Use the **show aaa tunnel-parameters** command to verify application of the default tunnel switch profile.

```
host1:east(config)#run show aaa tunnel-parameters
Tunnel password is <NULL>
Tunnel client-name is <NULL>
Tunnel nas-port-method is none
Tunnel switch-profile is boston
Tunnel nas-port ignore disabled
Tunnel nas-port-type ignore disabled
Tunnel assignmentId format is assignmentId
Tunnel calling number format is descriptive
```

Applying L2TP Tunnel Switch Profiles by Using RADIUS

On the LAC, the router can receive tunnel configuration attributes through a RADIUS authentication server. To use RADIUS to apply an L2TP tunnel switch profile to a

session, you can configure RADIUS to include the Tunnel-Switch-Profile RADIUS attribute (VSA 26-91) in RADIUS Access-Accept messages.

For more information about RADIUS Access-Accept messages, see “Configuring RADIUS Attributes” on page 171. For more information about the Tunnel-Switch-Profile attribute, see “RADIUS IETF Attributes” on page 259.

- Related Topics**
- Enabling Tunnel Switching on the Router on page 396
 - Configuring L2TP Tunnel Switch Profiles on page 396
 - Applying L2TP Tunnel Switch Profiles by Using AAA Domain Maps on page 397
 - Applying L2TP Tunnel Switch Profiles by Using AAA Tunnel Groups on page 398
 - Applying Default L2TP Tunnel Switch Profiles on page 399
 - Applying L2TP Tunnel Switch Profiles by Using RADIUS on page 399
 - `aaa tunnel switch-profile`
 - `avp`
 - `l2tp switch-profile`
 - `l2tp tunnel-switching`

Configuring the Transmit Connect Speed Calculation Method

You can configure the method that the router uses to calculate the transmit connect speed of the subscriber’s access interface for a tunneled L2TP session. L2TP reports the transmit connect speed in L2TP Transmit (TX) Speed AVP 24. During the establishment of an L2TP tunnel session, the LAC sends AVP 24 to the LNS to convey the transmit speed of the subscriber’s access interface.

You can configure the calculation method for the transmit connect speed reported in L2TP Transmit (TX) Speed AVP 24 in any of the following ways. The first three methods—AAA domain maps, AAA tunnel groups, and RADIUS—are mutually exclusive.

- AAA domain maps—Use the **`tx-connect-speed-method`** command from Domain Map Tunnel Configuration mode. For instructions, see “Using AAA Domain Maps to Configure the Transmit Connect Speed Calculation Method” on page 404.
- AAA tunnel groups—Use the **`tx-connect-speed-method`** command from Tunnel Group Tunnel Configuration mode. For instructions, see “Using AAA Tunnel Groups to Configure the Transmit Connect Speed Calculation Method” on page 405.
- AAA default tunnel parameters—Use the **`aaa tunnel tx-connect-speed-method`** command from Global Configuration mode. The router uses the calculation method specified with this command if the tunnel attributes returned from an AAA domain map, an AAA tunnel group, or a RADIUS authentication server do not include the transmit connect speed calculation method. For instructions, see

“Using AAA Default Tunnel Parameters to Configure the Transmit Connect Speed Calculation Method” on page 406.

- RADIUS Include the Tunnel-Tx-Speed-Method RADIUS attribute (Juniper Networks VSA 26-94) in RADIUS Access-Accept messages. For instructions, see “Using AAA Default Tunnel Parameters to Configure the Transmit Connect Speed Calculation Method” on page 406.

Transmit Connect Speed Calculation Methods

In previous releases, the router calculated the transmit speed of the subscriber’s access interface based only on statically configured settings for the underlying layer 2 access interface. With this feature, you can obtain a more accurate representation of the transmit connect speed by choosing a calculation method that reflects changes to the layer 2 interface due to statically configured settings, dynamically configured settings, or QoS settings.

You can choose one of the following methods for calculating the transmit connect speed that is reported in L2TP Transmit (TX) Speed AVP 24:

- Static layer 2
- Dynamic layer 2
- QoS
- Actual (lesser of dynamic layer 2 or QoS)

The following sections describe each of these calculation methods.



NOTE: Configuring the transmit connect speed calculation method has no effect on the operation of the L2TP Receive (RX) Speed AVP 38 or the Connect-Info RADIUS attribute [77] at the LAC.

Static Layer 2

The static layer 2 method calculates the transmit connect speed of the subscriber’s access interface based on the statically configured settings for the underlying layer 2 ATM 1483 or Ethernet interface. The static layer 2 method does not reflect changes to the transmit speed of the layer 2 interface due to dynamically configured settings or to QoS.

For ATM 1483 circuits, the static layer 2 value is based on the bandwidth that the connection requires. The router uses certain traffic parameters for each service category to determine the required bandwidth for the connection. For more information about how the router computes bandwidth for ATM 1483 circuits, see the *Connection Admission Control* section in *JUNOS Link Layer Configuration Guide*.

For Ethernet VLANs, the static layer 2 value is the advisory transmit speed of the VLAN subinterface, if configured with the **vlan advisory-tx-speed** command, or the speed of the underlying physical port if the advisory transmit speed is not configured.

If there is no explicit static configuration for the layer 2 interface, L2TP reports the speed of the underlying physical port as the transmit connect speed.

Dynamic Layer 2

The dynamic layer 2 method calculates the transmit connect speed of the subscriber's access interface based on the dynamically configured settings for the underlying layer 2 interface.

If there is no dynamic configuration for the layer 2 interface, L2TP reports the transmit connect speed based on statically configured settings. If there is no static speed configuration for the layer 2 interface, L2TP reports the speed of the underlying physical port as the transmit connect speed.

QoS

The QoS method calculates the transmit connect speed of the subscriber's access interface based on settings determined by static or dynamic QoS configurations. This calculation is based on the interface columns that QoS uses to build scheduler profiles for L2TP sessions. For example, a typical interface column might consist of an L2TP session over an Ethernet VLAN over a Gigabit Ethernet interface.

You can configure QoS to control the rate of any logical interface in the interface column. For those logical interfaces with a rate controlled by QoS, QoS reports this configured rate as the transmit connect speed for that interface. For those logical interfaces that do not have a QoS-configured rate, QoS reports the speed of the underlying physical port as the transmit connect speed.

For more information, see QoS and L2TP TX Speed AVP 24 Overview in *JUNOS Quality of Service Configuration Guide*.

Actual

The actual method calculates the transmit connect speed of the subscriber's access interface as the lesser of the following two values:

- Value using the dynamic layer 2 calculation method
- Value using the QoS calculation method

Transmit Connect Speed Calculation Examples

The examples in this section illustrate how the router uses the methods described in "Transmit Connect Speed Calculation Methods" on page 401 to calculate the transmit connect speed.

Example 1: L2TP Session over ATM 1483 Interface

In this example, an L2TP session is established over an ATM 1483 subinterface on an OC3/STM1 ATM IOA. The configuration has the following characteristics:

- There is no explicit static configuration for the layer 2 (ATM 1483) interface.

- A transmit connect speed of 10 Mbps is provided dynamically from a RADIUS authentication server when the subscriber logs in.
- The transmit connect speed calculated by QoS is 5 Mbps.

Based on these characteristics, Table 70 on page 403 lists the transmit connect speed value reported in L2TP Transmit (TX) Speed AVP 24 for each calculation method, and the reason why L2TP reports this value.

Table 70: Transmit Connect Speeds for L2TP over ATM 1483 Example

Calculation Method	Transmit Connect Speed Reported in AVP 24	Reason
Static layer 2	155 Mbps	L2TP reports the speed of the underlying OC3 physical port because there is no explicit static configuration for the layer 2 interface.
Dynamic layer 2	10 Mbps	L2TP reports the transmit connect speed provided by RADIUS.
QoS	5 Mbps	L2TP reports the transmit connect speed calculated by QoS.
Actual	5 Mbps	L2TP reports the lesser of the dynamic layer 2 speed (10 Mbps) or the QoS speed (5 Mbps).

Example 2: L2TP Session over Ethernet VLAN Interface

In this example, an L2TP session is established over a PPPoE subinterface over an Ethernet VLAN subinterface. The configuration has the following characteristics:

- The Ethernet VLAN subinterface is configured with an advisory transmit speed of 100 Mbps.
- The dynamic layer 2 setting does not apply to the VLAN subinterface.
- The transmit connect speed calculated by QoS is 10 Mbps.

Based on these characteristics, Table 71 on page 403 lists the transmit connect speed value reported in L2TP Transmit (TX) Speed AVP 24 for each calculation method, and the reason why L2TP reports this value.

Table 71: Transmit Connect Speeds for L2TP over Ethernet Example

Calculation Method	Transmit Connect Speed Reported in AVP 24	Reason
Static layer 2	100 Mbps	L2TP reports the advisory transmit speed configured on the VLAN subinterface. If configured, the advisory transmit speed takes precedence over the physical port speed for a VLAN subinterface.

Table 71: Transmit Connect Speeds for L2TP over Ethernet Example (continued)

Calculation Method	Transmit Connect Speed Reported in AVP 24	Reason
Dynamic layer 2	100 Mbps	L2TP reports the static layer 2 value because the dynamic layer 2 setting does not apply to a VLAN subinterface.
QoS	10 Mbps	L2TP reports the transmit connect speed calculated by QoS.
Actual	10 Mbps	L2TP reports the lesser of the dynamic layer 2 speed (100 Mbps) or the QoS speed (10 Mbps).

Transmit Connect Speed Reporting Considerations

The following considerations affect the transmit connect speed value reported in L2TP Transmit (TX) Speed AVP 24 when you use this feature.

Session Termination for Dynamic Speed Timeout

Under certain heavy load conditions, the router might be unable to obtain the dynamic-layer2 value for the transmit connect speed of the subscriber's access interface. In this situation, the LAC sends the LNS an L2TP Call-Disconnect-Notify (CDN) message to terminate the L2TP session.

For more information about supported L2TP terminate reasons, see “AAA Terminate Reasons” on page 279.

Advisory Speed Precedence for VLANs over Bridged Ethernet

For interface columns that consist of an L2TP session over an Ethernet VLAN subinterface over a bridged Ethernet interface, the advisory transmit speed of the VLAN subinterface, if configured with the **vlan advisory-tx-speed** command, takes precedence over the physical port speed of the underlying layer 2 ATM 1483 interface. As a result, if the advisory transmit speed is configured for the VLAN subinterface, L2TP reports this value as the transmit connect speed regardless of the port speed of the ATM 1483 interface.

Using AAA Domain Maps to Configure the Transmit Connect Speed Calculation Method

To configure the transmit connect speed calculation method for a tunneled L2TP session associated with an AAA domain map:

1. Access Domain Map Tunnel Configuration mode.

```
host1(config)#aaa domain-map sunnyvale.com
host1(config-domain-map)#router-name lac
host1(config-domain-map)#tunnel 5
host1(config-domain-map-tunnel)#
```

For more information about how to map a domain to an L2TP tunnel from Domain Map Tunnel Configuration mode, see “Mapping a User Domain Name to an L2TP Tunnel Overview” on page 358 .

2. From Domain Map Tunnel Configuration mode, configure the calculation method for the transmit connect speed of the subscriber’s access interface.

```
host1(config-domain-map-tunnel)#tx-connect-speed-method dynamic-layer2
```

3. (Optional) Use the **show aaa domain-map** command to verify configuration of the transmit connect speed calculation method.

```
host1(config-domain-map-tunnel)#run show aaa domain-map
```

```
Domain: sunnyvale.com; router-name: lac; ipv6-router-name: default
```

Tunnel Tag	Tunnel Peer	Tunnel Source	Tunnel Type	Tunnel Medium	Tunnel Password	Tunnel Id	Tunnel Client Name		
5	<null>	<null>	l2tp	ipv4	<null>	<null>	<null>		
Tunnel Tag	Server Name	Tunnel Preference	Tunnel Max Sessions	Tunnel RWS	Tunnel Virtual Router				
5	<null>	2000	0	system chooses	<null>				
Tunnel Tag	Failover Resync	Tunnel Switch Profile	Tunnel Tx Speed Method						
5	<null>	<null>	dynamic layer2						

Using AAA Tunnel Groups to Configure the Transmit Connect Speed Calculation Method

To configure the transmit connect speed calculation method for a tunneled L2TP session associated with an AAA tunnel group:

1. Access Tunnel Group Tunnel Configuration mode.

```
host1(config)#aaa tunnel-group boston
host1(config-tunnel-group)#tunnel 3
host1(config-tunnel-group-tunnel)#
```

For more information about how to map a domain to an L2TP tunnel from Tunnel Group Tunnel Configuration mode, see “Mapping a User Domain Name to an L2TP Tunnel Overview” on page 358.

2. From Tunnel Group Tunnel Configuration mode, configure the calculation method for the transmit connect speed of the subscriber’s access interface.

```
host1(config-tunnel-group-tunnel)#tx-connect-speed-method qos
```

3. (Optional) Use the **show aaa tunnel-group** command to verify configuration of the transmit connect speed calculation method.

```
host1(config-tunnel-group-tunnel)#run show aaa tunnel-group
```

```
Tunnel Group: boston
```

Tunnel Tag	Tunnel Peer	Tunnel Source	Tunnel Type	Tunnel Medium	Tunnel Password	Tunnel Id	Tunnel Client Name
3	<null>	<null>	l2tp	ipv4	<null>	<null>	<null>
Tunnel Tag	Tunnel Server Name	Tunnel Preference	Tunnel Max Sessions	Tunnel RWS	Tunnel Virtual Router		
3	<null>	2000	0	system chooses	<null>		
Tunnel Tag	Tunnel Failover Resync	Tunnel Switch Profile	Tunnel Tx Speed Method				
3	<null>	<null>	qos				

Using AAA Default Tunnel Parameters to Configure the Transmit Connect Speed Calculation Method

You can configure the transmit connect speed calculation method as a default AAA tunnel parameter by using the **aaa tunnel tx-connect-speed-method** command from Global Configuration mode. This command applies the specified calculation method to all tunneled L2TP sessions associated with a particular virtual router, and thereby alleviates the need for you to configure the transmit connect speed calculation method for each individual subscriber.

Configuring the calculation method as a default AAA tunnel parameter for a virtual router has lower precedence than using AAA domain maps, AAA tunnel groups, or RADIUS to configure the transmit connect speed calculation method. The router uses the calculation method specified with the **aaa tunnel tx-connect-speed-method** command if the tunnel attributes returned from an AAA domain map, an AAA tunnel group, or a RADIUS authentication server do not include the transmit connect speed calculation method.

To configure the transmit connect speed calculation method for all tunneled L2TP sessions associated with a particular virtual router:

1. Create the virtual router for which you want to configure the transmit connect speed calculation method.

```
host1(config)#virtual-router north
```

For more information about configuring and using virtual routers, see the *Configuring Virtual Routers* chapter in *JUNOS System Basics Configuration Guide*.

2. Configure the transmit connect speed calculation method in the context of this virtual router.

```
host1:north(config)#aaa tunnel tx-connect-speed-method qos
```

- To specify the calculation method for the transmit connect speed, use one of the following keywords, as described in “Using AAA Tunnel Groups to Configure the Transmit Connect Speed Calculation Method” on page 405:
 - **static-layer2**
 - **dynamic-layer2**
 - **qos**
 - **actual**
3. (Optional) Use the **show aaa tunnel-parameters** command to verify configuration of the transmit connect speed calculation method.

```

host1:north(config)#run show aaa tunnel-parameters
Tunnel password is <NULL>
Tunnel client-name is <NULL>
Tunnel nas-port-method is none
Tunnel switch-profile is boston
Tunnel tx-connect-speed-method is qos
Tunnel nas-port ignore disabled
Tunnel nas-port-type ignore disabled
Tunnel assignmentId format is assignmentId
Tunnel calling number format is fixed

```

Using RADIUS to Configure the Transmit Connect Speed Calculation Method

On the LAC, the router can receive tunnel configuration attributes through a RADIUS authentication server. To use RADIUS to configure the transmit connect speed calculation method for a subscriber's access interface, you can configure RADIUS to include the Tunnel-Tx-Speed-Method RADIUS attribute (Juniper Networks VSA 26-94) in RADIUS Access-Accept messages.

Table 72 on page 408 describes the Tunnel-Tx-Speed-Method RADIUS attribute. For more information about RADIUS Access-Accept messages, see “Configuring RADIUS Attributes” on page 171. For a description of the RADIUS attributes supported by JUNOS software, see “RADIUS IETF Attributes” on page 259.

Table 72: Tunnel-Tx-Speed-Method RADIUS Attribute

Attribute Number	Attribute Name	Description	Length	Subtype Length	Value
[26-94]	Tunnel-Tx-Speed-Method	The method that the router uses to calculate the transmit connect speed of the subscriber's access interface	12	6	integer: <ul style="list-style-type: none"> ■ 1 = static-layer2; TX speed based on static layer 2 settings ■ 2 = dynamic-layer2; TX speed based on dynamic layer 2 settings ■ 3 = qos; TX speed based on QoS settings ■ 4 = actual; TX speed that is the lesser of the dynamic-layer2 value or the qos value

- Related Topics**
- Transmit Connect Speed Calculation Methods on page 401
 - Using AAA Domain Maps to Configure the Transmit Connect Speed Calculation Method on page 404
 - Using AAA Tunnel Groups to Configure the Transmit Connect Speed Calculation Method on page 405
 - Using AAA Default Tunnel Parameters to Configure the Transmit Connect Speed Calculation Method on page 406
 - Using RADIUS to Configure the Transmit Connect Speed Calculation Method on page 407
 - `aaa tunnel tx-connect-speed-method`
 - `tx-connect-speed-method`

PPP Accounting Statistics

JUNOS accounting for tunneled subscribers at the L2TP LAC counts the payload that PPP passes to or receives from L2TP for transport. At this stage in the protocol processing, any padding outside PPP, such as that for PPPoE, has been removed. Accounting includes the authentication acknowledgement packet, CHAP success packets, and PAP acknowledgment packets. Accounting ends when L2TP has been notified to terminate the session. The statistics are reported in the following RADIUS attributes:

Attribute Number	Attribute Name
42	Acct-Input-Octets
43	Acct-Output-Octets

Attribute Number	Attribute Name
47	Acct-Input-Packets
48	Acct-Output-Packets

Termination of a tunneled session can result from PPP termination, L2TP shutdown, subscriber logout, or lower layer down events. When the session is terminated through PPP, the software counts both the PPP terminate-request and the PPP terminate-acknowledgement packets.

- Accounting statistics reported in RADIUS octet counts (Acct-Input-Octets and Acct-Output-Octets) for tunneled PPP customers at the L2TP LAC include the following data:
 - All upper layer control traffic, including IPCP, IPCPv6, OSICP, and MPLSNCP
 - All data traffic, including IP, IPv6, MPLS, and OSI
 - PPP PAP or CHAP acknowledgments, and also retransmission of PAP or CHAP that take place after the session is active (even when proxy authentication is accepted)
 - All PPP PAP or CHAP negotiations in the case where proxy authentication is disabled or required to renegotiate at the LNS
 - All LCP traffic when proxy LCP is disabled or required to renegotiate at the LNS
 - All PPP LCP echo requests and their responses
 - PPP LCP terminate-request or terminate-acknowledgement packets from the client or LNS when PPP initiates termination of the session
 - If present, the two PPP header bytes (Address Field 0xFF and Control Field 0x03) as part of the L2TP payload
- Accounting statistics reported in RADIUS octet counts (Acct-Input-Octets and Acct-Output-Octets) for tunneled PPP customers at the L2TP LAC exclude the following data:
 - LCP when Proxy LCP is enabled and accepted at the LNS
 - Initial PPP PAP request
 - Initial PPP CHAP challenge and response
- Accounting statistics reported in RADIUS packet counts (Acct-Input-Packets and Acct-Output-Packets) for tunneled PPP customers at the L2TP LAC are based on packets delivered to or received from the L2TP session. These statistics exclude L2TP control traffic and L2TP hello messages.

For information on accounting statistics for terminated PPP sessions, see the *PPP Accounting Statistics* section in *JUNOS Link Layer Configuration Guide*.

Chapter 14

Configuring L2TP Dial-Out

This chapter describes the Layer 2 Tunneling Protocol (L2TP) dial-out feature on your E Series router. This chapter includes the following sections:


- L2TP Dial-Out Overview on page 411
- L2TP Dial-Out Platform Considerations on page 418
- L2TP Dial-Out References on page 418
- Before You Configure L2TP Dial-Out on page 419
- Configuring L2TP Dial-Out on page 419
- Monitoring L2TP Dial-Out on page 421

L2TP Dial-Out Overview

L2TP dial-out provides a way for corporate virtual private networks (VPNs) that use Broadband Remote Access Server (B-RAS) to dial out to remote offices that have only narrowband dial-up access. The L2TP network server (LNS) function is deployed in networks that have a combination of broadband and narrowband access.

A remote site can communicate on demand with the home site with a normal L2TP access concentrator (LAC) to LNS session. When the communication finishes, the remote site terminates the session. However, if the home site wishes to communicate with the remote site and no incoming call is currently established, the home site needs a method to dial out to the remote site. This method is L2TP dial-out, which uses the L2TP outgoing call support defined in RFC 2661—Layer Two Tunneling Protocol “L2TP” (August 1999).

Figure 10 on page 412 shows the dial-out model in which the LNS initiates L2TP sessions and provides enough information to the narrowband LAC so that it can complete the dial-out from the home site to the remote site.

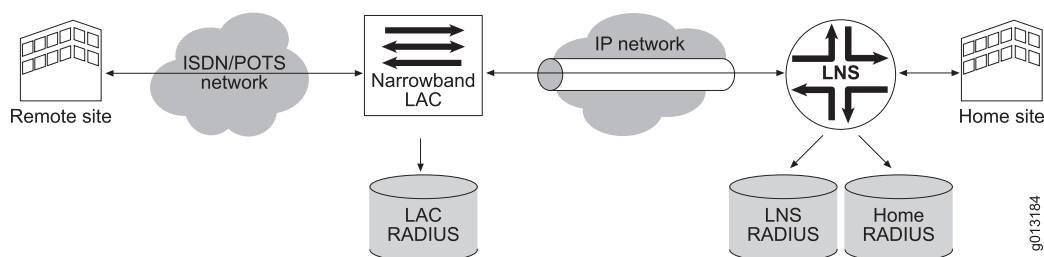Figure 10: Network Model for Dial-Out

NOTE: The dial-out feature exists in the LNS only. It does not exist in the LAC.

Terms

Table 73 on page 412 describes key terms used in L2TP dial-out.

Table 73: L2TP Dial-Out Terms

Term	Description
Dial-out trigger	IP packet that initiates a dial-out session
Dial-out session	Control entity for a triggered IP flow used to manage the establishment of an associated L2TP session for dial-out
Dial-out target	A virtual router context and an IP address prefix, for which the arrival of an IP packet (a dial-out trigger) initiates a dial-out session.
Dial-out route	Contains the dial-out target, as well as a domain name and profile. <ul style="list-style-type: none"> ■ The domain name is used in the initial Access-Request message. ■ The profile is used to create the IP/Point-to-Point Protocol (PPP) stack for the dial-out session.

Network Model for Dial-Out

In Figure 10 on page 412, the home site connects to the Internet over a permanent leased line to the Internet service provider's (ISP's) E Series LNS. The ISP uses an IP network to connect the LNS to the narrowband access point of the network where the narrowband LAC exists. The narrowband LAC connects to a narrowband network (ISDN) that the remote site is also connected to.

The figure shows three RADIUS servers. The home site maintains the home server, and the other two servers are at the LNS and the LAC. The router accesses the home and LNS RADIUS servers. (The separation of the RADIUS servers is transparent to the router.)

Before any attempts at connectivity can take place from the home site to the remote site, an administrator must configure a dial-out route on the router. This route directs

the router to start a dial-out operation. The route includes a dial-out target (the virtual router context and the IP address of the remote site). When the router receives a packet destined for the target, it triggers a dial-out session to the target. The route is associated with a profile that holds parameters for the interface stack that the router builds as a result of the dial-out.

Dial-Out Process

The following is the dial-out process used in the Figure 10 on page 412 network:

1. The router receives a trigger packet.
2. The router builds a RADIUS Access-Request message and sends it to the RADIUS server that is associated with the virtual router on which the dial-out route is defined—typically, the RADIUS home server.
3. The RADIUS server's response to the Access-Request is similar to the response used for LAC incoming calls. Notable differences are that the IP addresses of the peer are interpreted as LAC addresses instead of LNS addresses. In addition, narrowband details, such as calling numbers, are returned.
4. The LNS makes the outgoing call using a load-balancing or round-robin mechanism identical to the one that the E Series LAC uses for incoming calls. The LAC may also employ the LAC RADIUS in tunnel authentication.
5. Once the LNS successfully completes a control connection and session with the LAC, the LAC performs the actual narrowband dial-out operation to the remote site using the information passed by the LNS during session setup.
6. A PPP session is started on the remote customer premises equipment (CPE), and mutual PPP authentication is performed at the remote CPE and the LNS as follows:
 - a. The LNS uses the LNS RADIUS server to validate the remote CPE's PPP session, while the CPE can use its own RADIUS server to validate the LNS's PPP session.
 - b. The LNS uses the username and password that is returned in the first Access-Accept message.
7. Once authentication is successful, an IP interface is built on top of the PPP interface at the LNS. Internet Protocol Control Protocol (IPCP) is negotiated, and the framed route that RADIUS returns as a result of the PPP authentication supersedes the dial-out route.

IP traffic can now flow freely between the home and remote sites.

Dial-Out Operational States

The dial-out state machine is a control process within the router that manages the dial-out function for each IP flow. The dial-out state machine has four levels of control: the router chassis, virtual router, targets, and sessions. This section describes the operational states of each of these levels.

Chassis

Table 74 on page 414 describes the operational states of the chassis.

Table 74: Chassis Operational States

State	Description
inService	Dial-out service is operational at the chassis level.
initializationFailed	Dial-out service could not obtain enough system resources for basic operation. All configuration commands fail, and the dial-out service does not function.

Virtual Router

Table 75 on page 414 describes the operational states of the virtual router.

Table 75: Virtual Router Operational States

State	Description
inService	Dial-out service is operational for the virtual router.
initPending	Dial-out service is waiting for the virtual router to be operational. Targets defined within the virtual router are not functional.
down	The dial-out interface for this virtual router is down. Targets defined within the virtual router are not functional.

Targets

Table 76 on page 414 describes the operational states of the targets.

Table 76: Target Operational States

State	Description
inService	Dial-out route is up and operational.
inhibited	<p>Dial-out service cannot obtain sufficient resources to handle triggers, and all triggers are discarded. When resources become available, a target can transition from inhibited to inService.</p> <p>Note that sessions within an inhibited target that are already in the process of connecting or are in the inService state are not affected by this condition.</p>
down	<p>There are insufficient resources to support the creation of a dial-out route for the target. When resources become available, the target can transition to inService.</p> <p>Note that sessions within a down target that are already in the process of connecting or are in the inService state are not affected by this condition.</p>

Sessions

Table 77 on page 415 describes operational states of the sessions.

Table 77: Session Operational States

State	Description
authenticating	<p>New sessions start in the authenticating state. In this state, the dial-out state machine has received a valid trigger and is waiting for authentication, authorization, and accounting (AAA) to complete the initial authentication.</p> <p>On getting a grant from AAA, the session transitions to the connecting state. Alternatively, on getting a deny from AAA, the session transitions to the inhibited state.</p>
connecting	<p>Sessions enter the connecting state when authentication is complete. In this state, the dial-out state machine has initiated an outgoing L2TP call. On entering this state, the session-connecting timer is set to the chassis-wide trigger timer value. The session stays in this state until either the outgoing call is successful or the connecting timer expires. Any new trigger packets received for this session when it is in the connecting state are discarded.</p>
inService	<p>A session enters the inService state from the connecting state on successful completion of the dial-out call request. The session stays in this state until the outgoing call is closed.</p>
inhibited	<p>A session enters the inhibited state from the connecting state when the connecting timer expires (that is, the outgoing call was unsuccessful). This state prevents the router from thrashing on an outgoing call that cannot be completed. When in this state, the router discards all trigger packets received for the session.</p> <p>The inhibited timer controls the amount of time spent in this state. The setting of the inhibited timer varies depending on whether the session is entering the inhibited state for the first time or is reentering the state.</p> <ul style="list-style-type: none"> ■ If it is the first time, the inhibited timer is initialized to the chassis-wide trigger value. ■ If it is reentering the state, the inhibited timer is initialized to 2 times the previous value of the inhibited timer, up to a maximum of 8 times the chassis-wide trigger value. For example, if the chassis-wide trigger value is 30 seconds, the setting of the inhibited timer within the session (on subsequent immediate reentries; see postInhibited state) is 30, 60, 120, 240. Since 240 is 8 x 30, the inhibited timer for this session is never set larger than 240 seconds.
postInhibited	<p>A session enters the postInhibited state after completion of an inhibited state. The inhibited timer is reused to control the amount of time the session stays in postInhibited state. In this state the timer repeatedly times out and reduces the inhibited timer by a factor of 2 on each iteration. Once the inhibited timer reaches zero, the session transitions to dormant. The receipt of a trigger in this state results in a transition to the authenticating state.</p>

Table 77: Session Operational States (continued)

State	Description
dormant	A session enters the dormant state after completion of a postInhibited state. The dormant timer is initialized to the chassis-wide dormant timer value, minus the time the session spent in the postInhibited state. Receipt of a new trigger packet transitions the session to the authenticating state. If the dormant timer expires, the session is deleted. The dormant state exists to allow analysis of a dial-out session before it is deleted.
pending	A session enters the pending state when a valid trigger is received but there already are the maximum number of connecting sessions in the router. The router discards all subsequent trigger packets until other sessions transition out of the connecting state. When this happens, pending sessions can transition to the dormant state.
failed	<p>A session enters the failed state when the router detects a configuration error that prevents the successful operation of the session. Specifically, one of the final steps in a dial-out request is mutual PPP authentication at the LNS. A side-effect of authentication is the installation of an access route for the outgoing call. If the access route does not correspond to the trigger packet (that is, the trigger packet cannot be routed successfully by the new access route), the router detects this discrepancy as a configuration error because trigger packets that arrive are not forwarded into the outgoing call; rather, they are buffered or discarded.</p> <p>The only way to exit the failed state is with the l2tp dial-out session reset command.</p>

Outgoing Call Setup Details

This section details the process described in “Dial-Out Process” on page 413.

Access-Request Message

To create the username in the authentication request, the router uses the trigger, dial-out route, domain name, and optional Multiprotocol Label Switching (MPLS) route distinguisher (RD). The username is constructed as follows:

[MPLS RD]/[trigger destination address]@domain-name

For example, given a dial-out route with an IP prefix of 10.10.0.0/16, a domain name of L2TP-dial-out.de.dt, and an MPLS RD of 0.0.0.0:65000, if a trigger packet arrives with a destination IP address of 10.10.1.1, the router creates the following username:

0.0.0.0:65000/10.10.1.1@L2TP-dial-out.de.dt

No password is offered, and the authentication request is passed to the S-series AAA server for normal authentication processing.

Using the above example, the AAA domain map processes the L2TP-dial-out.de.dt domain as for any other domain. If RADIUS authentication is configured for the authenticating virtual router (VR) context, AAA passes the authentication request to

the E Series RADIUS client. The RADIUS authentication request is consistent with other requests, except that the Service-Type attribute is set to outbound (value of 5).

Access-Accept Message

The router expects RADIUS attributes that define a tunnel to be returned with the additions in Table 78 on page 417. If tunnel attributes are excluded from the Access-Accept message or the returned Service-Type attribute is not set to outbound, the dial-out session is denied.

Table 78: Additions to RADIUS Attributes in Access-Accept Messages

Attribute Number	Attribute Name	Content
6	Service-Type	Outbound
67	Tunnel-Server-Endpoint	IP address of LAC
Juniper VSA 26-35	Tunnel-Dialout-Number	L2TP dial-out number
Juniper VSA 26-36	PPP-Username	Username used in PPP L2TP dial-out sessions at the LNS
Juniper VSA 26-37	PPP-Password	Password used in PPP L2TP dial-out sessions at the LNS
Juniper VSA 26-38	PPP-Protocol	Authentication protocol used for L2TP sessions. 0 = none 1 = PAP 2 = CHAP 3 = PAP-CHAP 4 = CHAP-PAP
Juniper VSA 26-39	Tunnel-Min-Bps	Minimum line speed; passed to LAC (not interpreted by the LNS)
Juniper VSA 26-40	Tunnel-Max-Bps	Maximum line speed; passed to LAC (not interpreted by the LNS)
Juniper VSA 26-41	Tunnel-Bearer-Type	Bearer capability required: 0 = name; 1 = analog; 2 = digital. Passed to LAC (not interpreted by the LNS).

Outgoing Call

After receiving a valid tunnel definition from AAA, the E Series LNS initiates an outgoing call. The router follows the same load-sharing mechanisms as for incoming calls. See “Configuring LAC Tunnel Selection Parameters” on page 370.

After an outgoing call is successfully signaled, the router dynamically creates a PPP interface. The profile in the dial-out route definition specifies any PPP configuration options. Both the L2TP session and the PPP interface exist on a Service module, identical to the LNS operation for incoming calls.

Once the PPP interface is created, Link Control Protocol (LCP) and IPCP are negotiated.

Mutual Authentication

Mutual authentication takes place in LCP, where the LNS validates the PPP interface on the remote CPE and vice-versa. LNS takes the same actions to authenticate the peer as it does on incoming calls.

The LNS obtains the PPP username and password from the initial Access-Accept message. It then provides this information to the remote CPE for authentication.

Route Installation

Once authentication is complete, the router creates a new access route. This route directs the forwarding of IP packets related to the original trigger packet to the newly created interface. The route does not need to be identical to the one specified in the dial-out route, but it must be able to forward packets that have the same destination address as the trigger packet. However, if the access route does not encompass the dial-out route definition, any other trigger packets initiate a new dial-out session.

The dial-out state machine verifies that the trigger packet can be forwarded over the route.

- If the verification is unsuccessful, the dial-out session is put into the failed state.
- If the verification is successful, the dial-out session is put into the inService state.

L2TP Dial-Out Platform Considerations

L2TP dial-out is supported on all E Series routers.

For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the E120 and E320 Broadband Services Routers.

L2TP Dial-Out References

For more information about L2TP, see RFC 2661—Layer Two Tunneling Protocol “L2TP” (August 1999).

Before You Configure L2TP Dial-Out

Create a profile that the router uses to create the dynamic PPP and IP interfaces on the LNS. The profile specifies parameters that are common to all dial-out sessions that use the profile. The following is an example of a typical profile configuration.

1. Create a profile.

```
host1(config)#profile dialOut
host1(config-profile)#
```

2. Specify the interface used for dialout.

```
host1(config-profile)#ip unnumbered loopback 0/0
```

3. Specify the virtual router for the dial-out user's IP interface.

```
host1(config-profile)#ip virtual-router lns
```

4. Specify the authentication mechanism.

```
host1(config-profile)#ppp authentication chap
```

Configuring L2TP Dial-Out

To configure L2TP dial-out:

1. Enable the creation of a dial-out session.

```
host1(config)#l2tp dial-out target 10.10.0.0 255.255.0.0 L2TP-dial-out.de.dt
profile dialOut
```

2. (Optional) Set the maximum time allowed for successful establishment of an L2TP dial-out session.

```
host1(config)#l2tp dial-out connecting-timer-value 30
```

3. (Optional) Set how long the dial-out session stays in the dormant state waiting for a new trigger after the associated L2TP outgoing call ends.

```
host1(config)#l2tp dial-out dormant-timer-value 300
```

4. (Optional) Set the maximum number of trigger packets held in buffer while the dial-out session is being established.

```
host1(config)#l2tp dial-out max-buffered-triggers 50
```

You can also:

- Manually delete a dial-out session.

```
host1#l2tp dial-out session delete 10.10.0.0
```

- Reset a dial-out session by forcing it to the dormant state.

host1#**l2tp dial-out session reset 10.10.0.0**

l2tp dial-out connecting-timer-value

- Use to set the maximum time allowed for attempts to establish L2TP dial-out sessions.
- If the session fails to be established before the connecting timer expires, subsequent attempts to establish the dial-out session to the same destination are inhibited temporarily.
- The range is 30–3600 seconds.
- Example

host1(config)#**l2tp dial-out connecting-timer-value 30**

- Use the **no** version to set the connecting timer to the default, 30 seconds.
- See l2tp dial-out connecting-timer-value

l2tp dial-out dormant-timer-value

- Use to set how long the dial-out session waits in the dormant state for a new trigger after the associated L2TP outgoing call ends.
- If no trigger is received before the dormant timer expires, the dial-out session is deleted.
- The range is 0–3600 seconds.
- Example

host1(config)#**l2tp dial-out dormant-timer-value 300**

- Use the **no** version to set the dormant timer to the default, 300 seconds (5 minutes).
- See l2tp dial-out dormant-timer-value

l2tp dial-out max-buffered-triggers

- Use to set the maximum number of buffered trigger packets held for any dial-out session pending the successful establishment of the L2TP session. Once the session is established, the buffered trigger packets are transmitted.
- Trigger packets received when the maximum number of triggers are already buffered are discarded.
- The range of values is 0–50.
- Example

host1(config)#**l2tp dial-out max-buffered-triggers 50**

- Use the **no** version to set the number of trigger buffers to the default, 0.
- See l2tp dial-out max-buffered-triggers

l2tp dial-out session delete

- Use to delete a dial-out session.
- Closes any L2TP outgoing call associated with the dial-out session.
- Example

```
host1#l2tp dial-out session delete 10.10.0.0
```

- There is no **no** version.
- See l2tp dial-out session delete

l2tp dial-out session reset

- Use to force the dial-out session to the dormant state where it remains until the dormant timer expires or it receives a new trigger.
- Closes any L2TP outgoing call associated with the dial-out session.
- Example

```
host1#l2tp dial-out session reset 10.10.0.0
```

- There is no **no** version.
- See l2tp dial-out session reset

l2tp dial-out target

- Use to define an L2TP dial-out target. When the router receives packets destined for the target, it creates a dial-out session.
- When you create a target, you must specify the following:
 - *ipAddress*—IP address of the target
 - *ipAddressMask*—IP address mask of the target
 - *domainName*—Domain name used in the outgoing call Access-Request message
 - *profileName*—Name of profile used to create the interface stack
- Example

```
host1(config)#l2tp dial-out target 10.10.0.0 255.255.0.0 L2TP-dial-out.de.dt
profile dialOut
```

- Use the **default** version to remove the L2TP dial-out route.
- Use the **no** version to remove the L2TP dial-out route or target.
- See l2tp dial-out target

Monitoring L2TP Dial-Out

To monitor L2TP dial-out, see:

- “Monitoring Chassis-wide Configuration for L2TP Dial-out” on page 448
- “Monitoring Status of Dial-out Sessions” on page 453
- “Monitoring Dial-out Targets within the Current VR Context” on page 454
- “Monitoring Operational Status within the Current VR Context” on page 456

Chapter 15

L2TP Disconnect Cause Codes

- L2TP Disconnect Cause Codes on page 423

L2TP Disconnect Cause Codes

Table 79 on page 423 describes the Point-to-Point Protocol (PPP) disconnect cause codes that are displayed by the **show l2tp received-disconnect-cause-summary** command, sorted by code number. For additional information, see RFC 3145.

Table 79: PPP Disconnect Cause Codes

Code	Name	Description
0	no info	<p>Code 0 includes disconnect causes that are not specifically identified by other codes. This code is generated in the following circumstances:</p> <ul style="list-style-type: none">■ Internal resource constraints (for example, excessive load or reduced resource availability) have prevented the generation of a more specific disconnect code.■ RFC 3145 does not define a disconnect code that corresponds to the cause of the disconnection. <p>The following list shows current disconnection causes on an E Series LNS that do not have a specific disconnect cause codes:</p> <ul style="list-style-type: none">■ The peer initiated termination of LCP after the completion of LCP negotiations, but prior to proceeding to authentication of NCP negotiation. No conditions occurred that enabled the LNS to infer a more informative disconnect code.■ The peer initiated renegotiation of LCP.■ Invalid local MRU (for example, MRU negotiation has been disabled, but the lower MRU is less than the default MRU of 1500).■ Unexpected local MLPPP MRRU for existing bundle (RFC 3145 code 10 covers peer MRRU mismatches, but not local mismatches).■ Authentication failures not covered by any of the authentication-related codes (codes 13-16), such as:<ul style="list-style-type: none">■ Authentication denial of the local LCP by the peer■ Local authentication failure due to no resources■ Local authentication failure due to no authenticator

Table 79: PPP Disconnect Cause Codes *(continued)*

Code	Name	Description
1	admin disconnect	<p>The disconnection was a result of direct administrative action, including:</p> <ul style="list-style-type: none"> ■ The administrator shut down the network or link interface. ■ The administrator logged out the subscriber.
2	renegotiation disabled	Code 2 is not used; the E Series LNS is always capable of renegotiating LCP if proxy data is not available.
3	normal disconnect	<p>Indicates that one of the following events occurred:</p> <ul style="list-style-type: none"> ■ user-initiated logout (direction 1) ■ session timeout (direction 2) ■ inactivity timeout (direction 2) ■ address lease expired (direction 2) <p>The E Series LNS determines by inference that a normal disconnect has occurred for direction 1. The LNS does this when the peer initiates LCP termination after proceeding beyond the successful negotiation of LCP (that is, after starting authentication signaling or NCP negotiation).</p>
4	compulsory encryption refused	<p>Code 4 with direction 2 is generated if the following conditions are met:</p> <ul style="list-style-type: none"> ■ The peer initiates LCP termination without having proceeded beyond the completion of LCP negotiation, and ■ Prior to receiving the terminate request from the peer, the local LCP has sent a Protocol Reject in response to any packet for Encryption Control Protocol (ECP) protocols (protocol codes 0x8053, 0x8055) from the peer. <p>Code 4 with direction 1 is never generated, because the E Series LNS never requests ECP.</p>
5	lcp failed to converge	An LCP configuration error prevented LCP from converging; the two peers attempted to negotiate but did not agree on acceptable LCP parameters.
6	lcp peer silent	LCP negotiation timed out; the LNS did not receive any LCP packets from the LAC.
7	lcp magic number error	A magic number error was detected; this indicates a possible looped back link.
8	lcp keepalive error	The keepalive drop count was exceeded.
9	lcp mlppp endpoint discriminator mismatch	Code 9 is not used. Dynamic MLPPP bundling, which is the only kind of MLPPP bundling supported for MLPPP/L2TP, uses the endpoint discriminator as part of the key for bundle selection. Therefore, there will never be an unexpected endpoint discriminator for an existing MLPPP bundle.

Table 79: PPP Disconnect Cause Codes *(continued)*

Code	Name	Description
10	lcp mlppp mrru not valid	The link attempted to join an existing MLPPP bundle whose peer maximum received reconstructed unit (MRRU) did not match the peer MRRU negotiated by the link.
11	lcp mlppp peer ssn invalid	Code 11 is not used; the short sequence number (SSN) option is not supported.
12	lcp callback refused	<p>Code 12 with direction 2 is generated when the following conditions are met:</p> <ul style="list-style-type: none"> ■ The peer initiates LCP termination without having proceeded to NCP negotiation, and ■ Prior to the termination, the local LCP has responded with a negative acknowledgement (NAK) to a callback option (LCP option 13) from the peer. <p>The E Series LNS never generates code 12 with direction 1 because the LNS never requests callback.</p>
13	authenticate timed out	Authentication failed because the authentication protocol timed out; either the CHAP Authenticate Response or the PAP Authenticate Request was not received.
14	authenticate mlppp name mismatch	Code 14 is not used. Dynamic MLPPP bundling, which is the only kind of MLPPP bundling supported for MLPPP/L2TP, uses the authenticated name as part of the key for bundle selection. Therefore, there will never be an unexpected authenticated name for an existing MLPPP bundle.
15	authenticate protocol refused	<p>No acceptable authentication protocol was negotiated by LCP.</p> <ul style="list-style-type: none"> ■ Code 15 with direction 1 is generated if the peer rejected all of the authentication protocols requested by the local LCP. ■ Code 15 with direction 2 is generated if the following conditions are met: <ul style="list-style-type: none"> ■ The peer initiates LCP termination without having proceeded beyond completion of NCP negotiation, and ■ During LCP negotiation, the local LCP responded with a NAK to the final authentication protocol requested by the peer.
16	authenticate failure	<ul style="list-style-type: none"> ■ Code 16 with direction 1 is generated if the local authentication of the peer fails (that is, the authenticator sent a PAP NAK or CHAP Failure packet) ■ Code 16 with direction 2 is generated if the peer authentication of the local LCP fails (that is, the authenticator received a PAP NAK or CHAP Failure packet). <p>Note that there are a variety of causes for authentication failures, including bad credentials (bad name, password or secret) and resource problems.</p>

Table 79: PPP Disconnect Cause Codes *(continued)*

Code	Name	Description
17	ncp no negotiation completed	<p>Code 17 is generated only if an NCP configuration error has prevented NCP negotiation from converging. This occurs when the two peers do not agree on acceptable NCP parameters within the time allowed for upper-layer negotiation.</p> <p>Code 19 takes precedence over code 17 in situations related to address convergence failure.</p>
18	ncp no ncps available	No NCPs were successfully enabled within the time allowed for upper-layer negotiation.
19	ncp addresses failed to converge	<p>An NCP configuration error has prevented NCP negotiation from converging on acceptable addresses. This occurs if the two peers never agree on acceptable NCP addresses within the time allowed for upper-layer negotiation.</p> <ul style="list-style-type: none"> ■ Code 19 with direction 1 is generated if the peer denies address parameters requested by the local NCP. ■ Code 19 with direction 2 is generated if the local NCP denies address parameters requested by the peer. <p>The IPv6 interface identifier is considered an address for the purposes of code 19.</p> <p>Code 19 takes precedence over code 17 in situations related to address convergence failure.</p>
20	ncp negotiation inhibited	<ul style="list-style-type: none"> ■ Code 20 with direction 2 indicates that an upper layer negotiation was inhibited for any enabled NCP because the required network-layer parameters were not available as a result of the authentication stage. ■ Code 20 with direction 1 is never generated; the NCPs are never enabled if there is no non-null local address.

Chapter 16

Monitoring L2TP and L2TP Dial-Out

When you have configured L2TP and L2TP dial-out on your E Series router, you can monitor the active tunnels and sessions.



NOTE: All of the commands in this chapter apply to both the LAC and the LNS.

L2TP and L2TP dial-out topics are described in the following sections:

- Monitoring the Mapping for User Domains and Virtual Routers with AAA on page 428
- Monitoring Configured Tunnel Groups with AAA on page 430
- Monitoring Configuration of Tunnel Parameters with AAA on page 432
- Monitoring Global Configuration Status on E Series Routers on page 433
- Monitoring Detailed Configuration Information for Specified Destinations on page 435
- Monitoring Locked Out Destinations on page 437
- Monitoring Configured Destination Profiles or Host Profiles on page 437
- Monitoring Configured and Operational Status of all Destinations on page 440
- Monitoring Statistics on the Cause of a Session Disconnection on page 441
- Monitoring Detailed Configuration Information about Specified Sessions on page 442
- Monitoring Configured and Operational Summary Status on page 443
- Monitoring Configured Switch Profiles on Router on page 444
- Monitoring Detailed Configuration Information about Specified Tunnels on page 445
- Monitoring Configured and Operational Status of All Tunnels on page 448
- Monitoring Chassis-wide Configuration for L2TP Dial-out on page 448
- Monitoring Status of Dial-out Sessions on page 453
- Monitoring Dial-out Targets within the Current VR Context on page 454
- Monitoring Operational Status within the Current VR Context on page 456

Monitoring the Mapping for User Domains and Virtual Routers with AAA

Purpose Display the mapping between user domains and virtual routers.

Action To display the mapping between user domains and virtual routers:

```
host1#show aaa domain-map
Domain: lac-tunnel; router-name: lac; ipv6-router-name: default
Tunnel
Tag      Tunnel Peer      Tunnel Source      Tunnel Type      Tunnel Medium      Tunnel Password      Tunnel Id
-----
5        192.168.1.1      <null>             12tp             ipv4             welcome             lac-tunnel

Tunnel
Tag      Tunnel Client Name      Tunnel Server Name      Tunnel Preference      Tunnel Max Sessions      Tunnel RWS
-----
5        lac              boston              5                      0                      4

Tunnel
Tag      Tunnel Virtual Router      Tunnel Failover Resync      Tunnel Switch Profile      Tunnel Tx Speed Method
-----
5        <null>             <null>             denver              qos
```

Meaning Table 80 on page 428 lists the **show aaa domain-map** command output fields.

Table 80: show aaa domain-map Output Fields

Field Name	Field Description
Domain	Name of the domain
router-name	Virtual router to which user domain name is mapped
router-mask	IPv4 mask of the local interface
tunnel-group	Name of the tunnel group assigned to the domain map
ipv6-router-name	IPv6 virtual router to which user domain name is mapped
local-interface	Interface information to use on the local (E Series) side of the subscriber's interface
ipv6-local-interface	IPv6 interface information to use on the local (E Series) side of the subscriber's interface
poolname	Local address pool from which the router allocates addresses for this domain
IP hint	IP hint is enabled
strip-domain	Strip domain is enabled

Table 80: show aaa domain-map Output Fields *(continued)*

Field Name	Field Description
override-username	Single username used for all users from a domain in place of the values received from the remote client
override-password	Single password used for all users from a domain in place of the values received from the remote client
Tunnel Tag	Tag that identifies the tunnel
Tunnel Peer	Destination address of the tunnel
Tunnel Source	Source address of the tunnel
Tunnel Type	L2TP
Tunnel Medium	Type of medium for the tunnel; only IPv4 is supported
Tunnel Password	Password for the tunnel
Tunnel Id	ID of the tunnel
Tunnel Client Name	Host name that the LAC sends to the LNS when communicating to the LNS about the tunnel
Tunnel Server Name	Host name expected from the peer (the LNS) when during tunnel startup
Tunnel Preference	Preference level for the tunnel
Tunnel Max Sessions	Maximum number of sessions allowed on a tunnel
Tunnel RWS	L2TP receive window size (RWS) for a tunnel on the LAC; displays either the configured value or the default behavior, which is indicated by system chooses
Tunnel Virtual Router	Name of the virtual router to map to the user domain name
Tunnel Failover Resync	L2TP peer resynchronization method
Field descriptions	The actual fields displayed depend on your configuration
Tunnel Switch Profile	Name of the L2TP tunnel switch profile
Tunnel Tx Speed Method	Method that the router uses to calculate the transmit connect speed of the subscriber's access interface: static layer2, dynamic layer2, qos, actual, not set

Related Topics ■ [show aaa domain-map](#)

Monitoring Configured Tunnel Groups with AAA

Purpose Display the currently configured tunnel groups.

Action To display information about currently configured tunnel groups:

```
host1#show aaa tunnel-group
Tunnel Group: boston
Tunnel
Tag      Tunnel Peer      Tunnel Source      Tunnel Type      Tunnel Medium      Tunnel Password      Tunnel Id
-----
3        192.168.1.1      <null>             12tp             ipv4              msn                  <null>
Tunnel
Tag      Tunnel Client Name  Tunnel Server Name  Tunnel Preference  Tunnel Max Sessions  Tunnel RWS
-----
3        msn.del.com      <null>             2000              0                    4
Tunnel
Tag      Tunnel Virtual Router  Tunnel Failover Resync  Tunnel Switch Profile  Tunnel Tx Speed Method
-----
3        <null>           <null>             sanjose           qos
```

Meaning Table 81 on page 430 lists the **show aaa tunnel-group** command output fields.

Table 81: show aaa tunnel-group Output Fields

Field Name	Field Description
Domain	Name of the domain
router-name	Virtual router to which user domain name is mapped
router-mask	IPv4 mask of the local interface
tunnel-group	Name of the tunnel group assigned to the domain map
ipv6-router-name	IPv6 virtual router to which user domain name is mapped
local-interface	Interface information to use on the local (E Series) side of the subscriber's interface
ipv6-local-interface	IPv6 interface information to use on the local (E Series) side of the subscriber's interface
poolname	Local address pool from which the router allocates addresses for this domain
IP hint	IP hint is enabled

Table 81: show aaa tunnel-group Output Fields (continued)

Field Name	Field Description
strip-domain	Strip domain is enabled
override-username	Single username used for all users from a domain in place of the values received from the remote client
override-password	Single password used for all users from a domain in place of the values received from the remote client
Tunnel Tag	Tag that identifies the tunnel
Tunnel Peer	Destination address of the tunnel
Tunnel Source	Source address of the tunnel
Tunnel Type	L2TP
Tunnel Medium	Type of medium for the tunnel; only IPv4 is supported
Tunnel Password	Password for the tunnel
Tunnel Id	ID of the tunnel
Tunnel Client Name	Host name that the LAC sends to the LNS when communicating to the LNS about the tunnel
Tunnel Server Name	Host name expected from the peer (the LNS) when during tunnel startup
Tunnel Preference	Preference level for the tunnel
Tunnel Max Sessions	Maximum number of sessions allowed on a tunnel
Tunnel RWS	L2TP receive window size (RWS) for a tunnel on the LAC; displays either the configured value or the default behavior, which is indicated by system chooses
Tunnel Virtual Router	Name of the virtual router to map to the user domain name
Tunnel Failover Resync	L2TP peer resynchronization method
Field descriptions	The actual fields displayed depend on your configuration
Tunnel Switch Profile	Name of the L2TP tunnel switch profile
Tunnel Tx Speed Method	Method that the router uses to calculate the transmit connect speed of the subscriber's access interface: static layer2, dynamic layer2, qos, actual, not set

- Related Topics**
- `show aaa tunnel-group`
 - The information displayed is almost identical to the tunnel information displayed using the **`show aaa domain-map`** command. See *Monitoring the Mapping for User Domains and Virtual Routers with AAA* on page 428.

Monitoring Configuration of Tunnel Parameters with AAA

Purpose Display configuration of tunnel parameters used for tunnel definitions.

Action To display the configuration of tunnel parameters used for tunnel definitions:

```
host1#show aaa tunnel-parameters
Tunnel password is 3&92k%b#q4
Tunnel client-name is <NULL>
Tunnel nas-port-method is none
Tunnel switch profile is boston
Tunnel tx-connect-speed-method is qos
Tunnel nas-port ignore disabled
Tunnel nas-port-type ignore disabled
Tunnel assignmentId format is assignmentId
Tunnel calling number format is fixed (stacked)
Tunnel calling number format fallback is fixed
```

Meaning Table 82 on page 432 lists the **`show aaa tunnel-parameters`** command output fields.

Table 82: show aaa tunnel-parameters Output Fields

Field Name	Field Description
Tunnel password	Default tunnel password
Tunnel client-name	Hostname that the LAC sends to the LNS when communicating about the tunnel
Tunnel nas-port-method	Default NAS port type
Tunnel switch profile is	Name of the default L2TP tunnel switch profile
Tunnel tx-connect-speed-method is	Method that the router uses to calculate the transmit connect speed of the subscriber's access interface: static layer2, dynamic layer2, qos, actual, not set
Tunnel nas-port ignore	Whether the router uses the tunnel peer's NAS-Port [5] attribute; enabled or disabled
Tunnel nas-port-type ignore	Whether the router uses the tunnel peer's NAS-Port-Type [61] attribute; enabled or disabled
Tunnel assignmentId format	Value of the tunnel assignment ID that is passed to PPP/L2TP
Tunnel calling number format	Format configured for L2TP Calling Number AVP 22 generated by the LAC

Table 82: show aaa tunnel-parameters Output Fields (continued)

Field Name	Field Description
Tunnel calling number format fallback	Fallback format configured for L2TP Calling Number AVP 22 generated by the LAC

Related Topics ■ show aaa tunnel-parameters

Monitoring Global Configuration Status on E Series Routers

Purpose Display the global configuration and status for L2TP on E Series routers, including switched sessions.

Action To display the global configuration and status for L2TP on E Series routers, including switched sessions:

host1#show l2tp

Configuration

```
L2TP administrative state is enabled
Dynamic interface destruct timeout is 600 seconds
Data packet checksums are disabled
Receive data sequencing is not ignored
Tunnel switching is disabled
Retransmission retries for established tunnels is 5
Retransmission retries for not-established tunnels is 5
Tunnel idle timeout is 60 seconds
Failover within a preference level is disabled
Weighted load balancing is disabled
Tunnel authentication challenge is enabled
Calling number avp is enabled
Reject remote transmit address change is enabled for ip address
Ignore remote transmit address change is disabled
Disconnect-cause avp generation is enabled
Default receive window size is system chooses
Rx speed avp when equal is enabled
Destination lockout timeout is 300 seconds
Destination lockout test is disabled
Failover resync is silent-failover
```

Sub-interfaces	total	active	failed	auth-errors
Destinations	0	0	0	n/a
Tunnels	0	0	0	0
Sessions	0	0	0	n/a
Switched-sessions	0	0	0	n/a

Meaning Table 83 on page 434 lists the **show l2tp** command output fields.

Table 83: show l2tp Output Fields

Field Name	Field Description
Configuration	Configuration and status for L2TP on E Series routers, including switched sessions
L2TP administrative state	Status of L2TP on the router; enabled or disabled
Dynamic interface destruct timeout	Number of seconds that the router maintains dynamic destinations, tunnels, and sessions after they have terminated
Data packet checksums	Status of checking data integrity via UDP; enabled or disabled
Receive data sequencing	Whether the router processes or ignores sequence numbers in incoming data packets
Tunnel switching	Enabled or disabled
Retransmission retries for established tunnels	Number of retries configured for established tunnels
Retransmission retries for not-established tunnels	Number of retries configured for tunnels not established
Tunnel idle timeout	Length of the tunnel idle timeout, in seconds
Failover within a preference level	Enabled or disabled
Weighted load balancing	Enabled or disabled
Tunnel authentication challenge	Enabled or disabled
Calling number avp	Whether the E Series LAC sends Calling-Station-Id and Called-Station-Id AVPs in ICRQ packets, enabled or disabled
Reject remote transmit address change	Enabled or disabled for IP address, UDP port, or both
Ignore remote transmit address change	Enabled or disabled for IP address, UDP port, or both
Disconnect-cause avp generation	Enabled or disabled
Default receive window size	Default L2TP RWS for a tunnel on both the LAC and the LNS; displays either the configured value or the default behavior, indicated by system chooses
Rx speed avp when equal	Enabled or disabled
Destination lockout timeout	Number of seconds that L2TP destinations remain in the lockout state after they become unavailable
Destination lockout test	Status of the L2TP destination lockout test, enabled or disabled

Table 83: show l2tp Output Fields (continued)

Field Name	Field Description
Failover resync	Global L2TP peer resynchronization configuration
Sub-interfaces	Sub-interface information about L2TP
total	Number of destinations, tunnels, and sessions that the router created
active	Number of operational destinations, tunnels, and sessions
failed	Number of requests that did not reach an operational state
auth-errors	Number of requests that failed because the tunnel password was invalid

Related Topics ■ show l2tp

Monitoring Detailed Configuration Information for Specified Destinations

Purpose Display detailed configuration information about specified destinations.

Action To display detailed configuration information about specified destinations:

To display information about a specific destination:

```
host1#show l2tp destination ip 172.31.1.98
L2TP destination 1 is Up with 5 active tunnels and 64 active sessions
```

To display information about all destinations:

```
host1#show l2tp destination detail 1
L2TP destination 1 is Up with 5 active tunnels and 64 active sessions
Configuration
  Administrative state is enabled
  SNMP traps are enabled
Destination address
  Transport ipUdp
  Virtual router default
  Local address 192.168.1.230, peer address 172.31.1.98
Destination status
  Effective administrative state is enabled
Sub-interfaces total active failed auth-errors
Tunnels      5      5      0      0
Sessions     64     64     0     n/a
Statistics   packets  octets  discards  errors
Control rx   69      3251    2         0
Control tx   195     23939  0         0
```

```

Data rx      68383456    68383456    0      0
Data tx      68383456    68383456    0      0

```

Meaning Table 84 on page 436 lists the **show l2tp destination** command output fields.

Table 84: show l2tp destination Output Fields

Field Name	Field Description
Configuration	Configured status of the destination
Administrative state	Administrative status of the destination: <ul style="list-style-type: none"> ■ enabled—No restrictions on creation and operation of sessions and tunnels for this destination ■ disabled—Router disabled existing sessions and tunnels and will not create new sessions or tunnels for this destination ■ drain—Router will not create new sessions or tunnels for this destination
SNMP traps	Whether or not the router sends traps to SNMP for operational state changes
Destination address	Address information for the specified destination
Transport	Method used to transfer traffic
Virtual	Name of the virtual router on which the tunnel is configured
Local and peer addresses	Addresses of the local and remote interfaces
Destination status	Effective administrative state—The more restrictive of the router and destination administrative states. This setting, rather than the administrative state of the destination, determines whether the router can create new sessions or tunnels and whether the sessions or tunnels are disabled for this destination.
Sub-interfaces	Sub-interface information about the L2TP destination
total	Number of sessions or tunnels that the router created for this destination
active	Number of operational sessions or tunnels for this destination
failed	Number of requests that did not reach an operational state for this destination
auth-errors	Number of requests that failed because the tunnel password was invalid for this destination
Statistics	Information about the traffic sent and received

Related Topics ■ show l2tp destination

Monitoring Locked Out Destinations

Purpose Display information about the L2TP destinations that are currently locked out.

Action To display information about the L2TP destinations that are currently locked out:

```
host1#show l2tp destination lockout
L2TP destination 36 is waiting for lockout timeout (45 seconds remaining)
L2TP destination 54 is waiting for lockout test start
L2TP destination 76 is waiting for lockout test complete
3 L2TP lockout destinations found
```

Meaning Table 85 on page 437 lists the **show l2tp destination lockout** command output fields.

Table 85: show l2tp destination lockout Output Fields

Field Name	Field Description
L2TP destination waiting	Name of destination and its lockout status. The status indicates whether the destination is waiting for the lockout timeout to expire (and how much time is left), or waiting for the lockout test to start or finish
L2TP lockout destinations found	Number of destinations that are currently in lockout state

Related Topics ■ show l2tp destination lockout

Monitoring Configured Destination Profiles or Host Profiles

Purpose Display either a list of configured L2TP destination profiles or the host profiles defined in a particular profile.

If a nondefault L2TP RWS is configured for a particular host profile, the command displays the RWS setting as an attribute of that host profile. (See Example 2.)

Action To display either a list of configured L2TP destination profiles or the host profiles defined in a particular profile:

```
host1#show l2tp destination profile
L2TP destination profile westford
1 L2TP destination profile found
```

If a nondefault L2TP RWS is configured for a particular host profile, to display the RWS setting as an attribute of that host profile:

```

host1#show l2tp destination profile westford
L2TP destination profile westford
Configuration
  Destination address
  Transport ipUdp
  Virtual router lns
  Peer address 192.168.1.99
  Destination profile maximum sessions is 5000
Statistics
  Destination profile current session count is 2
Host profile attributes
  Remote host is remhost22.xyz.com
  Configuration
    Tunnel password is 23erf5
    Interface profile is ebcints
    Bundled group id is 1
    Bundled group id override is enabled
    Maximum sessions is 400
    Failover resync is failover-protocol
  Statistics
    Current session count is 14
  Remote host is asciitext
  Configuration
    Bundled group id is 0
    Tunnel password is 222
    Interface profile is ascints
    Default upper binding type mlppp
    Maximum sessions is 250
    Failover resync is failover-protocol
  Statistics
    Current session count is 2
  Remote host is mexico
  Configuration
    Local ip address is 10.10.2.2
    Proxy lcp is disabled
    Proxy authenticate is enabled
    mlppp upper binding type
    Disconnect-cause avp is enabled
    Receive window size is 4
    Maximum sessions is 500
    Failover resync is failover-protocol
  Statistics
    Current session count is 14
  Remote host is LAC
  Configuration
    Tunnel password is TunnelPass
    Local host name is LNS
    Local ip address is 46.1.1.2
    Disconnect-cause avp is enabled
    Tunnels are single-shot
    Override out-of-resource-result-code is enabled
  Statistics
    Current session count is 0
5 L2TP host profiles found

```

Meaning Table 86 on page 439 lists the **show l2tp destination profile** command output fields.

Table 86: show l2tp destination profile Output Fields

Field Name	Field Description
Destination profile attributes	Destination profile attributes of L2TP destination
Transport	Method used to transfer traffic
Virtual Router	Method used to transfer traffic
Peer address	IP address of the LAC
Destination profile maximum sessions	Maximum number of sessions allowed for the destination profile
Destination profile current session count	Number of current sessions for the destination profile
Host profile attributes	Host profile attributes of L2TP destination
Remote host	Name of the remote host
Local hostname	Name of the local host
Local IP address	IP address of the local host
Bundled group id	Identifier for bundled sessions
Tunnel password	Password for the tunnel
Interface profile	Name of the host profile
Proxy lcp	Status of proxy LCP for the remote host
mlppp upper binding type	Default upper binding type
Disconnect-cause avp generation	Status of the disconnect cause generation
Receive window size	Number of packets that the peer can transmit without receiving an acknowledgment from the router
Maximum sessions	Maximum number of sessions allowed for the host profile
Failover resync	L2TP peer resynchronization method for the host profile
Override out-of-resource-result-code	State of result code override, enabled or disabled
Current session count	Number of current sessions for the host profile

Related Topics ■ show l2tp destination profile

Monitoring Configured and Operational Status of all Destinations

Purpose Display summary of the configured and operational status of all L2TP destinations.

Action To display a summary of the configured and operational status of all L2TP destinations.:

```
host1#show l2tp destination summary
```

```
Administrative status  enabled    drain    disabled
                      0         0        0
Operational status    up        down    lower-down not-present
                      0         0        0         0
```

Meaning Table 87 on page 440 lists the **show l2tp destination summary** command output fields.

Table 87: show l2tp destination summary Output Fields

Field Name	Field Description
Administrative status	Administrative status of the L2TP destination: <ul style="list-style-type: none"> ■ enabled—No restrictions on creation and operation of sessions and tunnels for this destination ■ drain—Router will not create new sessions or tunnels for this destination ■ disabled—Router disabled existing sessions and tunnels and will not create new sessions or tunnels for this destination
Operational status	Operational status of the L2TP destination: <ul style="list-style-type: none"> ■ up—Destination is available for tunnels ■ down—Destination is not available for tunnels ■ lower-down—Underlying transport is unavailable; for example, you removed the virtual router ■ not-present—Hardware supporting the destination is unavailable; for example, you removed a required line module

Related Topics ■ show l2tp destination **summary**

Monitoring Statistics on the Cause of a Session Disconnection

Purpose Display statistics for all information the LAC receives from an LNS about the cause of an L2TP session disconnection.

Action To display statistics for all information the LAC receives from an LNS about the cause of an L2TP session disconnection.

```
host1# show l2tp received-disconnect-cause-summary
Disconnect Cause (Code)          Global    Peer      Local
-----
no info (0)                      0         0         0
admin disconnect (1)             0         0         0
renegotiation disabled (2)       0         0         0
normal disconnect (3)            0         0         0
compulsory encryption refused (4) 0         0         0
lcp failed to converge (5)       0         0         0
lcp peer silent (6)              0         0         0
lcp magic number error (7)       0         0         0
lcp keepalive failure (8)        0         0         0
lcp mlppp endpoint discriminator mismatch (9) 0         0         0
lcp mlppp peer mrru not valid (10) 0         0         0
lcp mlppp peer ssn invalid (11)  0         0         0
lcp callback refused (12)        0         0         0
authenticate timed out (13)      0         0         0
authenticate mlppp name mismatch (14) 0         0         0
authenticate protocol refused (15) 0         0         0
authenticate failure (16)        0         0         0
ncp no negotiation completed (17) 0         0         0
ncp no ncps available (18)       0         0         0
ncp addresses failed to converge (19) 0         0         0
ncp negotiation inhibited (20)   0         0         0
```

Meaning Table 88 on page 441 lists the **show l2tp received-disconnect-cause-summary** command details.

Table 88: show l2tp received-disconnect-cause-summary Output Fields

Field Name	Field Description
show l2tp received-disconnect-cause-summary	Display statistics for all information the LAC receives from an LNS about the cause of an L2TP session disconnection.

Related Topics ■ [show l2tp received-disconnect-cause-summary](#)

Monitoring Detailed Configuration Information about Specified Sessions

Purpose Display detailed configuration information about specified sessions.

Action To display detailed configuration information about specified sessions:

To display L2TP session:

```
host1#show l2tp session
L2TP session 1/1/1 is Up
1 L2TP session found
```

To display L2TP session details:

```
host1#show l2tp session detail
L2TP session 1/1/1 is Up
Configuration
  Administrative state is enabled
  SNMP traps are enabled
Session status
  Effective administrative state is enabled
  State is established
  Local session id is 25959, peer session id is 2
Statistics packets octets discards errors
  Data rx 7      237  1      0
  Data tx 6      160  0      0

Session operational configuration
  User name is 't1.s1@local'
  Tunneling PPP interface atm 0/0.1
  Call type is lacIncoming
  Call serial number is 0
  Bearer type is none
  Framing type is none
  Proxy LCP was provided
  Authentication method was chap
  Tunnel switch profile is chicago
```

Meaning Table 89 on page 442 lists the **show l2tp session** command output fields.

Table 89: show l2tp session Output Fields

Field Name	Field Description
Configuration	Configured status of the session
Administrative state	Administrative status of the destination: <ul style="list-style-type: none"> ■ enabled—No restrictions on the operation of this session ■ disabled—Router terminated this session

Table 89: show l2tp session Output Fields *(continued)*

Field Name	Field Description
SNMP traps	Whether or not the router sends traps to Simple Network Management Protocol (SNMP) for operational state changes
Session status	Session status of the destination
Effective administrative state	Most restrictive of the following administrative states: router, destination, tunnel, and session. This setting, rather than the administrative state of the session, determines whether the router can maintain this session or not.
State	Status of the session: idle, connecting, established, or disconnecting
Local and peer session id	Names the router uses to identify the session locally and remotely
Statistics	Information about the traffic for this session
Session operational configuration	Information received from the peer when the session was created

Related Topics ■ show l2tp session

Monitoring Configured and Operational Summary Status

Purpose Display a summary of the configured and operational status of all L2TP sessions.

Action To display a summary of the configured and operational status of all L2TP sessions:

```
host1#show l2tp session summary
Administrative status  enabled    disabled
                     64         0
Operational status    up        down    lower-down  not-present
                     64         0         0         0
```

Meaning Table 90 on page 444 lists the **show l2tp session summary** command output fields.

Table 90: show l2tp session summary Output Fields

Field Name	Field Description
Administrative status:	Administrative status of the session: <ul style="list-style-type: none"> ■ enabled—No restrictions on the creation of sessions ■ disabled—Router disabled these sessions
Operational status:	Operational status of the session: <ul style="list-style-type: none"> ■ up—Session is available ■ down—Session is unavailable ■ lower-down—Session is unavailable because the tunnel supporting it is inaccessible ■ not-present—Session is unavailable because the hardware (such as a line module) supporting it is inaccessible

Related Topics ■ [show l2tp session summary](#)

Monitoring Configured Switch Profiles on Router

Purpose Display information about the L2TP switch profiles configured on the router.

Action To display only the names of the L2TP tunnel switch profiles configured on the router:

```
host1#show l2tp switch-profile
L2TP tunnel switch profile concord
L2TP tunnel switch profile myProfile
2 L2TP tunnel switch profiles found
```

To display information about the settings in a particular L2TP tunnel switch profile:

```
host1#show l2tp switch-profile concord
L2TP tunnel switch profile concord
  AVP bearer type action is relay
  AVP calling number action is relay
  AVP Cisco nas port info action is relay
```

Meaning Table 91 on page 444 lists the **show l2tp switch-profile** command output fields.

Table 91: show l2tp switch-profile Output Fields

Field Name	Field Description
L2TP tunnel switch profile	Name of the L2TP tunnel switch profile

Table 91: show l2tp switch-profile Output Fields (continued)

Field Name	Field Description
AVP <i>actionType</i> action is	Indicates the tunnel switching behavior or action type (for example, relay) configured for the specified L2TP AVP type

Related Topics ■ show l2tp switch-profile

Monitoring Detailed Configuration Information about Specified Tunnels

Purpose Display detailed configuration information about specified tunnels.

Action To display detailed configuration information about specified tunnel by ip address:

```
host1#show l2tp tunnel virtual router default ip 172.31.1.98
L2TP tunnel 1/xyz is Up with 13 active sessions
L2TP tunnel 1/aol.com is Up with 13 active sessions
L2TP tunnel 1/isp.com is Up with 13 active sessions
L2TP tunnel 1/msn.com is Up with 13 active sessions
L2TP tunnel 1/mv.com is Up with 12 active sessions
5 L2TP tunnels found
```

To display detailed configuration information about specified tunnel:

```
host1#show l2tp tunnel detail 1/xyz
L2TP tunnel 1/xyz is Up with 13 active sessions
Configuration
  Administrative state is enabled
  SNMP traps are enabled
Tunnel address
  Transport ipUdp
  Virtual router default
  Local address 192.168.1.230, peer address 172.31.1.98
  Local UDP port 1701, peer UDP port: 1701
Tunnel status
  Effective administrative state is enabled
  State is established
  Local tunnel id is 14529, peer tunnel id is 34
Sub-interfaces      total    active    failed
Sessions            13       13        0
Statistics  packets    octets      discards    errors
Control rx   14         683          0          0
Control tx   41        4666          0          0
Data rx      67900944    67900944     0          0
Data tx      67900944    67900944     0          0
Control channel statistics
  Receive window size = 4
  Receive ZLB = 17
  Receive out-of-sequence = 0
  Receive out-of-window = 0
  Transmit window size = 4
```

```

Transmit ZLB = 12
Transmit queue depth = 0
Retransmissions = 8
Tunnel operational configuration
Peer host name is 'Juniper-POS'
Peer vendor name is 'XYZ, Inc.'
Peer protocol version is 1.1
Peer firmware revision is 0x1120
Peer bearer capabilities are digital and analog
Peer framing capabilities are sync and async

```

Meaning Table 92 on page 446 lists the **show l2tp tunnel** command output fields.

Table 92: show l2tp tunnel Output Fields

Field Name	Field Description
Configuration	Configured status of the tunnel enabled
Administrative state	Administrative status of the enabled tunnel: <ul style="list-style-type: none"> ■ enabled—No restrictions on creation and operation of sessions for this tunnel ■ disabled—Router disabled existing sessions and will not create new sessions on this tunnel ■ drain—Router will not create new sessions on this tunnel
SNMP traps	Whether or not the router sends traps to SNMP for operational state changes
Tunnel address	Tunnel address information.
Transport	Method used to transfer traffic
Virtual router	Name of the virtual router on which the tunnel is configured
Local and peer addresses	IP addresses of the local and remote ends of the tunnel. If the router is set up to ignore address and port changes in SCCRP packets, both the transmit and receive addresses are listed for the peer.
Local and peer UDP ports	UDP ports for the local and remote ends of the tunnel. If the router is set up to accept address and port changes in SCCRP packets, both the transmit and receive UDP ports are listed for the peer.
Tunnel status	Tunnel status information.
Effective administrative state	Most restrictive of the following administrative states: E Series router, destination, and tunnel. This setting, rather than the administrative state of the tunnel, determines whether the router can create new sessions on a tunnel or whether the sessions on a tunnel are disabled or not.

Table 92: show l2tp tunnel Output Fields (continued)

Field Name	Field Description
State	Status of the enabled tunnel: <ul style="list-style-type: none"> ■ idle ■ connecting ■ established ■ disconnecting
Local and peer tunnel id	Names the router used to identify the tunnel locally and remotely
Sub-interfaces:	Sub-interface information for the enabled tunnel: <ul style="list-style-type: none"> ■ total—Number of sessions that the router has created on this tunnel ■ active—Number of operational sessions on the tunnel ■ failed—Number of requests that did not reach an operational state
Statistics	Information about the traffic sent and received
Control channel statistics	Tunnel control channel information
Receive window size	Number of packets that the peer can transmit without receiving an acknowledgment from the router.
Receive ZLB	Number of acknowledgments that the router has received from the peer.
Receive out-of-sequence	Number of received control packets that were out of order.
Receive out-of-window	Number of packets that arrived at the router outside the receiving window.
Transmit window size	Number of packets that the router can transmit before receiving an acknowledgment from the peer.
Transmit ZLB	Number of acknowledgments that the router has sent to the peer.
Transmit queue depth	Number of packets that the router is waiting to send to the peer, plus the number of packets for which the peer has not yet acknowledged receipt.
Tunnel operation configuration	Information received from the peer when the tunnel was created

Related Topics ■ [show l2tp tunnel](#)

Monitoring Configured and Operational Status of All Tunnels

Purpose Display a summary of the configured and operational status of all L2TP tunnels.

Action To display a summary of the configured and operational status of all L2TP tunnels:

```
host1#show l2tp tunnel summary
```

Administrative status	enabled	drain	disabled		
	5	0	0		
Operational status	up	down	lower-down	not-present	
	5	0	0	0	0

Meaning Table 93 on page 448 lists the **show l2tp tunnel summary** command output fields.

Table 93: show l2tp tunnel summary Output Fields

Field Name	Field Description
Administrative status	Administrative status of all tunnels: <ul style="list-style-type: none"> ■ enabled—No restrictions on the creation and operation of sessions for this tunnel ■ drain—Router will not create new sessions for this tunnel ■ disabled—Router disabled existing sessions and will not create new sessions for this tunnel
Operational status	Operational status of all tunnels: <ul style="list-style-type: none"> ■ up—Tunnel is available ■ down—Tunnel is unavailable ■ lower-down—Tunnel is unavailable because the destination supporting it is inaccessible ■ not-present—Tunnel is unavailable because the hardware (such as a line module) supporting the tunnel is inaccessible

Related Topics ■ [show l2tp tunnel summary](#)

Monitoring Chassis-wide Configuration for L2TP Dial-out

Purpose To display the chassis-wide configuration, operational state, and statistics for L2TP dial-out.

This command displays aspects of the dial-out state machine and details about the dial-out routes themselves. This section presents sample output. The actual output on your router may differ significantly.

Action To display chassis-wide configuration, operational state, and statistics for L2TP dial-out:

```
host1#show l2tp dial-out
Operational status: inService
Connecting timer value: 30 seconds
Dormant timer value: 300 seconds
```

To display detailed chassis-wide configuration information:

```
host1#show l2tp dial-out detail
Dial-out Chassis Configuration and Operational Status
  Chassis operational status :    inService
  Dormant timeout           :    30 seconds
  Connecting timeout        :    30 seconds
Dial-out Chassis Statistics
  Current sessions:                0
  Maximum sessions:                0
  Current sessions in the process of connecting: 0
  Maximum sessions connecting at one time: 0
  Current sessions pending:        0
  Maximum sessions pending:        0
  Current targets inhibited:        0
  Maximum targets inhibited:        0
  Authentication grant for nonexistent session: 0
  Authentication deny for nonexistent session: 0
Dial-out Virtual router statistics
  Virtual routers active:          0
  Virtual routers created:         0
  Virtual routers removed:         0
  Virtual routers in init-pending state: 0
  Virtual routers in init-failed state: 0
  Virtual routers in down state:    0
  Virtual routers in in-service state: 0
  IP Discarded trigger frames:      0
  Trigger frames received for unknown route: 0
  Sessions in dormant state:        0
  Sessions in pending state:        0
  Sessions in authenticating state: 0
  Sessions in connecting state:     0
  Sessions in in-service state:     0
  Sessions in inhibited state:      0
  Sessions in post-inhibited state: 0
  Sessions in failed state:         0
Dial-out target statistics
  Targets active:                  0
  Targets created:                 0
  Targets removed:                 0
  Targets in down state:           0
  Targets in inhibited state:       0
  Targets in in-service state:      0
  Triggers discarded:              0
Dial-out session statistics
  Sessions active:                 0
  Sessions created:                 0
  Sessions removed:                 0
```

```

Sessions reset:                0
Triggers received:             0
Triggers enqueued:             0
Triggers discarded:            0
Triggers forwarded:            0
Triggers max enqueued:         0
Authentication requests:       0
No resources for authentication: 0
Authentication grants:         0
Authentication Denies:         0
Dial-outs requested:           0
Dial-outs rejected:            0
Dial-outs established:         0
Dial-outs timed out:           0
Dial-outs torn down:           0

```

To display summary information for chassis-wide configuration:

```

host1#show l2tp dial-out summary
Virtual routers in init pending state :      0
Virtual routers in init failed state  :      0
Virtual routers in down state         :      0
Virtual routers in inService state    :      0
Targets in down state                 :      0
Targets in inhibited state            :      0
Targets in inService state            :      0
Sessions in dormant state             :      0
Sessions in pending state             :      0
Sessions in authenticating state      :      0
Sessions in connecting state          :      0
Sessions in inService state           :      0
Sessions in inhibited state           :      0
Sessions in postInhibited state       :      0
Sessions in failed state              :      0

```

To display information about the operational or administrative state:

```
host1#show l2tp dial-out state inService
```

Meaning Table 94 on page 450 lists the **show l2tp dial-out** command output fields.

Table 94: show l2tp dial-out Output Fields

Field Name	Field Description
Operational status	Current operational status of the chassis
Connecting timer value	Configuration of the connecting timeout
Dormant timer value	Configuration of the dormant timeout
Dial-out Chassis Statistics	Statistics at the chassis level
Current sessions	Total number of session currently active on the chassis
Maximum sessions	Highest value of current sessions recorded on the chassis since the last router restart

Table 94: show l2tp dial-out Output Fields (continued)

Field Name	Field Description
Current sessions in the process of connecting	Sessions currently in the connecting state
Maximum sessions connecting at one time	Highest number of sessions recorded on the chassis at the same time since the last router restart
Current sessions pending	Sessions in the pending state
Maximum sessions pending	Highest number of sessions recorded in the pending state since the last router restart
Current targets inhibited	Targets currently in the inhibited state
Maximum targets inhibited	Highest value of targets recorded in the inhibited state since the last router restart
Authentication grant for nonexistent session	Number of authentication requests granted to nonexistent sessions
Authentication deny for nonexistent session	Number of authentication requests denied to nonexistent sessions
Dial-out Virtual router statistics	Statistics at the virtual router level
Virtual routers active	VRs in use by the state machine
Virtual routers created	VRs that have been used by the state machine
Virtual routers removed	VRs no longer used by the state machine
Virtual routers in init-pending state	VRs in the initializationPending state
Virtual routers in init-failed state	VRs in the initializationFailed state
Virtual routers in down state	VRs in the down state
Virtual routers in in-service state	VRs in the inService state
IP Discarded trigger frames	Trigger frames that IP discarded
Trigger frames received for unknown route	Trigger frames received for an unknown route
Sessions in dormant state	Sessions on the VR that are in the dormant state
Sessions in pending state	Sessions on the VR that are in the pending state
Sessions in authenticating state	Sessions on the VR that are in the authenticating state
Sessions in connecting state	Sessions on the VR that are in the connecting state
Sessions in in-service state	Sessions on the VR that are in the inService state

Table 94: show l2tp dial-out Output Fields (continued)

Field Name	Field Description
Sessions in inhibited state	Sessions on the VR that are in the inhibited state
Sessions in post-inhibited state	Sessions on the VR that are in the postInhibited state
Sessions in failed state	Sessions on the VR that are in the failed state
Dial-out target statistics	Statistics at the route target level
Targets active	Current active targets
Targets created	All targets created
Targets removed	Targets deleted
Targets in down state	Targets in the down state
Targets in inhibited state	Targets in the inhibited state
Targets in in-service state	Targets in the inService state
Triggers discarded	Trigger packets discarded
Dial-out session statistics	Statistics at the session level
Sessions active	Currently active sessions
Sessions created	All sessions created
Sessions removed	Sessions deleted
Sessions reset	Sessions reset using the l2tp dial-out session reset command
Triggers received	Triggers received for dial-out sessions
Triggers enqueued	Triggers that have been put into the queue
Triggers discarded	Trigger packets discarded
Triggers forwarded	Trigger packets forwarded
Triggers max enqueued	Maximum number of triggers that have been enqueued simultaneously since the last router reset
Authentication requests	Authentication requests received
No resources for authentication	Authentication requests not processed because of insufficient resources
Authentication grants	Authentication requests granted
Authentication Denies	Authentication requests denied
Dial-outs requested	Outgoing calls requested for sessions

Table 94: show l2tp dial-out Output Fields (continued)

Field Name	Field Description
Dial-outs rejected	Outgoing call requests that were rejected
Dial-outs established	Successful outgoing calls before the connecting timer expired
Dial-outs timed out	Number of times the connecting timer expired
Dial-outs torn down	Successful outgoing calls that were terminated

- Related Topics**
- For detailed information about operational states, see Dial-Out Operational States on page 413
 - show l2tp dial-out
 - show l2tp dial-out virtual-router

Monitoring Status of Dial-out Sessions

Purpose Display the status of dial-out sessions.

This command displays aspects of the dial-out state machine and details about the dial-out routes themselves. This section presents sample output. The actual output on your router may differ significantly.

Action To display all sessions within the current virtual router context:

```
host1#show l2tp dial-out session
Session          Status
-----
10.10.1.1        connected
10.10.2.1        dormant
```

To display detailed information about a particular session, specify the trigger IP address for the session:

```
host1#show l2tp dial-out session 10.1.1.1
Session 10.1.1.1
Operational status: dormant
```

To display aggregate counts for dial-out sessions in each of the possible operational and administrative states:

```
host1#show l2tp dial-out session summary
```

To display detailed configuration, state, and statistics:

```
host1#show l2tp dial-out session detail
```

To display information about the operational or administrative state:

```
host1#show l2tp dial-out session state connecting
```

To display dial-out information across all virtual routers

```
host1#show l2tp dial-out session allVirtualRouters
```



NOTE: The level of a user's permission determines the use of the **allVirtualRouters** option. For example, if you have permission to view only the current virtual router, then that is all that is displayed when you enter a command.

Meaning Table 95 on page 454 lists the **show l2tp dial-out session** command output fields.

Table 95: show l2tp dial-out session Output Fields

Field Name	Field Description
Session	IP address of the session
Status	Current status of the session
Operational status	Current operational status of session

- Related Topics**
- For detailed information about operational states, see Dial-Out Operational States on page 413
 - show l2tp dial-out session

Monitoring Dial-out Targets within the Current VR Context

Purpose Display configured dial-out targets within the current virtual router context.

This command displays aspects of the dial-out state machine and details about the dial-out routes themselves. This section presents sample output. The actual output on your router may differ significantly.

Action To display general information for all targets within the virtual router:

```
host1:dialout#show l2tp dial-out target
Target      Status      Active Sessions
-----
10.10.1.1/16 up          14
10.1.1.0/24 up          10
```

To display detailed information about a particular target, specify the target IP address and mask:

```
host1:dialout#show l2tp dial-out target 10.1.1.0/24
Target 10.1.1.0/24
Operational status: up
Active sessions: 10
Total triggers: 127
Failed sessions: 2
Connected sessions: 8
```

To display aggregate counts for targets in each of the possible operational and administrative states:

```
host1:dialout#show l2tp dial-out target summary
```

To display detailed configuration, state, and statistics:

```
host1:dialout#show l2tp dial-out target detail
```

To display information about the operational or administrative state:

```
host1:dialout#show l2tp dial-out target state inService
```

To displays dial-out information across all virtual routers:

```
host1:dialout#show l2tp dial-out target allVirtualRouters
```



NOTE: The level of a user's permission determines the use of the **allVirtualRouters** option. For example, if you have permission to view only the current virtual router, then that is all that is displayed when you enter a command.

Meaning Table 96 on page 455 lists the **show l2tp dial-out target** command output fields.

Table 96: show l2tp dial-out target Output Fields

Field Name	Field Description
Target	Address of the target
Status	Status of the connection to the target
Active Sessions	Currently active session to the target
Total triggers	Trigger packets received for the target
Failed sessions	Sessions that are currently in the failed state
Connected sessions	Sessions that are currently in the connected state

- Related Topics**
- For detailed information about operational states, see Dial-Out Operational States on page 413
 - `show l2tp dial-out target`

Monitoring Operational Status within the Current VR Context

Purpose Display dial-out state machine operational status and statistics within the current VR context.

This command displays aspects of the dial-out state machine and details about the dial-out routes themselves. This section presents sample output. The actual output on your router may differ significantly.

Action To display dial-out state machine operational status and statistics within the current VR context:

```
host1#show l2tp dial-out virtual-router
Dial-out Virtual Router Configuration and Operational Status
Virtual router host1:
Virtual router operational status: inService
Maximum trigger buffers per session: 0
```

To display aggregate counts for dial-out state machines in each of the possible operational and administrative states:

```
host1:dialout#show l2tp dial-out virtual-router summary
```

To display detailed configuration, state, and statistics:

```
host1:dialout#show l2tp dial-out virtual-router detail
```

To display information about the operational or administrative state:

```
host1:dialout#show l2tp dial-out virtual-router state down
```

To displays dial-out information across all virtual routers:

```
host1:dialout#show l2tp dial-out virtual-router allVirtualRouters
```



NOTE: The level of a user's permission determines the use of the **allVirtualRouters** option. For example, if you have permission to view only the current virtual router, then that is all that is displayed when you enter a command.

Meaning Table 97 on page 457 lists the **show l2tp dial-out virtual-router** command output fields.

Table 97: show l2tp dial-out virtual-router Output Fields

Field Name	Field Description
Virtual router	Name of VR
Virtual router operational status	Operational status of the VR
Maximum trigger buffers per session	Maximum number of trigger packets held in buffer while the dial-out session is being established

- Related Topics**
- For detailed information about operational states, see Dial-Out Operational States on page 413
 - show l2tp dial-out virtual-router

Part 4

Managing DHCP

- DHCP Overview on page 461
- DHCP Local Server Overview on page 469
- Configuring DHCP Local Server on page 477
- Configuring DHCP Relay on page 495
- Configuring the DHCP External Server Application on page 523
- Monitoring and Troubleshooting DHCP on page 539

Chapter 17

DHCP Overview

The Dynamic Host Configuration Protocol (DHCP) provides a mechanism through which computers using Transmission Control Protocol/IP (TCP/IP) can obtain protocol configuration parameters automatically from a DHCP server on the network.

The following sections provide overview information for the E Series router DHCP support:

- DHCP Overview Information on page 461
- DHCP Platform Considerations on page 462
- DHCP References on page 463
- Configuring the DHCP Access Model on page 463
- Configuring DHCP Proxy Clients on page 464
- Logging DHCP Packet Information on page 465
- Viewing and Deleting DHCP Client Bindings on page 466

DHCP Overview Information

The most important configuration parameter carried by DHCP is the IP address. A computer must be initially assigned a specific IP address that is appropriate to the network to which the computer is attached and that is not assigned to any other computer on that network. If you move a computer to a new network, it must be assigned a new IP address for that new network. You can use DHCP to manage these assignments automatically.

An IP client contacts a DHCP server for configuration parameters. The DHCP server is typically centrally located and operated by the network administrator. Because the server is run by a network administrator, DHCP clients can be reliably and dynamically configured with parameters appropriate to the current network architecture.

You can configure the E Series router to support the following DHCP features:

- DHCP access model
- DHCP proxy client
- DHCP relay
- DHCP relay proxy

- DHCP local server
- DHCP external server

Session and Resource Control Software

The Session and Resource Control (SRC) software, formerly the Service Deployment System (SDX) software is a component of Juniper Networks management products. The SRC software provides a Web-based interface that allows subscribers to access services, such as the Internet, an intranet, or an extranet.

When a DHCP subscriber logs in, the SRC software can authorize the address request and select the DHCP address pool on the router from which the DHCP address is selected. The SRC software can also control the number of IP addresses that are given to a particular retailer or subscriber and control the lease time of IP addresses assigned to DHCP subscribers.

The router retrieves the DSL line rate parameters from Access Node Control Protocol (ANCP) and reports this information to the SRC software with the corresponding COPS messages. If the router cannot retrieve the DSL line rate parameters from ANCP, it retrieves the DSL information in the following ways:

- **From AAA layer**—For PPP interfaces, the router retrieves the DSL line rate parameters from the AAA layer and reports this information to the SRC software.
- **From DHCP options**—For DHCP external server and DHCP local server in equal-access mode, the router retrieves the DSL line rate parameters from DHCP options and reports this information to the SRC software. To enable the DHCP external server to receive the DHCP options if the router blocks the DHCP options on the DHCP application, you must use the **set dhcp relay preserve-trusted-client-option** command.

Related Topics set dhcp relay preserve-trusted-client-option

DHCP Platform Considerations

For information about modules that support DHCP on the ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router:

- See *ERX Module Guide, Table 1, ERX Module Combinations* for detailed module specifications.
- See *ERX Module Guide, Appendix A, Module Protocol Support* for information about the modules that support DHCP.

For information about modules that support DHCP on the E120 and E320 Broadband Services Routers:

- See *E120 and E320 Module Guide, Table 1, Module and IOAs* for detailed module specifications.
- See *E120 and E320 Module Guide, Appendix A, IOA Protocol Support* for information about the modules that support DHCP.

DHCP References

For more information about DHCP, consult the following resources:

- DSL Forum Technical Report (TR)-101—Migration to Ethernet-Based DSL Aggregation (April 2006)
- RFC 2131—Dynamic Host Configuration Protocol (March 1997)
- RFC 2132—DHCP Options and BOOTP Vendor Extensions (March 1997) 8.0.0b1 RLI-2736 (Bruce)
- RFC 3046—DHCP Relay Agent Information Option (January 2001)
- RFC 3315—Dynamic Host Configuration Protocol for IPv6 (DHCPv6) (July 2003)
- RFC 3633—IPv6 Prefix Options for Dynamic Host Configuration Protocol (DHCP) Version 6 (December 2003)
- RFC 4243—Vendor-Specific Information Suboption for the Dynamic Host Configuration Protocol (DHCP) Relay Agent Option (December 2005)



NOTE: IETF drafts are valid for only 6 months from the date of issuance. They must be considered as works in progress. Please refer to the IETF Web site at <http://www.ietf.org> for the latest drafts.

For information about supported accounting attributes, see “Configuring RADIUS Attributes” on page 171 and “RADIUS IETF Attributes” on page 259

Configuring the DHCP Access Model

The E Series router provides a DHCP access model, which enables you to integrate the router into an existing RADIUS-based operation support system (OSS). In the DHCP access model, a DHCP local server or DHCP external service is configured, but the E Series router does not have direct interaction with an OSS or a policy server, such as the SRC software. The router passes the client’s DHCP options, client’s media access control (MAC) address and, if appropriate, the DHCP relay’s IP address in RADIUS requests for authentication.

To configure the DHCP access model to pass the client’s information in RADIUS requests, you enable the DHCP options feature, then specify the client information to be passed to RADIUS. You can specify that the client’s MAC address be included in the request. You can also specify that the DHCP relay’s IP address be sent, if appropriate. For descriptions of the RADIUS attributes used with the DHCP access model, see “Configuring RADIUS Attributes” on page 171.

Configuring DHCP Proxy Clients

DHCP proxy client support enables the router to obtain an IP address from a DHCP server for a remote PPP client. Each virtual router (acting as a DHCP proxy client) can query up to five DHCP servers.

For PPP users, the router acts as a DHCP client to obtain an address for the user. This is referred to as DHCP proxy.

The process for PPP users is as follows:

1. The remote user dials in, and the client requests RADIUS authentication.
2. The AAA server on the router sends a request to the DHCP proxy client on the router for an IP address to be assigned to the remote user's host.
3. The proxy client assumes the role of DHCP client and sends a discovery message to each DHCP server.
4. One or more of the DHCP servers responds with an offer message containing an IP address.
5. The proxy client determines which offer to accept and sends a message to that DHCP server requesting that IP address.
6. The DHCP server responds to the proxy client with an acknowledgment message.
7. The proxy client passes the IP address to the authentication, authorization, and accounting (AAA) server on the router, and the AAA server returns the address to PPP. PPP then assigns the address to the remote host. The new IP address is included when the router next updates its routing table.

Dynamic IP addresses are *leased* to the remote host for a specific period of time, which can range from minutes to days. At the halfway point in the lease period, the proxy client requests an extension from the DHCP server on behalf of the remote host. The lease is extended for a period specified in the acknowledgment (ACK) message returned by the DHCP server—typically equal to the original lease. If the DHCP server returns a negative acknowledgment (NAK) message to the proxy client, the proxy client notifies the server on the router that the extension has been denied. The AAA server logs out the remote host and frees the IP address for reuse.

When a remote host disconnects, the AAA server notifies the proxy client that the IP address is available for reuse. The proxy client informs the DHCP server, which can now reassign that IP address.

For additional information on managing client bindings, see “Viewing and Deleting DHCP Client Bindings” on page 466.

To configure a proxy client from Global Configuration mode:

1. Specify the address of the DHCP server that will provide IP addresses for remote hosts. You can specify a maximum of five DHCP servers.

```
host1(config)#ip dhcp-server 10.6.128.10
```


2. Direct the router to request IP addresses for remote users from the DHCP server(s).

```
host1(config)#ip address-pool dhcp
```

- Related Topics**
- ip address-pool
 - ip dhcp-server

Logging DHCP Packet Information

The JUNOS software enables you to collect and log DHCP packet information for all JUNOS DHCP access models on a per-interface basis. To log packets for a specific DHCP application, you enable DHCP packet logging on the interface that serves the application. JUNOS software supports per-interface DHCP packet logging on a maximum of 16 interfaces. Per-interface DHCP packet logging is disabled by default.

You can specify which packets are logged—receive, transmit, or all. You can optionally assign low or high priority to the logged packets. Packets are assigned a low priority by default, which does not interfere with router DHCP packet processing. The logged packets are output to the dhcpCapture event logging category.

You can configure per-interface DHCP packet logging on statically configured and dynamically created IP interfaces. However, configuration information for dynamic interface configurations is lost after a cold restart. Both static and dynamic interface configuration information is maintained after a warm restart.

You use the **ip dhcp-capture** command with the following keywords to enable DHCP packet logging for all DHCP applications on the interface.

- Use the **receive**, **transmit**, and **all** keywords to specify the type of DHCP packets that is logged.
- Use the optional **priority** keyword to assign a **low** or **high** priority to logged packets. By default, logged packets have a low priority and do not interfere with the router's DHCP packet processing.

You can specify DHCP packet logging on a maximum of 16 interfaces.

- To enable DHCP packet logging:

```
host1(config-if)#ip dhcp-capture all
```

Related Topics ■ `ip dhcp-capture`

Viewing and Deleting DHCP Client Bindings

The JUNOS software provides commands that enable you to manage your router's DHCP external server, DHCP local server, and DHCP relay proxy client bindings. A client binding associates an IP address with a DHCP client, and describes both the client (for example, hardware address and state) and the IP address (for example, subnet and lease time).

The following commands enable you to view information about current DHCP client bindings:

- To display information and track lease times and status for specified DHCP client bindings, with results arranged in ascending order by binding ID, use the **show dhcp binding** command.
- To display information and track lease times and status for specified DHCP client bindings, with results arranged in ascending order by IP address, use the **show dhcp host** command. This command displays information only for DHCP client bindings with assigned IP addresses.
- To display count information for DHCP client bindings and interfaces, use the **show dhcp count** command.

To delete a connected user's IP address lease and the associated route configuration when the DHCP client binding is no longer needed, use the **dhcp delete-binding** command. When you delete a DHCP client binding, the lease is removed on the router. You might delete client bindings to:

- Recover functional resources from a user who has not explicitly terminated connectivity and whose lease is unexpired.
- Discontinue connectivity to a user, prompting or forcing the user to request a new lease in order to reestablish network connectivity.

The router does not notify the DHCP client or the DHCP server when you issue the **dhcp delete-binding** command.



NOTE: The **dhcp delete-binding** command replaces the **clear ip dhcp-local binding** and **dhcp-external delete-binding** commands, which are deprecated and might be removed in a future release.

Use the following keywords and variables with the **dhcp delete-binding** command to specify (filter) the client bindings you want to delete:

- **all**—All DHCP local server, DHCP external server, and DHCP relay proxy client bindings
- **all-local**—All DHCP local server client bindings
- **all-external**—All DHCP external server client bindings

- **all-relay-proxy**—All DHCP relay proxy client bindings
- *binding-id*—DHCP binding ID for a specific client
- **circuit-id**—Agent-circuit-id suboption (suboption 1) string of the DHCP relay agent information option (option 82); the circuit ID string supports matching of both regular expression metacharacters and nonprintable ASCII characters in binary sequences
- **external**—DHCP external server bindings that meet the deletion criteria
- **interface**—Interface string associated with DHCP client bindings; the interface string supports matching of regular expression metacharacters, and must be specified as a regular expression without spaces
- **ip-prefix**—IP prefix (address and subnetwork mask) of the DHCP client
- **local**—DHCP local server bindings that meet the deletion criteria
- **no-interface**—DHCP clients without a lower-layer interface; use this keyword to delete DHCP client bindings configured over dynamic interfaces for which the lower-layer interface has been shut down
- **relay-proxy**—DHCP relay proxy bindings that meet the deletion criteria
- **remote-id**—Agent-remote-id suboption (suboption 2) string of the DHCP relay agent information option (option 82); the remote ID string supports matching of both regular expression metacharacters and nonprintable ASCII characters in binary sequences
- *subnetAddress*—IP address of the subnet on which the DHCP client resides

Filtering the deletion of DHCP client bindings by the circuit ID string or remote ID string is not supported for the DHCP external server application. DHCP external server does not store information about the agent-circuit-id suboption or agent-remote-id suboption of option 82.

You can remove all DHCP client bindings, all DHCP client bindings of a particular type, or a specified DHCP client binding that meets the deletion criteria you specify.

- To delete all DHCP client bindings on virtual router vr1:

```
host1:vr1#dhcp delete-binding all
```

- To delete DHCP local server client bindings with the specified subnet address:

```
host1:vr2#dhcp delete-binding local 0.0.0.0
```

When you delete DHCP client bindings of a particular type on a specified subnet, you must specify the **local**, **external**, or **relay-proxy** type keyword to prevent accidental deletion of all DHCP client bindings.

- To delete a specific DHCP client binding:

```
host1:vr1#dhcp delete-binding 3972819365
```

- To delete DHCP client bindings with the specified IP prefix:

```
host1:vr1#dhcp delete-binding ip-prefix 10.1.0.0/28
```

- To delete DHCP client bindings without a lower-layer interface:

```
host1:vr1#dhcp delete-binding no-interface
```

- To delete DHCP client bindings with the specified interface string:

```
host1:vr2#dhcp delete-binding interface ip71.*4
```

This **dhcp delete-binding** command uses the * (asterisk) regular expression metacharacter in the interface string to delete DHCP client bindings on virtual router vr2 with an IP address beginning with 71 and ending with 4.

- To delete DHCP client bindings that match the specified circuit ID string:

```
host1:vr3#dhcp delete-binding circuit-id \\xe3
```

To specify nonprintable byte codes in the circuit ID string or remote ID string, you can use the string `\\xab`, where *ab* is a hex code of the byte. This **dhcp delete-binding** command uses the string `\\xe3` to represent byte E3 in the circuit ID string. This command deletes DHCP client bindings on virtual router vr3 with the specified circuit ID string.

Related Topics

- [dhcp delete-binding](#)
- [show dhcp binding](#)
- [show dhcp count](#)
- [show dhcp host](#)

Chapter 18

DHCP Local Server Overview

This chapter provides an overview of the DHCP local server on the E Series router. This chapter contains the following sections:

- Embedded DHCP Local Server Overview on page 469
- Equal-Access Mode Overview on page 470
- Standalone Mode Overview on page 472
- DHCP Local Server Prerequisites on page 474
- DHCP Local Server Configuration Tasks on page 475

Embedded DHCP Local Server Overview

The router offers an embedded DHCP server, known as the DHCP local server. The DHCP local server has two modes: equal-access and standalone.



NOTE: E Series routers also support an embedded DHCP version 6 (DHCPv6) local server. The DHCPv6 local server provides a subset of the features of the DHCP local server. For information about configuring the DHCPv6 local server, see “Configuring the DHCPv6 Local Server” on page 489.

- In equal-access mode, the DHCP local server works with the Juniper Networks SRC software to provide an advanced subscriber configuration and management service.
- In standalone mode, the DHCP local server provides a basic DHCP service, and also allows you to configure AAA authentication for incoming DHCP clients. Also, after successful authentication, the DHCP local server uses the information in the client's AAA subscriber record together with the client's DHCP parameters to select the IP address pool used for address assignment.

DHCP local server also supports RADIUS accounting, including interim accounting, in standalone mode. This feature allows you to use RADIUS start and stop attributes to track user events such as the lifetime of an IP address.

DHCP Local Server and Client Configuration

You can use DHCP to configure the router to allow remote access to non-PPP clients. DHCP-based access is also an alternative to PPP in environments such as Public

Wireless LANs (PWLANS). In PWLANS, a user scans for available broadband networks, then is redirected to a web-based authentication mechanism to request service.

DHCP provides address assignment information for users. Authentication, authorization, and accounting are separate processes, and are up to the Internet service provider (ISP) to define.

The DHCP local server can configure a client with the following DHCP options:

- Default router
- DNS server
- Domain name
- Lease time
- Grace period for address lease
- NetBIOS name server
- NetBIOS node type
- Subnet mask

For additional information on managing client bindings, see “Viewing and Deleting DHCP Client Bindings” on page 466.

Equal-Access Mode Overview

In equal-access mode, the router enables access to non-PPP users. Non-PPP equal access requires the use of the router’s DHCP local server and SRC software, which communicates with a RADIUS server.

The DHCP local server performs the following functions in equal-access mode:

- Communicates with SRC software.
- Assigns an IP address that enables the subscriber to access services.

Local Pool Selection and Address Allocation

The DHCP local server selects a DHCP pool from which to allocate an address using a number of parameters in a certain predefined sequence. The router compares the parameters with the local DHCP pools in the order presented in Table 98 on page 471. When the router finds a match, it selects a pool based on the match and does not examine other parameters.

Table 98: Local Pool Selection in Equal-Access Mode

Field	How the DHCP Local Server Uses the Field
Framed IP address	<p>The client's entry can be configured with a framed IP address, which the DHCP local server can get from the SRC software (formerly the SDX software).</p> <p>If the router selects a pool using a framed IP address, the DHCP local server attempts to allocate the framed IP address from the pool. If the framed IP address is not available, then the server allocates the next available address in the pool to the client.</p>
Pool name	Each DHCP local pool has a pool name. The client's entry can also be configured with a pool name, which the DHCP local server can get from the SRC software. The SRC software must be configured to send RADIUS attributes to DHCP.
Domain name	<p>You can use a domain name as the name of a DHCP local pool. If the client logs onto the SRC software and RADIUS authenticates the client using a domain name, the DHCP local server receives the domain name from the SRC software.</p> <p>If the client's domain name does not match the name of the DHCP local pool, the router attempts to match the client's domain name to the domain name field within the pool.</p>
Giaddr	A DHCP local pool is configured with a network address. A gateway IP address (giaddr), which indicates a client's subnetwork, can be presented to the DHCP local server in the client's DHCP request message. The giaddr field in the DHCP request message contains the IP address of a DHCP relay agent. The router attempts to match the giaddr address in the DHCP request message with the network address of a DHCP local pool.
Received interface IP address	The router uses the IP address of the interface on which the DHCP packet is being processed and attempts to match it with the network address of a DHCP local pool. If the interface address matches with the IP address configured in the DHCP local address pool on the router, that pool is used to delegate the address to the client.

The Connection Process

The following sequence describes how the subscriber connects to the network for the first time using equal-access mode. Figure 11 on page 472 illustrates the process.

1. The subscriber's computer boots and issues a DHCP request.
2. The DHCP local server uses the SRC client to issue a COPS request to retrieve address pool information.
3. After standard DHCP negotiations, the DHCP local server supplies an IP address to the subscriber's computer from a local address pool, as described in the previous section.


The router maintains a host route that maps the IP address to the router's interface associated with the subscriber's computer.

4. The subscriber's computer retains the IP address until the subscriber turns off the computer.



NOTE: If a DHCP client attempts to renew its address and the DHCP server receives the request on a different interface than the interface that the client originally used, the DHCP server sends a NAK message to the client, forcing the client to begin the DHCP connection process again.

Figure 11: Non-PPP Equal Access via the Router

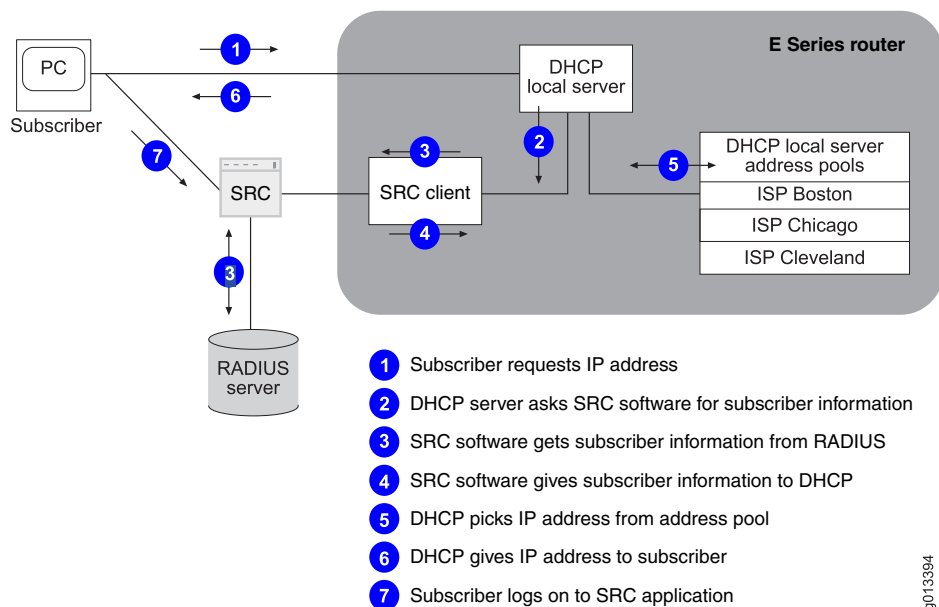

9013394

Standalone Mode Overview

In standalone mode, the DHCP local server operates as a basic DHCP server. Clients are not authenticated by default; however, you can optionally configure the DHCP local server to use AAA authentication for the incoming clients. The DHCP local server receives DHCP client requests for addresses, selects DHCP local pools from which to allocate addresses, distributes addresses to the clients, and maintains the resulting DHCP bindings in a server management table.

Local Pool Selection and Address Allocation

In standalone mode, the DHCP local server selects a pool to allocate an address for a client; the SRC software is never notified or queried. The process used depends on whether AAA authentication is configured.

- If AAA authentication is not configured, the DHCP local server selects a pool by matching the local pool network address to the giaddr or the received interface IP address. The router compares the parameters with the local DHCP pools in the order presented in Table 99 on page 473. When the router finds a match, it selects a pool based on the match and does not examine other parameters.

Table 99: Local Pool Selection in Standalone Mode Without AAA Authentication

Field	How the DHCP Local Server Uses the Field
Giaddr	A giaddr, which indicates a client's subnetwork, can be presented to the DHCP local server in the client DHCP REQUEST message. The giaddr field in the DHCP request message usually contains the IP address of a DHCP relay agent. The router attempts to match the giaddr address in the DHCP request message with the network address of a DHCP local pool. If it finds a match, the router uses the matching DHCP local pool.
Received interface IP address	The router uses the IP address of the interface on which the DHCP packet is being processed and attempts to match it with the network address of a DHCP local pool.

After the router selects a DHCP local pool, the DHCP local server first tries to find a reserved IP address for the client in the selected pool. If no reserved address is available, the router attempts to allocate a client's requested IP address. If the requested IP address is not available, the router allocates the next available address in the pool. If a grace period is configured for the pool, the router assigns the grace period to the allocated address. If no addresses are available in a pool, the DHCP local server attempts to allocate an address from the linked pool, if such a pool is configured.

- If AAA authentication is configured (as described in “Configuring AAA Authentication for DHCP Local Server Standalone Mode” on page 487) and the authentication is successful, the local server selects an IP address pool based on the order presented in Table 100 on page 473. When the router finds a match, it selects a pool based on the match and does not examine other parameters.

Table 100: Local Pool Selection in Standalone Mode with AAA Authentication

Field	How the DHCP Local Server Uses the Field
Framed IP address	<p>The client's RADIUS entry can be configured with a framed IP address, which the DHCP local server can get from the AAA server when the client is authenticated.</p> <p>If the AAA server specifies a framed IP address, the DHCP local server attempts to allocate the address pool that contains the framed IP address and allocates that address from the pool. If the framed IP address is not available, then the server allocates the next available address in the pool to the client.</p>
Pool name	<p>Each DHCP local pool has a pool name. The client's RADIUS entry can also be configured with a pool name, which the DHCP local server can get from the AAA server when the client is authenticated. The AAA server must be configured to send RADIUS attributes to DHCP.</p> <p>If AAA specifies an address pool name, the local server finds the pool with the matching name and allocates an address from that pool.</p>
Domain name	<p>You can use a domain name as the name of a DHCP local pool. If RADIUS authenticates the client using a domain name, the DHCP local server receives the domain name from the AAA server.</p> <p>If the client's domain name does not match the name of the DHCP local pool, the router attempts to match the client's domain name to the domain name field within the pool.</p>

Table 100: Local Pool Selection in Standalone Mode with AAA Authentication *(continued)*

Field	How the DHCP Local Server Uses the Field
Giaddr	A DHCP local pool is configured with a network address. A gateway IP address (giaddr), which indicates a client's subnetwork, can be presented to the DHCP local server in the client's DHCP request message. The giaddr field in the DHCP request message usually contains the IP address of a DHCP relay server. The router attempts to match the giaddr address in the DHCP request message with the network address of a DHCP local pool.
Received interface IP address	The router uses the IP address of the interface on which the DHCP packet is being processed and attempts to match it with the network address of a DHCP local pool. If the interface address matches with the IP address configured in the DHCP local address pool on the router, that pool is used to delegate the address to the client.

Server Management Table

For each client that makes requests of the DHCP local server, the router keeps an entry in the server management table. The entry defines client-specific information and state information. The router uses this table to identify clients when it receives subsequent messages and to maintain the state of each client within the DHCP protocol. In addition, the table contains information that may be transferred to and from the SRC software.

DHCP Local Server Prerequisites

Before you configure DHCP local server, you need to configure interfaces. You can configure ATM or Ethernet interfaces for DHCP local server. These interfaces can be numbered or unnumbered. Because subscribers connect to the router from different subnetworks, you must configure an IP address for each subnetwork on the interface. This action provides connectivity between the subnetwork and the router.

To configure a numbered IP address for DHCP local server:

1. Select an ATM or Ethernet interface.
2. Assign the primary IP address for one subnetwork to this interface.
3. Assign secondary IP addresses for all other subnetworks to this interface.

To configure an unnumbered IP address for DHCP local server:

1. Specify a loopback interface.
2. Assign the primary IP address for one subnet to the loopback interface.
3. Assign secondary IP addresses for all other subnets to the loopback interface.
4. Select an ATM or Ethernet interface.
5. Configure an unnumbered IP address associated with the loopback interface on the ATM or Ethernet interface.

For information about defining IP addresses, see the *Configuring IP* chapter in *JUNOS IP, IPv6, and IGP Configuration Guide*.

DHCP Local Server Configuration Tasks

This section covers the configuration tasks for equal-access and standalone modes. Perform the appropriate procedure:

1. For both equal-access and standalone modes, configure the DHCP local server.
See “Configuring AAA Authentication for DHCP Local Server Standalone Mode” on page 487 for a sample configuration.
2. For standalone mode, optionally configure the router to use AAA authentication for DHCP requests from subscribers.
See “Configuring AAA Authentication for DHCP Local Server Standalone Mode” on page 487 for a sample configuration.
3. For non-PPP equal access, configure the router to work with the SRC software.
See “Configuring the Router to Work with the SRC Software” on page 492 for a sample configuration.

Chapter 19

Configuring DHCP Local Server

This chapter provides information for configuring the DHCP local server on the E Series Broadband Services Routers. This chapter contains the following sections:

- Configuring the DHCP Local Server on page 477
- Configuring DHCP Local Address Pools on page 484
- Configuring AAA Authentication for DHCP Local Server Standalone Mode on page 487
- Configuring the DHCPv6 Local Server on page 489
- Deleting DHCPv6 Client Bindings on page 491
- Configuring the Router to Work with the SRC Software on page 492

Configuring the DHCP Local Server

Tasks to configure the DHCP local server include:

- Basic Configuration of DHCP Local Server on page 477
- Limiting the Number of IP Addresses Supplied by DHCP Local Server on page 479
- Excluding IP Addresses from Address Pools on page 479
- Configuring DHCP Local Server to Support Creation of Dynamic Subscriber Interfaces on page 480
- Differentiating Between Clients with the Same Client ID or Hardware Address on page 480
- Logging Out DHCP Local Server Subscribers on page 481
- Clearing an IP DHCP Local Server Binding on page 482
- Using SNMP Traps to Monitor DHCP Local Server Events on page 482
- Using DHCP Local Server Event Logs on page 483

Basic Configuration of DHCP Local Server

Before you configure a DHCP local server, you must identify which mode to activate (standalone mode or equal-access mode). Use equal-access mode, if you use the Session and Resource Control (SRC) software for address allocation and managing the subscribers. If you do not use SRC for managing subscribers, use standalone mode. SRC contributes to the address pool selection and so when you use standalone mode, SRC is not used for address allocation.

If you do not specify a mode, equal-access mode is activated, by default. When you activate equal-access mode, common open policy service usage for policy provisioning (COPS-PR) and SRC client are automatically started on the virtual router.

To configure the DHCP local server:

1. Enable the DHCP local server for either equal-access or standalone mode.

```
host1(config)#service dhcp-local equal-access
host1(config)#service dhcp-local standalone
```

2. (Optional) Specify the maximum number of IP addresses that the DHCP local server can supply to each VPI/VCI, VLAN, Ethernet subnetwork, or to a particular interface or subinterface. See “Limiting the Number of IP Addresses Supplied by DHCP Local Server” on page 479 for more information about limiting the number of IP addresses.

```
host1(config)#ip dhcp-local limit ethernet 6
```

3. (Optional) Specify any addresses that the DHCP local server must not assign. See “Excluding IP Addresses from Address Pools” on page 479 for more information.



NOTE: You can specify this command multiple times on the CLI and the excluded address must fall within a network that has been specified in the DHCP local pool.

```
host1(config)#ip dhcp-local excluded-address 10.10.3.4
```

4. (Optional) Enable general DHCP local server traps. See “Using SNMP Traps to Monitor DHCP Local Server Events” on page 482.

```
host1(config)#ip dhcp-local snmpTraps
```

5. (Optional) Configure the DHCP local server to support the creation of dynamic subscriber interfaces built over dynamic VLANs that are based on the agent-circuit-id option (suboption 1) of the option 82 field in DHCP messages. See “Configuring DHCP Local Server to Support Creation of Dynamic Subscriber Interfaces” on page 480.

```
host1(config)#ip dhcp-local auto-configure agent-circuit-identifier
```

6. (Optional) Specify that DHCP local server use an optional method to differentiate between clients with duplicate client IDs or hardware addresses. Any changes you make have no effect on currently bound clients. See “Differentiating Between Clients with the Same Client ID or Hardware Address” on page 480.

```
host1(config)# ip dhcp-local unique-client-ids
```

7. Configure the DHCP local address pool that supplies IP addresses to subscribers who want to access a domain. See “Configuring DHCP Local Address Pools” on page 484 for more information about configuring address pools.

Limiting the Number of IP Addresses Supplied by DHCP Local Server

You can specify the maximum number of IP addresses that the DHCP local server can supply to each VPI/VCI, VLAN, Ethernet subnetwork, or POS access interface type, or to a particular interface or subinterface.

You can set global limits for a given interface type—all interfaces of that type that are subsequently created, whether dynamically or statically, inherit that limit value.

You can also set an individual interface limit for a specific interface and override the global limit configured for that interface type. For example, suppose the VLAN interface type limit is five. You can specify a limit of 10 for the VLAN interface FastEthernet 1/0.100. All other VLAN interfaces retain the global limit of five.

The global limits for interface types and the individual interface limits set on static interfaces are kept in NVS. These values are restored during a switchover or a reload.

When you assign an individual limit to a dynamic interface, that limit is in force only until either a switchover or reload takes place. After the switchover or reload, if the action that caused the dynamic interface to be created occurs again, a new dynamic interface is created. The new dynamic interface then inherits the limit set by the global values based on the type of interface that is created.

- To set a global limit for an interface type:

```
host1(config)#ip dhcp-local limit ethernet 6
```

- To set a limit for a specific interface:

```
host1(config)#ip dhcp-local limit interface atm 3/1 15
```



NOTE: Limits that you specify on dynamic interfaces are not restored after a switchover or reboot.

Excluding IP Addresses from Address Pools

You can use the **ip dhcp-local excluded-address** command to specify IP addresses that you do not want the DHCP local server to supply from the default address pool. You might exclude addresses if because those addresses are already used by devices on the subnetwork.

You can exclude a single IP address or a range of addresses. To exclude a range, you specify the start-of-range IP address and the end-of-range IP address.

- To exclude a specific IP address:

```
host1(config)#ip dhcp-local excluded-address 10.10.3.4
```

- To exclude a range of IP addresses:

```
host1(config)#ip dhcp-local excluded-address 10.10.3.4 10.10.3.100
```

Configuring DHCP Local Server to Support Creation of Dynamic Subscriber Interfaces

You can use the **ip dhcp-local auto-configure agent-circuit-identifier** command to configure the DHCP local server to support the creation of dynamic subscriber interfaces built over dynamic VLANs that are based on the agent-circuit-id option (suboption 1) of the option 82 field in DHCP messages.

- Use this command within a specific virtual router context.
- This command requires that the user's DHCP control traffic and data traffic traverse the same client-facing ingress port on the E Series router.

The use of the option 82 field enables you to stack an IP interface that is associated with a particular subscriber over a dynamically created VLAN; the VLAN is dynamically created based on the agent-circuit-id option (suboption 1) that is contained in the DHCP option 82 field.

For information about configuring agent-circuit-id-based dynamic VLAN subinterfaces, see the *Configuring Dynamic Interfaces Using Bulk Configuration* chapter in *JUNOS Link Layer Configuration Guide*.

Differentiating Between Clients with the Same Client ID or Hardware Address

A JUNOS software feature enables the DHCP local server to create unique client IDs to support roaming clients and to manage situations in which two clients in the network have the same hardware address.



NOTE: This feature replaces the previous router behavior for DHCP local server client roaming and duplicate address support. The **ip dhcp-local unique-client-ids** command replaces the **ip dhcp-local inhibit-roaming** command, which has been removed from the CLI and has no effect on the DHCP local server.

You can configure the method DHCP local server uses when the router receives a DISCOVER or REQUEST packet that contains a client ID or hardware address that matches the ID or address of a currently bound client on another subnet or subinterface.

In the default configuration, the DHCP local server uses the DHCP client's subnet or subinterface to differentiate duplicate clients and support client roaming. When a new client, with a duplicate ID or hardware address, requests an address lease, DHCP assigns that client a new address and lease—the existing client's lease is unchanged.

The following table describes how the DHCP local server differentiates between a new DHCP client with the same ID or hardware address as a currently bound DHCP

client. The determination is based on whether the DHCP clients exist on the same or on different subnets and subinterfaces.

Location of DHCP Clients with Identical IDs or Addresses	How DHCP Local Server Differentiates Clients
On different subinterfaces in the same subnet	By unique subinterface
On the same subinterface in different subnets	By unique subnet
On different subinterfaces in different subnets	By unique subinterface and unique subnet
On the same subinterface in the same subnet	DHCP local server <i>cannot distinguish clients</i> with identical IDs or identical hardware addresses in this configuration

In the optional configuration, you use the **ip dhcp-local unique-client-ids** command to disable the use of the DHCP client's subnet or subinterface to differentiate between clients with duplicate client IDs or hardware addresses. When DHCP receives the request from a duplicate ID or address, DHCP terminates the address lease for the existing client and returns the address to its original address pool. DHCP then assigns a new address and lease to the new client.

We strongly recommend that you enable the **ip dhcp-local unique-client-ids** command in the following situations:

- When duplicate client IDs and duplicate hardware addresses do not exist in your network
- When the DHCP local server application interacts with DHCP relays in your network that do not support duplicate client IDs or duplicate hardware addresses

Enabling the **ip dhcp-local unique-client-ids** command in these cases enables you to properly manage DHCP clients that roam to different subnets.

The DHCP relay agent application and the DHCP relay proxy application do not support duplicate client IDs or duplicate hardware addresses.

Logging Out DHCP Local Server Subscribers

You can use the **logout subscribers** command from Privileged Exec mode to log out DHCP local server subscribers. For example, you might use this feature if you want to force a user to request a new lease or if you want to recover functional resources. The **logout subscribers** command, unlike the **clear ip address binding** command (described in “Clearing an IP DHCP Local Server Binding” on page 482), does not terminate the subscriber's user session or management representation.

This command applies to DHCP local server local-access and standalone clients, as well as to PPP users. You can log out **all** subscribers, or log out subscribers by **username**, **domain**, **virtual-router**, or **port**.

Clearing an IP DHCP Local Server Binding



NOTE: This command is deprecated and might be removed completely in a future release. The function provided by this command has been replaced by the **dhcp delete-binding** command.

You can use the **clear ip dhcp-local binding** command to force the removal of a connected user's IP address lease and associated route configuration. Using this command enables you to:

- Recover functional resources from a user who has not explicitly terminated connectivity and whose lease is unexpired.
- Discontinue connectivity to a user, prompting or forcing the user to request a new lease in order to reestablish network connectivity.

Using SNMP Traps to Monitor DHCP Local Server Events

The DHCP local server supports configurable global SNMP traps that monitor events related to the DHCP local server and local SNMP traps that are related to address pool utilization. You use the **ip dhcp-local snmpTraps** command to enable the global SNMP traps for DHCP local server.

The DHCP local server's global SNMP trap generates severity level 1 (alert), 2 (critical), and 3 (error) events. This trap helps administrators monitor DHCP local server general health, error statistics, address lease status, and protocol events. The global SNMP trap generates a severity level 4 (warning) event when a duplicate MAC address is detected. The global SNMP trap information is captured in the `dhcpLocalGeneral` logging category.

SNMP also traps events related to address pool utilization. You use the **warning** command to define the maximum and minimum threshold values and the **snmpTrap** command to generate traps when utilization occurs above or below the defined values.

For linked or shared pools, SNMP treats the members of the pool as a group, and uses the values configured for the first pool in the chain as the group's threshold.

The address pool utilization SNMP trap information is captured in the `dhcpLocalPool` logging category.



NOTE: You must configure your SNMP management client to read the MIB objects, and your SNMP trap collector must be capable of decoding the new traps. For information about setting up SNMP, see the *Configuring SNMP* chapter in *JUNOS System Basics Configuration Guide*.

Using DHCP Local Server Event Logs

To troubleshoot and monitor your DHCP local server, use the following system event logs:

- dhcpLocalClients—DHCP local server client events and duplicate MAC address detection
- dhcpLocalGeneral—DHCP local server infrastructure-related events and number of client threshold events



NOTE: The dhcpLocalGeneral category replaces the dhcpLocalServerGeneral category.

- dhcpLocalHighAvailability—DHCP high availability events
- dhcpLocalPool—DHCP local address pool events, including normal, linked, and shared pools
- dhcpLocalProtocol—DHCP local server protocol events

See the *JUNOS System Event Logging Reference Guide* for additional information about the DHCP local server logs.

Related Topics

- Clearing an IP DHCP Local Server Binding on page 482
- Configuring DHCP Local Address Pools on page 484
- Configuring AAA Authentication for DHCP Local Server Standalone Mode on page 487
- Configuring DHCP Local Server to Support Creation of Dynamic Subscriber Interfaces on page 480
- Differentiating Between Clients with the Same Client ID or Hardware Address on page 480
- Excluding IP Addresses from Address Pools on page 479
- Limiting the Number of IP Addresses Supplied by DHCP Local Server on page 479
- Logging Out DHCP Local Server Subscribers on page 481
- Using DHCP Local Server Event Logs on page 483
- Using SNMP Traps to Monitor DHCP Local Server Events on page 482
- clear ip dhcp-local binding
- dhcp delete-binding
- ip dhcp-local auto-configure agent-circuit-identifier
- ip dhcp-local excluded-address
- ip dhcp-local limit
- ip dhcp-local unique-client-ids

- `logout subscribers` command
- `service dhcp-local`
- `ipv6 local pool`

Configuring DHCP Local Address Pools

Tasks to configure DHCP local address pool include:

- Basic Configuration of DHCP Local Address Pools on page 484
- Linking Local Address Pools on page 486
- Setting Grace Periods for Address Leases on page 486

Basic Configuration of DHCP Local Address Pools

To configure the DHCP local address pool:

1. Specify the pool name and access DHCP Local Pool Configuration mode.

```
host1(config)#ip dhcp-local pool ispBoston
host1(config-dhcp-local)#
```

2. Specify the IP address of the router for the subscriber's computer to use for traffic destined for locations beyond the local subnetwork.

```
host1(config-dhcp-local)#default-router 10.10.1.1
```

The default router must be on the same subnetwork as the local server pool IP addresses that you configure with the **network** command.

You specify the IP address of a primary server, and optionally, the IP address of a secondary server.

3. (Optional) Assign a DNS server to an address pool. Some DHCP clients request the DHCP local server to assign a DNS server.

```
host1(config-dhcp-local)#dns-server 10.10.1.1
```

4. (Optional) Specify a domain name that can be returned to the subscriber if requested.

```
host1(config-dhcp-local)#domain-name ispBoston
```

The name of the domain must match the name you specified for the RADIUS vendor-specific attribute (VSA) and for authentication, authorization, accounting, and address assignment.

5. Specify the time period for which the supplied IP address is valid.

```
host1(config-dhcp-local)#lease 0 0 24
```

Specify the number of days, and optionally, the number of hours, minutes, and seconds. Use the keyword **infinite** to specify a lease that does not expire. The default lease time is 30 minutes.

6. (Optional) Link the DHCP local address pool being configured to another local address pool. See “Linking Local Address Pools” on page 486 for more information about linking local address pools.

```
host1(config-dhcp-local)#link ispChicago
```

7. (Optional) Assign a NetBIOS server for subscribers. Some DHCP clients request the DHCP local server to assign a NetBIOS server.

```
host1(config-dhcp-local)#netbios-name-server 10.10.1.1 10.10.1.2
```

Specify the IP address of a primary server and, optionally, the address of a secondary server.

8. (Optional) Specify NetBIOS node type.

```
host1(config-dhcp-local)#netbios-node-type b-node
```

Specify one of the following types of NetBIOS nodes. By default, the node type is unspecified.

- **b-node**—Broadcast
- **p-node**—Peer-to-peer
- **m-node**—Mixed
- **h-node**—Hybrid

9. Specify the IP addresses that the DHCP local server can provide from an address pool.

```
host1(config-dhcp-local)#network 10.10.1.0 255.255.0.0
```

Use the **force** keyword with the **no** version of the command to delete the address pool even if the pool is in use.

10. For both equal-access and standalone modes, you can reserve an IP address for a specific MAC address.

```
host1(config-dhcp-local)#reserve 10.10.13.8 0090.1a10.0552
```

11. For standalone mode, you can specify the DHCP server address that is sent to DHCP clients.

```
host1(config-dhcp-local)#server-address 10.10.20.0
```

12. (Optional) Enable Simple Network Management Protocol (SNMP) traps for local address pool utilization, including normal, linked, and shared address pools. Traps are generated based on threshold values for utilization. You can define threshold values by using the warning command. See “Using SNMP Traps to Monitor DHCP Local Server Events” on page 482 for more information about SNMP and local address pools.

```
host1(config-dhcp-local)#snmpTrap
host1(config-dhcp-local)#warning 50 40
```

13. (Optional) Configure a grace period for address leases allocated from the current DHCP local address pool. Specify the number of days and, optionally, the number of hours, minutes, and seconds in the grace period.

```
host1(config-dhcp-local)#grace-period 0 12
```

This command applies only to address leases that expire. Use the **use-release-grace-period** command to also apply the configured grace period to the local pool addresses that are explicitly released by clients. See “Setting Grace Periods for Address Leases” on page 486 for more information about grace periods.

14. (Optional) Specify that the grace period is applied to addresses that have been explicitly released by clients. By default, the grace period is applied only to address leases that expire, not to addresses that have been released. See “Setting Grace Periods for Address Leases” on page 486 for more information about grace periods.

```
host1(config-dhcp-local)#use-release-grace-period
```

Linking Local Address Pools

In both equal-access mode and standalone mode, you can link a DHCP local pool to another local pool. The linked pool serves as a backup pool. If no addresses are available in a pool, the DHCP local server attempts to allocate an address from the linked pool. The address pools that are linked are viewed as a group.

Setting Grace Periods for Address Leases

The JUNOS software enables you to configure a grace period for a particular local address pool—the grace period is applied to all address leases associated with the address pool. The grace period is the amount of time that a client continues to retain its address lease after the lease expires or is released. An address cannot be assigned to any other client during the grace period. When the grace period expires, the address is released back to the address pool.

Grace periods help to ensure that a DHCP client retains its previously assigned IP address in situations that might normally cause a lease termination followed by a new address assignment. For example, if a client loses its lease due to a network disruption, the grace period enables the client to be reassigned the same address when the client requests an address after the network stabilizes. Grace periods are also useful during client reboots and in cases where a non-compliant or unreliable DHCP implementation triggers a lease renewal.

You configure a grace period for a local address pool. The grace period is immediately applied to all addresses that are allocated from the pool, including previously allocated addresses that are currently active—the new grace period takes precedence over a previously configured grace period for the address pool.



NOTE: Configuring a new grace period that is shorter than the address pool current grace period immediately terminates any existing address leases that are in the grace period state and that have already exceeded the length of the new grace period.

An address continues to be counted against the address pool resources while in a grace period. For example, if the address pool is exhausted, a new address cannot be assigned to other clients.

Client address leases enter the grace period in two ways—the lease might expire or the address can be explicitly released by the client. In both cases the address remains unavailable to other clients and can only be reapplied to the original client during the grace period. The address is released back to the address pool if the grace period expires before the address is reapplied to the original client.

When you configure a grace period, by default it is applied to address leases that *expire*, but not to addresses that are *released* by clients. However, you can optionally apply the grace period to released addresses.

Configuring AAA Authentication for DHCP Local Server Standalone Mode

The DHCP local server enables you to optionally configure AAA-based authentication of standalone mode DHCP clients. In addition to providing increased security, AAA authentication also provides RADIUS-based input to IP address pool selection for standalone mode clients. By default, clients are not authenticated in standalone mode.

Typically, an incoming DHCP client does not provide a username—therefore, the DHCP local server constructs a username based on the user's attachment parameters and optional DHCP parameters. AAA uses the constructed username to authenticate the incoming client and create the AAA subscriber record for the client. The information in the AAA subscriber record is then used to determine the IP address pool from which to assign the address for the DHCP client. You can include the following elements in the username:

Attachment Parameters	DHCP Parameters
domain	circuit ID
user prefix	circuit type
–	MAC address
–	option 82
–	virtual router name



NOTE: The nondomain portion of a constructed username must contain at least one character. Otherwise, the DHCP local server rejects the DHCP client without performing the AAA authentication request.

When using authentication, AAA accepts the DHCP client as a subscriber—this enables you to use **show** commands to monitor configuration information and statistics about the client. You can also use the **logout subscriber** command to manage subscribers.

To configure AAA-based authentication for DHCP local server standalone mode clients:



CAUTION: Configuring authentication on the DHCP local server requires that you first disable the DHCP local server for standalone mode. Doing so removes your entire DHCP local server configuration. Therefore, if you want to configure authentication, do so before you have otherwise configured the DHCP local server.

1. Disable the DHCP local server for standalone mode.

```
host1(config)#no service dhcp-local standalone
```

2. Enable AAA-based authentication for DHCP local server standalone mode clients.

```
host1(config)#service dhcp-local standalone authenticate
```

3. Specify the password that authenticates a locally configured DHCP standalone mode client. In DHCP standalone mode, the password is presented to AAA in an authentication request.

```
host1(config)#ip dhcp-local auth password to4tool8
```

4. Specify the domain for a username that is locally configured for a DHCP standalone mode client. The locally configured username is presented to AAA in an authentication request.

```
host1(config)#ip dhcp-local auth domain ISP1.com
```

5. Specify the user-prefix for a username that is locally configured for a DHCP standalone mode client. The locally configured username is presented to AAA in an authentication request.

```
host1(config)#ip dhcp-local auth user-prefix ERX4-Boston
```

6. Include optional information as part of the locally configured username for a DHCP standalone mode client. The optional information becomes part of the AAA subscriber record, and is then used to determine the IP address pool from which to assign the address for the DHCP client.

Use the following keywords to include specific information:

- **circuit-identifier**—Specifies the circuit identifier of the interface on which the DHCP client's request was received.
- **circuit-type**—Specifies the circuit type of the interface on which the DHCP client's request was received.
- **mac-address**—Specifies the DHCP client's MAC address.
- **option82**—Specifies the DHCP client's option 82 value.
- **virtual-router-name**—Specifies the DHCP local server's virtual router name.

```
host1(config)#ip dhcp-local auth include virtual-router-name
host1(config)#ip dhcp-local auth include circuit-type
host1(config)#ip dhcp-local auth include circuit-identifier
```

7. (Optional) Verify your authentication configuration.

```
host1(config)#show ip dhcp-local auth config
```

DHCP Local Server Authentication Configuration

```
User-Prefix      : ERX4-Boston
Domain           : ISP1.com
Password         : to4TooL8
Virtual Router   : included
Circuit Type     : included
Circuit ID       : included
MAC Address      : excluded
Option 82        : excluded
```

- Related Topics**
- ip dhcp-local auth domain command
 - ip dhcp-local auth include command
 - ip dhcp-local auth password command
 - ip dhcp-local auth user-prefix
 - service dhcp-local authenticate

Configuring the DHCPv6 Local Server

In addition to the embedded DHCP local server that is used for IP version 4 (IPv4) address support, E Series routers include an embedded DHCPv6 local server. This server enables the router to function as a server for the DHCP protocol for IP version 6 (IPv6). The DHCPv6 local server sends and receives packets via IPv6 and informs IPv6 of the routing requirements of the router clients.

The DHCPv6 local server provides the following IPv6 address support:

- Delegates IPv6 prefixes to client routers; each client can have one prefix; prefixes and DNS information can be locally configured or derived from RADIUS via AAA.
- Provides DNS server information to directly connected router clients.



NOTE: You must add a vendor-specific attribute to RADIUS to enable E Series routers to retrieve IPv6 Domain Name System (DNS) addresses.

Use the following steps to configure the DHCPv6 local server:

1. Enable the DHCPv6 local server.

```
host1(config)#service dhcpv6-local
```

2. Specify the IPv6 prefix and lifetime that are to be delegated to the DHCPv6 client. The specified prefix is delegated by the DHCPv6 local server when requested by the client.

```
host1(config-if)#ipv6 dhcpv6-local delegated-prefix 2001:db8:17::/48 lifetime infinite
```

Use the **lifetime** keyword to specify the time period for which the prefix is valid. This lifetime overrides the default lifetime that is set in Global Configuration mode. If no lifetime is specified, the default lifetime is assigned.

- Specify the number of days and, optionally, the number of hours, minutes, and seconds. You cannot specify a lifetime of zero (that is, you cannot set the days, hours, minutes, and seconds fields all to zero).
 - Use the keyword **infinite** to specify a lifetime that does not expire.
3. Specify the name of a DNS domain for DHCPv6 clients in the current virtual router to search. You can specify a maximum of four DNS domains for a DHCPv6 local server's search list.

```
host1(config-if)#ipv6 dhcpv6-local dns-domain-search xyzcorporation.com  
host1(config-if)#ipv6 dhcpv6-local dns-domain-search xyzcorp.com
```

4. Specify the IPv6 address of the DNS server and to assign the server to the DHCPv6 clients in the current virtual router. You can specify a maximum of four DNS servers.

```
host1(config-if)#ipv6 dhcpv6-local dns-server 2001:db8:18::
```

5. Set the default lifetime for which a prefix delegated by this DHCPv6 local server is valid. This default is overridden by an interface-specific lifetime.

```
host1(config-if)#ipv6 dhcpv6-local prefix-lifetime infinite
```

- Specify the number of days and, optionally, the number of hours, minutes, and seconds. You cannot specify a lifetime of zero (that is, you cannot set the days, hours, minutes, and seconds fields all to zero).
- Use the keyword **infinite** to specify a lifetime that does not expire.

- Related Topics**
- `ip dhcp-local auth domain` command
 - `service dhcpv6-local`

- `ipv6 dhcpv6-local delegated-prefix`
- `ipv6 dhcpv6-local dns-domain-search`
- `ipv6 dhcpv6-local dns-server`
- `ipv6 dhcpv6-local prefix-lifetime`

Deleting DHCPv6 Client Bindings

The JUNOS Software enables you to manage your router's DHCPv6 local server client bindings. The client binding associates an IPv6 prefix with a unique DHCP ID (DUID) of the subscriber client. To view information about current DHCPv6 client bindings and track lease times of a specific client binding, use the **show ipv6 dhcpv6-local binding** command.

To delete a client binding and the associated route configuration when the DHCPv6 client binding is no longer needed, use the **dhcpv6 delete-binding** command. You can delete the DHCPv6 client bindings instead of waiting for the lease timer to expire. Use the following keywords and variables with the **dhcpv6 delete-binding** command to specify (filter) the client bindings you want to delete:

- **all**—All DHCPv6 local server client bindings
- *ipv6Prefix*—IPv6 prefix (address and subnetwork mask) of the DHCPv6 clients; for example, `2002:2:4:1::/64`
- *string*—Local address pool name; for example, `server4pool`



NOTE: After a stateful SRP switchover, in a scaled environment, the interface strings associated with DHCPv6 client bindings might not be displayed in the output of the **show** commands used to view information about client bindings if you issue the **show** command immediately after a stateful SRP switchover. These **show** commands display interface strings in the output only if the restoration of IPv6 interfaces on the router is complete after the SRP warm switchover. After the restoration of IPv6 interfaces is complete, interface strings are displayed properly in the output of the **show** commands available for this purpose.

You can remove all DHCPv6 client bindings, all DHCPv6 client bindings of a particular type, or a specified DHCPv6 client binding that meets the deletion criteria you specify.

- To delete all DHCPv6 client bindings on virtual router `vr1`:

```
host1:vr1#dhcpv6 delete-binding all
```

- To delete DHCPv6 client bindings with the specified IPv6 prefix:

```
host1:vr1#dhcpv6 delete-binding 2002:2:4:1::/64
```

- To delete a group of DHCPv6 client bindings that were assigned prefix from the local pool:

```
host1:vr2#dhcpv6 delete-binding server4pool
```


The router does not notify the DHCPv6 client when you use the **dhcpv6 delete-binding** command. To verify that the DHCPv6 client bindings have been deleted, use the **show ipv6 dhcpv6-local binding** command.

- Related Topics**
- [dhcpv6 delete-binding](#)
 - [show ipv6 dhcpv6-local binding](#)
 - [Monitoring DHCPv6 Local Server Binding Information on page 573](#)

Configuring the Router to Work with the SRC Software

E Series Broadband Services Routers have an embedded SRC client that interacts with the SRC software. For information about configuring the SRC client, see “Configuring the SRC Client” on page 94.

- Configuration Example**
- Figure 12 on page 493 shows the scenario for this example. Subscribers obtain access to ISP Boston via a router. Subscribers log in through the SRC software, and a RADIUS server provides authentication.

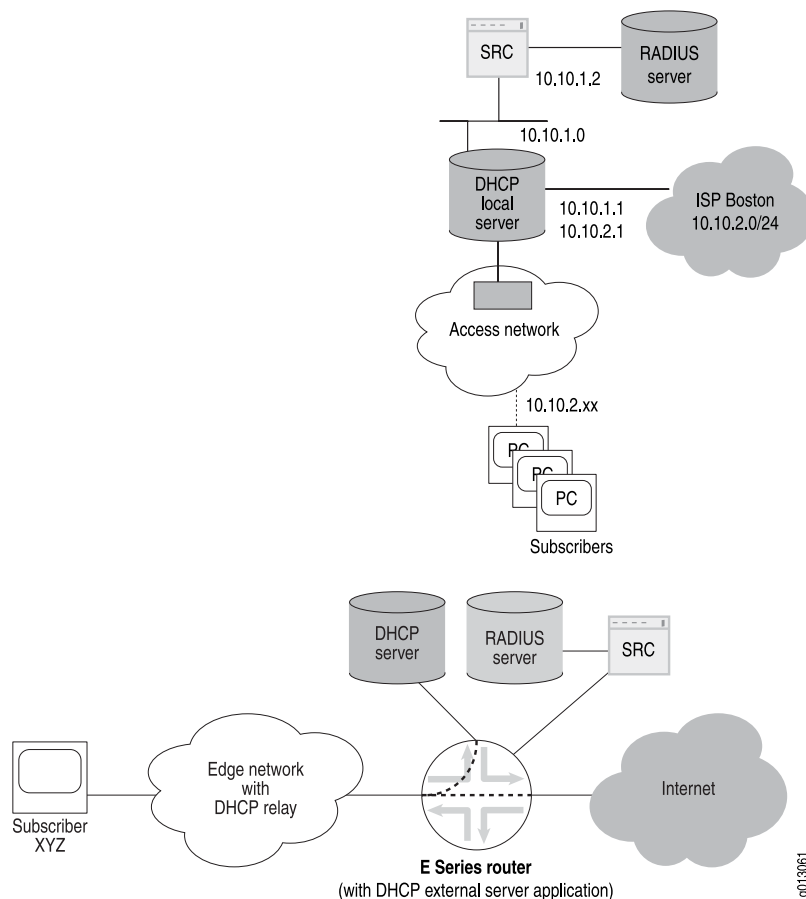Figure 12: Non-PPP Equal-Access Configuration Example

The following steps describe how to configure this scenario.

1. Configure interfaces on the router.

```
host1(config)#interface loopback 0
host1(config-if)#ip address 10.10.1.1 255.255.255.255
host1(config-if)#ip address 10.10.2.1 255.255.255.255 secondary
host1(config-if)#exit
host1(config)#interface fastEthernet 2/0
host1(config-if)#ip unnumbered loopback 0
```

2. Configure the parameters to enable the router to forward authentication requests to the RADIUS server.

```
host1(config)#radius authentication server 10.10.1.2
host1(config)#udp-port 1645
host1(config)#key radius
```

3. Specify the authentication method.

```
host1(config)#aaa authentication ppp default radius
```

Or

```
host1(config)#aaa authentication ppp default none
```

4. Enable the DHCP local server.

```
host1(config)#service dhcp-local
```

5. Specify the IP addresses that are in use, so that the DHCP local server cannot assign these addresses.

```
host1(config)#ip dhcp-local excluded-address 10.10.1.1
host1(config)#ip dhcp-local excluded-address 10.10.1.2
```

6. Configure the DHCP local server to provide IP addresses to subscribers of ISP Boston.

```
host1(config)#ip dhcp-local pool ispBoston
host1(config-dhcp-local)#network 10.10.2.0 255.255.255.0
host1(config-dhcp-local)#domain-name ispBoston
host1(config-dhcp-local)#default-router 10.10.2.1
host1(config-dhcp-local)#lease 0 0 10
host1(config-dhcp-local)#ip dhcp-local limit atm 5
```

7. Configure the SRC client.

```
host1(config)#sscc enable
host1(config)#sscc retryTimer 200
host1(config)#sscc primary address 10.10.1.2 port 3288
```

Chapter 20

Configuring DHCP Relay

The Dynamic Host Configuration Protocol (DHCP) provides a mechanism through which computers using Transmission Control Protocol/IP (TCP/IP) can obtain protocol configuration parameters automatically from a DHCP server on the network.

The following sections describe how to configure your E Series router to provide DHCP support:

- Configuring DHCP Relay and BOOTP Relay on page 495
- Configuring DHCP Relay Proxy on page 518

Configuring DHCP Relay and BOOTP Relay

The DHCP relay feature relays a request from a remote client to a DHCP server for an IP address. When the router receives a DHCP request from an IP client, it forwards the request to the DHCP server and passes the response back to the IP client.

Configuring DHCP relay also enables bootstrap protocol (BOOTP) relay. The router relays any BOOTP requests it receives to the same set of servers that you configured for DHCP relay. A DHCP server can respond to the BOOTP request only if it is also a BOOTP server. The router relays any BOOTP responses it receives to the originator of the BOOTP request. If you do not configure DHCP relay, then BOOTP relay is disabled.

The router must wait for an acknowledgment from the DHCP server that the assigned address has been accepted. The IP client must accept an IP address from one of the servers. When the DHCP server sends an acknowledgment message back to the DHCP client via the router, the router updates its routing table with the IP address of the client.

If a DHCP relay request is received on an unnumbered interface, the router determines the loopback address for that interface and passes that IP address to the server.

DHCP carries other important configuration parameters, such as the subnet mask, default router, and DNS server. You can also use the DHCP relay agent information option (option 82) to add information to the DHCP packets sent to DHCP servers—the additional information, in the form of suboptions to the option 82 value, helps you to manage the IP address and service level assignments granted to your subscribers. For example, you can add the E Series hostname or the virtual router name to the front of the Agent Circuit ID suboption (suboption 1) of the DHCP relay agent information option (option 82). See “Configuring Relay Agent Option 82 Information” on page 506.

Enabling DHCP Relay

You use the **set dhcp relay** command to create and enable DHCP relay in the current virtual router.

- Include the IP address variable to enable DHCP relay and BOOTP relay and to specify an IP address for the DHCP server. When you include the IP address of a DHCP server, the router adds the IP address to the list of DHCP servers (up to five) and forwards all request packets to all configured servers.

Issuing this command also enables relay of BOOTP requests to the configured DHCP servers. If one of the DHCP servers is also a BOOTP server and responds, the router relays the response to the request originator.

```
host1(config)#set dhcp relay 192.168.29.10
```

- Use the **no** version with an IP address to remove the specified DHCP server:

```
host1(config)#no set dhcp relay 192.168.29.25
```

- Use this command without an IP address to create the DHCP relay independent of any DHCP servers. Use this version of the command when configuring support for DHCP vendor-option strings (option 60). For information about configuring option 60 support, see “Using Option 60 Strings to Forward Client Traffic to Specific DHCP Servers” on page 503.

```
host1(config)#set dhcp relay
```

- Use the **no** version without specifying an IP address to explicitly delete the DHCP relay from the current virtual router.

```
host1(config)#no set dhcp relay
```

Removing Access Routes from Routing Tables and NVS

You can remove existing access routes for an interface from routing tables and nonvolatile storage (NVS).

This command removes all installed host routes from IP and deletes host routes from mirrored storage and NVS for specified interfaces. In relay proxy mode, this command enforces consistent state of the route and client database and discards all client information for specified interfaces.

Because DHCP relay cannot distinguish between temporary dynamic interface deletions—where the interface is subsequently re-created—and permanent deletions, sometimes it retains routing information for dynamic interfaces that have already been deleted. You can use the **unknown** keyword with the **dhcp relay discard access-routes** command to remove the routing information for these interfaces.

- To remove access routes:

```
host1(config)#set dhcp relay discard-access-routes
```




NOTE: When this feature is configured, the client bypasses the DHCP relay component and communicates directly with the DHCP server to request address renewal or to release the address. The DHCP relay component has no role in determining when or whether to remove the installed host route.

Treating All Packets as Originating at Trusted Sources

By default, the DHCP relay treats all packets destined for DHCP servers as if the packets originated at an untrusted source; if the packets have a gateway IP address (giaddr) of 0 and if option 82 information is present, these packets are dropped.

- To enable the trust-all method on the DHCP relay:

```
host1(config)#set dhcp relay trust-all
```

In the trust-all method, the DHCP relay treats the packets as if they are from trusted sources and forwards the packets to the DHCP server. When you enable this command:

- If the DHCP packets contain option 82 and a giaddr field of 0, the DHCP relay inserts its giaddr into the packets and then forwards the packets.
- If the DHCP relay is configured to add option 82, it does not add an additional option 82 if one is already present in the DHCP packets.

Assigning the Giaddr to Source IP Address

As a security measure, DHCP servers typically use the giaddr included in DHCP packets to ensure that the packets come from a recognized DHCP gateway. The servers verify that the giaddr in the DHCP packet matches the source IP address in the IP packet header. You can use the **set dhcp relay assign-giaddr-source-ip** command to specify that the DHCP relay and DHCP relay proxy assign the giaddr to the source IP packet header of packets they send to DHCP servers—the DHCP servers can then compare the giaddr in the IP packet header to the giaddr in the DHCP packets.

- To assign the giaddr to the source IP packet header:

```
host1(config)#set dhcp relay assign-giaddr-source-ip
```

Protecting Against Spoofed Giaddr and Relay Agent Option Values

DHCP relay includes an override feature that provides enhanced security to protect against spoofed giaddr and relay agent option (option 82) values in packets destined for DHCP servers.

DHCP relay can detect spoofed giaddrs when the giaddr value is equal to a local IP address on which the DHCP relay can be accessed; otherwise, DHCP relay does not

detect spoofed giaddrs. Also, DHCP relay does not detect spoofed relay agent option values.

Spoofed giaddrs are a concern when the DHCP relay is used if the giaddr value in received DHCP packets is different from the local IP address on which the DHCP relay is accessed. In this situation, DHCP relay always honors the giaddr. To configure DHCP relay to override all giaddrs (including valid giaddrs) that are received from downstream network elements, use the **set dhcp relay override** command with the **giaddr** keyword. DHCP relay then takes control of the client, adding its own giaddr to the packets before forwarding the packets to the DHCP server.

Spoofed relay agent options are a concern if the giaddr is not null, or if it is null and the DHCP relay is operating in the trust-all method. In these two situations, DHCP relay always honors the relay agent option value in received DHCP packets.

- To protect against spoofed giaddrs and relay agent option values:

```
host1(config)#set dhcp relay override agent-option
```

DHCP relay then overrides all relay agent option values that are received from downstream network elements, performing one of the following actions:

- If the DHCP relay is configured to add relay agent option 82 to the packets, it clears the existing option 82 values and inserts the new values.
- If the DHCP relay is not configured to add relay agent option 82, it clears the existing option values but does not add any new values.

Using the Broadcast Flag Setting to Control Transmission of DHCP Reply Packets

Each DHCP request packet includes a broadcast flag that, if set, specifies how to transmit DHCP Offer reply packets and DHCP ACK and NAK reply packets to DHCP clients during the discovery process. To configure DHCP relay and DHCP relay proxy to use the setting of the broadcast flag to control the transmission of DHCP Offer, DHCP ACK, and DHCP NAK reply packets, use the **set dhcp relay broadcast-flag-replies** command from Global Configuration mode.

When you issue the **set dhcp relay broadcast-flag-replies** command, the method that DHCP relay and DHCP relay proxy use to transmit DHCP Offer reply packets and ACK and NAK reply packets depends on whether the broadcast flag in the DHCP request packet is set or not set, as follows:

- If the broadcast flag is set in the DHCP request packet, using the **set dhcp relay broadcast-flag-replies** command causes DHCP relay and DHCP relay proxy to broadcast DHCP reply packets to clients.
- If the broadcast flag is not set in the DHCP request packet, using the **set dhcp relay broadcast-flag-replies** command causes DHCP relay and DHCP relay proxy to use the layer 2 unicast transmission method to send DHCP reply packets using the client's layer 2 (MAC) address and layer 3 (IP) unicast address.

There are exceptions to this behavior for DHCP relay proxy when the DHCP client is already bound to an IP address or is renewing the lease on its IP address. For information, see “Behavior for Bound Clients and Address Renewals” on page 520.

To display whether support for broadcast flag replies is currently on or off on the router, use the **show dhcp relay** command. For information, see “Monitoring and Troubleshooting DHCP” on page 539.

To troubleshoot applications that use this feature, you can use the `dhcpCapture` system event log category. For information about how to log system events, see *JUNOS System Event Logging Reference Guide*.

Interaction with Layer 2 Unicast Transmission Method

As described in “Configuring Layer 2 Unicast Transmission Method for Reply Packets to DHCP Clients” on page 502, you can use the **set dhcp relay layer2-unicast-replies** command to configure DHCP relay and DHCP relay proxy to use the layer 2 unicast and layer 3 broadcast transmission method to send DHCP Offer reply packets and DHCP ACK and NAK reply packets to clients.

The **set dhcp relay broadcast-flag-replies** command and the **set dhcp relay layer2-unicast-replies** command are mutually exclusive. If you attempt to issue the **set dhcp relay broadcast-flag-replies** command when the **set dhcp relay layer2-unicast-replies** command is already in effect, the operation fails and the router displays the following message:

```
% layer2-unicast-replies and broadcast-flag-replies are mutually exclusive
```

If this message appears, you must first issue the **no set dhcp relay layer2-unicast-replies** command to disable layer 2 unicast replies, and then issue the **set dhcp relay broadcast-flag-replies** command again to enable broadcast flag replies.

Table 101 on page 499 summarizes how the configuration of the **set dhcp relay broadcast-flag-replies** command and the **set dhcp relay layer2-unicast-replies** command interacts with the setting of the broadcast flag in DHCP request packets to control how the router transmits DHCP reply packets to clients during the discovery process. Because these commands are mutually exclusive, broadcast flag replies and layer 2 unicast replies cannot both be enabled on the router at the same time.

Table 101: Router Configuration and Transmission of DHCP Reply Packets

Broadcast Flag Replies	Layer 2 Unicast Replies	Router Behavior if Broadcast Flag Set	Router Behavior if Broadcast Flag Not Set
Enabled (on)	Disabled (off)	DHCP relay and DHCP relay proxy broadcast DHCP reply packets to clients.	DHCP relay and DHCP relay proxy use layer 2 unicast and layer 3 unicast transmission to send DHCP reply packets to clients.
Disabled (off)	Enabled (on)	DHCP relay and DHCP relay proxy use layer 2 unicast and layer 3 broadcast transmission to send DHCP reply packets to clients.	DHCP relay and DHCP relay proxy use layer 2 unicast and layer 3 broadcast transmission to send DHCP reply packets to clients.

Table 101: Router Configuration and Transmission of DHCP Reply Packets *(continued)*

Broadcast Flag Replies	Layer 2 Unicast Replies	Router Behavior if Broadcast Flag Set	Router Behavior if Broadcast Flag Not Set
Disabled (off)	Disabled (off)	DHCP relay and DHCP relay proxy broadcast DHCP reply packets to clients. For information about exceptions to this behavior for DHCP relay proxy, see “Behavior for Bound Clients and Address Renewals” on page 520 .	DHCP relay and DHCP relay proxy broadcast DHCP reply packets to clients. For information about exceptions to this behavior for DHCP relay proxy, see “Behavior for Bound Clients and Address Renewals” on page 520 .

Preventing DHCP Relay from Installing Host Routes by Default

The Address Resolution Protocol (ARP) performs spoof checking on all incoming ARP requests by default. For each incoming packet, ARP does a route lookup on the source IP address to determine the interface on which that IP address was routed. ARP then verifies that the interface on which the packet was received matches the routed interface. If the interface on which the packet was received does not match the routed interface, the router drops the packet.

When you configure applications such as DHCP relay that automatically install routes, you must ensure that the routes are correctly installed for your configuration. DHCP relay installs host routes by default, which is required in certain configurations to enable address renewals from the DHCP server to work properly. However, the default installation of host routes might cause a conflict when you configure DHCP relay with static subscriber interfaces. To avoid these configuration conflicts, use the **set dhcp relay inhibit-access-route-creation** command to prevent DHCP relay from installing host routes by default. The command enforces consistent state of the route and client database.

In relay mode, this command removes all installed host routes from IP, deletes all host routes from mirrored storage and NVS, and stops accumulating host route information.

In relay proxy mode, this command removes all installed host routes from IP, deletes all NVS client data, and stops installing host routes for newly bound clients in IP. However, it does preserve the client data in mirrored storage and continues preservation of newly bound clients in mirrored storage.

The **no set dhcp relay inhibit-access-route-creation** command enforces consistent state of the route and client database. In relay proxy mode, after the unified ISSU is completed and normal operations resume, this command installs a host route for all existing bound clients in IP and saves it in NVS.

Configuration Example—Preventing Installation of Host Routes

This example describes a sample procedure for configuring multiple subscribers over a particular static subscriber interface (ip53001 in this example)—you might use

commands similar to the following to create demultiplexer table entries and a subnet route that points to the static subscriber interface.

In the example, the host routes are associated with the primary IP interface on Gigabit Ethernet 1/0. Because the host routes are statically configured with the subscriber interface, there is no need for the router to install DHCP host routes. Therefore, in step 7, the `set dhcp relay inhibit-access-route-creation` command is used to prevent DHCP relay from installing host routes.

1. Create a shared IP interface.

```
host1(config)#interface ip ip53001
```

2. Associate the shared IP interface with a static layer 2 interface.

```
host1(config-if)#ip share-interface gigabitEthernet 1/0
```

3. Make the shared interface an unnumbered interface.

```
host1(config-if)#ip unnumbered loopback 53
```

4. Specify the source addresses that the subscriber interface uses to demultiplex traffic.

```
host1(config-if)#ip source-prefix 10.10.10.0 255.255.255.252
```

5. Exit Interface Configuration mode.

```
host1(config-if)#exit
```

6. Create a static route that sends traffic for destination address 10.10.10.0 to subscriber interface ip53001.

```
host1(config)#ip route 10.10.10.0 255.255.255.252 ip ip53001
```

7. Prevent DHCP relay from installing host routes—this avoids a conflict that can cause undesirable ARP behavior.

```
host1(config)#set dhcp relay inhibit-access-route-creation
```

In the example, if you do not prevent DHCP relay from installing host routes, the ARP spoof-checking mechanism associates the ARP traffic with the primary IP interface (Gigabit Ethernet 1/0), although packets actually arrive on the subscriber interface (ip53001), causing the router to detect a spoof and drop the packet.

Including Relay Agent Option Values in the PPPoE Remote Circuit ID

You can enable the router to capture and format a vendor-specific tag containing a PPPoE remote circuit ID value transmitted from a digital subscriber line access multiplexer (DSLAM) device. The router can then send this value to a Remote Authentication Dial-In User Service (RADIUS) server or to a Layer 2 Tunneling Protocol (L2TP) network server (LNS) to uniquely identify subscriber locations.

By default, the router formats the captured PPPoE remote circuit ID to include only the `agent-circuit-id` suboption (suboption 1) of the DHCP relay agent information

option (option 82). You can use the **radius remote-circuit-id-format** command to configure the following nondefault formats for the PPPoE remote circuit ID value:

- Include either or both of the agent-circuit-id (suboption 1) and agent-remote-id (suboption 2) suboptions of the DHCP relay agent information option, with or without the NAS-Identifier [32] RADIUS attribute.
- Append the agent-circuit-id suboption value to an interface specifier that is consistent with the recommended format in the DSL Forum Technical Report (TR)-101—Migration to Ethernet-Based DSL Aggregation (April 2006).

For information about configuring the PPPoE remote circuit ID, see the *Using the PPPoE Remote Circuit ID to Identify Subscribers* and *Configuring PPPoE Remote Circuit ID Capture* sections in *JUNOS Link Layer Configuration Guide*.

Using the Giaddr to Identify the Primary Interface for Dynamic Subscriber Interfaces

When creating dynamic subscriber interfaces, the router builds the dynamic interfaces on the associated primary interface. By default, the router identifies the primary interface based on the interface on which DHCP client discover packets are received. The router then builds all dynamic interfaces on that primary interface.

In some cases you might want more control over the determination of the primary interface and you might not want to use the primary interface that is determined by the default behavior. The JUNOS software enables you to configure DHCP relay to use information in the giaddr in DHCP ACK messages to specify which interface is to be used as the primary interface. This capability allows you to build dynamic interfaces on the primary interface of your choice.

- To use information in the giaddr to identify the primary interface for dynamic subscriber interfaces:

```
host1(config)#set dhcp relay giaddr-selects-interface
```

Configuring Layer 2 Unicast Transmission Method for Reply Packets to DHCP Clients

By default, DHCP relay and relay proxy broadcast DHCP Offer reply packets and DHCP ACK and NAK reply packets to DHCP clients during the discovery process. In some environments, this default broadcast method might be a security concern because all clients can receive packets intended for all other clients.

You use the **set dhcp relay layer2-unicast-replies** command in Global Configuration mode to configure the optional layer 2 unicast and layer 3 broadcast transmission method for DHCP relay and DHCP relay proxy. This method uses the client's layer 2 (MAC) address and layer 3 (IP) broadcast address to provide secure transmission of DHCP Offer reply packets and ACK and NAK reply packets. The optional layer 2 unicast method enables reply packets to be broadcast through the layer 3 network but received only by the specified client.

There are exceptions to this behavior for DHCP relay proxy when the DHCP client is already bound to an IP address or is renewing the lease on its IP address. For information, see “Behavior for Bound Clients and Address Renewals” on page 520.

To display whether the layer 2 unicast method is currently on or off on the router, use the **show dhcp relay** command. For information, see “Monitoring and Troubleshooting DHCP” on page 539.

The dhcpRelayGeneral logging event category uses the debug severity level to log DHCP reply packets that are transmitted to clients using a layer 2 unicast address and a layer 3 broadcast address.

The **set dhcp relay broadcast-flag-replies** command configures the router to use the setting of the broadcast flag in DHCP request packets to control the transmission of DHCP reply packets. The **set dhcp relay layer2-unicast-replies** command and the **set dhcp relay broadcast-flag-replies** command are mutually exclusive. For more information, see “Interaction with Layer 2 Unicast Transmission Method” on page 499.



NOTE: When you enable the layer 2 unicast transmission feature, the DHCP relay and DHCP relay proxy instance must be the next hop from the DHCP clients. Otherwise, the DHCP reply packets might be discarded.

The layer 2 unicast transmission method is not supported on non-ASIC line modules.

- To configure the optional broadcast transmission method:

```
host1(config)#set dhcp relay layer2-unicast-replies
```

Using Option 60 Strings to Forward Client Traffic to Specific DHCP Servers

The DHCP functionality supports the DHCP vendor class identifier option (option 60). This support allows DHCP relay to compare option 60 strings in received DHCP client packets against strings that you configure on the router. You can use the DHCP relay option 60 feature when providing converged services in your network environment—option 60 support enables DHCP relay to direct client traffic to the specific DHCP server (the vendor-option server) that provides the service that the client requires. Or, as another option, you can configure option 60 strings to direct traffic to the DHCP local server in the current virtual router.

For example, you might have an environment in which some DHCP clients require only Internet access, while other clients require IPTV service. The clients that need Internet access get their addresses assigned by the DHCP local server on the E Series router (in equal-access mode). Clients requiring IPTV must be relayed to a specific DHCP server that provides the service. To support both types of clients, you configure two option 60 strings on the DHCP relay. Now, when any DHCP client packets are received with option 60 strings configured, the strings are matched against all strings configured on the DHCP relay. If the client string matches the first string you configured, that client is directed to the DHCP local server and gains Internet access. Client traffic with an option 60 string that matches your second string is relayed to the DHCP server that provides the IPTV service. In addition, you can configure a default action, which DHCP relay performs when a client option 60 string does not

match any strings you have configured—for example, you might specify that all clients with non-matching strings be dropped.

You use the **set dhcp vendor-option** command to configure vendor-option (option 60) strings to control DHCP client traffic. Create DHCP vendor-option servers by configuring DHCP relay to match DHCP option 60 strings and to specify what action to use for the traffic.

Use the following guidelines when configuring the **set dhcp vendor-option** command:

- Use the **equals** or **starts-with** keywords to specify a unique string to match, and to configure the action to take for traffic with a matching string:
 - **equals**—The DHCP client string is an exact match of the specified string
 - **starts-with**—The DHCP client string is a partial match, from left-to-right, of the specified string. For example, a client string of **day** matches a **starts-with** configured string of **daytime**.
- Use the following keywords to configure actions for matching strings:
 - **local-server**—Forward packets to the DHCP local server
 - **relay**—Forward packets to the DHCP server with the specified IP address
- Use the **default** keyword to set the default action to take when the option 60 string does not match a configured vendor-option string. Use the following keywords to configure actions for nonmatching strings:
 - **drop**—Discard traffic
 - **local-server**—Forward packets to the DHCP local server
 - **proxy-client**—Forward traffic to the DHCP proxy client server
 - **relay**—Forward packets to the DHCP server with the specified IP address
 - **relay-server-list**—Forward traffic to all non-vendor option DHCP servers. The relay-server-list consists of all non-vendor option servers. Non-vendor option servers are those servers that are configured with the **set dhcp relay** command but not with the **set dhcp vendor-option** command.
 - When you configure the first DHCP vendor-option and no default action is specified for a configured DHCP application, the router chooses the default action according to the preference of the DHCP applications. The order of preference from first to last is DHCP local server, DHCP relay, and DHCP proxy client.

You can map multiple strings to the same DHCP server, and you can map a single string to multiple servers. However, mapping one string to more than five DHCP vendor-option servers might impact performance.

You can configure a maximum of 100 option 60 strings per DHCP relay. Strings can contain a maximum of 254 characters.

Client packets that have option 60 configured but have no string specified (a string of 0 length) are treated as nonmatching strings and handled accordingly.

- To configure an exact match:

```
host1(config)#set dhcp vendor-option equals myword relay 192.168.7.7
```

- To configure a partial match:

```
host1(config)#set dhcp vendor-option starts-with abcd local-server
```

- To configure the default action:

```
host1(config)#set dhcp vendor-option default drop
```

- To remove a configuration:

```
host1(config)#no set dhcp vendor-option starts-with abcd local-server
```

Configuration Example—Using DHCP Relay Option 60 to Specify Traffic Forwarding

You use the DHCP relay option 60 feature to specify the action performed on DHCP client traffic. The DHCP relay uses the option 60 string in the client traffic to determine what action to take with the incoming traffic.

The following example describes a sample procedure that creates three actions for incoming DHCP client traffic, depending on the traffic's option 60 string.

1. Enable the DHCP relay. Do not specify an IP address when you configure DHCP relay to support vendor-option strings.

```
host1(config)#set dhcp relay
```

2. Configure the action DHCP relay takes when the incoming traffic has an exact option 60 string of myword. DHCP relay forwards this traffic to the DHCP server with an IP address of 192.168.7.7.

```
host1(config)#set dhcp vendor-option equals myword relay 192.168.7.7
```

3. Configure the action DHCP relay takes when the incoming traffic has a partial match, from left-to-right, with an option 60 string you have configured. For this command, matching strings include a, ab, abc, and abcd. DHCP relay forwards matching traffic to the DHCP server with IP address 192.168.15.2.

```
host1(config)#set dhcp vendor-option starts-with abcd relay 192.168.15.2
```

4. Configure the default option 60 action. DHCP relay takes this action when the incoming traffic has an option 60 string that does not match any of the option 60 strings that you have configured. In this example, the traffic is sent to the DHCP local server.

```
host1(config)#set dhcp vendor-option default local-server
```

5. (Optional) View your DHCP relay vendor-option configuration.

```
host1(config)#run show dhcp vendor-option
Codes:
```

```

*           - the configured vendor-string is an exact-match
default    - all DHCP client packets not matching a configured vendor-string

implied    - the DHCP application is configured but has not been enabled
              with the vendor-option command
drop       - the DHCP application responsible for the action has not been
              configured yet therefore all packets for this application
              will be dropped
Total 3 entries.
Vendor-option      Action
-----
abcd              relay to 192.168.15.2 (rx: 0)

default(*)        local-server (rx: 0, no-match: 0)
myword(*)         relay to 192.168.7.7 (rx: 0)

```

Relaying DHCP Packets That Originate from a Cable Modem

You can use the DHCP vendor class identifier option (option 60) to configure DHCP relay to relay DHCP packets that originate from a cable modem to an external DHCP server that provides the cable modem with the configuration it requests.

Configure the vendor class identifier option to match the string used by cable modems—DHCP relay then forwards the packets to each DHCP server that you configured with the **set dhcp vendor-option** command (these servers are also considered to be cable-modem DHCP servers).

- To relay DHCP packets from a cable modem:

```

host1(config)#set dhcp relay
host1(config)#service dhcp-local equal-access
host1(config)#set dhcp vendor-option equals docsis relay 192.168.1.1
host1(config)#set dhcp vendor-option equals cablemodem relay 192.168.1.1

```

Use the **show dhcp summary** and **show dhcp vendor-option** commands to display information about the cable modem DHCP relay configuration. See “Monitoring and Troubleshooting DHCP” on page 539.

Configuring Relay Agent Option 82 Information

You can specify the type the relay agent option 82 information that the router adds to DHCP packets before it relays the packets to the DHCP server. You can use one of the following keywords to add either the hostname or virtual router name to the front of the Circuit-Id field or to strip the subinterface ID from the Interface-Id field:

- **hostname**—Adds the router’s hostname to the front of the Circuit-Id field; a colon separates the hostname from the circuit information
- **vrname**—Adds the router’s virtual router name to the front of the Circuit-Id field; a colon separates the virtual router name from the circuit information
- Use the **exclude-subinterface-id** to strip the subinterface ID from the Interface-Id field. When the interface ID is constructed, it contains the slot/port numbers, the subinterface ID, and the VPI/VCI for ATM interfaces or the VLAN ID for

Ethernet interfaces. Use this keyword to remove the subinterface ID from the Interface-Id field.

The **hostname** and **vrname** keywords are a toggle; that is, specifying either hostname or virtual router name turns off the other selection.

- To configure the relay agent option 82 information:

```
host1(config)#set dhcp relay options hostname
```

Preventing Option 82 Information from Being Stripped from Trusted Client Packets

You can configure DHCP relay or DHCP relay proxy to preserve option 82 information for trusted clients. This ensures that DHCP relay and DHCP relay proxy prevent option 82 information from being stripped off packets destined for a trusted client. A trusted client has a giaddr value of 0. If DHCP relay is configured not to remove option 82 and the giaddr field is 0, option 82 information remains in the packets.

- To prevent the option 82 information from being removed from packets destined for a trusted client:

```
host1(config)#set dhcp relay preserve-trusted-client-option
```

Configuring Relay Agent Information Option (Option 82) Suboption Values

The DHCP relay agent information option (option 82) enables you to include additional useful information in the client-originated DHCP packets that the DHCP relay forwards to a DHCP server.

When the DHCP relay agent information option is enabled, the DHCP relay adds the option 82 information to packets it receives from clients, then forwards the packets to the DHCP server. The DHCP server uses the option 82 information to decide which IP address to assign to the client—the DHCP server might also use information in the option 82 field for additional purposes, such as determining which services to grant to the client. The DHCP server sends its reply back to the DHCP relay, which removes the option 82 information field from the message, and then forwards the packet to the client.

The option 82 information is made up of a sequence of suboptions. JUNOS software supports the following DHCP relay agent information suboptions.

- Agent Circuit ID (suboption 1)—An ASCII string that identifies the interface on which a client DHCP packet is received.
- Agent Remote ID (suboption 2)—An ASCII string assigned by the relay agent that securely identifies the client.
- Vendor-Specific (suboption 9)—The JUNOS software data field, which contains the Internet Assigned Numbers Authority (IANA) enterprise number (4874) used by JUNOS software and either or both the layer 2 circuit ID and the user packet class.

- Layer 2 Circuit ID (type 1)—The hexadecimal representation of the layer 2 identifier in the Agent Circuit ID (suboption 1) value (for example, the ATM VPI/VCI or Ethernet SVLAN/VLAN ID.) You can configure this suboption type without the Agent Circuit ID.
- User Packet Class (type 2)—The hexadecimal representation of the user packet class field, whose value is assigned by the layer 2 policy application. The layer 2 policy application can be used to map the DHCP packet or message IEEE 802.1p value to the user packet class field. See the *JUNOS Policy Management Configuration Guide* for information about layer 2 policies.

The Agent Circuit ID suboption (suboption 1) and the Agent Remote ID suboption (suboption 2) are typically determined by the client network access device and depend on the network configuration. The Vendor-Specific suboption (suboption 9) is more flexible and can be used by administrators to associate specific data with the DHCP messages relayed between the DHCP relay and the DHCP server. For example the Vendor-Specific suboption can include the client's IEEE 802.1p value, which identifies the client's user priority.



NOTE: The DHCP relay agent replaces any existing Vendor-Specific value in the client packet with the relay agent's value.

The JUNOS software provides two commands that you can use to configure DHCP relay agent information suboptions.

- The **set dhcp relay agent sub-option** command—Enables you to configure option 82 to include any combination of the supported suboptions, including the Vendor-Specific suboption.
- The **set dhcp relay agent** command—Enables you to configure option 82 to include either or both the Agent Circuit ID suboption (suboption 1) and Agent Remote ID suboption (suboption 2). The command does not support the Vendor-Specific suboption (suboption 9).



NOTE: The **set dhcp relay agent** command is a legacy command, which JUNOS software continues to support to provide backward-compatibility for existing scripts. We recommend that all new configurations use the **dhcp relay agent sub-option** command.

The **set dhcp relay agent sub-option** command enables you to manage specific option 82 suboptions without impacting the configuration of other suboptions. The legacy **set dhcp relay agent** command, however, changes the configuration of suboptions in some cases.

Table 102 on page 509 indicates the effect each command has on enabling or disabling relay agent information suboptions.

Table 102: Effect of Commands on Option 82 Suboption Settings

Command	Suboption and Status		
	Agent Circuit ID	Agent Remote ID	Vendor-Specific
set dhcp relay agent sub-option circuit-id	Enable	No change	No change
set dhcp relay agent sub-option remote-id	No change	Enable	No change
set dhcp relay agent sub-option vendor-specific <i>suboption-type</i>	No change	No change	Enable specified suboption type
no set dhcp relay agent sub-option circuit-id	Disable	No change	No change
no set dhcp relay agent sub-option remote-id	No change	Disable	No change
no set dhcp relay agent sub-option vendor-specific <i>suboption-type</i>	No change	No change	Disable specified suboption type
set dhcp relay agent	Enable	Enable	Not supported
set dhcp relay agent circuit-id-only	Enable	Disable	Not supported
set dhcp relay agent remote-id-only	Disable	Enable	Not supported
no set dhcp relay agent	Disable	Disable	Disable

Format of the JUNOSe Data Field in the Vendor-Specific Suboption for Option 82

RFC 4243 describes support for data fields from multiple vendors in the Vendor-Specific suboption for option 82. The JUNOSe software DHCP relay agent, however, supports only the JUNOSe software data field.

RFC 4243 supports the following format of the Vendor-Specific suboption:

```

      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
      +-----+-----+-----+-----+-----+-----+-----+-----+
      | Code (9) | Length | Enterprise Number 1 |
      +-----+-----+-----+-----+-----+-----+-----+-----+
      |                               | DataLen 1 |
      +-----+-----+-----+-----+-----+-----+-----+-----+
      \                               Suboption Data 1                               \
      +-----+-----+-----+-----+-----+-----+-----+-----+
      .
      .
      +-----+-----+-----+-----+-----+-----+-----+-----+

```

The JUNOSe software data field appears after the JUNOSe software enterprise number and data length fields in the Vendor-Specific suboption. The format of the JUNOSe data field is a sequence of type/length/value (TLV) tuples. The type field and length field (the length of the following value field) are each 1 byte in size. The JUNOSe data

length field specifies the total length of all TLV tuples. The JUNOSE software enterprise number is 4874 (0x130a.)

The format of the Layer 2 Circuit ID type field (type 1) is hexadecimal. The data field length of a normal non-stacked VLAN is 2 bytes, with the VLAN ID occupying the 12 low-order bits of the value; the 4 high-order bits are 0. The data field length of a stacked VLAN is 4 bytes, with the SVLAN ID occupying the 12 low-order bits of the 2 high-order bytes, and the VLAN ID occupying the 12 low-order bits of the 2 low-order bytes; the unused bits are 0. The data field length of a VPI/VCI is 4 bytes, with the VPI occupying the 8 to 10 low-order bits of the 2 high-order bytes, and the VCI occupying the 16 bits of the 2 low-order bytes; the unused bits are 0.

The format of the UPC data field (type 2) is hexadecimal; its data field length is 1 byte, with the UPC occupying the 4 low-order bits of the value; the 4 high-order bits are 0.

Example 1—The Vendor-Specific suboption for a VLAN ID of 2468 (0x09a4) and a UPC of 5 is formatted as follows:

```
09 0c 00 00 13 0a 07 01 02 09 a4 02 01 05
| | |      | | | | | | |
| | |      | | | | |   UPC val: 5
| | |      | | | | |   UPC len: 1 byte
| | |      | | | | |       UPC type: 2
| | |      | | | L2 Circuit ID val: 09 a4
| | |      | | | L2 Circuit ID len: 2 bytes
| | |      | | | L2 Circuit ID type: 1
| | |      JUNOSE data len: 7 bytes
| | JUNOSE IANA: 13 0a
| subopt 9 len: 12 bytes
subopt code: 9
```

Example 2—The Vendor-Specific suboption for a VLAN ID of 135-2468 (0x87-0x09a4, format <SVLAN ID> - <VLAN ID>) and a UPC of 5 is formatted as follows:

```
09 0e 00 00 13 0a 09 01 04 00 87 09 a4 02 01 05
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | UPC val: 5
| | | | | | | | | | | | | | UPC len: 1 byte
| | | | | | | | | | | | | | UPC type: 2
| | | | | | | | | | | | | | L2 Circuit ID val: 00 87 09 a4
| | | | | | | | | | | | | | L2 Circuit ID len: 4 bytes
| | | | | | | | | | | | | | L2 Circuit ID type: 1
| | | | | | | | | | | | | | JUNOSE data len: 9 bytes
| | JUNOSE IANA: 13 0a
| subopt 9 len: 14 bytes
subopt code: 9
```

Example 3—The Vendor-Specific suboption for a VPI/VCI of 123.45678 (0x7b.0xb26e, format <VPI> . <VCI>) and a UPC of 5 is formatted as follows:

```
09 0e 00 00 13 0a 09 01 04 00 7b b2 6e 02 01 05
| | |   | | |   | | |   | | |   | | |
| | |   | | |   | | |   | | |   | | |   UPC val: 5
| | |   | | |   | | |   | | |   | | |   UPC len: 1 byte
| | |   | | |   | | |   | | |   | | |   UPC type: 2
| | |   | | |   | | |   | | |   | | |   L2 Circuit ID val: 00 7b b2 6e
| | |   | | |   | | |   | | |   | | |   L2 Circuit ID len: 4 bytes
```

```

| | |          | L2 Circuit ID type: 1
| | |          JUNOS data len: 9 bytes
| | JUNOS IANA: 13 0a
| subopt 9 len: 14 bytes
subopt code: 9

```

Using the `set dhcp relay agent sub-option` Command to Enable Option 82 Suboption Support



NOTE: We recommend that you use the `set dhcp relay agent sub-option` command for new option 82 suboption configurations. However, JUNOS software continues to support the `set dhcp relay agent` command, with option 82 suboptions, to provide backward-compatibility for existing scripts.

You use the `set dhcp relay agent sub-option` command to enable support for a specific DHCP relay agent option 82 suboption—Agent Circuit ID (suboption 1), Agent Remote ID (suboption 2), and Vendor-Specific (suboption 9). When you issue this command, the router adds DHCP relay agent information suboption 1 to every packet it relays from a DHCP client to a DHCP server. The Agent Circuit ID suboption identifies the interface on which DHCP packets are received. When the packets are received on a LAG interface, the router clearly identifies the interface.

The suboptions include information from the DHCP relay agent that the DHCP server can use to implement parameter assignment policies. The DHCP server echoes the suboptions when it replies to the DHCP client, but the DHCP relay strips the suboptions before relaying the packets to the client.

The Agent Circuit ID suboption identifies the interface on which the DHCP packets are received. This suboption contains the following information, based on interface type:

- ATM interface

```
[<hostname>|<vrname>:]<interface type> <slot>/<port>[.<sub-if>]:<vpi>.<vci>
```

Examples:

```

atm 4/1.2:0.101
relayVr:atm 4/1:0.101
bostonHost:atm 4/1.2:0.101

```

- Ethernet interface

```
[<hostname>|<vrname>:]<interface type> <slot>/<port>
```

Examples:

```

fastEthernet 1/2
relayVr:fastEthernet 1/2
bostonHost:fastEthernet 1/2

```

- Ethernet interface with VLAN

```
[<hostname>|<vrname>:]<interface type> <slot>/<port>[.<sub-if>]:<vlan id>
```

Examples:

```
fastEthernet 1/2.3:4
relayVr:fastEthernet 1/2:4
bostonHost:fastEthernet 1/2.3:4
```

- Ethernet interface with Stacked VLAN

```
[<hostname>|<vrname>:]<interface type> <slot>/<port>[.<sub-if>]:
<svlan id>-<vlan id>
```

Examples:

```
fastEthernet 1/2.3:4-5
relayVr:fastEthernet 1/2:4-5
bostonHost:fastEthernet 1/2.3:4-5
```

- LAG interface

```
[<hostname>|<vrname>:]<interface type> <bundle name>
```

Examples:

```
lag bundleA
relayVr:lag bundleA
bostonHost:lag bundleA
```

- LAG interface with VLAN

```
[<hostname>|<vrname>:]<interface type> <bundle name>[.<sub-if>]:<vlan id>
```

Examples:

```
lag bundleA.1:2
relayVr:lag bundleA:2
bostonHost:lag bundleA.1:2
```

- LAG interface with Stacked VLAN

```
[<hostname>|<vrname>:]<interface type> <bundle name>[.<sub-if>]:
<svlan id>-<vlan id>
```

Examples:

```
lag bundleA.1:2-3
relayVr:lag bundleA:2-3
bostonHost:lag bundleA.1:2-3
```

The Agent Remote ID suboption contains a value only when (1) the interface is a dynamic ATM interface and (2) the **subscriber** command is used to configure a username and domain name for the interface. If both conditions are met, the

suboption contains a string with the username and domain name in the format: *username@domainname*.

The Vendor-Specific suboption contains a value that includes a JUNOS data field. You can configure the data field to support one or both of the following values:

- **layer2-circuit-id** (type 1)—The hexadecimal representation of the layer 2 identifier in the Agent Circuit ID (suboption 1) value (for example, the ATM VPI/VCI or Ethernet SVLAN/VLAN ID). You can configure this suboption type without the Agent Circuit ID.
- **user-packet-class** (type 2)—The hexadecimal representation of the user packet class field, whose value is assigned by the layer 2 policy application. The layer 2 policy application can be used to map the DHCP packet or message IEEE 802.1p value to the user packet class field. See the *JUNOS Policy Management Configuration Guide* for information about layer 2 policies.

Configuration Example—Using DHCP Relay Option 82 to Pass IEEE 802.1p Values to DHCP Servers

Using the DHCP relay agent option 82 feature, you can configure an environment in which a customized DHCP server assigns an IP address that provides the desired service to the DHCP client.

The DHCP server uses information based on the IEEE 802.1p values, which are extracted from the DHCP packets using JUNOS software layer 2 policies, to determine the appropriate IP address to assign to the client.


This type of environment, which is illustrated in Figure 13 on page 514, includes the following components:

- Layer 2 policy on the ingress interface (that is, the interface that receives the client's DHCP packet) that maps the 802.1p value from the packet to a user packet class (UPC.)



NOTE: To ensure optimal performance when mapping 802.1p values to UPCs, order the classifier groups in the VLAN policy list with the most often used UPC values listed first.

- DHCP relay agent option 82 configuration that enables Vendor-Specific suboption type 2 (User Packet Class) support and maps the Layer 2 policy user packet class to the option 82 user packet class suboption.
- Customized DHCP server configuration that assigns IP addresses based on the option 82 user packet class suboption. The IP address is associated with the appropriate quality, type, or class of service for the user packet class specified in the option 82 suboption.

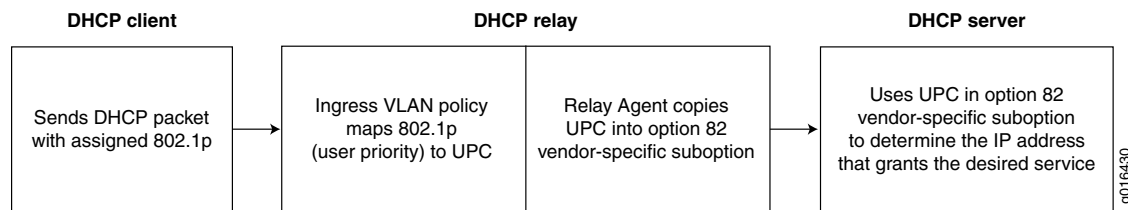Figure 13: Passing 802.1p Values to the DHCP Server

The following example describes a sample procedure that creates an environment that passes 802.1p values to the DHCP server, which then assigns an IP address that enables the desired service to the DHCP client.

1. Configure a layer 2 policy that maps 802.1p values to user packet class values for a VLAN interface.

```

host1(config)# vlan classifier-list dot1p0 user-priority 0
host1(config)# vlan classifier-list dot1p1 user-priority 1
host1(config)# vlan classifier-list dot1p2 user-priority 2
host1(config)# vlan classifier-list dot1p3 user-priority 3
host1(config)# vlan classifier-list dot1p4 user-priority 4
host1(config)# vlan classifier-list dot1p5 user-priority 5
host1(config)# vlan classifier-list dot1p6 user-priority 6
host1(config)# vlan classifier-list dot1p7 user-priority 7
host1(config)# vlan policy-list dot1pToUpc
host1(config-policy-list)# classifier-group dot1p0
host1(config-policy-list-classifier-group)# user-packet-class 0
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)# classifier-group dot1p1
host1(config-policy-list-classifier-group)# user-packet-class 1
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)# classifier-group dot1p2
host1(config-policy-list-classifier-group)# user-packet-class 2
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)# classifier-group dot1p3
host1(config-policy-list-classifier-group)# user-packet-class 3
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)# classifier-group dot1p4
host1(config-policy-list-classifier-group)# user-packet-class 4
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)# classifier-group dot1p5
host1(config-policy-list-classifier-group)# user-packet-class 5
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)# classifier-group dot1p6
host1(config-policy-list-classifier-group)# user-packet-class 6
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)# classifier-group dot1p7
host1(config-policy-list-classifier-group)# user-packet-class 7
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)#exit
host1(config)# profile atm1483BaseProfile
host1(config-profile)# vlan policy input dot1pToUpc statistics enabled
host1(config-profile)#exit
host1(config)#
  
```

2. (Optional) Verify the policy list configuration.

```
host1(config)# run show policy-list dot1pToUpc
```

Policy Table

```
VLAN Policy dot1pToUpc
Administrative state: enable
Reference count:      1
Classifier control list: dot1p0, precedence 100
  user-packet-class 0
Classifier control list: dot1p1, precedence 100
  user-packet-class 1
Classifier control list: dot1p2, precedence 100
  user-packet-class 2
Classifier control list: dot1p3, precedence 100
  user-packet-class 3
Classifier control list: dot1p4, precedence 100
  user-packet-class 4
Classifier control list: dot1p5, precedence 100
  user-packet-class 5
Classifier control list: dot1p6, precedence 100
  user-packet-class 6
Classifier control list: dot1p7, precedence 100
  user-packet-class 7

Referenced by interface(s):
  None

Referenced by profile(s):
  atm1483BaseProfile  input policy, statistics enabled

Referenced by merged policies:
  None
```

3. Configure the DHCP relay to use the option 82 suboptions. This configuration includes the command that specifies the mapping of the user packet class values from the layer 2 policy to the user-packet-class type in the option 82 Vendor-Specific suboption.

```
host1(config)# set dhcp relay 192.168.32.1 proxy
host1(config)# set dhcp relay 192.168.32.2
host1(config)# set dhcp relay agent sub-option circuit-id
host1(config)# set dhcp relay agent sub-option remote-id
host1(config)# set dhcp relay agent sub-option vendor-specific
user-packet-class
host1(config)# set dhcp relay agent sub-option vendor-specific
layer2-circuit-id
host1(config)# set dhcp relay options hostname
host1(config)# set dhcp relay options exclude-subinterface-id
host1(config)# set dhcp relay inhibit-access-route-creation
host1(config)# set dhcp relay trust-all
host1(config)# set dhcp relay override agent-option
```

4. (Optional) Verify the DHCP Relay configuration.

```
host1(config)# run show dhcp relay
```

DHCP Relay Configuration

Mode: Proxy

```

Restore Client Timeout: 72
Inhibit Access Route Creation: off
Assign Giaddr to Source IP: off
Layer 2 Unicast Replies: off
Giaddr Selects Interface: off
Relay Agent Information Option (82):
  Override Giaddr: off
  Override Option: on
  Trust All Clients: on
  Preserve Option From Trusted Clients: off
  Circuit-ID Sub-option (1): on
    select - hostname
    select - exclude-subinterface-id
  Remote-ID Sub-option (2): on
  Vendor-Specific Sub-option (9): on
    select - layer2-circuit-id
    select - user-packet-class

DHCP Server Addresses
-----
192.168.32.1
192.168.32.2

```

Using the `set dhcp relay agent` Command to Enable Option 82 Suboption Support



NOTE: The `set dhcp relay agent` command, when used to configure option 82 suboptions is a legacy command, which JUNOS software continues to support to provide backward-compatibility for existing scripts. We recommend that you use the `dhcp relay agent sub-option` command for new option 82 suboption configurations.

You can use the `set dhcp relay agent` command to enable support for DHCP relay agent option, which includes the option 82 suboptions—Agent Circuit ID (suboption 1) and Agent Remote ID (suboption 2). This command does not support the Vendor-Specific option (suboption 9).

The suboptions include information from the DHCP relay agent that the DHCP server can use to implement parameter assignment policies. The DHCP server echoes the suboptions when it replies to the client—the DHCP relay agent can optionally strip the option 82 information before relaying the packets to the client. (Use the CLI command `set dhcp relay preserve-trusted-client-option` to configure this behavior for trusted clients.)

When you issue the `set dhcp relay agent` command, the router adds the configured DHCP relay agent information suboptions to every packet it relays from a DHCP client to a DHCP server.

The **circuit-id-only** keyword specifies the Agent Circuit ID suboption, which contains the following information, based on interface type. This keyword disables support for the Agent Remote ID suboption.

- ATM interface

[<hostname>|<vrname>:]<interface type> <slot>/<port>[.<sub-if>]:<vpi>.<vci>

Examples:

```
atm 4/1.2:0.101
relayVr:atm 4/1:0.101
bostonHost:atm 4/1.2:0.101
```

- Ethernet interface

[<hostname>|<vrname>:]<interface type> <slot>/<port>

Examples:

```
fastEthernet 1/2
relayVr:fastEthernet 1/2
bostonHost:fastEthernet 1/2
```

- Ethernet interface with VLAN

[<hostname>|<vrname>:]<interface type> <slot>/<port>[.<sub-if>]:<vlan id>

Examples:

```
fastEthernet 1/2.3:4
relayVr:fastEthernet 1/2:4
bostonHost:fastEthernet 1/2.3:4
```

- Ethernet interface with Stacked VLAN

[<hostname>|<vrname>:]<interface type> <slot>/<port>[.<sub-if>]:
<svlan id>-<vlan id>

Examples:

```
fastEthernet 1/2.3:4-5
relayVr:fastEthernet 1/2:4-5
bostonHost:fastEthernet 1/2.3:4-5
```

- LAG interface

[<hostname>|<vrname>:]<interface type> <bundle name>

Examples:

```
lag bundleA
relayVr:lag bundleA
bostonHost:lag bundleA
```

- LAG interface with VLAN

[<hostname>|<vrname>:]<interface type> <bundle name>[.<sub-if>]:<vlan id>

Examples:

```
lag bundleA.1:2
relayVr:lag bundleA:2
bostonHost:lag bundleA.1:2
```

■ LAG interface with Stacked VLAN

```
[<hostname>|<vrname>:]<interface type> <bundle name>[.<sub-if>]:
<svlan id>-<vlan id>
```

Examples:

```
lag bundleA.1:2-3
relayVr:lag bundleA:2-3
bostonHost:lag bundleA.1:2-3
```

The **remote-id-only** keyword specifies the Agent Remote ID suboption, which contains a value only when (1) the interface is a dynamic ATM interface and (2) the **subscriber** command is used to configure a username and domain name for the interface. If both conditions are met, the suboption contains a string with the username and domain name in the format: *username@domainname*. The **remote-id-only** keyword disables support for the Agent Circuit ID suboption.

If you do not explicitly specify the **circuit-id-only** or **remote-id-only** keyword, both suboptions are used.

Related Topics

- radius remote-circuit-id-format
- set dhcp relay
- set dhcp relay **agent**
- set dhcp relay agent sub-option
- set dhcp relay assign-giaddr-source-ip
- set dhcp relay broadcast-flag-replies
- set dhcp relay giaddr-selects-interface
- set dhcp relay layer2-unicast-replies
- set dhcp relay options
- set dhcp relay override
- set dhcp relay preserve-trusted-client-option
- set dhcp relay trust-all
- set dhcp vendor-option

Configuring DHCP Relay Proxy

The DHCP relay proxy is an enhancement to the E Series router's DHCP relay component. The DHCP relay proxy manages host routes for DHCP clients, and determines which offer to use when there are multiple DHCP servers configured.



NOTE: The E Series router configured as a DHCP relay proxy must be the first hop from the DHCP client. If it is not the first hop, the router defaults to the DHCP relay configuration.

Enabling DHCP Relay Proxy

Enable DHCP relay proxy and specify an IP address for the DHCP server. After you are in DHCP relay proxy mode, all **set dhcp relay** commands are supported.

```
host1(config)#set dhcp relay 192.168.29.10 proxy
```

When you issue this command, the router adds the IP address to the list of DHCP servers (up to five) and forwards all request packets to all configured servers.

After you are in DHCP relay proxy mode, all **set dhcp relay** commands are supported.

Use the First Offer from a DHCP Server

You can configure the DHCP relay proxy to use the first offer it receives from any configured DHCP server and send that offer to the DHCP client. By default, DHCP relay proxy sends the most appropriate offer it receives from the configured DHCP servers to the DHCP client.

```
host1(config)#set dhcp relay proxy send-first-offer
```

Set a Timeout for DHCP Client Renewal Messages

You can set the amount of time, in the range 1–168 hours, that the DHCP relay proxy waits for a renewal message from DHCP clients after a router reboot or switchover occurs. A renewal message is required from DHCP clients when a router reboot or switchover occurs. If no renewal message is received before the timeout expires, the relay proxy declares the client no longer active and removes the client's host route. By default, DHCP relay proxy uses timeout of 72 hours.

```
host1(config)#set dhcp relay proxy timeout 8
```



NOTE: DHCP relay proxy does not remove a DHCP client's host route when the lease for the client's IP address expires. DHCP relay proxy will instead remove the host route when the relay proxy timeout expires. To prevent a host route from remaining long after lease expiration, modify the relay proxy timeout from its default setting of 72 hours to a setting close to, but not less than the lease time.

Managing Host Routes

The DHCP relay proxy feature enables the E Series router to efficiently manage host routes for DHCP clients, including:

- Installing routes when DHCP clients are configured

- Removing routes when DHCP clients release their DHCP-assigned addresses or when the addresses expire

When a DHCP client sends a request to an external DHCP server, the relay proxy receives the request and forwards it to the external DHCP server. The relay proxy then sends the DHCP server's response back to the client. This process is similar to that used by the DHCP relay component. The DHCP client views the relay proxy as a DHCP server, and the DHCP server sees the relay proxy as a DHCP relay agent.

To DHCP clients, there is no difference when they use a DHCP relay or a DHCP relay proxy. However, the DHCP relay proxy differs from the DHCP relay in how client address renewals and releases are handled:

- With the DHCP relay proxy, DHCP clients communicate with the relay proxy to renew and release addresses.
- With the DHCP relay, DHCP clients communicate directly with the DHCP server to renew and release addresses.

A major benefit of the relay proxy configuration is that the E Series router is kept informed of the status of a DHCP client's address. When addresses are released by clients, the router removes the installed host route for that client. In the DHCP relay configuration, the router does not know when addresses have been renewed or released; the host routes that are no longer needed are still unavailable.

For additional information on managing client bindings, see "Viewing and Deleting DHCP Client Bindings" on page 466.

Selecting the DHCP Server Response

Similar to the DHCP relay, the DHCP relay proxy enables you to specify up to five DHCP servers to provide address and configuration information for a DHCP client. As an added benefit over the relay, when using multiple DHCP external servers, you can configure how the DHCP relay proxy determines which offer to send to the DHCP client. You can configure the DHCP relay proxy to use either the single best offer or the first offer it receives from the DHCP servers.

If there are multiple offers, the DHCP relay proxy selects the final offer based on the following priorities:

1. The offer that contains the IP address requested by the DHCP client.
2. The offer that contains an IP address on the same subnetwork as the requested IP address.
3. The offer that has the longest lease time.

If you have enabled the optional select-first-offer feature, the DHCP relay proxy immediately uses the first offer that it receives from any DHCP server.

Behavior for Bound Clients and Address Renewals

When a DHCP client is already bound to an IP address or is renewing the lease on its IP address, DHCP relay proxy unicasts DHCP ACK and DHCP NAK replies to the

client regardless of the current configuration of the **set dhcp relay layer2-unicast-replies** command or the **set dhcp relay broadcast-flag-replies** command. These commands control the transmission method used for DHCP reply packets.

This behavior applies only to DHCP relay proxy; it does not apply to DHCP relay because DHCP relay does not maintain a list of active clients or receive address renewal requests from clients.

For information about using the **set dhcp relay layer2-unicast-replies** command, see “Configuring Layer 2 Unicast Transmission Method for Reply Packets to DHCP Clients” on page 502. For information about using the **set dhcp relay broadcast-flag-replies** command, see “Configuring Layer 2 Unicast Transmission Method for Reply Packets to DHCP Clients” on page 502.

- Related Topics**
- Managing Host Routes on page 519
 - set dhcp relay proxy
 - set dhcp relay proxy send-first-offer
 - set dhcp relay proxy timeout

Chapter 21

Configuring the DHCP External Server Application

The following sections describe how to configure the DHCP external server application on the E Series router:

- DHCP External Server Overview on page 523
- Preservation of Dynamic Subscriber Interfaces with DHCP External Server Overview on page 525
- DHCP External Server Identification of Clients with Duplicate MAC Addresses Overview on page 526
- DHCP External Server Configuration Requirements on page 528
- Enabling and Disabling the DHCP External Server Application on page 528
- Monitoring DHCP Traffic Between Remote Clients and DHCP Servers on page 529
- Synchronizing the DHCP External Application and the Router on page 529
- Configuring Interoperation with Ethernet DSLAMs on page 529
- Configuring the DHCP External Server to Support the Creation of Dynamic Subscriber Interfaces on page 530
- Configuring DHCP External Server to Control Preservation of Dynamic Subscriber Interfaces on page 532
- Configuring Dynamic Subscriber Interfaces for Interoperation with DHCP Relay and DHCP Relay Proxy on page 533
- Deleting Clients from a Virtual Router's DHCP Binding Table on page 534
- Configuring DHCP External Server to Uniquely Identify Clients with Duplicate MAC Addresses on page 536
- Configuring DHCP External Server to Re-Authenticate Auto-Detected Dynamic Subscriber Interfaces on page 537

DHCP External Server Overview

You can configure the E Series router to provide support for an external DHCP server. This enables the router, which is not running DHCP relay or DHCP proxy server, to monitor DHCP packets and to keep information for subscribers based on their IP address and MAC address. When the E Series router's DHCP external server application is used, all DHCP traffic to and from the DHCP server is monitored by the router.


The services provided by integrating the E Series router's DHCP external server application with SRC software are similar to those provided when the DHCP local server is integrated with SRC software. The router's DHCP external application is used together with other features of the router to provide subscriber management. For additional information, see "Configuring Subscriber Management" on page 583.



NOTE: To ensure that DHCP external server with DHCP relay proxy processes unicast reply packets (such as renewal ACK and NAK packets), you must configure DHCP external server with the IP address of the DHCP relay proxy's giaddr. This configuration ensures that DHCP external server processes renewal ACK packets, which in turn enables the updating of client leases.

Figure 14 on page 524 shows a network that includes an external DHCP server and the E Series router.

Figure 14: DHCP External Server

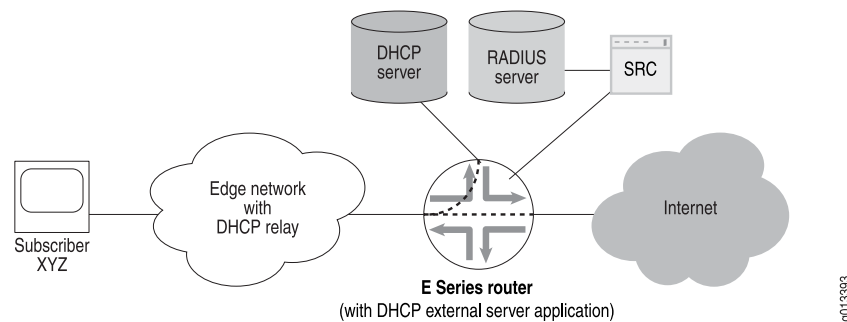

In Figure 14 on page 524, the subscriber requests an address from the DHCP server through the E Series router. All communication between the subscriber and the DHCP server is monitored by the E Series router. After the subscriber receives an IP address, the subscriber is able to access the Internet and use the value-added services provided by the E Series router and by the SAE software. For this to occur, the edge network must be using a DHCP relay function.

When the subscriber requests an IP address from the DHCP server, the E Series router performs the following actions:

- Identifies the subscriber's IP address, MAC address, giaddr, and client identifier
- Extracts the lease time, creates a shadow lease, and starts its own lease timer that is associated with the subscriber

The E Series router views the subscriber as active once the subscriber sends a packet. The router then performs the following actions:

- Processes the subscriber's IP address by using a route map
- Extracts the dynamic subscriber interface profile (optional)
- Creates the subscriber's dynamic subscriber interface

If the SRC software is configured, the router also performs the following actions:

- Alerts the SRC software that the dynamic subscriber interface exists
- Alerts the SRC software that the subscriber's address exists and provides DHCP options

The SRC software then provides its enhanced services to the subscriber.

The E Series router monitors all traffic between the subscriber and the DHCP server, and resets the shadow lease by monitoring the DHCP server/client lease renewal. When the subscriber disconnects, the shadow lease will eventually expire. The E Series router then performs the following actions:

- Deletes the subscriber's dynamic subscriber interface
- Alerts the SRC software that the dynamic subscriber interface has been deleted
- Alerts the SRC software that the subscriber's address has been deleted

For additional information on managing client bindings, see "Viewing and Deleting DHCP Client Bindings" on page 466.

Preservation of Dynamic Subscriber Interfaces with DHCP External Server Overview

You can configure the DHCP external server application to control whether the router preserves or deletes and re-creates a DHCP client's existing dynamic subscriber interface in certain situations.

The DHCP discovery process assigns an IP address to a DHCP client. A client initiates the discovery process on a primary IP interface in the router. When this process completes successfully, the IP subscriber manager application may create a dynamic subscriber interface for the client that exists with the client's primary interface. A client normally receives broadcast traffic, such as the traffic associated with the DHCP discovery process, on its primary interface. A client normally receives unicast traffic, such as the traffic associated with the DHCP renewal process, on its dynamic subscriber interface if one exists.

A DHCP client that has successfully completed the discovery process and has been assigned an IP address in the DHCP external server application is referred to as a *bound client*. An IP address is leased to a client for a specified period of time. Before the lease period expires, most bound DHCP clients typically use the DHCP renewal process to extend their IP address lease. However, some bound DHCP clients might extend their IP address lease by restarting the DHCP discovery process instead of using the DHCP renewal process.

When a bound DHCP client on a dynamic subscriber interface extends its address lease by restarting the discovery process on its primary IP interface, you can configure the DHCP external server application to control whether the client's existing dynamic subscriber interface is preserved, or deleted and re-created. By default, the DHCP external server preserves the client's existing dynamic subscriber interface in this situation. To configure the DHCP external server to delete and re-create the client's dynamic subscriber interface after the client restarts discovery, you must issue the

ip dhcp-external recreate-subscriber-interface command from Global Configuration mode.

When a bound DHCP client restarts the discovery process on a different primary IP interface than the interface on which it initiated the original discovery process, the DHCP external server application always deletes and re-creates the existing dynamic subscriber interfaces for that client.

You must use the **ip dhcp-external recreate-subscriber-interface** command within a specific virtual router context. Because you issue this command on a per-virtual router basis, different virtual routers configured in the same router can use different settings for this command.

In some lower-numbered JUNOS software releases, the default behavior for the DHCP external server was to delete and re-create the dynamic subscriber interface after a bound client restarted the discovery process on its primary IP interface. If you are upgrading the JUNOS software on the router from one of these releases to the current release, keep in mind that you must explicitly issue the **ip dhcp-external recreate-subscriber-interface** command to continue to delete and re-create the dynamic subscriber interface. The router no longer deletes and re-creates the dynamic subscriber interface by default in this situation.

See *DHCP External Server* in the *Known Behavior* section of the *JUNOS Release Notes* for a list of the JUNOS releases in which deleting and re-creating the dynamic subscriber interface was the default behavior for the DHCP external server.

- Related Topics**
- Configuring DHCP External Server to Control Preservation of Dynamic Subscriber Interfaces on page 532
 - ip dhcp-external recreate-subscriber-interface

DHCP External Server Identification of Clients with Duplicate MAC Addresses Overview

You can configure the DHCP external server application to use a combination of the media access control (MAC) address and the gateway IP address (giaddr) to uniquely identify DHCP clients attached to the router. Using this feature enables you to manage DHCP clients in network environments in which MAC addresses are not unique.

In some network environments where the DHCP external server application manages DHCP clients from multiple DHCP relays, the same MAC address might be assigned to more than one DHCP client. This can occur, for example, when network adapters are manufactured with the same hardware address, resulting in duplicate MAC addresses among the DHCP clients attached to the router.

To better manage DHCP clients in network environments with multiple DHCP relays in which MAC addresses are not unique, you can configure the DHCP external server application to use a combination of the MAC address and the giaddr to uniquely identify the clients connected to the router. This setting for DHCP external server is also referred to as *duplicate MAC mode*.

By default, DHCP external server uses only the MAC address to uniquely identify DHCP clients. The default setting for DHCP external server is also referred to as *unique MAC mode*.

To enable duplicate MAC mode for the DHCP external server application, you must issue the **dhcp-external duplicate-mac-address** command from Global Configuration mode. To restore the default behavior and re-enable unique MAC mode, issue the **no dhcp-external duplicate-mac-address** command.

Configuration Guidelines for Using Duplicate MAC Mode

Observe the following guidelines when you configure the DHCP external server application to use a combination of the MAC address and giaddr to uniquely identify DHCP clients, otherwise known as enabling duplicate MAC mode:

- Unlike other commands for configuring DHCP external server, the **dhcp-external duplicate-mac-address** command applies globally to all instances of the DHCP external server application on the router, and is not issued on a per-VR basis.
- Although the same MAC address can be assigned to more than one DHCP client in the network, MAC addresses must be unique for each giaddr assigned by a DHCP relay in the network when duplicate MAC mode is enabled.
- As is the case with unique MAC mode, client IP addresses managed by the DHCP external server application must be unique across all VRs configured on the router.
- You can configure DHCP external server to support both duplicate MAC mode (by issuing the **dhcp-external duplicate-mac-address** command) and creation of subscriber state information based on lease renewals (by issuing the **ip dhcp-external server-sync** command) simultaneously.
- DHCP external server supports the following VR topology changes for DHCP clients regardless of whether duplicate MAC mode is enabled or disabled:
 - A client roams across VRs; this might occur, for example, when a laptop computer moves to a different building in a campus network.
 - A client is assigned to a different VR; this might occur, for example, when a quality of service (QoS) policy assigns a client to a different VR during the DHCP binding process.
- When DHCP external server is configured to support unique MAC mode, which is the default, it uses only the MAC address to uniquely identify DHCP clients. Consequently, when unique MAC mode is enabled, the MAC addresses for all DHCP clients must be unique across all VRs configured on the router.

Restrictions for Using Duplicate MAC Mode to Manage Clients

The following restrictions apply when you configure the DHCP external server application to use a combination of the MAC address and giaddr to uniquely identify DHCP clients, otherwise known as duplicate MAC mode:

- You can issue the **dhcp-external duplicate-mac-address** command at any time to enable duplicate MAC mode. However, you *cannot* issue the **no dhcp-external duplicate-mac-address** command to restore the default setting, unique MAC

mode, if DHCP external server is configured for duplicate MAC mode and is currently managing any DHCP clients.

- Do not enable duplicate MAC mode for the DHCP external server application when it is configured in the same VR with either of the following:
 - An instance of the DHCP relay application that is currently managing host routes
 - Any instance of the DHCP relay proxy application
- When you enable duplicate MAC mode, the DHCP external server application ignores notifications of new clients from the RADIUS relay server application because these notifications do not include the giaddr.

- Related Topics**
- Configuring DHCP External Server to Uniquely Identify Clients with Duplicate MAC Addresses on page 536
 - `dhcp-external duplicate-mac-address`

DHCP External Server Configuration Requirements

To configure the E Series router to support an external DHCP server, you enable the DHCP external server application on the router. If you are using DHCP packet detection, you must also specify each external DHCP server that determines which packets are monitored. The E Series router monitors all DHCP traffic between subscriber clients and the specified DHCP servers.

Enabling and Disabling the DHCP External Server Application

Use to enable the DHCP external server application on the E Series router. Use the **no** version of the command to disable the application.

To enable the DHCP external server application on the router:

- Issue the **service dhcp-external** command:

```
host1(config)#service dhcp-external
```

To disable the DHCP external server application on the router:

- Issue the **no service dhcp-external** command:

```
host1(config)#no service dhcp-external
```


Related Topics ■ service dhcp-external

Monitoring DHCP Traffic Between Remote Clients and DHCP Servers

You can configure the router to monitor DHCP packets between remote clients and specified DHCP servers. You can specify up to four DHCP servers.

To monitor DHCP packets between remote clients and a DHCP server:

- Issue the **ip dhcp-external server-address** command and specify the IP address of the DHCP server:

```
host1(config)#ip dhcp-external server-address 10.10.10.1
host1(config)#ip dhcp-external server-address 10.20.10.1
```

You can specify a maximum of four DHCP servers to monitor.

Related Topics ■ ip dhcp-external server-address

Synchronizing the DHCP External Application and the Router

In some cases the router and the DHCP external application might not be synchronized. For example, an unsynchronized condition might occur when you first enable the DHCP external server application. You can resynchronize and create subscriber state information that is based on lease renewals.

To synchronize the external DHCP server with the E Series router:

- Issue the **ip dhcp-external server-sync** command from Global Configuration mode:

```
host1(config)#ip dhcp-external server-sync
```

Related Topics ■ ip dhcp-external server-sync

Configuring Interoperation with Ethernet DSLAMs

The DHCP external server application uses the giaddr it receives in DHCP server-destined packets to determine the next hop for a subscriber's access routes. However, when interoperating with Ethernet digital subscriber line access multiplexers (DSLAMs), using the giaddr sent by the DSLAM can result in traffic being dropped. To ensure that traffic is forwarded properly, you can configure the DHCP external server application to disregard the DSLAM's giaddr and learn the subscriber's correct next-hop address.

The dropped traffic situation can occur because of the way some DSLAMs create the giaddr that is sent to the DHCP external server application. Some Ethernet DSLAMs use a DHCP relay implementation that inserts giaddr values and relay agent options in DHCP packets that are received from end users. The intent is that this information is provided to a DHCP server, which uses the values to determine the configuration parameters for the subscriber.

However, when the DHCP external server application receives the giaddr from an Ethernet DSLAM, the application installs the subscriber access route with the Ethernet DSLAM's IP address as the next hop. This operation results in the subscriber-destined traffic being incorrectly sent to the Ethernet DSLAM, which cannot process the traffic.

To avoid dropping the traffic in this situation, use the **ip set dhcp-external disregard-giaddr-next-hop** command to configure the DHCP external server application to ignore the giaddr when determining the next hop for the subscriber access routes. The E Series router then uses Address Resolution Protocol (ARP) to discover the subscriber's IP address and sends the traffic to the learned IP address.

To configure the DHCP external server application to ignore the giaddr when determining the next hop for the subscriber access routes:

- Issue the **ip dhcp-external disregard-giaddr-next-hop** command from Global Configuration mode:

```
host1(config)#ip dhcp-external disregard-giaddr-next-hop
```

Related Topics ■ [ip dhcp-external disregard-giaddr-next-hop](#)

Configuring the DHCP External Server to Support the Creation of Dynamic Subscriber Interfaces

You can configure the DHCP external server to support the creation of dynamic subscriber interfaces. This configuration requires that the user's DHCP control traffic and data traffic traverse the same client-facing ingress port on the E Series router.

You must use the **ip dhcp-external auto-configure** command within a specific virtual router context.

To configure the DHCP external server to support the creation of dynamic subscriber interfaces:

- Issue the **ip dhcp-external auto-configure** command from Global Configuration mode:

```
host1(config)#ip dhcp-external auto-configure
```

To configure the DHCP external server to support the creation of dynamic subscriber interfaces built over dynamic VLANs that are based on the agent-circuit-id option (suboption 1) of the option 82 field in DHCP messages, include the **agent-circuit-identifier** keyword.

- Issue the **ip dhcp-external auto-configure** command with the **agent-circuit-identifier** keyword from Global Configuration mode:

```
host1(config)#ip dhcp-external auto-configure agent-circuit-identifier
```

The use of the option 82 field enables you to stack an IP interface that is associated with a particular subscriber over a dynamically created VLAN; the VLAN is dynamically created based on the agent-circuit-id option (suboption 1) that is contained in the DHCP option 82 field.

For information about configuring agent-circuit-id-based dynamic VLAN subinterfaces, see the *Configuring Dynamic Interfaces Using Bulk Configuration* chapter in *JUNOS Link Layer Configuration Guide*.

Related Topics ■ `ip dhcp-external auto-configure`

Configuring DHCP External Server to Control Preservation of Dynamic Subscriber Interfaces

You can configure the DHCP external server application to delete and re-create the dynamic subscriber interface after a bound client restarts the discovery process on the its primary IP interface. By default, the DHCP external server preserves the existing dynamic subscriber interface in this situation.

Deleting and re-creating the dynamic subscriber interface for a DHCP client may trigger additional authentication, authorization, and accounting (AAA) services if AAA is configured on the router. Therefore, issuing the **`ip dhcp-external recreate-subscriber-interface`** command to delete and re-create the dynamic subscriber interface is useful if you want to use AAA services to validate and collect subscriber information during a restart of the DHCP discovery process.

Preserving the client's dynamic subscriber interface is useful if deleting and re-creating the dynamic subscriber interface might result in a service interruption.

To enable the DHCP external server application to delete and re-create the dynamic subscriber interface after a bound client restarts the discovery process on its primary IP interface:

- Issue the **`ip dhcp-external recreate-subscriber-interface`** command from Global Configuration mode:

```
host1:vr1(config)#ip dhcp-external recreate-subscriber-interface
```

To restore the DHCP external server default behavior to preserve the dynamic subscriber interface after a bound client restarts the discovery process on its primary IP interface:

- Issue the **`no ip dhcp-external recreate-subscriber-interface`** command from Global Configuration mode:

```
host1:vr1(config)#no ip dhcp-external recreate-subscriber-interface
```



NOTE: If you are upgrading the JUNOS software on the router from a release in which the DHCP external server deleted and re-created the dynamic subscriber interface by default, you must explicitly issue the **`ip dhcp-external recreate-subscriber-interface`** command in the current release to delete and re-create the dynamic subscriber interface. The router no longer deletes and re-creates the dynamic subscriber interface by default in this situation.

For a list of the JUNOS releases in which deleting and re-creating the dynamic subscriber interface was the default behavior for the DHCP external server, see *DHCP External Server* in the *Known Behavior* section of the *JUNOS Release Notes*.

- Related Topics**
- Preservation of Dynamic Subscriber Interfaces with DHCP External Server Overview on page 525
 - `ip dhcp-external recreate-subscriber-interface`

Configuring Dynamic Subscriber Interfaces for Interoperation with DHCP Relay and DHCP Relay Proxy

When you configure the DHCP relay application or the DHCP relay proxy application in the same virtual router (VR) as the DHCP external server application, we recommend that you define interface profiles to create the dynamic subscriber interfaces when the primary IP interface is static. Otherwise, the gateway IP address (giaddr) used for DHCP rebind or renewal requests might be inconsistent. Renewal requests apply only when DHCP relay proxy is configured in the same VR as DHCP external server.

The use of inconsistent giaddrs results in the transmission of negative acknowledgment (NAK) messages from the DHCP server and the removal of existing DHCP client bindings.

To apply an interface profile to a dynamic subscriber interface:

1. Define the interface profile.

```
host1(config)#profile dsiTest
host1(config-profile)#ip unnumbered loopback 5500
host1(config-profile)#exit
```

2. Define a route map in the VR in which the static primary IP interface resides.

```
host1(config)#virtual-router relay
Proceed with new virtual-router creation? [confirm]
host1:relay(config)#route-map dsiTest
host1:relay(config-route-map)#set ip interface-profile dsiTest
host1:relay(config-route-map)#exit
```

3. Define a loopback interface with a host mask in the VR in which the static primary IP interface resides.

```
host1:relay(config)#interface loopback 5500
host1:relay(config-if)#ip address 71.23.1.2/32
```

4. Enable the static primary IP interface to support creation of dynamic subscriber interfaces, and apply the route map to the IP interface subscriber in the static primary IP interface configuration.

```
host1:relay(config)#interface fastEthernet 5/5.100
host1:relay(config-if)#ip unnumbered loopback 5500
host1:relay(config-if)#ip auto-configure ip-subscriber exclude-primary
host1:relay(config-if)#ip route-map ip-subscriber dsiTest
```

Use the **exclude-primary** keyword in the **ip auto-configure ip-subscriber** command to specify that the primary interface cannot be assigned to a subscriber.

5. If you have issued the **ip dhcp-external server-sync** command to resynchronize the DHCP external server application with the router and to support creation of subscriber state information based on lease renewals, you must do either of the following to ensure that the unicast acknowledgment (ACK) response to the renewal request has a route back to the DHCP client that generated the renewal request:

- Enable the packet detection feature on the static primary IP interface in the context of the VR in which the static primary interface resides.

```
host1:relay(config-if)#ip auto-detect ip-subscriber
```

Issuing the **ip auto-detect ip-subscriber** command creates a dynamic subscriber interface back to the DHCP client when the router receives a packet with a source IP address that does not match any entries in the demultiplexer table. This method requires you to configure the primary IP interface to support creation of dynamic subscribers interfaces, which is accomplished by issuing the **ip auto-configure ip-subscriber exclude-primary** command, as shown in Step 4.

- Configure an explicit network route in the context of the VR in which the static primary interface resides to provide connectivity back to the DHCP client.

```
host1:relay(config)#ip route 71.23.0.0/24 fastEthernet 5/5.100
```

- Related Topics**
- ip auto-configure ip-subscriber
 - ip auto-detect ip-subscriber
 - ip dhcp-external server-sync
 - ip route
 - ip route-map ip-subscriber
 - set ip interface-profile

Deleting Clients from a Virtual Router's DHCP Binding Table

You can delete clients from a virtual router's DHCP binding table. You can delete all clients or a specific client.



NOTE: This command is deprecated and might be removed completely in a future release. The function provided by this command has been replaced by the **dhcp delete-binding** command.

To delete clients from a virtual router's DHCP binding table, issue the **dhcp-external delete-binding** command in Privileged Exec configuration mode:

- To delete all clients:

```
host1#dhcp-external delete-binding all
```

- To delete a specific client:

```
host1#dhcp-external delete-binding binding-id 3972819365
```

Related Topics

- [dhcp delete-binding](#)
- [dhcp-external delete-binding](#)

Configuring DHCP External Server to Uniquely Identify Clients with Duplicate MAC Addresses

You can configure the DHCP external server application to use a combination of the MAC address and giaddr to uniquely identify DHCP clients attached to the router. This behavior is also referred to as *duplicate MAC mode*. By default, DHCP external server uses only the MAC address to uniquely identify DHCP clients. The default behavior is also referred to as *unique MAC mode*.

Enabling duplicate MAC mode is useful if you are using the DHCP external server application to manage DHCP clients from multiple DHCP relays in network environments where the same MAC address might be assigned to more than one client. In such environments, DHCP external server must use a combination of the MAC address and giaddr to uniquely identify the DHCP clients it manages.

Preserving the client's dynamic subscriber interface is useful if deleting and re-creating the dynamic subscriber interface might result in a service interruption.

To configure the DHCP external server application to use a combination of the MAC address and giaddr to uniquely identify DHCP clients, also known as *enabling duplicate MAC mode*:

- Issue the **dhcp-external duplicate-mac-address** command from Global Configuration mode:

```
host1:vr1(config)#dhcp-external duplicate-mac-address
```

To restore the DHCP external server default behavior to use only the MAC address to uniquely identify DHCP clients, also known as *enabling unique MAC mode*:

- Issue the **no dhcp-external duplicate-mac-address** command from Global Configuration mode:

```
host1:vr1(config)#no dhcp-external duplicate-mac-address
```



NOTE: Unlike other commands for configuring DHCP external server, the **dhcp-external duplicate-mac-address** command applies globally to all instances of the DHCP external server application on the router, and is not issued on a per-VR basis.

- Related Topics**
- DHCP External Server Identification of Clients with Duplicate MAC Addresses Overview on page 526
 - dhcp-external duplicate-mac-address

Configuring DHCP External Server to Re-Authenticate Auto-Detected Dynamic Subscriber Interfaces

You can use the **ip re-authenticate-auto-detect ip-subscriber** command to re-authenticate the auto-detected subscribers or Dynamic Subscriber Interfaces (DSIs) created on static and dynamic primary IP interfaces, using the DHCP options when the DHCP external application manages the DSIs following a cold boot. The **no** version negates the command or restores the defaults.

To enable the IP Subscriber Manager application to re-authenticate the auto-detected subscribers created on static and dynamic primary IP interfaces after a cold boot:

- Issue the **ip re-authenticate-auto-detect ip-subscriber** command from Interface Configuration or Profile Configuration mode:

```
host1:vr1(config)#ip re-authenticate-auto-detect ip-subscriber
```

- Related Topics**
- Preservation of Dynamic Subscriber Interfaces with DHCP External Server Overview on page 525
 - ip dhcp-external recreate-subscriber-interface

Chapter 22

Monitoring and Troubleshooting DHCP

This chapter describes the commands you can use to monitor and troubleshoot DHCP support on E Series routers.

- Setting Baselines for DHCP Statistics on page 540
- Monitoring Addresses Excluded from DHCP Local Server Use on page 541
- Monitoring DHCP Bindings on page 542
- Monitoring DHCP Binding Information on page 543
- Monitoring DHCP Binding Count Information on page 546
- Monitoring DHCP Binding Host Information on page 548
- Monitoring DHCP Bindings (Displaying IP Address-to-MAC Address Bindings) on page 550
- Monitoring DHCP Bindings (Displaying DHCP Bindings Based on Binding ID) on page 551
- Monitoring DHCP Bindings (Local Server Binding Information) on page 552
- Monitoring DHCP External Server Configuration Information on page 553
- Monitoring DHCP External Server Statistics on page 554
- Monitoring DHCP External Server Duplicate MAC Address Setting on page 555
- Monitoring DHCP Local Address Pools on page 556
- Monitoring DHCP Local Server Authentication Information on page 558
- Monitoring DHCP Local Server Configuration on page 559
- Monitoring DHCP Local Server Leases on page 560
- Monitoring DHCP Local Server Statistics on page 561
- Monitoring DHCP Option 60 Information on page 564
- Monitoring DHCP Packet Capture Settings on page 565
- Monitoring DHCP Relay Configuration Information on page 566
- Monitoring DHCP Relay Proxy Statistics on page 567
- Monitoring DHCP Relay Statistics on page 569
- Monitoring DHCP Server and DHCP Relay Agent Statistics on page 571
- Monitoring DHCP Server and Proxy Client Information on page 572
- Monitoring DHCPv6 Local Server Binding Information on page 573
- Monitoring DHCPv6 Local Server DNS Search Lists on page 574

- Monitoring DHCPv6 Local Server DNS Servers on page 575
- Monitoring DHCPv6 Local Server Prefix Lifetime on page 575
- Monitoring DHCPv6 Local Server Statistics on page 576
- Monitoring Duplicate MAC Addresses Use By DHCP Local Server Clients on page 577
- Monitoring the Maximum Number of Available Leases on page 578
- Monitoring Static IP Address and MAC Address Pairs Supplied by DHCP Local Server on page 579
- Monitoring Status of DHCP Applications on page 580

Setting Baselines for DHCP Statistics

You can use the **baseline dhcp** commands to set statistics baselines for DHCP operations. The router implements the baseline by reading and storing the statistics at the time the baseline is set and then subtracting this baseline when you retrieve baseline-relative statistics.

Use the **delta** keyword with the **show dhcp** commands to display baselined statistics.

Tasks to set a baseline for DHCP statistics are:

1. Setting a Baseline for DHCP Relay and Relay Proxy on page 540
2. Setting a Baseline for DHCP Proxy Server Statistics on page 540
3. Setting a Baseline for DHCP External Server Statistics on page 541
4. Setting a Baseline for DHCP Local Server Statistics on page 541

Setting a Baseline for DHCP Relay and Relay Proxy

To set a statistics baseline for DHCP relay and DHCP relay proxy: :

- Issue the **baseline dhcp relay** command:

```
host1#baseline dhcp relay
```

There is no **no** version.

Setting a Baseline for DHCP Proxy Server Statistics

To set a baseline for DHCP proxy server statistics.

- Issue the **baseline dhcp server** command:

```
host1#baseline dhcp server
```

There is no **no** version.

Setting a Baseline for DHCP External Server Statistics

To set a baseline for DHCP external server statistics.

- Issue the **baseline ip dhcp-external** command:

```
host1#baseline ip dhcp-external
```

There is no **no** version.

Setting a Baseline for DHCP Local Server Statistics

To set a baseline for DHCP local server statistics:

- Issue the **baseline ip dhcp-local** command:

```
host1#baseline ip dhcp-local
```

There is no **no** version.

To set a baseline for DHCP local server statistics for a specific ATM, Fast Ethernet, or Gigabit Ethernet interface:

- Issue the **baseline ip dhcp-local** command with the optional **interface** keyword to specify the type of interface and interface specifier:

```
host1#baseline ip dhcp-local interface atm 3/1
```

To set a baseline for DHCPv6 local server statistics:

- Issue the **baseline ipv6 dhcpv6-local** command:

```
host1#baseline ipv6 dhcpv6-local
```

Monitoring Addresses Excluded from DHCP Local Server Use

Purpose Display addresses that have been excluded by the **ip dhcp-local excluded-address** command. The DHCP local server does not allocate excluded addresses, because they are already used by devices on the subnetwork.

Action To display excluded IP addresses:

```
host1(config)#show ip dhcp-local excluded
Dhcp Excluded Addresses
-----
      Pool      Low      High
      Address    Address
-----
default 10.10.1.1
default 10.10.1.5 10.10.1.30
cable2  10.10.2.1
```

```

home.com  10.10.3.1
cable4    10.10.4.1
cable5    10.10.5.1

```

Meaning Table 103 on page 542 lists the **show ip dhcp-local excluded** command output fields.

Table 103: show ip dhcp-local excluded Output Fields

Field Name	Field Description
Pool	Name of the pool that contains the excluded address
Low Address	Excluded address or first address in a range of addresses
High Address	Last address in a range of addresses

Related Topics ■ show ip dhcp-local excluded

Monitoring DHCP Bindings

Tasks to monitor DHCP bindings are:

- Monitoring DHCP Binding Information on page 543
- Monitoring DHCP Binding Count Information on page 546
- Monitoring DHCP Binding Host Information on page 548
- “Monitoring DHCP Bindings (Displaying IP Address-to-MAC Address Bindings)” on page 550
- “Monitoring DHCP Bindings (Displaying DHCP Bindings Based on Binding ID)” on page 551
- “Monitoring DHCP Bindings (Local Server Binding Information)” on page 552

Related Topics ■ show dhcp binding

- show dhcp count
- show dhcp host
- show ip dhcp-external binding
- show ip dhcp-external binding-id
- show ip dhcp-local binding

Monitoring DHCP Binding Information

Purpose Display information for specified DHCP client bindings, with results arranged in ascending order by binding ID.



NOTE: The **show dhcp binding** command replaces the **show ip dhcp-external binding**, **show ip dhcp-external binding-id**, and **show ip dhcp-local binding** commands, which are deprecated and might be removed completely in a future release.

Action To display information about all DHCP local server bindings:

```
host1:vr1#show dhcp binding local
BindingId      HwAddress      Type      IpSubnet      IpAddress      State
-----
2409734593     8000.0001.9365 local      0.0.0.0       81.3.0.2      bound
2409734595     8000.0003.9365 local      0.0.0.0       81.3.0.3      bound
2409734597     8000.0005.9365 local      0.0.0.0       81.3.0.4      bound
2409734599     8000.0007.9365 local      0.0.0.0       81.3.0.5      bound
2409734605     8000.000d.9365 local      0.0.0.0       81.3.0.8      bound
2409734607     8000.000f.9365 local      0.0.0.0       81.3.0.9      bound
2409734609     8000.0011.9365 local      0.0.0.0       81.3.0.10     bound
2409734611     8000.0013.9365 local      0.0.0.0       81.3.0.11     bound
2409734618     8000.000b.9365 local      0.0.0.0       81.3.0.7      bound
2409734619     8000.0009.9365 local      0.0.0.0       81.3.0.6      bound
```

The output of the **show dhcp binding** command is identical to the output of the **show dhcp host** command except for the order of the client bindings. The results of the **show dhcp binding** command are arranged in ascending order by binding ID, whereas the results of the **show dhcp host** command are arranged in ascending order by IP address.

To display information about a specific DHCP binding ID:

```
host1#show dhcp binding 3070230530
BindingId:      3070230530
HwAddress:      7000.0002.9365
IpSubnet:       0.0.0.0
IpAddress:      192.168.0.90
State:          bound
Type:           relay-p
Server:         192.168.15.1
Giaddr:         192.168.0.1
Lease:          3600
Remaining:      2079
IpInterface:    GigabitEthernet1/0/1.101
ClientId:       45-41-48-00-01-70-00-00-02-93-65
Interface:
Relay Agent:
Agent Circuit Id: test circuit id
Agent Remote Id: test remote id
Vendor Specific: 01-02-03-04-05-06-07-08-09-0a-0b-0c-0d-0e-0f-10
Unrecognized:   11-12-13-14-15-16-17-18-19-1a-1b-1c-1d-1e-1f-20
```

To display binding information for DHCP clients with a specified interface string:

```
host1:vr2#show dhcp binding interface ip71.*4
```

BindingId	HwAddress	Type	IpSubnet	IpAddress	State
3053453315	7000.0002.9365	external	0.0.0.0	71.1.0.4	bound
3053453325	7000.000c.9365	external	0.0.0.0	71.1.0.14	bound
3053453353	7000.0016.9365	external	0.0.0.0	71.1.0.24	bound

This **show dhcp binding** command uses the * (asterisk) regular expression metacharacter in the interface string to display information for DHCP client bindings on virtual router vr2 with an IP address beginning with 71 and ending with 4. The results of the **show dhcp binding** command are arranged in ascending order by binding ID.

To display binding information for DHCP clients that match the specified circuit ID string:

```
host1:vr3#show dhcp binding circuit-id \\xe3
```

BindingId	HwAddress	Type	IpSubnet	IpAddress	State
3070230529	7000.0000.9365	relay-p	0.0.0.0	71.1.0.2	bound
3070230531	7000.0002.9365	relay-p	0.0.0.0	71.1.0.4	bound
3070230535	7000.0006.9365	relay-p	0.0.0.0	71.1.0.8	bound
3070230537	7000.0008.9365	relay-p	0.0.0.0	71.1.0.10	bound
3070230539	7000.000a.9365	relay-p	0.0.0.0	71.1.0.12	bound
3070230541	7000.000c.9365	relay-p	0.0.0.0	71.1.0.14	bound
3070230543	7000.000e.9365	relay-p	0.0.0.0	71.1.0.16	bound
3070230545	7000.0010.9365	relay-p	0.0.0.0	71.1.0.18	bound
3070230547	7000.0012.9365	relay-p	0.0.0.0	71.1.0.20	bound
3070230549	7000.0014.9365	relay-p	0.0.0.0	71.1.0.22	bound
3070230553	7000.0018.9365	relay-p	0.0.0.0	71.1.0.26	bound
3070230555	7000.001a.9365	relay-p	0.0.0.0	71.1.0.28	bound
3070230557	7000.001c.9365	relay-p	0.0.0.0	71.1.0.30	bound
3070230569	7000.0016.9365	relay-p	0.0.0.0	71.1.0.24	bound
3070230572	7000.0004.9365	relay-p	0.0.0.0	71.1.0.6	bound

To specify nonprintable byte codes in the circuit ID string or remote ID string, you can use the string `\\xab`, where `ab` is a hex code of the byte. This **show dhcp binding** command uses the string `\\xe3` to represent byte E3 in the circuit ID string. This command displays information for the DHCP client bindings on virtual router vr3 with the specified circuit ID string, with results arranged in ascending order by binding ID.

To display information about DHCP local server bindings with a specified subnet address:

```
host1:vr1#show dhcp binding local 0.0.0.0
```

To display information about DHCP bindings with a specified IP prefix:

```
host1:vr1#show dhcp binding ip-prefix 10.1.0.0/28
```

To display information about DHCP relay proxy bindings without a lower-layer interface:


```
host1:vr1#show dhcp binding relay-proxy no-interface
```

To display binding information for DHCP clients that match the specified remote ID string:

```
host1:vr1#show dhcp binding remote-id "remote id.*even"
```

Filtering the display of DHCP client bindings by the circuit ID string or remote ID string is not supported for the DHCP external server application. DHCP external server does not store information about the agent-circuit-id suboption or agent-remote-id suboption of option 82.

Meaning Table 104 on page 545 lists the **show dhcp binding** command output fields.

Table 104: show dhcp binding Output Fields

Field Name	Field Description
BindingId	Client binding ID
HwAddress	MAC address of client
Type	Binding type; external (DHCP external server), local (DHCP local server), or relay-p (DHCP relay proxy)
IpSubnet	For DHCP local server bindings, the subnet of the IP address assigned to the client; 0.0.0.0 for DHCP external server and DHCP relay proxy bindings
IpAddress	IP address assigned to client
State	State of the DHCP client binding
Server	IP address of the DHCP server that allocated the client IP address
Giaddr	For DHCP relay proxy the IP address of the DHCP relay proxy; for DHCP local server bindings, the IP address of the DHCP relay that sent the packet or 0.0.0.0 if the packet comes from the client; for DHCP external server bindings, the giaddr from the DHCP packet
Lease	Total time for which the IP address is available, in seconds
Remaining	Time remaining on the current lease, in seconds
IpInterface	IP interface that is associated with the client
ClientId	DHCP Option 61 received from the client
Interface	Subinterface for DHCP local server bindings; does not apply to DHCP external server and DHCP relay proxy
Relay Agent	Indicates Relay Agent Information option (option 82)
Agent Circuit Id	Suboption 1 of the DHCP Relay Agent information option

Table 104: show dhcp binding Output Fields (continued)

Field Name	Field Description
Agent Remote Id	Suboption 2 of the DHCP relay agent information option
Vendor Specific	Suboption 9 of the DHCP relay agent information option

- Related Topics**
- `show dhcp binding`
 - To compare the output of the **show dhcp binding** command and the **show dhcp host** command, see Monitoring DHCP Binding Host Information on page 548

Monitoring DHCP Binding Count Information

Purpose Display count information for DHCP client bindings and interfaces.

Action To display count information for all DHCP client bindings and interfaces:

```
host1:vr1#show dhcp count
```

Type	IpSubnet	Interfaces	Clients	Assigned Clients	Bound Clients
external	0.0.0.0	30	30	30	30
relay-p	0.0.0.0	2	30	30	30

To display count information for DHCP client bindings and interfaces with the specified interface string:

```
host1:vr2#show dhcp count interface ip71.*4
```

Type	IpSubnet	Interfaces	Clients	Assigned Clients	Bound Clients
external	0.0.0.0	3	3	3	3

This **show dhcp count** command uses the * (asterisk) regular expression metacharacter in the interface string to display information for DHCP client bindings on virtual router vr2 with an IP address beginning with 71 and ending with 4.

To display count information for DHCP client bindings and interfaces that match the specified circuit ID string:

```
host1:vr3#show dhcp count circuit-id \xe3
```

Type	IpSubnet	Interfaces	Clients	Assigned Clients	Bound Clients
relay-p	0.0.0.0	1	15	15	15

To specify nonprintable byte codes in the circuit ID string or remote ID string, you can use the string `\xab`, where *ab* is a hex code of the byte. This **show dhcp count** command uses the string `\xe3` to represent byte E3 in the circuit ID string. This

command displays information for the DHCP client bindings on virtual router vr3 with the specified circuit ID string, with results arranged in ascending order by binding ID.

To display count information for DHCP local server client bindings and interfaces with a specified subnet address:

```
host1:vr1#show dhcp count local 0.0.0.0
```

To display count information for DHCP client bindings and interfaces with a specified IP prefix:

```
host1:vr1#show dhcp count ip-prefix 71.1.0.0/28
```

To display count information for DHCP relay proxy client bindings without a lower-layer interface:

```
host1:vr1#show dhcp count relay-proxy no-interface
```

To display count information for DHCP client bindings that match the specified remote ID string:

```
host1:vr1#show dhcp count remote-id "remote id.*odd"
```

Filtering the display of DHCP client bindings by the circuit ID string or remote ID string is not supported for the DHCP external server application. DHCP external server does not store information about the agent-circuit-id suboption or agent-remote-id suboption of option 82.

Meaning Table 105 on page 547 lists the **show dhcp count** command output fields.

Table 105: show dhcp count Output Fields

Field Name	Field Description
Type	Binding type; external (DHCP external server), local (DHCP local server), or relay-p (DHCP relay proxy)
IpSubnet	For DHCP local server bindings, the subnet of the IP address assigned to the client; 0.0.0.0 for DHCP external server and DHCP relay proxy bindings
Interfaces	Number of interfaces associated with this binding type; includes the number of DHCP client bindings without a lower-layer interface, if configured
Clients	Number of DHCP clients associated with this binding type
Assigned Clients	Number of DHCP clients with an assigned IP address
Bound Clients	Number of DHCP clients in a bound state

Related Topics ■ `show dhcp count`

Monitoring DHCP Binding Host Information

Purpose Display information for specified DHCP client bindings, with results arranged in ascending order by IP address. The **show dhcp host** command displays information only for DHCP client bindings with assigned IP addresses.

Action To display information about all DHCP local server bindings:

```
host1:vr1#show dhcp host local
BindingId      HwAddress      Type      IpSubnet      IpAddress      State
-----
2409734593     8000.0001.9365 local      0.0.0.0       81.3.0.2       bound
2409734595     8000.0003.9365 local      0.0.0.0       81.3.0.3       bound
2409734597     8000.0005.9365 local      0.0.0.0       81.3.0.4       bound
2409734599     8000.0007.9365 local      0.0.0.0       81.3.0.5       bound
2409734619     8000.0009.9365 local      0.0.0.0       81.3.0.6       bound
2409734618     8000.000b.9365 local      0.0.0.0       81.3.0.7       bound
2409734605     8000.000d.9365 local      0.0.0.0       81.3.0.8       bound
2409734607     8000.000f.9365 local      0.0.0.0       81.3.0.9       bound
2409734609     8000.0011.9365 local      0.0.0.0       81.3.0.10      bound
2409734611     8000.0013.9365 local      0.0.0.0       81.3.0.11      bound
```

The output of the **show dhcp host** command is identical to the output of the **show dhcp binding** command except for the order of the client bindings. The results of the **show dhcp host** command are arranged in ascending order by IP address, whereas the results of the **show dhcp binding** command are arranged in ascending order by binding ID.

To display binding information for DHCP clients with a specified interface string:

```
host1:vr2#show dhcp host interface ip71.*4
BindingId      HwAddress      Type      IpSubnet      IpAddress      State
-----
3053453315     7000.0002.9365 external    0.0.0.0       71.1.0.4       bound
3053453325     7000.000c.9365 external    0.0.0.0       71.1.0.14      bound
3053453353     7000.0016.9365 external    0.0.0.0       71.1.0.24      bound
```

This **show dhcp host** command uses the * (asterisk) regular expression metacharacter in the interface string to display information for DHCP client bindings on virtual router vr2 with an IP address beginning with 71 and ending with 4. The results of the **show dhcp host** command are arranged in ascending order by IP address.

To display binding information for DHCP clients that match the specified circuit ID string:

```
host1:vr3#show dhcp host circuit-id \\xe3
BindingId      HwAddress      Type      IpSubnet      IpAddress      State
-----
3070230529     7000.0000.9365 relay-p     0.0.0.0       71.1.0.2       bound
3070230531     7000.0002.9365 relay-p     0.0.0.0       71.1.0.4       bound
3070230572     7000.0004.9365 relay-p     0.0.0.0       71.1.0.6       bound
3070230535     7000.0006.9365 relay-p     0.0.0.0       71.1.0.8       bound
```

```

3070230537 7000.0008.9365 relay-p 0.0.0.0 71.1.0.10 bound
3070230539 7000.000a.9365 relay-p 0.0.0.0 71.1.0.12 bound
3070230541 7000.000c.9365 relay-p 0.0.0.0 71.1.0.14 bound
3070230543 7000.000e.9365 relay-p 0.0.0.0 71.1.0.16 bound
3070230545 7000.0010.9365 relay-p 0.0.0.0 71.1.0.18 bound
3070230547 7000.0012.9365 relay-p 0.0.0.0 71.1.0.20 bound
3070230549 7000.0014.9365 relay-p 0.0.0.0 71.1.0.22 bound
3070230569 7000.0016.9365 relay-p 0.0.0.0 71.1.0.24 bound
3070230553 7000.0018.9365 relay-p 0.0.0.0 71.1.0.26 bound
3070230555 7000.001a.9365 relay-p 0.0.0.0 71.1.0.28 bound
3070230557 7000.001c.9365 relay-p 0.0.0.0 71.1.0.30 bound

```

To specify nonprintable byte codes in the circuit ID string or remote ID string, you can use the string `\xab`, where *ab* is a hex code of the byte. This **show dhcp host** command uses the string `\xe3` to represent byte E3 in the circuit ID string. This command displays information for the DHCP client bindings on virtual router `vr3` with the specified circuit ID string, with results arranged in ascending order by IP address.

To display information about DHCP external server bindings with a specified subnet address:

```
host1:vr1#show dhcp host external 0.0.0.0
```

To display information about DHCP bindings with a specified IP prefix:

```
host1:vr1#show dhcp host ip-prefix 10.2.0.0/28
```

To display information about DHCP relay proxy bindings without a lower-layer interface:

```
host1:vr1#show dhcp host relay-proxy no-interface
```

To display binding information for DHCP clients that match the specified remote ID string:

```
host1:vr1#show dhcp host remote-id "remote id.*west"
```

Filtering the display of DHCP client bindings by the circuit ID string or remote ID string is not supported for the DHCP external server application. DHCP external server does not store information about the agent-circuit-id suboption or agent-remote-id suboption of option 82.

Meaning Table 106 on page 549 lists the **show dhcp host** command output fields.

Table 106: show dhcp host Output Fields

Field Name	Field Description
BindingId	Client binding ID
HwAddress	MAC address of client
Type	Binding type; external (DHCP external server), local (DHCP local server), or relay-p (DHCP relay proxy)

Table 106: show dhcp host Output Fields (continued)

Field Name	Field Description
IpSubnet	For DHCP local server bindings, the subnet of the IP address assigned to the client; 0.0.0.0 for DHCP external server and DHCP relay proxy bindings
IpAddress	IP address assigned to client
State	State of the DHCP client binding
Server	(Detailed output only) IP address of the DHCP server that allocated the client IP address
Giaddr	(Detailed output only) For DHCP relay proxy the IP address of the DHCP relay proxy; for DHCP local server bindings, the IP address of the DHCP relay that sent the packet or 0.0.0.0 if the packet comes from the client; for DHCP external server bindings, the giaddr from the DHCP packet
Lease	(Detailed output only) Total time for which the IP address is available, in seconds
Remaining	(Detailed output only) Time remaining on the current lease, in seconds
IpInterface	(Detailed output only) IP interface that is associated with the client

- Related Topics**
- `show dhcp host`
 - To compare the output of the **show dhcp host** command and the **show dhcp binding** command, see Monitoring DHCP Binding Information on page 543

Monitoring DHCP Bindings (Displaying IP Address-to-MAC Address Bindings)

Purpose Display the mapping between the assigned IP address and the MAC address of the subscriber's computer.



NOTE: This command is deprecated and might be removed completely in a future release. The function provided by this command has been replaced by the **show dhcp binding** command.

Action To display the DHCP IP address to MAC address bindings:

```
host1#show ip dhcp-external binding
```

```
Dhcp External Bindings
```

Hardware	Giaddr	IpAddress	Server	Lease	Expire	Interface
7000.0001.9365	91.3.0.1	91.3.0.2	10.1.2.1	3600	3175	ATM3/1.100.1

Meaning Table 107 on page 551 lists the **show ip dhcp-external binding** command output fields

Table 107: show ip dhcp-external binding Output Fields

Field Name	Field Description
Hardware	MAC address of subscriber's computer
Giaddr	Gateway IP address (giaddr) in the DHCP packet received from a client
IpAddress	Subscriber client's IP address
Server	DHCP server's address
Lease	Time for which the IP address is available, in seconds
Expire	Time remaining on the current lease, in seconds
Interface	Interface that is associated with the subscriber's computer

Related Topics ■ show ip dhcp-external binding

Monitoring DHCP Bindings (Displaying DHCP Bindings Based on Binding ID)

Purpose Display binding information for all DHCP clients.



NOTE: This command is deprecated and might be removed completely in a future release. The function provided by this command has been replaced by the **show dhcp binding** command.

Action To display DHCP binding information:

```
host1(config)#show ip dhcp-external binding-id
```

Dhcp External Binding Ids			
Binding Id	Hardware	Giaddr	IpAddress
3053453316	7000.0001.9365	91.3.0.1	91.3.0.2

Meaning Table 108 on page 552 lists the **show ip dhcp-external binding-id** command output file

Table 108: show ip dhcp-external binding-id

Field Name	Field Description
Binding Id	DHCP client binding ID option value associated with the user
Hardware	MAC address of the subscriber's computer
Giaddr	Gateway IP address (giaddr) in the DHCP packet received from a client
IpAddress	IP address assigned to the client

Related Topics ■ [show ip dhcp-external binding-id](#)

Monitoring DHCP Bindings (Local Server Binding Information)

Purpose Display DHCP local server binding information for DHCP local server clients. Optionally, specify an IP address or an interface to display binding information for a particular address or interface.



NOTE: This command is deprecated and might be removed completely in a future release. The function provided by this command has been replaced by the **show dhcp binding** command.

Action To display DHCP local server binding information for a specific IP address:

```
host1#show ip dhcp-local binding 192.168.1.3
```

Dhcp Local Bindings

Address	Hardware	Lease	Interface	State
192.168.1.3	11-11-22-22-33-33	(600)	fastEthernet 5/0	expired

To display DHCP local server binding information for a specific interface:

```
host1#show ip dhcp-local binding interface fastEthernet 5/0.2
```

Dhcp Local Bindings

Address	Hardware	Lease	Interface	State
192.168.0.6	40-00-00-0b-00-01	240	fastEthernet 5/0.2	bound
192.168.0.7	40-00-00-0c-00-01	240	fastEthernet 5/0.2	bound
192.168.1.3	11-11-22-22-33-33	(600)	fastEthernet 5/0.2	expired

Meaning Table 109 on page 553 lists the **show ip dhcp-local binding** command output fields.

Table 109: show ip dhcp-local binding Output Fields

Field Name	Field Description
Address	IP address
Hardware	MAC address of subscriber's computer
Lease	Infinite, or the number of seconds in which the IP address is available; grace period is shown in parentheses for clients in a grace period
Interface	Interface whose statistics are reported
State	Binding state; expired or released state for clients currently in the grace period

Related Topics ■ show ip dhcp-local binding

Monitoring DHCP External Server Configuration Information

Purpose Display information about the router's DHCP external server application.

Action To display DHCP external server information:

```
host1#show ip dhcp-external configuration
Dhcp External : Enabled
Auto-Configure : Enabled
Server-Sync : Enabled
Disregard-Giaddr-Next-Hop : Enabled
Detect-Agent-Circuit-Id : Disabled
Recreate-Subscriber-Interface : Enabled
Duplicate-MAC-Address : Enabled
Servers:
-----
10.1.1.1
10.2.1.1
10.3.1.1
```

Meaning Table 110 on page 553 lists the **show ip dhcp-external configuration** command output fields.

Table 110: show ip dhcp-external configuration Output Fields

Field Name	Field Description
Dhcp External	Enabled or disabled

Table 110: show ip dhcp-external configuration Output Fields (continued)

Field Name	Field Description
Auto-Configure	Enabled or disabled
Server-Sync	Enabled or disabled
Disregard-Giaddr-Next-hop	Enabled or disabled
Detect-Agent-Circuit-Id	Enabled or disabled
Recreate-Subscriber-Interface	Enabled or disabled
Duplicate-MAC-Address	Enabled or disabled
Servers	DHCP servers whose traffic is monitored by the E Series router

Related Topics ■ show ip dhcp-external configuration

Monitoring DHCP External Server Statistics

Purpose Display statistics for all external DHCP servers, or for a specific server.

Action To display statistics for a DHCP external server:

```
host1(config)#show ip dhcp-external statistics server-address 100.20.32.1
DHCP External Statistics
Server Address 10.10.32.1
-----
      Item          Count
-----
memUsage           136
bindings           1
request            69
ack (request)      1120
renew              38611
ack (renew)        38611
nak                42
release            68
lease expirations  0
```

Meaning Table 111 on page 554 lists the **show ip dhcp-external statistics** command output fields.

Table 111: show ip dhcp-external statistics Output Fields

Field Name	Field Description
memUsage	Memory in bytes used by DHCP server

Table 111: show ip dhcp-external statistics Output Fields *(continued)*

Field Name	Field Description
bindings	Number of IP addresses currently assigned
request	Number of DHCP request packets
ack (request)	Number of DHCP acknowledgment packets in response to DHCP requests
renew	Number of DHCP renew packets
ack (renew)	Number of DHCP acknowledgment packets in response to DHCP renewals
nak	Number of DHCP negative acknowledgment packets
release	Number of DHCP release packets
lease expirations	Number of lease expirations

Related Topics ■ show ip dhcp-external statistics

Monitoring DHCP External Server Duplicate MAC Address Setting

Purpose Display global configuration information for the DHCP external server application. Currently, this command displays the status of the method that DHCP external server uses to uniquely identify DHCP clients with duplicate MAC addresses.

Action To display the duplicate MAC address setting for DHCP external server:

```
host1#show dhcp-external
Duplicate MAC Address: Enabled
```

Meaning Table 112 on page 555 lists the **show dhcp-external** command output fields.

Table 112: show dhcp-external Output Fields

Field Name	Field Description
Duplicate MAC Address	<p>Status of the identification method for DHCP clients with duplicate MAC addresses:</p> <ul style="list-style-type: none"> ■ Enabled—DHCP external server uses a combination of the MAC address and giaddr to uniquely identify DHCP clients. ■ Disabled—(Default) DHCP external server uses only the MAC address to uniquely identify DHCP clients.

Related Topics ■ `show dhcp-external`

Monitoring DHCP Local Address Pools

Purpose Display the DHCP local pool configurations.

Action To display information about the local address pool:

```
host1#show ip dhcp-local pool
*****
Pool Name - ispBoston
Pool Id - 6
Domain Name - ispBoston
Network - 10.10.0.0
Mask - 255.255.255.0
NETBIOS Node Type - 1
Lease - Days:0 Hours:0 Minutes:24 Seconds:0
Grace Period - Days:0 Hours:0 Minutes:10 Seconds:0
Grace period for released leases enabled
DNS Servers
  10.10.1.1
NETBIOS Name Servers
  10.10.1.1
  10.10.1.2
Default Routers
  10.10.1.3
Server Address - 10.10.20.8
Linked Pool - cable5
High utilization threshold - 85%
Abated utilization threshold - 75%
Current utilization - 0%
Utilization trap disabled.
Shared pool allocations - 25
```

To display information about local address pool groups:

```
host1#show ip dhcp-local pool groups
DHCP Local Server Pool Groups
There is 1 group configured
*****
Group Name: pool8_7-1-Group
Total Addresses Available: 145
Total Addresses In Use: 0
High Utilization Thresh: 85%
Abated Utilization Thresh: 75%
Current Utilization: 0%
Trap Enabled: no
===== Pools =====
  pool8_7-1
  pool8_7-2
  pool8_7-3
  pool8_7-4
  pool8_7-5
```

Meaning Table 113 on page 557 lists the `show ip dhcp-local pool` command output fields.

Table 113: show ip dhcp-local pool Output Fields

Field Name	Field Description
Pool Name	Name of the DHCP local pool
Pool Id	ID of the pool
Domain Name	Domain name assigned to the pool
Network	Addresses that the DHCP local server can provide from the pool
Mask	Subnet mask that goes with the network address
NETBIOS Node Type	Type of NetBIOS server: 1 = Broadcast 2 = Peer-to-peer 4 = Mixed 8 = Hybrid
Lease	Time for which the supplied IP address is valid
Grace Period	Length of grace period
Grace period for released leases	Status of the grace period for released leases; enabled or disabled
DNS Servers	Address of each DNS server assigned to the pool
NETBIOS Name Servers	NetBIOS server assigned to subscribers
Default Routers	Address of default router used for subscribers
Server Address	DHCP server address that is sent to subscribers
Linked Pool	Names of any pools that are linked to this pool
High utilization threshold	Threshold at which the utilization trap is triggered, if the trap is enabled
Abated utilization threshold	Threshold at which the utilization trap is reenabled after the trap has been triggered
Current utilization	Percentage of local address pool currently used
Utilization trap	Status of the utilization trap, which is generated when the high utilization threshold is reached; enabled or disabled
Shared pool allocations	Number of addresses allocated to shared pools
Group Name	Group name; based on the name of the original pool
Total Addresses Available	Number of addresses in the group

Table 113: show ip dhcp-local pool Output Fields (*continued*)

Field Name	Field Description
Total Addresses In Use	Number of addresses currently being used
Trap Enabled	Status of utilization trap, yes or no
Pools	Names of pools in the group

Related Topics ■ [show ip dhcp-local pool](#)

Monitoring DHCP Local Server Authentication Information

Purpose Display the DHCP local server's AAA authentication configuration information and statistics.

Action To display DHCP local server AAA authentication configuration:

```
host1#show ip dhcp-local auth config
DHCP Local Server Authentication Configuration
User-Prefix       : ERX4-Boston
Domain            : ISP1.com
Password          : to4Tool8
Virtual Router    : included
Circuit Type      : included
Circuit ID        : included
MAC Address       : excluded
Option 82         : excluded
```

To display DHCP local server AAA authentication statistics:

```
host1#show ip dhcp-local auth statistics
DHCP Local Server Authentication Statistics
-----
      Item                Count
-----
auth requests            10
auth request failures    0
auth grants              9
auth denies              1
```

Meaning Table 114 on page 558 lists the **show ip dhcp-local auth** command output fields.

Table 114: show ip dhcp-local auth Output Fields

Field Name	Field Description
User-Prefix	Client's user prefix
Domain	Client's domain

Table 114: show ip dhcp-local auth Output Fields (*continued*)

Field Name	Field Description
Password	Password used to authenticate client
Virtual Router	Client's virtual router; excluded or included
Circuit Type	Client's circuit type; excluded or included
Circuit ID	Client's circuit ID; excluded or included
MAC Address	Client's MAC address; excluded or included
Option 82	Status of client's option 82 field; excluded or included
auth requests	Number of authorization requests received by this DHCP local server
auth request failures	Number of authorization requests that have failed
auth grants	Number of authorization requests that have been granted
auth denies	Number of authorization requests that have been denied

Related Topics ■ show ip dhcp-local auth

Monitoring DHCP Local Server Configuration

Purpose Display the DHCP local server's configuration information.

Action To display configuration settings for DHCP local server:

```
host1#show ip dhcp-local
*****
      DHCP Local Server Configuration
Mode: Standalone
SNMP Traps Enabled - no
Unique Client IDs  - enabled
```

Meaning Table 115 on page 559 lists the **show ip dhcp-local** command output fields.

Table 115: show ip dhcp-local Output Fields

Field Name	Field Description
Mode	DHCP local server mode, equal-access or standalone
SNMP Traps Enabled	Status of DHCP local traps support, yes or no

Table 115: show ip dhcp-local Output Fields (continued)

Field Name	Field Description
Unique Client IDs	Status of duplicate client ID and duplicate hardware address detection, enabled or disabled

Related Topics ■ [show ip dhcp-local](#)

Monitoring DHCP Local Server Leases

Purpose Display lease information for a specific IP address or for all DHCP local server leases.

Action To display information about a specific DHCP local server lease:

```
host1#show ip dhcp-local leases 192.168.0.3
Dhcp Local Leases
-----
```

Address	Hardware	Lease	Initiated/Renewed
192.168.0.3	10-06-10-00-10-33	120	THU SEP 08 2005 08:02:11 UTC
Address	Expiration		Remaining
192.168.0.3	THU SEP 08 2005 08:04:11 UTC		79
Address	Initial Lease Start		
192.168.0.3	THU SEP 08 2005 08:01:12 UTC		

To display information about all DHCP local server leases:

```
host1#show ip dhcp-local leases
Dhcp Local Leases
-----
```

Address	Hardware	Lease	Initiated/Renewed
192.168.0.2	10-06-10-00-10-32	120	THU JUL 06 2006 08:02:11 UTC
192.168.0.3	10-06-10-00-10-33	120	THU JUL 06 2006 08:02:11 UTC
192.168.55.4	10-06-10-00-10-34	(600)	THU JUL 06 2006 09:57:22 UTC
192.168.55.5	10-06-10-00-10-35	infinite	THU JUL 06 2006 08:03:10 UTC
Address	Expiration		Remaining
192.168.0.2	THU JUL 06 2006 08:04:11 UTC		80
192.168.0.3	THU JUL 06 2006 08:04:11 UTC		80
192.168.55.4	THU JUL 06 2006 10:07:22 UTC		575
192.168.55.5	THU JUL 06 2006 08:04:11 UTC		infinite
Address	Initial Lease Start		
10.1.0.2	THU JUL 06 2006 08:01:12 UTC		
10.1.0.3	THU JUL 06 2006 08:01:12 UTC		
192.168.55.4	THU JUL 06 2006 09:54:19 UTC		
192.168.55.5	THU JUL 06 2006 08:03:10 UTC		

Meaning Table 116 on page 561 lists the **show ip dhcp-local leases** command output fields.

Table 116: show ip dhcp-local leases Output Fields

Field Name	Field Description
Address	IP address
Hardware	MAC address of the subscriber's computer
Lease	Infinite, or the number of seconds in which the IP address is available; grace period in parentheses for clients in the grace period
Initiated/Renewed	Day, date, and time the lease was most recently initiated or renewed; start time of grace period for clients in the grace period
Expiration	Day, date, and time the lease expires; expiration time of grace period for clients in the grace period
Remaining	Infinite, or the number of seconds remaining in the lease, if any; remaining time of grace period for clients in the grace period
Initial Lease Start	Day, date, and time the lease was initiated

Related Topics ■ show ip dhcp-local leases

Monitoring DHCP Local Server Statistics

Purpose Display statistics for the DHCP local server.

Action To display all DHCP local server statistics:

```
host1#show ip dhcp-local statistics
DHCP Local Server Statistics
```

```
-----
      Item              Count
-----
memUsage                184
bindings                 2
--Receive Statistics--
discover                 8
request(accept)         10
request(renew)           6
request(rebind)          2
request(other)           6
decline                  0
release                  6
inform                   0
total in packet          38
in error                  0
in discard                0
```

```

        unknown client packet      6
--Transmit Statistics--
    offer                          8
    ack(accept)                   10
    ack(renew)                    6
    ack(rebind)                   2
    nak                           6
    nak(renew)                    0
    nak(rebind)                   0
    total out packet              32
    out error                     0
    out discard                   0

```

To display DHCP local server statistics for a specific interface:

```

host1#show ip dhcp-local statistics interface atm 4/0.32
      DHCP Local Server SubInterface Statistics
      Interface      Item      Count
-----
ATM4/0.32
Receive Statistics
        discover      4
        request(accept) 5
        request(renew) 1
        request(rebind) 1
        request(other) 3
        decline       0
        release       3
        inform        0
        total in packet 17
        in error      0
        in discard    0
        unknown client packet 3
Transmit Statistics
        offer          4
        ack(accept)    5
        ack(renew)     1
        ack(rebind)    1
        nak            3
        nak(renew)     0
        nak(rebind)    0
        total out packet 14
        out error      0
        out discard    0

```

Meaning Table 117 on page 562 lists the **show ip dhcp-local statistics** command

Table 117: show ip dhcp-local statistics output fields.

Field Name	Field Description
memUsage	Number of bytes of memory used by the DHCP local server
bindings	Number of leased IP addresses currently assigned
Receive Statistics	Statistics for packets that have been received
discover	Number of DHCP discover messages received

Table 117: show ip dhcp-local statistics output fields. (continued)

Field Name	Field Description
request(accept)	Number of DHCP requests accepted
request(renew)	Number of DHCP requests for renewal received
request(rebind)	Number of DHCP requests for rebinding received
request(other)	Number of DHCP unknown requests received
decline	Number of DHCP decline messages received
release	Number of DHCP release messages received
inform	Number of DHCP inform messages received
total in packet	Number of packets received
in error	Number of packets received with errors that prevent further processing; count is independent of the message-type counters
in discard	Number of packets received that are discarded due to system resource issues; count is independent of the message-type counters
unknown client packet	Number of nonrequest packets that have no entry in the local server database received
Transmit Statistics	Statistics for packets that have been transmitted
offer	Number of DHCP offer messages sent
ack(accept)	Number of DHCP acknowledgments sent in response to accepted requests
ack(renew)	Number of DHCP acknowledgments sent in response to renewal requests
ack(rebind)	Number of DHCP acknowledgments sent in response to rebinding requests
nak	Number of DHCP NAK messages sent in response to requests that cannot be bound or that are unknown to this local server
nak(renew)	Number of DHCP NAK messages sent in response renewal requests
nak(rebind)	Number of DHCP NAK messages sent in response to rebinding requests
total out packet	Number of packets sent by the DHCP local server
out error	Number of packets that cannot be transmitted due to protocol errors or configuration errors; count is independent of the message-type counters
out discard	Number of packets that cannot be transmitted due to system resource issues; count is independent of the message-type counters

Related Topics ■ `show ip dhcp-local statistics`

Monitoring DHCP Option 60 Information

- Purpose** Display configuration and action information for the DHCP vendor-option (option 60) feature.
- Use the command without additional keywords to display information for all vendor option configurations.
 - Use the **vendor-option-relay-server** keyword and server address to display information for option 60 strings that match a configured string that results in the packets being sent to the specified vendor-option server.
 - Use the **default** keyword to display information for option 60 strings that do not match a configured vendor-option string.

Action To display information for all vendor option configurations:

```
host1#show dhcp vendor-option
```

Codes:

- * - the configured vendor-string is an exact-match
- default - all DHCP client packets not matching a configured vendor-string
- implied - the DHCP application is configured but has not been enabled with the vendor-option command
- drop - the DHCP application responsible for the action has not been configured yet therefore all packets for this application will be dropped

Total 4 entries.

Vendor-option	Action
Juniper	relay to 10.10.1.1 (rx: 0)
default(*)	relay to 192.168.5.5 (rx: 0, no-match: 0)
someString(*)	relay to 192.168.7.7 (rx: 0)
someString2(*)	local-server (rx: 0)

To display information for option 60 strings that match a configured string:

```
host1#show dhcp vendor-option vendor-option-relay-server 10.10.1.1
```

Codes:

- * - the configured vendor-string is an exact-match
- default - all DHCP client packets not matching a configured vendor-string
- implied - the DHCP application is configured but has not been enabled with the vendor-option command
- drop - the DHCP application responsible for the action has not been configured yet therefore all packets for this application will be dropped

Total 4 entries.

Vendor-option	Action
Juniper	relay to 10.10.1.1 (rx: 0)

Meaning Table 118 on page 565 lists the **show dhcp vendor-option** command output fields.

Table 118: show dhcp vendor-option Output Fields

Field Name	Field Description
Vendor-option	Option 60 string; an asterisk (*) indicates that the string exactly matches a configured option 60 string, default indicates the action to take when the string does not match a configured option 60 string
Action	Action to take for the indicated string match; drop, forward to local-server, proxy client server, or all configured DHCP vendor option servers; or relay to the specified DHCP server
rx	Received packets that match a vendor-option string
no-match	Received packets that do not match a vendor-option string; no-match statistics appear only for default entries

Related Topics ■ show dhcp vendor-option

Monitoring DHCP Packet Capture Settings

Purpose Display the configuration for per-interface DHCP packet logging.

Action To display configuration information about the DHCP packet capture feature:

```
host1#show ip dhcp-capture
      Dhcp Capture Configuration
      -----
Router  Interface  Type   Priority
-----
default ip3/1    Rx/Tx  low/low
default ip5/1    Rx     high
```

Meaning Table 119 on page 565 lists the **show ip dhcp-capture** command output fields.

Table 119: show ip dhcp-capture Output Fields

Field Name	Field Description
Router	Router name
Interface	Interface whose DHCP packets are logged
Type	Packet type to be logged, Rx (received), Tx (transmitted), or Rx/Tx (all)
Priority	Priority assigned to logged packets, low or high

Related Topics ■ [show ip dhcp-capture](#)

Monitoring DHCP Relay Configuration Information

Purpose Display DHCP relay configuration information and the IP addresses of the configured DHCP servers.

Action To display information about the DHCP relay configuration and the IP address of the DHCP servers.

```
host1#show dhcp relay
DHCP Relay Configuration
-----
Mode: Proxy
  Restore Client Timeout: 72
  Send First Offer: off
Inhibit Access Route Creation: off
Assign Giaddr to Source IP: off
Layer 2 Unicast Replies: off
Giaddr Selects Interface: off
Broadcast Flag Replies: on
Relay Agent Information Option (82):
  Override Giaddr: off
  Override Option: off
  Trust All Clients: off
  Preserve Option From Trusted Clients: off
Circuit-ID Sub-option (1): on
  select - hostname
  select - exclude-subinterface-id
Remote-ID Sub-option (2): on
Vendor-Specific Sub-option (9): on
  select - layer2-circuit-id
  select - user-packet-class
DHCP Server Addresses
-----
30.3.7.1
```

Meaning Table 120 on page 566 lists the **show dhcp relay** command output fields.

Table 120: show dhcp relay Output Fields

Field Name	Field Description
Mode	DHCP relay mode; either Standard (DHCP relay mode) or Proxy (DHCP relay proxy mode)
Restore Client Timeout	(DHCP relay proxy mode only) number of hours
Send First Offer	On or off
Inhibit Access Route Creation	On or off
Assign Giaddr to Source IP	On or off

Table 120: show dhcp relay Output Fields (continued)

Field Name	Field Description
Layer 2 Unicast Replies	On or off
Giaddr Selects Interface	On or off
Broadcast Flag Replies	On or off
Override Giaddr	On or off
Override Option	On or off
Trust All Clients	On or off
Preserve Option From Trusted Clients	On or off
Circuit-ID Sub-option (1)	On or off; when on includes a list of selected suboptions
Remote-ID Sub-option (2)	On or off
Vendor-Specific Sub-option (9)	On or off; when on includes a list of selected suboptions
DHCP Server Addresses	IP addresses of configured DHCP servers

Related Topics ■ show dhcp relay

Monitoring DHCP Relay Proxy Statistics

Purpose Display statistics for the DHCP relay proxy.



NOTE: The **show dhcp relay statistics** command displays additional DHCP statistics that the router reports for both DHCP relay and DHCP relay proxy.

Action To display DHCP relay proxy statistics:

```
host1# show dhcp relay proxy statistics
DHCP Relay/Proxy Statistics
-----
  Address  Disc.  Offer  Req.   Ack   Nak  Decline Release Inform
-----
  192.168.1.1    9     0     0     0     0     0       0       0
  192.168.1.2    9     0     0     0     0     0       0       0
  192.168.32.1   9     5     5     5     0     0       0       0
Active Clients: 5
Clients to Restore: 0
```

```

Client Packets: 14
Server Packets: 10
Timed Out: 0
No Offers: 4
Modify Fail: 0

```

Meaning Table 121 on page 568 lists the **show dhcp relay proxy statistics** command output fields.

Table 121: show dhcp relay proxy statistics Output Fields

Field Name	Field Description
Address	IP address of the DHCP server
Disc.	Number of discover messages sent to server
Offer	Number of offers received from a server
Req.	Number of requests sent to a server
Ack	Number of ACK messages received from a server
Nak	Number of NAK messages received from a server
Decline	Number of decline messages sent to a server
Release	Number of releases sent to a server
Inform	Number of information messages sent to a server
Active Clients	Number of clients being maintained by the relay proxy
Clients to Restore	Number of host routes installed without an active client (waiting for renewal)
Client Packets	Total number of packets received from clients
Server Packets	Total number of packets received from servers
Timed Out	Number of clients removed because of lease expiration
No Offers	Number of clients removed because no server sent an offer
Modify Fail	Number of clients deleted because the relay proxy failed to modify the DHCP packet

Related Topics ■ show dhcp relay proxy statistics

Monitoring DHCP Relay Statistics

Purpose Display DHCP packet error and relay agent option statistics that are reported for both DHCP relay and DHCP relay proxy, and also to display DHCP server statistics related only to DHCP relay.



NOTE: The **show dhcp relay proxy statistics** command displays additional DHCP statistics that the router reports only for DHCP relay proxy.

Action To display DHCP relay statistics:

```
host1# show dhcp relay statistics
DHCP Relay Statistics
-----
Statistic                                     Values
-----
Packet error statistics (standard & proxy modes):
  dropped discover packets, no resources          0
  dropped dhcp packets, no resources              0
  dropped bad message operation packets           0
  dropped unknown message type request packets    0
  dropped unknown message type reply packets      0
Relay Agent Option statistics (standard & proxy modes):
  add Relay Agent Option circuit ID suboption     On
  add Relay Agent Option remote ID suboption      On
  packets with giaddr override                   0
  packets with Relay Agent Option override        2
  packets forwarded with Relay Agent Option already present 4
  dropped packets with Relay Agent Option already present 3
  dropped giaddr spoof packets                   0
DHCP server statistics (standard mode only):
  dropped duplicate request packets               12
  packets transmitted to servers                 38
  packets received from servers                  26
  dropped unknown xid reply packets               0
  dropped stale request packets                  12
```

To display detailed statistics for DHCP relay only, use the optional **detail** keyword—this command displays DHCP server statistics and dropped unknown message type reply packets statistics:

```
host1# show dhcp relay statistics detail
DHCP Relay Detail Statistics
-----
Statistics          10.10.1.1  192.168.32.12  192.168.32.1
-----
Dropped unknown message type replies  0          0          0
Dropped duplicate requests             6          6          0
Packets transmitted to server          6          6          26
Packets received from server           0          0          26
```

Dropped unknown xids replies	0	0	0
Dropped stale requests	6	6	0

Meaning Table 122 on page 570 lists the **show dhcp relay statistics** command output fields.

Table 122: show dhcp relay statistics Output Fields

Field Name	Field Description
Packet error statistics (standard & proxy modes)	
dropped discover packets, no resources	Number of received DHCP relay discover messages that were discarded because of lack of resources
dropped dhcp packets, no resources	Number of received DHCP relay messages, other than discover messages, that were discarded because of lack of resources
dropped bad message operation packets	Number of received DHCP relay messages that were discarded because their message operation (for example, bootrequest, bootreply) was unknown, possibly due to corruption
dropped unknown message type request packets	Number of received DHCP relay request messages that were discarded because their message type (for example, discover, offer-request) was unknown, possibly due to corruption
dropped unknown message type reply packets	Number of received DHCP relay reply messages that were discarded because their message type (for example, offer, ack) was unknown, possibly due to corruption
Relay Agent Option statistics (standard & proxy modes)	
add Relay Agent Option circuit ID suboption	Status of circuit ID suboption, on or off
add Relay Agent Option remote ID suboption	Status of remote ID suboption, on or off
packets with giaddr override	Number of received DHCP relay requests whose giaddr field is overridden with IP address 0.0.0.0
packets with Relay Agent Option override	Number of received DHCP relay requests whose relay agent information option is overridden with an option string created by this relay agent
packets forwarded with Relay Agent Option already present	Number of received DHCP relay requests already containing the relay agent information option that were forwarded to DHCP servers
dropped packets with Relay Agent Option already present	Number of received DHCP relay requests that were discarded because they already contained the relay agent information option when this relay agent was configured to insert the option

Table 122: show dhcp relay statistics Output Fields (continued)

Field Name	Field Description
dropped giaddr spoof packets	Number of received DHCP relay requests that were discarded because the gateway IP address field already contained this relay agent's IP address
DHCP server statistics (standard mode only)	
dropped duplicate request packets	Number of received DHCP relay requests that were discarded because they have a matching server address and XID of an outstanding DHCP server request
packets transmitted to servers	Number of DHCP relay requests successfully transmitted to DHCP servers
packets received from servers	Number of DHCP relay replies successfully received from DHCP servers
dropped unknown xid reply packets	Number of DHCP relay replies received from DHCP servers that were discarded because their server address and XID do not match an outstanding DHCP server request
dropped stale request packets	Number of DHCP relay requests sent to DHCP servers that were discarded because their replies timed out

Related Topics ■ show dhcp relay statistics

Monitoring DHCP Server and DHCP Relay Agent Statistics

Purpose Display DHCP proxy server statistics

Action To display statistics for the DHCP proxy server:

```
host1#show dhcp server statistics
DHCP Proxy Global Statistics
  Messages from Unknown Servers 0
    DHCP Proxy Server Statistics
    -----
      Statistic           Counts           Counts           Counts
    -----
DHCP Server Address    10.6.128.10    10.10.0.42    192.168.200.10
Discovers sent          0              0              0
Leases granted          0              0              0
Offers received         0              0              0
Requests sent           0              0              0
Acks received           0              0              0
```

Naks received	0	0	0
addresses declined	0	0	0
addresses released	0	0	0
Inform sent	0	0	0
unknown messages	0	0	0
bad messages	0	0	0

Meaning Table 123 on page 572 lists the **show dhcp server statistics** command output fields

Table 123: show dhcp server statistics Output Fields

Field Name	Field Description
DHCP Server Address	IP address of the server
Discovers sent	Number of discover messages sent by the server
leases granted	Number of leases granted by the server
Offers received	Number of offers sent by the server
Requests sent	Number of requests sent to the server
Acks received	Number of acknowledgments received from the server
Naks received	Number of negative acknowledgments received from the server
addresses declined	Number of IP addresses rejected because they were already in use
addresses released	Number of IP addresses released back to the server
Inform sent	Number of inform messages sent to the server
unknown messages	Number of illegal DHCP messages or messages that cannot be handled by the router
bad messages	Number of messages not recognized as DHCP messages

Related Topics ■ [show dhcp server statistics](#)

Monitoring DHCP Server and Proxy Client Information

Purpose Display DHCP server and proxy client information.

Action To display information about the DHCP server and proxy clients:

```
host1#show dhcp server
DHCP Proxy Client Status:
-----
0 A Address    Leases Offers Requests Acks Naks Declines Releases
- - - - -
```

```

E E 10.6.128.10      0      0      0      0      0      0      0
E E 10.6.128.11      0      0      0      0      0      0      0

```

Meaning Table 124 on page 573 lists the **show dhcp server** command output fields.

Table 124: show dhcp server Output Fields

Field Name	Field Description
O	Read-only value that displays the operational status of the server
A	Read/write value that displays the administrative status of the server
E	Enabled; indicates that the server is being actively used to supply IP addresses to clients
D	Draining; indicates that the server is not accepting any new requests for addresses, but is maintaining the addresses that it has already assigned
X	Disabled; means that the server is not accepting any new requests for addresses and has no outstanding addresses
Address	IP address of a DHCP server
Leases	Number of IP address leases granted by the server
Offers	Number of offers sent by the server
Requests	Number of requests sent to the server
Acks	Number of acknowledgments received from the server
Naks	Number of negative acknowledgments received from the server
Declines	Number of IP addresses rejected because they were already in use
Releases	Number of IP addresses released back to the server

Related Topics ■ show dhcp server

Monitoring DHCPv6 Local Server Binding Information

Purpose Display the mapping between one or more IPv6 addresses and the DHCP unique ID of the subscriber's computer.

Action To display the DHCP binding information for an IPv6 address:

```

host1#show ipv6 dhcpv6-local binding 2001:db8:4::/48
  Prefix      Client DUID      Lease      Intf
-----
2001:db8:4::/48 <LL 1/00A0DE113502> infinite FastEthernet 3/6.1

```

Meaning Table 125 on page 574 lists the **show ipv6 dhcpv6-local binding** command output fields.

Table 125: show ipv6 dhcpv6-local binding Output Fields

Field Name	Field Description
Prefix	IPv6 address
Client DUID	DHCP unique ID of subscriber's computer
Lease	Time for which the IPv6 address is available in seconds, or infinite
Intf	Router's interface that is associated with the subscriber's computer

Related Topics ■ [show ipv6 dhcpv6-local binding](#)

Monitoring DHCPv6 Local Server DNS Search Lists

Purpose Display the DHCPv6 local servers DNS search list.

Action To display the DNS search list for DHCPv6 local servers:

```
host1#show ipv6 dhcpv6-local dns-domain-searchlist
Domain 1: xyzcorporation.net
Domain 2: xyzcorp.com
Domain 3: financeDomain.com
Domain 4: researchDomain.com
```

Meaning Table 126 on page 574 lists the **show ipv6 dhcpv6-local dns-domain-searchlist** command output fields.

Table 126: show ipv6 dhcpv6-local dns-domain-searchlist Output Fields

Field Name	Field Description
Domain	Domains in the search list

Related Topics ■ `show ipv6 dhcpv6-local dns-domain-searchlist`

Monitoring DHCPv6 Local Server DNS Servers

Purpose Display a list of DNS servers configured on the DHCPv6 local server.

Action To display the list of DNS servers:

```
host1#show ipv6 dhcpv6-local dns-servers
DNS server 1: 2001:db8:18::
DNS server 2: 2001:db8:19::
DNS server 3: 2001:db8:20::
DNS server 4: 2001:db8:21::
```

Meaning Table 127 on page 575 lists the `show ipv6 dhcpv6-local dns-servers` command output fields.

Table 127: show ipv6 dhcpv6-local dns-servers Output Fields

Field Name	Field Description
DNS server	IPv6 address of the DNS server

Related Topics ■ `show ipv6 dhcpv6-local dns-servers`

Monitoring DHCPv6 Local Server Prefix Lifetime

Purpose Display the DHCPv6 default prefix lifetime.

Action To display the DHCPv6 default prefix lifetime:

```
host1#show ipv6 dhcpv6-local prefix-lifetime
default prefix lifetime is 1 day, 12 hours, 30 minutes
```

Meaning Table 128 on page 575 lists the `show ipv6 dhcpv6-local prefix-lifetime` command output fields.

Table 128: show ipv6 dhcpv6-local prefix-lifetime Output Fields

Field Name	Field Description
default prefix lifetime	Number of days, hours, and minutes

Related Topics ■ `show ipv6 dhcpv6-local prefix-lifetime`

Monitoring DHCPv6 Local Server Statistics

Purpose Display statistics for the DHCPv6 local server.

Action To display DHCPv6 local server statistics:

```
host1#show ipv6 dhcpv6-local statistics
DHCPv6 Local Server Statist
-----
      Item              Count
-----
memUsage                136
bindings                1
solicit rx              1
request(accept) rx      1
request(renew) rx       0
decline rx              0
release rx              0
inform rx               0
confirm rx              0
rebind rx               0
reconfigure tx          0
advertise tx            1
successful reply tx     1
failed reply tx         0
unknown msgs            0
bad msgs                0
```

Meaning Table 129 on page 576 lists the `show ipv6 dhcpv6-local statistics` command output fields.

Table 129: show ipv6 dhcpv6-local statistics Output Fields

Field Name	Field Description
memUsage	Number of bytes of memory used by DHCPv6 local server
bindings	Number of leased IPv6 prefixes currently assigned
solicit rx	Number of DHCPv6 solicit messages received
request(accept) rx	Number of DHCPv6 request messages received
request(renew) rx	Number of DHCPv6 requests for renewal received
decline rx	Number of DHCPv6 decline messages received
release rx	Number of DHCPv6 release messages received
inform rx	Number of DHCPv6 information-request messages received
confirm rx	Number of DHCPv6 confirm messages received

Table 129: show ipv6 dhcpv6-local statistics Output Fields (continued)

Field Name	Field Description
rebind rx	Number of DHCPv6 rebind messages received
reconfigure tx	Number of DHCPv6 reconfigure messages transmitted
advertise tx	Number of DHCPv6 advertise messages transmitted
successful reply tx	Number of reply messages transmitted with success reply code
failed reply tx	Number of reply messages transmitted with reply codes other than success
unknown msgs	Unused field; always 0
bad msgs	Number of messages with errors received by the DHCPv6 local server

Related Topics ■ show ipv6 dhcpv6-local statistics

Monitoring Duplicate MAC Addresses Use By DHCP Local Server Clients

Purpose Display duplicate MAC addresses that are being used by DHCP local server clients. Optionally, display information for a specific duplicate MAC address.

Action To display information about a specific MAC address being used by multiple clients:

```
host1# show ip dhcp-local duplicate-clients 00-0D-61-7F-67-70
MAC 00-0D-61-7F-67-70
      Interface      Count      Time
      ATM 3/0.1      100        Sat Sept 17, 2005 06:00:51 UTC
      ATM 3/0.2       90         Sun Sept 18, 2005 09:00:00 UTC
```

Meaning Table 130 on page 577 lists the **show ip dhcp-local duplicate-clients** command output fields.

Table 130: show ip dhcp-local duplicate-clients Output Fields

Field Name	Field Description
MAC	Duplicate MAC address
Interface	Interfaces used by the duplicate MAC address
Count	Number of times the duplicate MAC address has been detected
Time	Date and time the first duplication was detected

Related Topics ■ `show ip dhcp-local duplicate-clients`

Monitoring the Maximum Number of Available Leases

Purpose Display the maximum number of leases available for each VPI/VCI, VLAN, Ethernet subnetwork, or POS access interface type, or for a specific interface or subinterface.

Action To display the maximum number of leases available for each interface type:

```
host1(config)#show ip dhcp-local limits
*****
DHCP Local Server Address Limits
ATM Limit      - 48000
VLAN Limit     - 48000
POS Limit      - 1000
Ethernet Limit - 48000
```

To display information about the maximum number of leases for a specific interface:

```
host1(config)#show ip dhcp-local limits interface atm 3/1
Dhcp Local Interface Limits
-----
```

Interface	Limit	Count	Denied	Total Denied
-----	-----	-----	-----	-----
atm 3/1	300	127	5	29

To display information about the maximum number of leases on all interfaces:

```
host1(config)#show ip dhcp-local limits interface
Dhcp Local Interface Limits
-----
```

Interface	Limit	Count	Denied	Total Denied
-----	-----	-----	-----	-----
fastEthernet0/0	200	0	0	0
atm 3/1	300	127	5	29
atm 4/2	5000	0	0	0
atm 5/1	5000	15	2	5
pos 2/1	1000	0	0	0

Meaning Table 131 on page 578 lists the `show ip dhcp-local limits` command output fields.

Table 131: show ip dhcp-local limits Output Fields

Field Name	Field Description
ATM Limit	Number of leases available for each VPI/VCI
VLAN Limit	Number of leases available for each VLAN
POS Limit	Number of leases available for each POS access interface

Table 131: show ip dhcp-local limits Output Fields (continued)

Field Name	Field Description
Ethernet Limit	Number of leases available for each Ethernet subnet
Limit	Number of leases available to the specified interface or subinterface; indicates the configured value for the interface type unless a specific lease value is configured for the particular interface
Count	Number of active leases on the interface
Denied	Number of lease requests denied during the current denial period; this number is reset to zero (and the denial period restarted) when the number of active leases no longer exceeds the configured limit
Total Denied	Total number of lease requests denied on the interface since the interface became active

Related Topics ■ show ip dhcp-local limits

Monitoring Static IP Address and MAC Address Pairs Supplied by DHCP Local Server

Purpose Display the static IP address/MAC address pairs that the DHCP local server supplies in standalone mode.

Action To display information about static IP address/MAC address pairs:

```
host1#show ip dhcp-local reserved
Dhcp Reserved Addresses
-----
Pool      Address      Hardware
-----
cablemodem 10.44.44.100 12-34-12-34-12-34-00-00-00-00-00-00-00-00-00-00-00-00
cablemodem 10.44.44.101 22-33-22-33-22-33-00-00-00-00-00-00-00-00-00-00-00-00
```

Meaning Table 132 on page 579 lists the **show ip dhcp-local reserved** command output fields.

Table 132: show ip dhcp-local reserved Output Fields

Field Name	Field Description
Pool	Name of pool in which the address is reserved
Address	IP address that is reserved

Table 132: show ip dhcp-local reserved Output Fields (*continued*)

Field Name	Field Description
Hardware	Address for which the IP address is reserved

Related Topics ■ show ip dhcp-local reserved

Monitoring Status of DHCP Applications

Purpose Display which DHCP applications are configured whether they are active or inactive—displays the status of DHCP relay, DHCP relay proxy, DHCP local server, and DHCP external server.

Action To display the status of the configured DHCP applications:

```
host1#show dhcp summary
DHCP local-server configured and inactive
DHCP relay configured and active
```

Meaning Table 133 on page 580 lists the **show dhcp summary** command output fields.

Table 133: show dhcp summary Output Fields

Field Name	Field Description
configured	Applications that are currently configured
active or inactive	Current status of the application

Related Topics ■ show dhcp summary

Part 5

Managing the Subscriber Environment

- Configuring Subscriber Management on page 583
- Monitoring Subscriber Management on page 599
- Configuring Subscriber Interfaces on page 603
- Monitoring Subscriber Interfaces on page 635

Chapter 23

Configuring Subscriber Management

This chapter describes how to set up subscriber management on the E Series router. Subscriber management integrates a variety of router features and enables you to manage your constantly changing subscriber environment without affecting the performance you provide to your customers.

The following sections discuss subscriber management:

- Subscriber Management Overview on page 583
- Subscriber Management Platform Considerations on page 584
- Subscriber Management Attributes on page 584
- Subscriber Management Procedure on page 585
- Subscriber Management Commands on page 587
- Subscriber Management Configuration Examples on page 595

Subscriber Management Overview

The E Series router enables customers to create a unified subscriber management, provisioning, and service delivery environment. The flexibility of the router provides a variety of methods and configurations that enable customers to dynamically provision new subscribers and quickly create new value-added services.

Two major aspects of subscriber management are subscriber provisioning and differentiated service delivery. The E Series router enables you to use both static and dynamic methods to add and delete subscribers. Important subscriber management concepts provided by JUNOS subscriber management include:

- Subscriber use of a shared medium
- Multiple subscribers using the same primary interface
- User authentication and accounting
- Differentiated services for individual subscribers

A subscriber management environment can include the following components:

- Local Dynamic Host Configuration Protocol (DHCP) server
- External DHCP server

- RADIUS server
- Session and Resource Control (SRC) software

You employ the components you need in a variety of configurations, depending on your specific requirements.

Subscriber Management Platform Considerations

Subscriber management is supported on all E Series routers.

For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the E120 and E320 Broadband Services Routers.

Subscriber Management Attributes

E Series routers take advantage of many of the JUNOS features to enable you to create the subscriber management environment that best meets your requirements. These features include:

- Authentication—Uses RADIUS to determine whether a user can access a specific service or resource.
- Accounting—Uses RADIUS and policy management to track service usage that can be used for volume-based billing.
- Dynamic address assignment—Uses RADIUS, DHCP, and profiles to dynamically allocate IP addresses to subscribers.
- Dynamic policy management—Uses policy and quality of service (QoS) management to assign and monitor subscriber bandwidth restrictions.
- Security—Uses policy management, source address validation, and media access control (MAC) address validation to grant subscriber access and to enable the use of classification when monitoring subscriber traffic flows.
- Dynamic interfaces—Automatically creates an interface column based on a catalyst packet or event.
- Marking—Uses policy management marking to enable differential treatment of specific packets.
- Policy routing—Uses policy management routing policies to assign subscriber routes that are based on classification.

Dynamic IP Subscriber Interfaces

You can set up your subscriber management environment to create dynamic IP subscriber interfaces in two situations—when a DHCP event occurs or when a packet is detected.

In the first case, the interface is created when an external DHCP server or the DHCP local server responds to a subscriber request. In the second case, the subscriber interface is created when the router receives a packet (the packet detect feature) with a source IP address that is not in the demultiplexer table. In this second case the primary IP interface must be in autoconfiguration mode.

Subscriber management uses the following process when validating the IP source address of the packet:

- If the address is not valid, no subscriber interface is created. A discard entry is added to the demultiplexer table, and an error message is generated.
- If the address is valid with respect to the address ranges configured on the primary IP interface, subscriber management uses packet information to select the appropriate dynamic subscriber interface profile. The commands corresponding to the profile are then used to create the subscriber interface.


Subscriber Management Procedure

Figure 15 on page 585 shows a subscriber management environment that includes an external DHCP server, a RADIUS server, the SRC software, and the DHCP external server application running on the E Series router.

The E Series router DHCP external server application is used with other JUNOS features to provide subscriber management. Using the router's DHCP external server application for subscriber management enables you to take advantage of the following features:

- Profile assignment—A dynamic subscriber interface profile is associated with a specific source address by the router's packet detect feature.
- Dynamic subscriber interface packet detection and inactivity timer—Subscriber interfaces are dynamically created based on packet information that is identified by the packet detection feature. The inactivity timer determines when a dynamic subscriber interface expires and needs to be deleted.
- DHCP external server application—DHCP packets are examined to determine the state of subscribers.

Figure 15: DHCP External Server

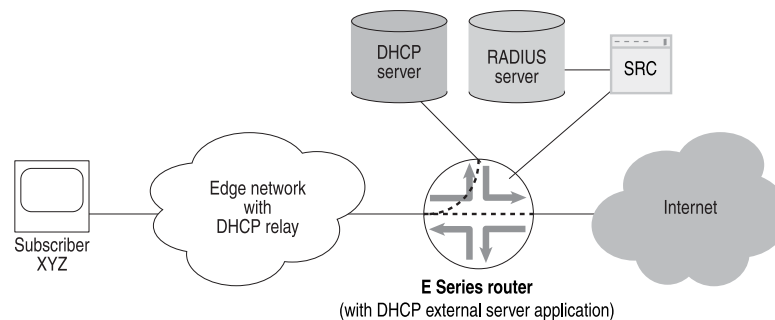

9013393

In Figure 15 on page 585, the subscriber requests an address from the DHCP server. The E Series router DHCP external server application monitors all DHCP communications between the subscriber and the DHCP server. After the subscriber receives an IP address, the subscriber can access the Internet and use the value-added services provided by the SRC software. The following list describes the various procedures performed in the subscriber management environment:

- Subscriber PC—Requests an IP address from the DHCP server
- E Series router
 - Monitors DHCP traffic between the subscriber and the DHCP server:
 - Identifies the subscriber's IP address, MAC address, giaddr, and client identifier
 - Extracts the lease time, creates a shadow lease, and starts its own lease timer that is associated with the subscriber
 - Determines the subscriber is active when the subscriber sends a packet after receiving an IP address from DHCP. The router then:
 - Processes the subscriber's IP address by using a route map
 - Extracts the dynamic subscriber interface profile (optional)

The router uses the profile to provide authentication, authorization, accounting, and address assignment. RADIUS uses the profile to obtain information for the subscriber's IP interface.
 - Creates the subscriber's dynamic subscriber interface (DSI)
 - If the SRC software is configured, the router also alerts the SRC software that the subscriber's DSI and address exist.
 - The DHCP external server application continues to monitor all traffic between the subscriber and the DHCP server, and periodically resets the shadow lease it originally created when the subscriber first requested an IP address. When the subscriber disconnects, the shadow lease eventually expires, at which time the E Series router performs the following:
 - Deletes the DSI
 - Alerts the SRC software that the DSI has been deleted
 - Alerts the SRC software that the subscriber's address has been deleted
- SRC software—Provides enhanced services to the subscriber.

Configuring Subscriber Management with an External DHCP Server

To configure subscriber management for clients by using an external DHCP server, as in Figure 15 on page 585, use the following procedure on E Series routers:

1. Enable the DHCP external server application.

```
host1(config)#service dhcp-external
```

- Specify each DHCP server for which to monitor traffic. You can specify a maximum of four DHCP servers.

```
host1(config)#ip dhcp-external server-address 10.10.10.1
```

- Configure a default policy for subscribers, using a previously configured classifier group.

```
host1(config)#ip policy-list filterAll
host1(config-policy-list)#classifier-group filterGroupA
host1(config-policy-list-classifier-group)#filter
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)#exit
```

- Configure a dynamic subscriber interface policy.

```
host1(config)#profile disableUser
host1(config-profile)#ip policy input filterAll
host1(config-profile)#ip policy output filterAll
host1(config-profile)#exit
```

- Configure a route map.

```
host1(config)#route-map routeMapWest21
host1(config-route-map)#set ip interface-profile disableUser
host1(config-route-map)#exit
```

- Enable autoconfiguration mode.

```
host1(config)#interface gigabitEthernet 12/0
host1(config-if)#ip address 192.168.1.1 255.255.255.0
host1(config-if)#ip auto-configure ip-subscriber include-primary
host1(config-if)#ip route-map ip-subscriber routeMapWest21
host1(config-if)#ip auto-detect ip-subscriber
host1(config-profile)#exit
```

Subscriber Management Commands

This section describes the commands that you use to configure subscriber management. For commands related to a specific component, see the appropriate documentation.

- DHCP—“DHCP Overview Information” on page 461
- Policies—*JUNOS Policy Management Configuration Guide*
- QoS—*JUNOS Quality of Service Configuration Guide*
- Route maps—*JUNOS IP Services Configuration Guide*
- SRC software—SRC software documentation set

clear ip demux

- Use to clear all dynamically created demultiplexer table entries associated with the route-map processing of the **set ip source-prefix** command.

- **deny**—Drop addresses that appear in the source address range
- **primary**—Associate the source prefix with the primary IP interface
- Example


```
host1(config-if)#clear ip demux
```
- There is no **no** version.
- See clear ip demux

domain

- Use to specify a domain for an IP service profile.
- The domain is included in a username that is dynamically created by JUNOS subscriber management.
- Specify a domain name with up to 32 ASCII characters.
- Example


```
host1(config-service-profile)#domain eastcoast
```
- Use the **no** version to remove the domain from the IP service profile.
- See domain

include circuit-identifier

- Use to include the circuit identifier in the username that is dynamically created by JUNOS subscriber management.
- Specify one of the following circuit types: atm or vlan.
- Use the optional **prepend-circuit-type** keyword to specify that the circuit type is prepended to the circuit identifier in the username.
- Example


```
host1(config-service-profile)#include circuit-identifier atm prepend-circuit-type
```
- Use the **no** version to disable inclusion of the circuit identifier in the username.
- See include circuit-identifier

include dhcp-option 82

- Use to include a suboption of the DHCP relay agent information option (option 82) in the username that is dynamically created by JUNOS subscriber management.
- Specify one of the following suboptions: **agent-circuit-id** or **agent-remote-id**.
- Example


```
host1(config-service-profile)#include dhcp-option 82 agent-circuit-id
```

- Use the **no** version to disable inclusion of the suboption in the username.
- See include dhcp-option 82

include hostname

- Use to include the router hostname in the username that is dynamically created by JUNOS subscriber management.
- Example


```
host1(config-service-profile)#include hostname
```
- Use the **no** version to disable inclusion of the router hostname in the username.
- See include hostname

include ip-address

- Use to include the IP address in the username that is dynamically created by JUNOS subscriber management.
- Example


```
host1(config-service-profile)#include ip-address
```
- Use the **no** version to disable inclusion of the IP address in the username.
- See include ip-address

include mac-address

- Use to include the MAC address identifier in the username that is dynamically created by JUNOS subscriber management.
- Example


```
host1(config-service-profile)#include mac-address
```
- Use the **no** version to disable inclusion of the MAC address in the username.
- See include mac-address

include virtual-router-name

- Use to include the virtual router name in the username that is dynamically created by JUNOS subscriber management.
- Example


```
host1(config-service-profile)#include virtual-router-name
```
- Use the **no** version to disable inclusion of the virtual router name in the username.
- See include virtual-router-name

ip auto-configure ip-subscriber

- Use to configure an IP interface to support creation of dynamic subscriber interfaces. The specified IP interface is considered the primary interface.
- The router creates the required dynamic subscriber interfaces when the IP address is assigned to the associated subscriber. The address might be assigned by an external DHCP server, the DHCP local server, or the packet detect feature.
- Use the **include-primary** keyword to specify that the primary interface can be assigned to a subscriber. Use the **exclude-primary** keyword to specify that the primary interface cannot be used for subscribers. The primary interface is not assigned to a subscriber by default.
- You can issue this command from Interface Configuration mode, Subinterface Configuration mode, or Profile Configuration mode.
- Example

```
host1(config-if)#ip auto-configure ip-subscriber include-primary
```

- Use the **no** version to disable creation of dynamic subscriber interfaces associated with this primary IP interface. Use the **no** version with the **include-primary** keyword to specify that the primary interface is not assigned to a subscriber. Use the **no** version with the **exclude-primary** keyword to specify that the primary interface is assigned to a subscriber.
- See ip auto-configure ip-subscriber

ip auto-detect ip-subscriber

- Use to set the router packet detect feature and specify that IP automatically detect packets that do not match any entries in the demultiplexer table. When an unmatched packet is detected, an event is generated that determines whether to create a dynamic subscriber interface or configure an existing interface.
- You can issue this command from Interface Configuration mode or Profile Configuration mode.
- Example

```
host1(config-if)#ip auto-detect ip-subscriber
```

- Use the **no** version to restore the default, in which packet detection is disabled.
- See ip auto-detect ip-subscriber

ip destination-prefix

- Use to specify a destination address for a subscriber interface or for a primary IP interface.
- Use the **deny** keyword to drop all packets that match the command.
- On the ERX1440 Broadband Services Router or the E320 router, you can configure up to 1024 subnets for static subscriber interfaces per primary IP interface when each subnet has a variable network mask that is less than /32. The number of subnets identifying a single route (/32) is still limited by the global maximum of 16,000 hosts per line module.
- Example

```
host1(config-if)#ip destination-prefix 10.0.0.0 255.0.0.0
```

- Use the **no** version to remove the association between the interface and the specified IP destination address and mask.
- See ip destination-prefix

ip inactivity-timer

- Use to configure the inactivity timer value for an IP interface.
- A dynamically created subscriber interface is deleted if it is inactive for a period longer than the inactivity timer value. IP polls the dynamic interface at the configured interval to determine whether the interface was active during the interval. Inactive interfaces are deleted only when the period of inactivity is equal to or greater than the configured value.

For example, if you configure an inactivity timer of 15 minutes, IP polls the interface every 15 minutes. If a poll determines that the interface was last active 14 minutes earlier, the inactive time is less than the configured value so nothing happens. IP polls again 15 minutes later. If the interface is still inactive then the total period of inactivity is now 29 minutes. This is greater than the configured value and the interface is deleted.

- On static interfaces, the subscriber's access route is removed when the inactivity timer is exceeded. When the subscriber logs back in, the timer is restarted.
- The timer value can in the range 0–65335 minutes. A timer value of 0 specifies that dynamically created subscriber interfaces are never deleted by the inactivity timer.
- Example

```
host1(config-if)#ip inactivity-timer 100
```

- Use the **no** version to restore the default, in which inactivity timer feature is disabled.
- See ip inactivity-timer

ip re-authenticate-auto-detect ip-subscriber

- Use to re-authenticate the auto-detected subscribers or Dynamic Subscriber Interfaces (DSIs) created on static and dynamic primary IP interfaces, using the DHCP options when the DHCP external application manages the DSIs following a cold boot. The **no** version negates the command or restores the defaults.
- You can issue this command from Interface Configuration mode or Profile Configuration mode.
- Example

```
host1(config-if)#ip re-authenticate-auto-detect ip-subscriber
```

- Use the **no** version negate the command or restore the defaults.

ip route-map ip-subscriber

- Use to configure an interface to perform route-map processing, and to specify the route map that is applied to the IP interface subscriber. If no route map is specified, then all packets trigger the creation of a dynamic subscriber interface.
- You can issue this command from Interface Configuration mode or Profile Configuration mode.
- Example

```
host1(config-if)#ip route-map ip-subscriber bostonRouteMap
```

- Use the **no** version to delete the route map.
- See ip route-map ip-subscriber

ip service-profile

- Use to specify a service profile name and to enter IP Service Profile Configuration mode. Service profiles contain user and password information, and are used in route maps for subscriber management and to authenticate subscribers with RADIUS.
- You can specify a service profile name with up to 32 ASCII characters.
- To use the subscriber management application to configure IP subscribers on dynamic bridged Ethernet interfaces to support RADIUS authentication, you can create an IP service profile and assign it to a dynamic bridged Ethernet interface profile. If your router is running stateful SRP switchover (high availability), using an IP service profile to configure subscriber authentication is preferable to using either the **subscriber** command or the **atm atm1483 subscriber** command because these commands can suspend stateful SRP switchover on the router or prevent it from becoming active.

For more information, see the *Authenticating Subscribers on Dynamic Bridged Ethernet over Static ATM Interfaces* section or the *Authenticating Subscribers on Dynamic Bridged Ethernet over Dynamic ATM Interfaces* section in *JUNOS Link Layer Configuration Guide*.

- Example

```
host1(config)#ip service-profile class1Service
host1(config-service-profile)#
```

- Use the **no** version to delete the service profile.
- See ip service-profile

ip source-prefix

- Use to specify a source address for a subscriber interface.
- Use the **deny** keyword to drop all packets that match the command.
- On the ERX1 440 router or the E320 router, you can configure up to 1024 subnets for static subscriber interfaces per primary IP interface when each subnet has a variable network mask that is less than /32. The number of subnets identifying a single route (/32) is still limited by the global maximum of 16,000 hosts per line module.

- Example

```
host1(config-if)#ip source-prefix 10.0.0.0 255.0.0.0
```

- Use the **no** version to remove the association between the interface and the specified IP source address and mask.
- See ip source-prefix

ip use-framed-routes ip-subscriber

- Use to configure a static primary IP interface to use framed routes as source IP addresses when creating dynamic subscriber interfaces. The router uses the Framed-Route RADIUS attribute [22] sent in Access-Accept messages to apply framed routes to subscriber interfaces associated with the primary interface.

- Example

```
host1(config-if)#ip use-framed-routes ip-subscriber
```

- Use the **no** version to disable the use of framed routes when creating dynamic subscriber interfaces associated with this primary IP interface.
- See ip use-framed-routes ip-subscriber

password

- Use to specify the password for an IP service profile. The password is used as the dynamically created password by JUNOS subscriber management.
- You can specify a password with up to 32 ASCII characters.
- Example

```
host1(config-service-profile)#password mypassword
```

- Use the **no** version to remove the password from the IP service profile.
- See password

set ip interface-profile

- Use to specify a dynamic subscriber interface profile that is used in the route map.
- Example

```
host1(config)#route-map mapForEPort  
host1(config-route-map)#set ip interface-profile disableUser
```

- Use the **no** version to delete the interface profile from the route map.
- See set ip interface-profile

set ip service-profile

- Use to specify the name of a subscriber's service profile that is used in the route map.
- You can specify a service profile name with up to 32 ASCII characters.
- Example


```
host1(config-route-map)#set ip service-profile yourServiceProfile
```
- Use the **no** version to remove the service profile from the route map.
- See set ip service-profile

set ip source-prefix

- Use to specify a source address range to be inserted into a specific interface, and the action to take with the range.
 - **deny**—Drop addresses that appear in the source address range
 - **primary**—Associate the source prefix with the primary IP interface
- Example


```
host1(config-route-map)#set ip source-prefix 10.10.30.0 255.255.255.0 primary
```
- Use the **no** version to remove the source address range from the route map.
- See set ip source-prefix

user-name

- Use to specify the username for an IP service profile. The username is used as the dynamically created username by JUNOS subscriber management.
- You can specify a username with up to 32 ASCII characters.
- Example


```
host1(config-service-profile)#user-name westford211
```
- Use the **no** version to remove the user name from the IP service profile.
- See user-name

user-prefix

- Use to specify a user prefix for an IP service profile.
- This command appends the user prefix to the username that is dynamically created by JUNOS subscriber management.
- Example


```
host1(config-service-profile)#user-prefix xyz.atl
```
- Use the **no** version to remove the user prefix from the IP service profile.
- See user-prefix

vlan service-profile

- Use to assign an IP service profile to a VLAN subinterface. Service profiles contain user and password information, and are used in route maps for subscriber management and to authenticate subscribers with RADIUS.
- You can specify a service profile name with up to 32 ASCII characters.
- Example

```
host1(config-profile)#vlan service-profile vlanClass1Service
host1(config-profile)#
```

- Use the **no** version to remove the service profile from the VLAN subinterface.
- See vlan service-profile

Subscriber Management Configuration Examples

This section contains examples of creating dynamic usernames and shows the usernames that are generated. The examples all use the following IP policy, interface profile, and route map:

- An IP policy that restricts access.

```
host1(config)#ip policy-list restrictAccess
host1(config-policy-list)#classifier-group *
host1(config-policy-list-classifier-group)#filter
host1(config-policy-list-classifier-group)#exit
host1(config-policy-list)#exit
host1(config)#
```

- An interface profile that references the restrictAccess policy.

```
host1(config)#profile atlInterfaceProfile
host1(config-profile)#ip policy input restrictAccess
host1(config-profile)#ip policy output restrictAccess
host1(config-profile)#exit
host1(config)#
```

- A route map that references the interface profile and the atlServiceProfile service profile.

```
host1(config)#route-map atlRouteMap
host1(config-route-map)#set interface-profile atlInterfaceProfile
host1(config-route-map)#set ip service-profile atlServiceProfile
host1(config-route-map)#exit
host1(config)#
```

Each example shows the configuration of a service profile that enables RADIUS authentication.

Username with ATM Circuit Identifier and No Circuit Type

This example shows the steps to configure a service profile for a username that includes the ATM circuit identifier, but does not include the circuit type.

```

host1(config)#ip service-profile atlServiceProfile
host1(config-service-profile)#user-prefix xyzcorp.atl
host1(config-service-profile)#domain eastcoast
host1(config-service-profile)#include hostname
host1(config-service-profile)#include circuit-identifier atm
host1(config-service-profile)#exit
host1(config)#

```

The example generates the following username:

user prefix	circuit identifier	domain
xyzcorp.atl	2.3.32.100	@eastcoast

The circuit identifier indicates a user at slot 2, port 3, with a virtual path identifier (VPI) of 32 and a virtual channel identifier (VCP) of 100.

Username with VLAN Circuit Identifier and Circuit Type

This example shows the steps to configure a service profile for a username that includes a VLAN circuit identifier and the circuit type.

```

host1(config)#ip service-profile atlServiceProfile
host1(config-service-profile)#user-prefix xyzcorp.atl
host1(config-service-profile)#domain eastcoast
host1(config-service-profile)#include hostname
host1(config-service-profile)#include circuit-identifier vlan prepend-circuit-type
host1(config-service-profile)#exit

```

The example generates the following username:

user prefix	circuit type	circuit identifier	domain
xyzcorp.atl	vlan	1.0.0.45	@eastcoast

The circuit identifier indicates a user on slot 1, port 0, no stacked vlan, and a vlan ID of 45.

Username with MAC Address

This example shows the steps to configure a service profile that generates a username that includes a MAC address.



NOTE: Including a MAC address in a username works only for DHCP users. It does not work for IP subscribers that have statically configured IP addresses.

```

host1(config)#ip service-profile atlServiceProfile
host1(config-service-profile)#user-prefix xyzcorp.atl

```

```

host1(config-service-profile)#domain eastcoast
host1(config-service-profile)#include hostname
host1(config-service-profile)#include circuit-identifier vlan
host1(config-service-profile)#include mac-address
host1(config-service-profile)#include dhcp-option 82 agent-circuit-id
host1(config-service-profile)#exit
host1(config)#

```

The example generates the following username, which includes the MAC address:

user prefix	circuit identifier	mac-address	domain
┌──────────┐	┌──────────┐	┌──────────┐	┌──────────┐
xyzcorp.atl	1.0.0.45	1234.5678.9012	@eastcoast

Chapter 24

Monitoring Subscriber Management

This chapter describes how to monitor subscriber management on the E Series router.

The following sections describe commands you can use to display status information and statistics for the subscriber management environment:

- Monitoring IP Service Profiles on page 599
- Monitoring Active IP Subscribers Created by Subscriber Management on page 600

Monitoring IP Service Profiles

Purpose Display information for all IP service profiles or for a specific profile.

Action To display information about IP service profiles:

```
host1#show ip service-profile
ip service-profile west500
  user-name: finance22
  user-prefix: xyz.bos
  domain: xyzcorp.net
  include virtual-router-name
  include mac-address
  include circuit-identifier atm prepend-circuit-type
  password: 4398aa
ip service-profile atlSerPro9
  user-name: salesCorp
  domain: xyzcorp.net
  include virtual-router-name
  include circuit-identifier vlan
  password: u473qv
```

Meaning Table 134 on page 599 lists the **show ip service-profile** command output field.

Table 134: show ip service-profile Output Fields

Field Name	Field Description
ip service-profile	Name of profile
user-name	Username used to retrieve information from RADIUS for subscriber interfaces

Table 134: show ip service-profile Output Fields (continued)

Field Name	Field Description
user-prefix	User prefix used to retrieve information from RADIUS for subscriber interfaces
domain	Domain used to retrieve information from RADIUS for subscriber interfaces
include ip-address	IP address is included in the service profile
include virtual-router-name	Virtual router is included in the service profile
include mac-address	MAC address is included in the service profile
include circuit-identifier	Circuit identifier that is included in the service profile; atm or vlan, and whether the circuit type is prepended
include hostname	Router hostname is included in the service profile
include dhcp-option 82	Suboptions of DHCP option 82 are included in the service profile: agent-circuit-id or agent-remote-id
password	Password used to retrieve information from RADIUS for subscriber interfaces

Related Topics ■ show ip service-profile

Monitoring Active IP Subscribers Created by Subscriber Management

Purpose Display information about active IP subscribers that were created by the JUNOS software's subscriber management feature.

Action To display information about subscribers created by subscriber management:

```
host1# show ip-subscriber 2835349506
```

Id	User Name	Ip Address	Virtual Router	Interface
2835349506	user1@isp1.com	192.168.0.1	default	ip192.168.0.1
Id	Login time			
2835349506	WED AUG 23 20:46:24 2006			

```
host1# show ip-subscriber detail
```

Subscriber List				
Id	User Name	Ip Address	Virtual Router	Interface
2835349506	user1@isp1.com	192.168.0.1	default	ip192.168.0.1


```

      Id                Login Time                Mac Address                Profile
      -----
2835349506  WED AUG 23 20:46:24 2006  3000.0001.9365  13631489
      Id                Interface  Service  Option 82
      -----
2835349506  myProfile  profile22  FastEthernet 3/1

```

Meaning Table 135 on page 601 lists the **show ip-subscriber** command output field.

Table 135: show ip-subscriber Output Fields

Field Name	Field Description
Id	ID of the subscriber
User Name	Username used to retrieve information from RADIUS for the subscriber interface
Ip Address	IP address of the subscriber interface
Virtual Router	Name of the virtual router on which the subscriber interface is configured
Interface	Name of subscriber interface; ip indicates that subscriber manager created this interface
Login Time	Day, date, and time that the subscriber logged in
Mac Address	MAC address of the subscriber
Profile Handle	AAA profile handle
Interface Profile	Interface profile name used to configure the subscriber interface
Service Profile	IP service profile name used by subscriber management to authorize and configure the subscriber interface with AAA
Option 82	DHCP relay agent information (option 82) circuit identifier that describes the physical interface location associated with the subscriber

Related Topics ■ show ip-subscriber

Chapter 25

Configuring Subscriber Interfaces

This chapter describes how to configure static and dynamic subscriber interfaces for remote access to the E Series router. This chapter contains the following sections:

- Subscriber Interfaces Overview on page 603
- Subscriber Interfaces Platform Considerations on page 609
- Subscriber Interfaces References on page 610
- Dynamic Creation of Subscriber Interfaces on page 610
- Configuring Static Subscriber Interfaces on page 615
- Configuring Dynamic Subscriber Interfaces on page 622

Subscriber Interfaces Overview

You can configure E Series routers to create subscriber interfaces statically or dynamically.

The following list shows the underlying (layer 2) interfaces on which you can currently configure each type of subscriber interface.

- Static subscriber interfaces
 - Bridged Ethernet over ATM (with and without VLANs)
 - Fast Ethernet (with and without VLANs)
 - Gigabit Ethernet (with and without VLANs)
 - 10-Gigabit Ethernet (with and without VLANs)
 - IP over ATM
 - POS
 - Generic Routing Encapsulation (GRE) tunnels
- Dynamic subscriber interfaces
 - Bridged Ethernet over ATM (with and without VLANs)
 - Fast Ethernet (with and without VLANs)
 - Gigabit Ethernet (with and without VLANs)

- 10-Gigabit Ethernet (with and without VLANs)
- GRE tunnels


For information about platform support for subscriber interfaces, see “Subscriber Interfaces Platform Considerations” on page 609.

Dynamic Interfaces and Dynamic Subscriber Interfaces

Dynamic interfaces are created automatically and transparently in response to external events. For example, the router creates dynamic interfaces when a lower-layer link such as an ATM or VLAN receives data. The layers of a dynamic interface are created based on the packets received on the link and can be configured using profiles, RADIUS, or a combination of the two. Dynamic interfaces are used to terminate Broadband Residential Access Server (B-RAS) access such as: Point-to-Point Protocol over Ethernet (PPPoE), Point-to-Point Protocol over ATM (PPPoA), and Point-to-Point Protocol over Ethernet over ATM (PPPoEoA). A PPP session acts as logical separation between one subscriber session and the next. Multiple services using policies and QoS can be applied to the IP interface that is associated with the PPP session.

An example of a dynamic interface configuration is a PPPoE session running on top of a Gigabit Ethernet VLAN interface. Figure 16 on page 604 shows an example of the dynamic interface stack.

Figure 16: Example of a Dynamic Interface Stack

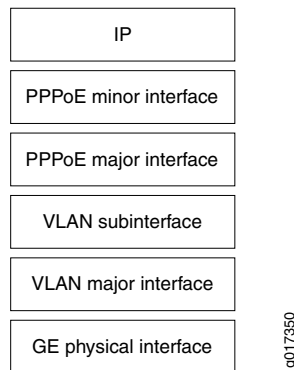


You can configure the lower layers of the stack (GE physical interface and VLAN major interface) either dynamically or statically, and dynamically configure the upper layers (VLAN subinterface, PPPoE, and IP). An interface is considered dynamic if at least one of the layers in the interface stack is configured dynamically.

The router creates dynamic subscriber interfaces (DSIs) on demand, in response to external events, such as when a Dynamic Host Configuration Protocol (DHCP) event occurs or when the router detects a packet. DSIs function in a manner similar to dynamic interfaces. However, DSIs have a more specific application than dynamic interfaces. You use DSIs when there are no PPPoE, PPPoA, or PPPoEoA sessions to provide separation between layers and when subscriber management is required.

For example, on an Ethernet VLAN, multiple subscribers can enter the network from a Wi-Fi hotspot, as shown in Figure 17 on page 605:

Figure 17: Example of a Dynamic Subscriber Interface

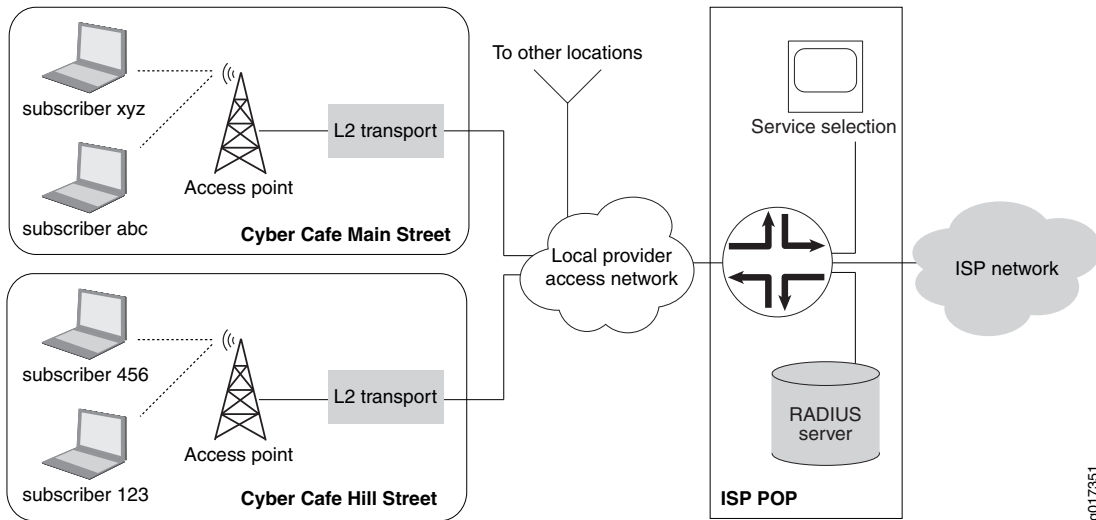

In Figure 17 on page 605, multiple subscribers share the same broadcast segment. Each subscriber is identified by an individual IP address or a group of subscribers can be identified with an IP network. When each subscriber is identified by an individual IP address, a dynamic subscriber interface is created for each subscriber. You can manage a group of subscribers identified with an IP network, on a single DSI. You can also manage a group of subscribers using a static subscriber interface (SSI). However, you must manually configure the SSI and you cannot use the same dynamic profiles and RADIUS that DSIs use.

Subscribers can be connected to a single broadcast segment without using dynamic or static subscriber interfaces. This configuration is useful when subscriber management is not required. Subscriber management usually refers to (but is not limited to) tailoring IP policies and QoS profiles to a specific address or a very small group of addresses. For detailed information about the uses for Dynamic Subscriber interfaces, see “Configuring Dynamic Subscriber Interfaces” on page 622.

Relationship to Shared IP Interfaces

A subscriber interface is an extension of a *shared IP interface*. A shared IP interface is one of a group of IP interfaces that use the same layer 2 interface.

Shared IP interfaces are unidirectional—they can transmit but not receive traffic. In contrast, subscriber interfaces are bidirectional—they can both receive and transmit traffic.

For details about shared IP interfaces, see the *Shared IP Interfaces* section in *JUNOS IP, IPv6, and IGP Configuration Guide*.


Relationship to Primary IP Interfaces

A subscriber interface operates only with a *primary IP interface*—a normal IP interface on a supported layer 2 interface, such as Ethernet. You create a primary interface by assigning an IP address to the Ethernet interface. Although you can configure a subscriber interface directly on an Ethernet interface, the subscriber interface does not operate until you assign an IP address to the Ethernet interface.

To configure a subscriber interface you must associate either a source address or a destination address with the interface. The router receives packets on a subscriber interface after demultiplexing the packet according to the specified source address or destination address. You can associate multiple source addresses or multiple destination addresses with a subscriber interface. However, a single primary interface and its associated subscriber interfaces can only demultiplex source addresses or destination addresses at any given time.

For example, Figure 18 on page 606 illustrates the relationship between subscriber interfaces, an associated primary IP interface, and an associated Ethernet interface.

Figure 18: Subscriber Interfaces over Ethernet

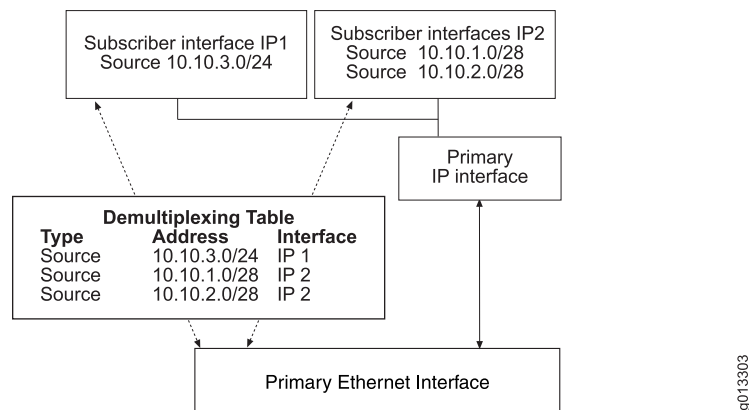

When the router receives traffic on a primary interface, the primary interface performs a lookup in its demultiplexing table. If the result of the lookup is a subscriber interface, the traffic is received on the associated subscriber interface.



NOTE: You can use the `set dhcp relay giaddr-selects-interface` command to specify that the primary interface is identified by information in the giaddr field of DHCP ACK messages. By default, the router identifies the primary interface based on the interface used by the DHCP-destined packets. See “Using the Giaddr to Identify the Primary Interface for Dynamic Subscriber Interfaces” on page 502 .

Ethernet Interfaces and VLANs

In the absence of VLANs, Ethernet does not have a demultiplexing layer. A subscriber interface adds a demultiplexing layer for an Ethernet interface that is configured

without VLANs. Using subscriber interfaces, the router can demultiplex or separate the traffic associated with different subscribers.

You can configure subscriber interfaces with VLANs. If you do so, the E Series router demultiplexes packets by using first the VLAN and then the subscriber interface.

Moving Interfaces

A shared IP interface that has associated subscriber demultiplexing attributes retains these attributes when it moves.

For details about moving shared IP interfaces, see the *Moving IP Interfaces* section in *JUNOS IP, IPv6, and IGP Configuration Guide*.

Preventing IP Spoofing

You can prevent IP spoofing on subscriber interfaces by using media access control (MAC) address validation.

For information about configuring MAC address validation, see the *MAC Address Validation* section in *JUNOS IP, IPv6, and IGP Configuration Guide*.

For information about the relationship between the MAC address validation state and dynamically created subscriber interfaces, see “Inheritance of MAC Address Validation State for Dynamic Subscriber Interfaces” on page 613.

Routing Protocols

You configure unicast routing protocols on subscriber interfaces in the same way that you configure routing protocols on primary IP interfaces, provided that you configure them to use unicast addressing when communicating with a peer. You can also enable multicast routing protocols such as IGMP on subscriber interfaces; however, we do not recommend this type of configuration.

Policies and QoS

You can configure policies, such as rate limiting and filtering, and quality of service (QoS) for subscriber interfaces in the same way that you do for primary IP interfaces. For more information, see the *JUNOS Policy Management Configuration Guide* and the *JUNOS Quality of Service Configuration Guide*.

Applications

In a cable modem network, service providers can use subscriber interfaces to:


- Direct traffic toward special local content in the network
- Differentiate traffic for virtual private networks (VPNs)

Directing Traffic Toward Special Local Content

Figure 19 on page 608 shows an example of a cable modem network. Multiple cable modem termination systems (CMTSs) connect to multiple shared media access LANs. Many subscribers connect to each LAN.

In this example, the service provider uses subscriber interfaces to direct traffic toward special local content on the network: a voice over Internet Protocol (VoIP) service on network 10.11.0.0/16, or a local gaming service on network 10.12.0.0/16. Rate limits and policies on the subscriber interface customize the service level for the associated service. In this application, the E Series router is the first-hop router for the subscribers, and the subscriber interfaces demultiplex traffic based on the destination address.

Figure 19: Subscriber Interfaces in a Cable Modem Network

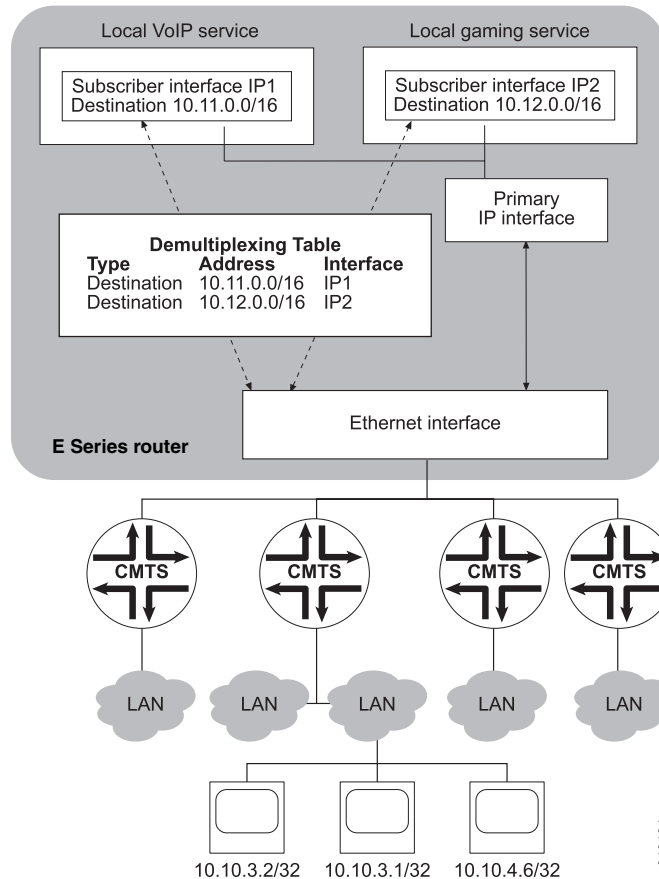


For instructions on configuring the application shown in Figure 19 on page 608, see “Using a Destination Address to Demultiplex Traffic” on page 616.

Differentiating Traffic for VPNs

Similarly, service providers can use subscriber interfaces to differentiate traffic for VPNs. Figure 20 on page 609 shows an example of this application.

Customers on subnet A need to connect to VPN A, and customers on subnet B need to connect to VPN B. The E Series router connects to VPN A through virtual router A and to VPN B through virtual router B. Using two subscriber interfaces on the same primary interface (one on virtual router B and one on virtual router A), the E Series router can separate the traffic from subnets A and B. Because the E Series router is forwarding traffic in this application, the shared IP interface should demultiplex the traffic by using a source address.

Figure 20: Associating Subnets with a VPN Using Subscriber Interfaces

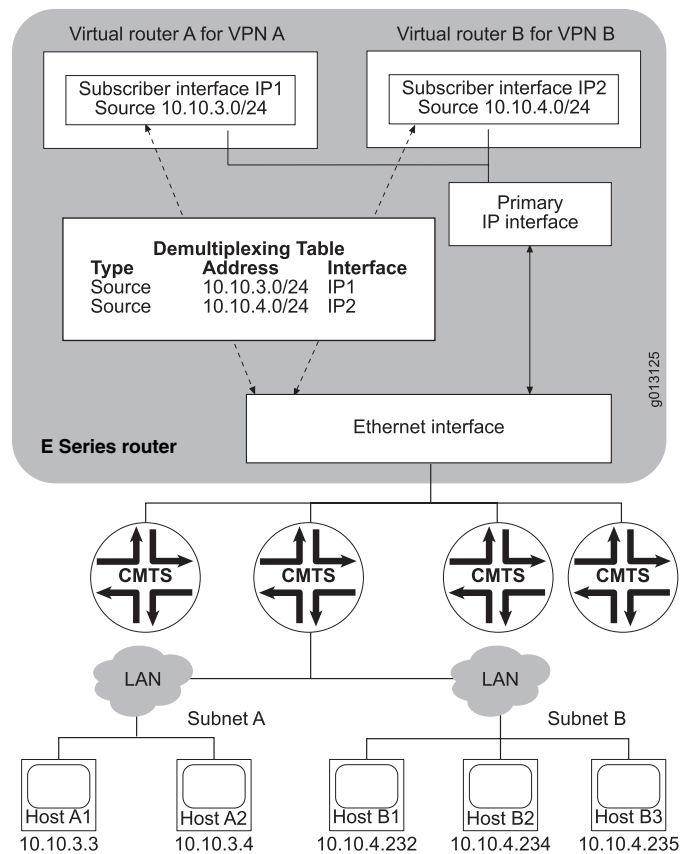

For instructions on configuring the application shown in Figure 20 on page 609, see “Using a Source Address to Demultiplex Traffic” on page 617.

Subscriber Interfaces Platform Considerations

For information about modules that support subscriber interfaces on the ERX7xx models, ERX14xx models, and the ERX510 Broadband Services Router:

- See *ERX Module Guide, Table 1, ERX Module Combinations* for detailed module specifications.
- See *ERX Module Guide, Appendix A, Module Protocol Support* for information about the modules that support subscriber interfaces.

For information about modules that support subscriber interfaces on the E120 and E320 Broadband Services Routers:

- See *E120 and E320 Module Guide, Table 1, Modules and IOAs* for detailed module specifications.
- See *E120 and E320 Module Guide, Appendix A, IOA Protocol Support* for information about the modules that support subscriber interfaces.

Interface Specifiers

The configuration task examples in this chapter use the *slot/port* format to specify an interface. However, the interface specifier format that you use depends on the router that you are using.

For ERX7xx models, ERX14xx models, and ERX310 routers, use the *slot/port* format. For example, the following command specifies a Gigabit Ethernet interface on slot 0, port 1 of an ERX7xx model, ERX14xx model, or ERX310 Broadband Services Router.

```
host1(config)#interface gigabitEthernet 0/1
```

For E120 and E320 Routers, use the *slot/adaptor/port* format, which includes an identifier for the bay in which the I/O adapter (IOA) resides. In the software, adaptor 0 identifies the right IOA bay (E120 router) and the upper IOA bay (E320 router); adaptor 1 identifies the left IOA bay (E120 router) and the lower IOA bay (E320 router). For example, the following command specifies a Gigabit Ethernet interface on slot 5, adaptor 0, port 0 of an E320 router.

```
host1(config)#interface gigabitEthernet 5/0/0
```

For more information about supported interface types and specifiers on E Series routers, see *Interface Types and Specifiers* in *JUNOS Command Reference Guide*.

Subscriber Interfaces References

For more information about the DHCP local server and DHCP external server, which are used in dynamic creation of subscriber interfaces, consult the following resources:

- “DHCP Overview Information” on page 461
- RFC 2131—Dynamic Host Configuration Protocol (March 1997)

Dynamic Creation of Subscriber Interfaces

As an alternative to creating static subscriber interfaces, you can configure E Series routers to create subscriber interfaces dynamically.

When you create a static subscriber interface, as described in “Configuring Static Subscriber Interfaces” on page 615, each layer in the interface stack is created through an existing configuration mechanism such as command-line interface (CLI) or Simple Network Management Protocol (SNMP).

By contrast, the router creates dynamic subscriber interfaces on demand, in response to an external event. Two types of external events can cause dynamic creation of subscriber interfaces: when a Dynamic Host Configuration Protocol (DHCP) event occurs or when the router detects a packet.

DHCP Servers

The DHCP event that triggers dynamic creation of subscriber interfaces occurs when either a local DHCP server or external DHCP server assigns an IP address to a subscriber that has issued a DHCP request. After the DHCP server assigns the IP address and the router creates the associated dynamic subscriber interface, the subscriber can access required network services.

DHCP Local Server and Address Allocation

You can configure the DHCP local server to operate in either equal-access mode or standalone mode.

In standalone mode, the DHCP local server provides a basic DHCP service. The server receives a client request for an IP address and immediately allocates the subscriber an IP address from one of the local address pools.

In equal-access mode, the DHCP local server works with Juniper Networks Session and Resource Control (SRC) software and the authorization, accounting, and address assignment utility to provide an advanced subscriber configuration and management service. After the subscriber is authenticated through RADIUS, the DHCP server assigns the subscriber an IP address with a long lease time. This assignment of an IP address triggers the creation of dynamic subscriber interfaces.

For more information about the DHCP servers and the SRC software, see the following chapters:

- “DHCP Overview Information” on page 461
- *SRC-PE Getting Started Guide, Chapter 1, SRC Product Overview*

DHCP External Server and Address Allocation

With DHCP external server, all communication between the subscriber and the DHCP server is monitored by the E Series router. The subscriber requests an address from the DHCP server through the E Series router. After the subscriber receives an IP address, the subscriber can access the Internet and use the value-added services provided by the E Series router and by the SRC software. The edge network must be using a DHCP relay function.

The services provided by integrating the E Series router’s DHCP external server application with SRC software are similar to those provided when the DHCP local

server is integrated with SRC software. For more information, see *SRC-PE Getting Started Guide, Chapter 1, SRC Product Overview*.

DHCP Relay Configuration

When you are configuring dynamic subscriber interface support, and you configure DHCP relay in the same virtual router as the dynamic subscriber interfaces, you must use the **set dhcp relay inhibit-access-route-creation** command to ensure that DHCP relay does not install access internal routes. Otherwise, DHCP relay will overwrite the access internal routes that are originally created for the subscriber interface.


Supported Configurations

E Series routers currently support dynamic creation of subscriber interfaces with DHCP servers in the following configurations:

- IP over Ethernet
- IP over VLAN over Ethernet
- IP over bridged Ethernet over ATM

For example, Figure 21 on page 612 shows the interface stacking in an IP over Ethernet dynamic subscriber interface configuration. The illustration indicates which layers in the stack are static and dynamic, and identifies the CLI commands typically used to create the configuration.

Figure 21: IP over Ethernet Dynamic Subscriber Interface Configuration

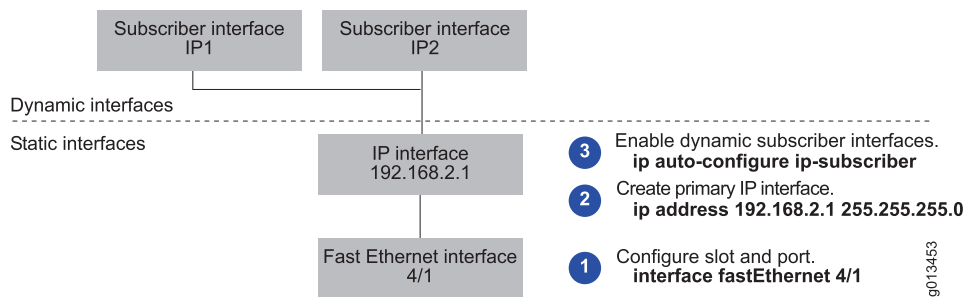

As shown in Figure 21 on page 612, issuing the **ip auto-configure ip-subscriber** command configures the primary IP interface to enable dynamic creation of subscriber interfaces. However, the router does not actually create the dynamic subscriber interface until the DHCP server assigns an IP address to the associated subscriber.

To configure each supported configuration, see “Configuring Dynamic Subscriber Interfaces” on page 622.

Packet Detection

For GRE tunnel interfaces, the event that triggers dynamic creation of subscriber interfaces occurs when the router receives a packet with a source IP address that is

not in the demultiplexer table. In this case, the primary IP interface must be in autoconfiguration mode.

Packet detection is the only method of dynamically creating subscriber interfaces on GRE tunnel interfaces; you cannot use DHCP local server or DHCP external server.

Issuing the **ip auto-configure ip-subscriber** command configures the primary IP address to enable dynamic configuration of subscriber interfaces. Unlike DHCP configurations, the router creates the dynamic subscriber interface when it receives the first packet that contains the subscriber's IP address as the source address.

In addition, a dynamic subscriber interface becomes inactive after a period of time in which the router receives no packets that contain the subscriber's IP address as the source address. You can configure the period of time by issuing the **ip inactivity-timer** command.

To configure dynamic creation of subscriber interfaces on GRE tunnel interfaces, see "Configuring Dynamic Subscriber Interfaces" on page 622.

Designating Traffic for the Primary IP Interface

When dynamic creation of subscriber interfaces is enabled on the primary IP interface (by means of the **ip auto-configure ip-subscriber** command), you can use the **ip source-prefix** command to specify the source address of traffic that is destined for the primary IP interface instead of the subscriber interface. If the DHCP server (for DHCP server configurations) or the router (for packet detection configurations) then assigns a subscriber an IP address matching this source prefix, the router does not create a dynamic subscriber interface for that address.

Using Framed Routes

You can use the **ip use-framed-routes ip-subscriber** command to enable a primary IP interface to use framed routes as source IP addresses when creating dynamic subscriber interfaces. The framed routes are applied to the dynamic subscriber interface during configuration so traffic from the subsets can traverse the interface. By applying framed routes in this fashion, you can extend the per-subscriber interface management to any subnetworks behind the dynamic subscriber interface. RADIUS includes the Framed-Route attribute [22] in Access-Accept messages to specify the route in the following format:

Framed-Route = *ipAddress/mask nextHop*

Inheritance of MAC Address Validation State for Dynamic Subscriber Interfaces

A dynamic IP subscriber interface inherits the MAC address validation state (enabled or disabled) configured for its parent static primary IP interface.

MAC address validation binds a MAC source address for an interface to a given IP source address. When the IP-MAC binding is established, the router forwards ingress packets on the interface when the packet's MAC source address and IP source address match, and drops ingress packets when the packet's MAC source address and IP source address do not match. MAC address validation thereby prevents spoofing on

IP-based Ethernet interfaces, and is very useful in subscriber management applications.

When MAC address validation is enabled on an interface, the router checks the entry in the MAC validation table that corresponds to the IP source address of an incoming packet. The MAC source address of the packet must match the MAC source address of the table entry for the router to forward the packet.

How MAC Address Validation State Inheritance Works

To enable MAC address validation for the static primary IP interface, you must use the existing **ip mac-validate** command with either the **strict** keyword or the **loose** keyword. The **strict** keyword prevents transmission of IP packets that do not reside in the MAC validation table. The **loose** keyword, which is the default setting, enables IP packets to pass through even when the packets do not have entries in the MAC validation table; only packets that have matching IP-MAC pair entries in the table are validated.

When a dynamic IP subscriber interface is created with the MAC address validation state inherited from the static primary IP interface, an entry for the MAC source address is installed in the MAC validation table when MAC address validation is enabled (either loose or strict) on the static primary IP interface. For each packet received on this interface, the router compares the packet's MAC source address to the value in the MAC validation table. If these values match, the router forwards the packet; otherwise, the packet is discarded.

In addition, creation of the dynamic IP subscriber interface adds a static MAC address validation entry in the router's Address Resolution Protocol (ARP) table. This occurs regardless of whether you configure MAC address validation on the static primary IP interface with the **ip mac-validate strict** command or the **ip mac-validate loose** command.

Configuration of MAC Address Validation State Inheritance

No special configuration is required to enable inheritance of the MAC address validation state on dynamic IP subscriber interfaces; this occurs automatically provided that MAC address validation is properly enabled on the parent static primary IP interface with the **ip mac-validate** command. If MAC address validation is disabled on the static primary IP interface, the dynamic subscriber interface inherits the disabled state for MAC address validation.

Keep the following guidelines in mind for using dynamic IP subscriber interfaces that inherit the MAC address validation state from their parent static primary IP interface:

- A dynamic subscriber interface inherits the MAC address validation state of its static primary IP interface only when the dynamic subscriber interface is created.
- You cannot change the MAC address validation state inherited by a dynamic subscriber interface from its static primary IP interface.
- Changing the MAC address validation state of a static primary IP interface does not affect the MAC address validation state of dynamic subscriber interfaces already created from this primary IP interface. Any dynamic subscriber interfaces

created from this primary IP interface after you change the MAC address validation state inherit the new MAC validation state.

- When you configure a dynamic subscriber interface with one or more framed routes (subnets), we recommend that you use the **ip mac-validate loose** command to configure MAC address validation for the static primary IP interface. Using the **loose** keyword, which is the default, prevents the router from discarding packets with an IP source address from a subnet.
- Because enabling MAC address validation on an IP interface creates a static MAC address validation entry in the router's ARP table, be sure to observe the system limit for the maximum number of dynamic ARP table entries supported per line module. See the Link Layer Maximums tables in *Appendix A, System Maximums*, of the *Release Notes* corresponding to your software release for information about the maximum number of dynamic ARP entries that the router supports. Currently, this limit is set to 32,768 dynamic ARP entries for all E Series modules that support Ethernet interfaces.

Verification of MAC Address Validation State Inheritance

To verify inheritance of the MAC address validation state on a dynamic subscriber interface, you can use the **show ip mac-validate interface** command and the **show arp** command.

The following sample output from the **show ip mac-validate interface** command displays the MAC address validation state (strict) inherited by the dynamic subscriber interface ip74.39.64.3 from its parent static primary IP interface.

```
host1#show ip mac-validate interface ip74.39.64.3
ip74.39.64.3: Strict
      Address      Hardware Addr
      74.39.64.3   0090.1a40.f4f6
```

Building on this example, the following sample output from the **show arp** command displays a static MAC address validation entry (74.39.64.3) in the ARP table for the dynamic subscriber interface when it is created with the MAC address validation state inherited from its parent static primary IP interface. The asterisk (*) indicates that the ARP entry was added as the result of issuing an **arp validate** command rather than an **arp** command.

```
host1#show arp
      Address      Age      Hardware Addr      Interface
      10.13.10.1   21600   0090.6939.751b     FastEthernet6/0
      74.39.64.3   -       0090.1a40.f4f6     ip74.39.64.3 *
      192.168.1.2   20700   0090.1a40.280d     FastEthernet8/2
```

Configuring Static Subscriber Interfaces


You can configure static subscriber interfaces on ATM, Fast Ethernet, Gigabit Ethernet, 10-Gigabit Ethernet, or POS layer 2 interfaces.

The examples in this section show how to configure static subscriber interfaces on a Fast Ethernet interface, but the steps for configuring static subscriber interfaces over other supported layer 2 interface types are similar.

Using a Destination Address to Demultiplex Traffic

The example in Figure 22 on page 616 shows how you can use static subscriber interfaces to direct traffic toward special local content on the network, based on the traffic's destination address. In this application, a local VoIP service is on network 10.11.0.0/16, and a local gaming service is on network 10.12.0.0/16.

Figure 22: Subscriber Interfaces Using a Destination Address to Demultiplex Traffic

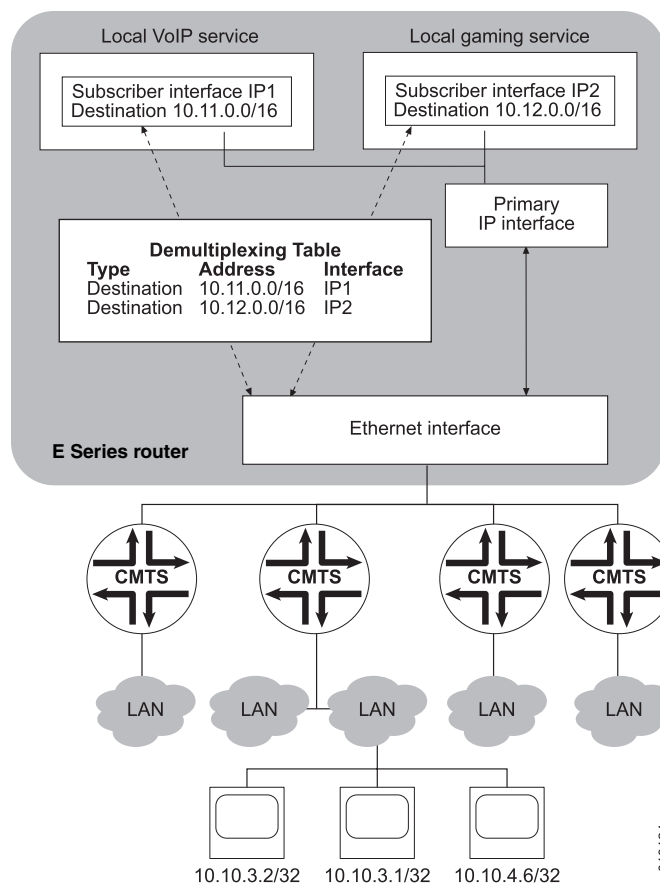

To configure the static subscriber interfaces shown in Figure 22 on page 616, perform the following steps:

1. Configure a primary IP interface on a supported layer 2 interface.
 - a. Create a layer 2 interface.


```
host1(config)#interface fastEthernet 3/1
```
 - b. Create a primary IP interface.


```
host1(config-if)#ip address 10.1.1.1 255.0.0.0
```


- c. Configure the primary interface to use a destination address to demultiplex traffic. (By default, a source address is used to demultiplex traffic.)

```
host1(config-if)#ip demux-type da-prefix
```

- d. Exit Interface Configuration mode.

```
host1(config-if)#exit
```

- 2. Configure subscriber interface IP1.

- a. Create the shared IP interface.

```
host1(config)#interface ip ip1
```

- b. Associate the shared IP interface with the layer 2 interface by using one of the following methods:

- Static

```
host1(config-if)#ip share-interface fastEthernet 3/1
```

- Dynamic

```
host1:vr-a:vrf-1(config-if)#ip share-nexthop 10.1.1.2
```

- c. To fully configure the shared interface, assign an address or make it unnumbered.

```
host1(config-if)#ip unnumbered loopback 0
```

- d. Specify the destination addresses for the subscriber interface to use to demultiplex traffic.

```
host1(config-if)#ip destination-prefix 10.11.0.0 255.255.0.0
```

- e. Exit Interface Configuration mode.

```
host1(config-if)#exit
```

- 3. Repeat Step 2 to configure subscriber interface IP2.

```
host1(config)#interface ip ip2
```


```
host1(config-if)#ip share-interface fastEthernet 3/1
```

```
host1(config-if)#ip unnumbered loopback 0
```

```
host1(config-if)#ip destination-prefix 10.12.0.0 255.255.0.0
```

Using a Source Address to Demultiplex Traffic

Figure 23 on page 618 shows how you can use static subscriber interfaces to differentiate traffic for VPN access, based on the traffic's source address.

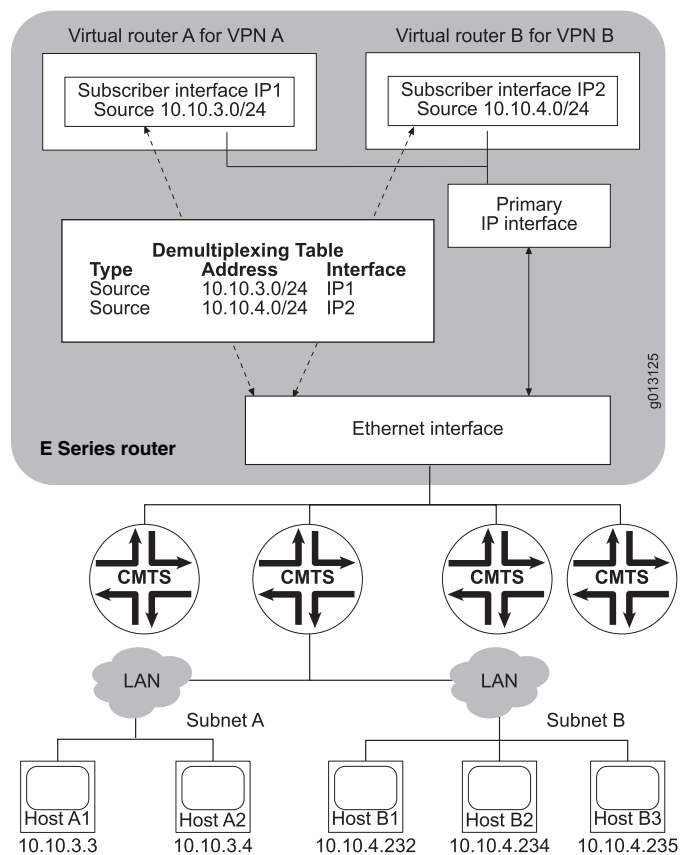Figure 23: Subscriber Interfaces Using a Source Address to Demultiplex Traffic

To configure the static subscriber interfaces shown in Figure 23 on page 618, perform the following steps:

1. Configure a primary IP interface on a supported layer 2 interface.
 - a. Create a layer 2 interface.


```
host1(config)#interface fastEthernet 4/1
```
 - b. Create a primary IP interface.


```
host1(config-if)#ip address 10.1.1.1 255.255.255.0
```
 - c. Exit Interface Configuration mode.


```
host1(config-if)#exit
```
2. Configure subscriber interface IP1.
 - a. Create the shared IP interface.


```
host1(config)#virtual-router vra  
Proceed with new virtual-router creation? [confirm] yes  
host1:vra(config)#interface ip ip1
```

- b. Associate the shared IP interface with the layer 2 interface by using one of the following methods:

- Static

```
host1:vra(config-if)#ip share-interface fastEthernet 4/1
```

- Dynamic

```
host1:vra(config-if)#ip share-nexthop 10.1.1.2
```

- c. To fully configure the shared interface, assign an address or make it unnumbered.

```
host1:vra(config-if)#ip unnumbered loopback 0
```

- d. Specify the source addresses for the subscriber interface to use to demultiplex traffic, then exit Interface Configuration mode.

```
host1:vra(config-if)#ip source-prefix 10.10.3.0 255.255.255.0
host1:vra(config-if)#exit
```

3. Create a static route that sends traffic for destination address 10.10.3.0 to subscriber interface IP1.

```
host1:vra(config)#ip route 10.10.3.0 255.255.255.0 ip ip1
```

4. Repeat Step 2 to configure subscriber interface IP2.

```
host1(config)#virtual-router vrb
Proceed with new virtual-router creation? [confirm] yes
host1:vr(config)#interface ip ip2
host1:vr(config-if)#ip share-interface fastEthernet 4/1
host1:vr(config-if)#ip unnumbered loopback 0
host1:vr(config-if)#ip source-prefix 10.10.4.0 255.255.255.0
host1:vr(config-if)#exit
```

5. Create a static route that sends traffic for destination address 10.10.4.0 to subscriber interface IP2.

```
host1:vr(config)#ip route 10.10.4.0 255.255.255.0 ip ip2
```

6. Specify that DHCP relay does not install host routes—this avoids a conflict that can causes undesirable ARP behavior.

```
host1(config)#set dhcp relay inhibit-access-route-creation
```

For details about the cause of this conflict and the use of the **set dhcp relay inhibit-access-route-creation** command to avoid the conflict, see “Configuring DHCP Relay” on page 495.

Interface ip

- Use to create an IP interface to share a layer 2 interface.
- Use the specified name to refer to the shared IP interface; you cannot use the layer 2 interface to refer to the shared IP interface, because the shared interface can be moved.
- Example


```
host1(config)#interface ip si0
```
- Use the **no** version to delete the IP interface.
- See interface ip

ip demux-type da-prefix

- Use to specify that the router use a destination address to demultiplex traffic for the subscriber interface.
- Example


```
host1(config-if)#ip demux-type da-prefix
```
- Use the **no** version to restore the default situation in which the router uses a source address to demultiplex traffic.
- See ip demux-type da-prefix

ip destination-prefix

- Use to specify a destination address for a subscriber interface or for a primary IP interface.
- On the ERX1440 Broadband Services Router or the E320 router, you can configure up to 1024 subnets for static subscriber interfaces per primary IP interface when each subnet has a variable network mask that is less than /32. The number of subnets identifying a single route (/32) is still limited by the global maximum of 16,000 hosts per line module.
- Example


```
host1(config-if)#ip destination-prefix 196.168.2.2 255.0.0.0
```
- Use the **no** version to remove the association between the interface and the specified IP destination address and mask.
- See ip destination-prefix

ip share-interface

- Use to specify the layer 2 interface for this IP interface to share. The command fails if the layer 2 interface does not yet exist.
- If you issue this command on a shared IP interface, you cannot issue the **ip share-nexthop** command for the interface.
- After creating the shared IP interface, you can configure it as you do any other IP interface.

- The shared interface is operationally up when the layer 2 interface is operationally up and IP is properly configured.
- You can create operational shared IP interfaces in the absence of a primary IP interface.
- Example

```
host1(config-if)#ip share-interface atm 5/3.101
```

- Use the **no** version to remove the association between the layer 2 interface and the shared IP interface. You can delete shared and primary IP interfaces independently.
- See ip share-interface

ip share-nexthop

- Use to specify that the shared IP interface dynamically tracks a next hop. If the next hop changes, the shared IP interface moves to the new layer 2 interface associated with the IP interface toward the new next hop.
- If you issue this command on a shared IP interface, you cannot issue the **ip share-interface** command for the interface.
- If you issue this command on a shared IP interface, the shared interface cannot dynamically track the next hop for the specified destination if the next-hop IP address is resolvable over MPLS.
- If you specify a virtual router, the command fails if the VR does not already exist. If you do not specify a VR, the current VR is assumed.
- After creating the shared IP interface, you can configure it as you do any other IP interface.
- The shared interface is operationally up when the layer 2 interface associated with the specified next hop is operationally up and IP is properly configured.
- Example

```
host1(config-if)#ip share-nexthop 192.168.10.16
```

- Use the **no** version to halt tracking of the next hop.
- See ip share-nexthop

ip source-prefix

- Use to specify a source address for a subscriber interface.
- On the ERX1 440 router or the E320 router, you can configure up to 1024 subnets for static subscriber interfaces per primary IP interface when each subnet has a variable network mask that is less than /32. The number of subnets identifying a single route (/32) is still limited by the global maximum of 16,000 hosts per line module.
- Example

```
host1(config-if)#ip source-prefix 192.168.0.0 255.0.0.0
```

- Use the **no** version to remove the association between the interface and the specified IP source address and mask.
- See `ip source-prefix`

Configuring Dynamic Subscriber Interfaces

You can configure dynamic subscriber interfaces in the following configurations:

- IP over Ethernet
- IP over VLAN over Ethernet
- IP over bridged Ethernet over ATM
- GRE tunnels


The following sections describe how to create each of these basic configurations. In addition, “Dynamic Subscriber Interface Configuration Example” on page 626, provides a detailed sample configuration.

Configuring Dynamic Subscriber Interfaces over Ethernet

To configure a dynamic subscriber interface in an IP over Ethernet configuration by using DHCP events, perform the following steps:

1. Configure the DHCP server.
For instructions, see “Configuring the DHCP Local Server” on page 477 .
2. Specify a Fast Ethernet, Gigabit Ethernet, or 10-Gigabit Ethernet port.
host1(config)#interface fastEthernet 4/1
3. Create the primary IP interface by assigning an IP address and mask to the Ethernet interface (or make it unnumbered).
host1(config-if)#ip address 192.168.2.1 255.255.255.0
4. Configure the primary IP interface to enable dynamic creation of subscriber interfaces.
host1(config-if)#ip auto-configure ip-subscriber
5. (Optional) Specify the source address of traffic that is destined for the primary IP interface.
host1(config-if)#ip source-prefix 192.168.2.1 255.255.255.0

Figure 24 on page 623 shows the interface stack built for this configuration.

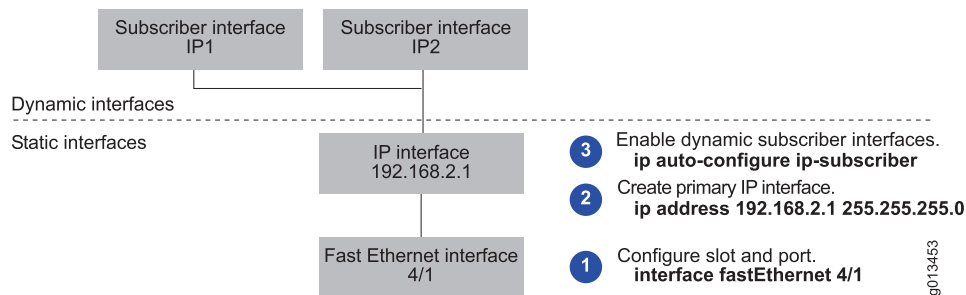Figure 24: IP over Ethernet Dynamic Subscriber Interface Configuration

Configuring Dynamic Subscriber Interfaces over VLANs

To configure a dynamic subscriber interface in an IP over VLAN over Ethernet configuration by using DHCP events, perform the following steps:

1. Configure the DHCP server.

For instructions, see “Configuring the DHCP Local Server” on page 477 .

2. Specify a Fast Ethernet, Gigabit Ethernet, or 10-Gigabit Ethernet port.

```
host1(config)#interface gigabitEthernet 1/0
```

3. Specify VLAN as the encapsulation method on the interface. This command creates the VLAN major interface.

```
host1(config-if)#encapsulation vlan
```

4. Create a VLAN subinterface by adding a subinterface number to the interface identification command.

```
host1(config-if)#interface gigabitEthernet 1/0.1
```

5. Assign a unique VLAN ID to the VLAN subinterface.

```
host1(config-if)#vlan id 101
```

6. Create the primary IP interface by assigning an IP address and mask to the VLAN subinterface (or make it unnumbered).

```
host1(config-if)#ip address 192.168.2.10 255.255.255.0
```


7. Configure the primary IP interface to enable dynamic creation of subscriber interfaces.

```
host1(config-if)#ip auto-configure ip-subscriber
```

8. (Optional) Specify the source address of traffic that is destined for the primary IP interface.

```
host1(config-if)#ip source-prefix 192.168.2.10 255.255.255.0
```

Figure 25 on page 624 shows the interface stack built for this configuration.

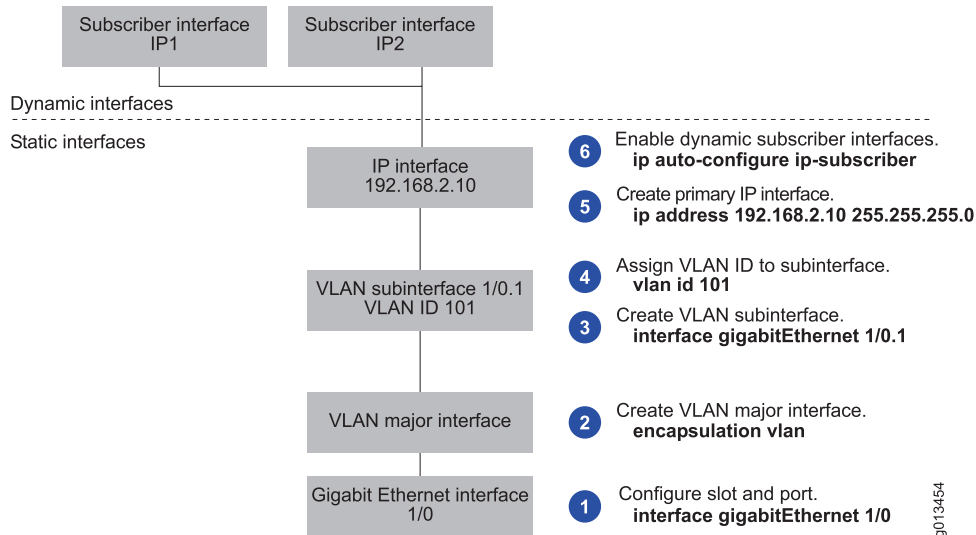Figure 25: IP over VLAN over Ethernet Dynamic Subscriber Interface Configuration

Configuring Dynamic Subscriber Interfaces over Bridged Ethernet

To configure a dynamic subscriber interface in an IP over bridged Ethernet over ATM configuration by using DHCP events, perform the following steps:

1. Configure DHCP server.

For instructions, see “Configuring the DHCP Local Server” on page 477 .

2. Create an ATM major interface.

```
host1(config)#interface atm 3/3
```

3. Create an ATM 1483 subinterface.

```
host1(config-if)#interface atm 3/3.1
```

4. Configure an associated PVC for the ATM 1483 subinterface by specifying the VCD, the VPI, the VCI, and the encapsulation type.

```
host1(config-subif)#atm pvc 10 100 22 aal5snap
```

5. Specify bridged Ethernet as the encapsulation method on the ATM 1483 subinterface.

```
host1(config-subif)#encapsulation bridge1483
```

6. Create the primary IP interface by assigning an IP address and mask to the bridged Ethernet interface (or make it unnumbered).

```
host1(config-subif)#ip address 192.168.2.20 255.255.255.0
```

7. Configure the primary IP interface to enable dynamic creation of subscriber interfaces.


```
host1(config-subif)#ip auto-configure ip-subscriber
```


8. (Optional) Specify the source address of traffic that is destined for the primary IP interface.

```
host1(config-subif)#ip source-prefix 192.168.2.20 255.255.255.0
```

Figure 26 on page 625 shows the interface stack built for this configuration.

Figure 26: IP over Bridged Ethernet over ATM Dynamic Subscriber Interface Configuration

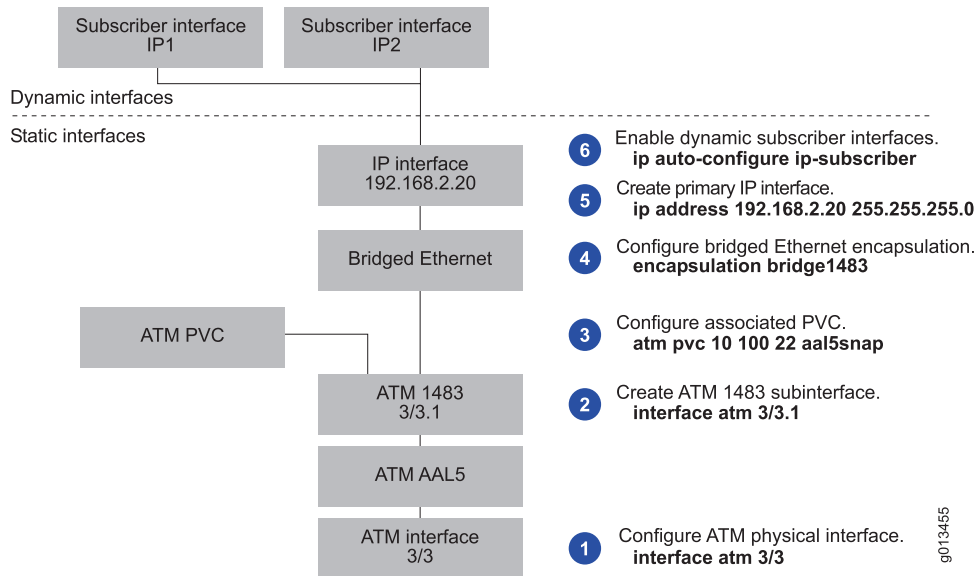

Configuring Dynamic Subscriber Interfaces over GRE Tunnels

To configure a dynamic subscriber interface in an GRE tunnel configuration by using packet detection, perform the following steps:

1. Create a GRE tunnel interface.

For instructions, see the *Configuration Tasks* section in *JUNOS IP Services Configuration Guide*.

2. Create the primary IP interface by assigning an IP address and mask to the bridged Ethernet interface (or make it unnumbered).

```
host1(config-subif)#ip address 192.168.2.20 255.255.255.0
```

3. Configure the packet detect feature and specify that IP automatically detect packets that do not match any entries in the demultiplexer table.

```
host1(config-if)#ip auto-detect ip-subscriber
```

4. Configure the primary IP interface to enable dynamic creation of subscriber interfaces.

```
host1(config-subif)#ip auto-configure ip-subscriber
```

5. (Optional) Specify the IP inactivity timer.


```
host1(config-subif)#ip inactivity-timer 100
```

6. (Optional) Specify the source address of traffic that is destined for the primary IP interface.

```
host1(config-subif)#ip source-prefix 192.168.2.1 255.255.255.0
```

Figure 27 on page 626 shows the interface stack built for this configuration.

Figure 27: GRE Tunnel Dynamic Subscriber Interface Configuration

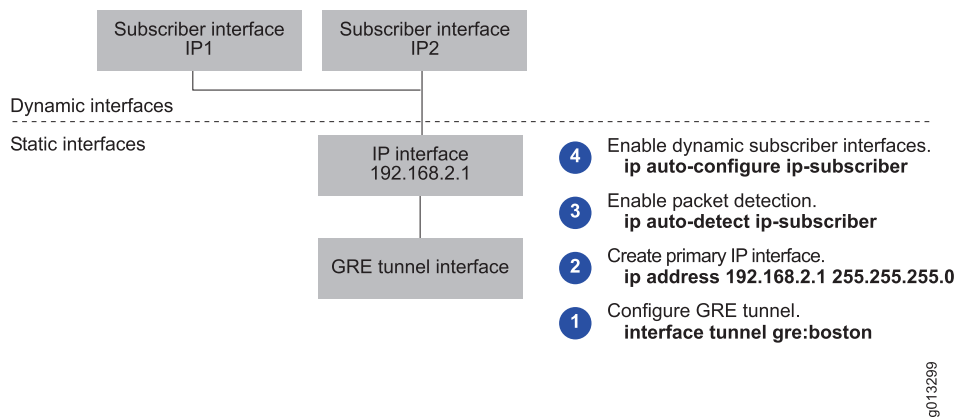

Dynamic Subscriber Interface Configuration Example

The procedure in this section shows how to configure dynamic subscriber interfaces by using the same loopback interface referenced by multiple unnumbered IP interfaces. Instead of assigning a different IP address to each physical interface, this example assigns an IP address to a loopback interface (loopback 0). Each physical interface is then configured as an unnumbered IP interface, referencing the same loopback interface. This example uses a DHCP local server.

This approach has the following benefits:

- A loopback interface provides a stable IP address that can minimize the impact if a physical interface in the network goes down.
- Unnumbered IP interfaces preserve valuable IP address space.

To configure dynamic subscriber interfaces, perform the following steps:

1. Enable the DHCP local server for standalone mode.

```
host1(config)#service dhcp-local standalone
```

2. Access DHCP Local Pool Configuration mode for the local address pool.

```
host1(config)#ip dhcp-local pool ispWestford
```

3. Specify the enduring IP addresses that the DHCP local server can assign from the local address pool.

```
host1(config-dhcp-local)#network 10.20.0.0 255.255.192.0
```

4. Specify the router to forward traffic from the IP addresses to destinations on other subnets.

```
host1(config-dhcp-local)#default-router 10.20.32.1
```

5. Exit DHCP Local Pool Configuration mode.

```
host1(config-dhcp-local)#exit
```

6. Configure a loopback interface.

```
host1(config)#interface loopback 0
```

7. Assign an IP address and mask to the loopback interface.

```
host1(config-if)#ip address 10.20.32.1 255.255.255.255
```

8. Exit Interface Configuration mode.

```
host1(config-if)#exit
```

9. Specify a Fast Ethernet port.

```
host1(config)#interface fastEthernet 3/0
```

10. Create an unnumbered primary IP interface associated with the loopback interface configured in Steps 6 and 7.

```
host1(config-if)#ip unnumbered loopback 0
```

11. Configure the primary IP interface to enable dynamic creation of subscriber interfaces.

```
host1(config-if)#ip auto-configure ip-subscriber
```

12. Exit Interface Configuration mode.

```
host1(config-if)#exit
```

13. Repeat Steps 9 through 12 for each Fast Ethernet interface on which you want to configure dynamic subscriber interfaces. For example:

```
host1(config)#interface fastEthernet 3/1
host1(config-if)#ip unnumbered loopback 0
host1(config-if)#ip auto-configure ip-subscriber
host1(config-if)#exit
host1(config)#interface fastEthernet 3/2
host1(config-if)#ip unnumbered loopback 0
host1(config-if)#ip auto-configure ip-subscriber
host1(config-if)#exit
```

atm pvc

- Use to configure a PVC on an ATM interface.
- Specify the VCD, the VPI, the VCI, and the encapsulation type. (For more information about these parameters, see the *Creating a Basic Configuration* section in *JUNOS Link Layer Configuration Guide* .)
- Example

```
host1(config-subif)#atm pvc 10 100 22 aal5snap
```

- Use the **no** version to remove the specified PVC.
- See atm pvc

default-router

- Use to specify the IP address of the router for the subscriber's computer to use for traffic destined for locations beyond the local subnet.
- Specify the IP address of a primary server, and optionally, specify the IP address of a secondary server.
- Example

```
host1(config-dhcp-local)#default-router 10.10.1.1
```

- Use the **no** version to remove the association between the address pool and the router.
- See default-router

encapsulation bridge1483

- Use to configure bridged Ethernet as the encapsulation method on an interface.
- Example

```
host1(config-subif)#encapsulation bridge1483
```

- Use the **no** version to remove bridged Ethernet as the encapsulation method on the interface.
- See encapsulation bridge1483

encapsulation vlan

- Use to configure VLAN as the encapsulation method on an interface.
- Issuing this command creates the VLAN major interface.
- Example

```
host1(config-if)#encapsulation vlan
```

- Use the **no** version to disable VLAN encapsulation on the interface.
- See encapsulation vlan

interface atm

- Use to configure an ATM interface or subinterface type in the *slot/port.subinterface* format:
 - *slot*—Specifies router chassis slot
 - *port*—Specifies I/O module port
 - *subinterface*—Specifies subinterface number
- Example


```
host1(config-if)#interface atm 9/1.1
```
- Use the **no** version to remove the ATM interface or subinterface.
- See interface atm

interface fastEthernet

- Use to select a Fast Ethernet (FE) interface on a line module or an SRP module.
- Example


```
host1(config)#interface fastEthernet 1/0
```
- Use the **no** version to remove IP from an interface or subinterface. You must issue the **no** version from the highest level down; you cannot remove an interface or a subinterface if the one above it still exists.
- See interface fastEthernet

interface gigabitEthernet

- Use to select a Gigabit Ethernet interface.



NOTE: You can configure only the primary port, 0, on the Gigabit Ethernet module. The router automatically uses the redundant port if the primary port fails.

- Example


```
host1(config)#interface gigabitEthernet 1/0
```
- Use the **no** version to remove IP from an interface. You must issue the **no** version from the highest level down; you cannot remove an interface or a subinterface if the one above it still exists.
- See interface gigabitEthernet

interface tenGigabitEthernet

- Use to select a 10-Gigabit Ethernet interface on the E120 router or the E320 router.
- Use the *slot/adaptor/port* format.

- Example

```
host1(config)#interface tenGigabitEthernet 4/0/1
```

- Use the **no** version to remove IP from an interface. You must issue the **no** version from the highest level down; you cannot remove an interface or subinterface if the one above it still exists.
- See interface tenGigabitEthernet

interface loopback

- Use to access and configure a loopback interface.
- You can use a loopback interface to provide a stable IP address that can minimize the impact if a physical interface goes down.
- You cannot shut down a loopback interface.



BEST PRACTICE: We recommend that you configure a 32-bit subnet mask for the loopback interface. For example, if you configure a loopback interface with the IP address and mask as 1.1.1.1/16, the 1.1.0.0/16 route entry is entered on the line module and all traffic destined to the 1.1.0.0/16 subnet is forwarded to the SRP module by the line module. Although the SRP module responds only to traffic destined to the 1.1.1.1 subnet and discards traffic to all other host IP addresses within that subnet (1.1.1.1/16), if no specific or longer route entry is found or if the SRP module receives too much traffic from subnets other than 1.1.1.1, the CPU utilization on the SRP module reaches the saturation level.

If you use a subnet mask other than a /32 mask for the IP address configured on the loopback interface, traffic from the entire subnet is routed to the loopback interface. Therefore, that subnet cannot be routed through any other interface on the router, unless a more specific route points to another interface.

- Example

```
host1(config)#interface loopback 10  
host1(config-if)#ip address 10.20.32.1 255.255.255.255
```

- Use the **no** version to delete the loopback interface.
- See interface loopback

ip address

- Use to set an IP address for an interface or a subinterface.
- Specify the layer 2 encapsulation before you set the IP address.
- Issuing this command creates the primary IP interface. You must create a primary IP interface on which to enable dynamic creation of subscriber interfaces.
- Example

```
host1(config-subif)#ip address 192.168.2.50 255.255.255.0
```

- Use the **no** version to remove the IP address or to disable IP processing.
- See ip address

ip auto-configure ip-subscriber

- Use to configure an IP interface to support creation of dynamic subscriber interfaces. The specified IP interface is considered the primary interface.
- The router creates the required dynamic subscriber interfaces when the IP address is assigned to the associated subscriber. The address might be assigned by an external DHCP server, the DHCP local server, or the packet detect feature.
- Use the **include-primary** keyword to specify that the primary interface can be assigned to a subscriber. Use the **exclude-primary** keyword to specify that the primary interface is not used for subscribers. The primary interface is not assigned to a subscriber by default.
- You can issue this command from Interface Configuration mode, Subinterface Configuration mode, or Profile Configuration mode.
- Example

```
host1(config-if)#ip auto-configure ip-subscriber include-primary
```

- Use the **no** version to disable creation of dynamic subscriber interfaces associated with this primary IP interface. Use the **no** version with the **include-primary** keyword to specify that the primary interface is not assigned to a subscriber.
- See ip auto-configure ip-subscriber

ip auto-detect ip-subscriber

- Use to set the router's packet detect feature and specify that IP automatically detect packets that do not match any entries in the demultiplexer table. When an unmatched packet is detected, an event is generated that determines whether to create a dynamic subscriber interface.
- Example

```
host1(config-if)#ip auto-detect ip-subscriber
```

- Use the **no** version to restore the default, in which packet detection is disabled.
- See ip auto-detect ip-subscriber

ip dhcp-local pool

- Use to access DHCP Local Pool Configuration mode.
- The DHCP local server uses pool names other than default to maintain configuration information for subscribers to a particular domain.
- Example

```
host1(config)#ip dhcp-local pool ispBoston
```

- Use the **no** version to prevent the DHCP local server from supplying IP addresses from the specified pool.
- See `ip dhcp-local pool`

ip inactivity-timer

- Use to configure the inactivity timer value. A dynamically created subscriber interface is deleted if it is inactive for a period longer than the inactivity timer value.
- The timer value can be in the range 1–65535 minutes.
- A timer value of 0 specifies that dynamically created subscriber interfaces are never deleted by the inactivity timer.
- Example

```
host1(config-if)#ip inactivity-timer 100
```

- Use the **no** version to restore the default, in which inactivity timer feature is disabled.
- See `ip inactivity-timer`

ip source-prefix

- Use to configure a subscriber interface or a primary IP interface enabled for dynamic creation of subscriber interfaces to demultiplex traffic with the specified source address.
- You can issue this command from either Interface Configuration mode or Subinterface Configuration mode.
- Example

```
host1(config-if)#ip source-prefix 10.10.2.0 255.255.255.0
```

- Use the **no** version to remove the association between the interface and the specified IP source address and mask.
- See `ip source-prefix`

ip unnumbered

- Use to configure an unnumbered IP interface.
- This command enables IP processing on an interface without assigning an explicit IP address to the interface.
- You must specify an interface location, which is the identifier of another interface on which the router has an assigned IP address. This interface cannot be another unnumbered interface.
- Examples

```
host1(config-if)#ip unnumbered fastEthernet 3/0  
host1(config-if)#ip unnumbered loopback 10
```


- Use the **no** version to disable IP processing on the interface.
- See ip unnumbered

ip use-framed-routes ip-subscriber

- Use to configure a static primary IP interface to use framed routes as source IP addresses when creating dynamic subscriber interfaces. The router uses the Framed-Route RADIUS attribute [22] sent in Access-Accept messages to apply framed routes to subscriber interfaces associated with the primary interface.

- Example

```
host1(config-if)#ip use-framed-routes ip-subscriber
```

- Use the **no** version to disable the use of framed routes when creating dynamic subscriber interfaces associated with this primary IP interface.
- See ip use-framed-routes ip-subscriber

network

- Use to specify the IP addresses that the DHCP local server can provide from an address pool.

- Example

```
host1(config-dhcp-local)#network 10.10.1.0 255.255.255.0
```

- Use the **no** version to remove the network address and mask.
- See network

service dhcp-local

- Use to enable the DHCP local server to operate in either equal-access mode or standalone mode.

- Example

```
host1(config)#service dhcp-local standalone
```

- Use the **no** version to disable the DHCP local server.
- See service dhcp-local

set dhcp relay giaddr-selects-interface

- Use to configure DHCP relay to use information in the giaddr in DHCP server-destined packets to identify the primary interface on which dynamic subscriber interfaces are built. See “Using the Giaddr to Identify the Primary Interface for Dynamic Subscriber Interfaces” on page 502 for additional information about this feature.

- Example

```
host1(config)#set dhcp relay giaddr-selects-interface
```

- Use the **no**version to restore the default in which DHCP relay builds dynamic subscriber interfaces on the IP interface that is used for DHCP server-destined messages.
- See set dhcp relay giaddr-selects-interface

vlan id

- Use to configure a VLAN ID for a VLAN subinterface.
- Specify a VLAN ID number that is in the range 0–4095 and is unique within the Ethernet interface.
- Issue the **vlan id** command before you configure any upper-layer interfaces, such as IP.
- Example

```
host1(config-if)#vlan id 400
```

- There is no **no** version.
- See vlan id

Chapter 26

Monitoring Subscriber Interfaces

This chapter describes how to monitor static and dynamic subscriber interfaces for remote access to the E Series router. This chapter contains the following sections:

- Monitoring Subscriber Interfaces Overview on page 635
- Monitoring Subscriber Interfaces on page 635
- Monitoring Active IP Subscribers Created by Subscriber Management on page 636

Monitoring Subscriber Interfaces Overview

- Purpose** The state of the subscriber interface is determined by state of the Ethernet interface and the existence of the primary IP interface, which you can monitor with the `show ip interface` command. For information about using the **show ip interface** command, see the *Monitoring IP* section in *JUNOS IP Services Configuration Guide*.
- Action** You can use the **show ip demux interface** command to monitor the configuration of subscriber interfaces.

Monitoring Subscriber Interfaces

- Purpose** Display information about subscriber interfaces.

- Action** To display subscriber interface information:

```
host1#show ip demux interface fastEthernet 2/0
Prefix/Length    SA/DA  Subscriber-Intf  VR/VRF    Description
10.12.2.2/32     SA     ip subsc1       3         subsc1@test
10.12.2.3/32     SA     ip subsc2       3         subsc2@test
10.12.2.4/32     SA     ip subsc3       3         subsc3@test
10.12.2.5/32     SA     ip subsc4       3         subsc4@test
```

- Meaning** Table 136 on page 635 lists the **show ip demux interface** command output fields.

Table 136: show ip demux interface Output Fields

Field Name	Field Description
Prefix/Length	Source or destination addresses that the subscriber interface demultiplexes

Table 136: show ip demux interface Output Fields (continued)

Field Name	Field Description
SA/DA	Demultiplexing method for subscriber interface
SA	Source address
DA	Destination address
Subscriber-Intf	Name of shared interface on which subscriber interface is configured
VR/VRF	Name of virtual router (VR) or VPN routing and forwarding (VRF) instance on which the subscriber interface is configured
Description	Text description for the IP interface on which subscriber interface is configured (added with the ip description command)

Related Topics ■ show ip demux interface

Monitoring Active IP Subscribers Created by Subscriber Management

Purpose Display information about active IP subscribers that were created by the JUNOS software's subscriber management feature.

Action To display information about subscribers that were created by subscriber management:

```
host1# show ip-subscriber 2835349506
```

Id	User Name	Ip Address	Virtual Router	Interface
2835349506	user1@isp1.com	192.168.0.1	default	ip192.168.0.1
Id	Login time			
2835349506	WED AUG 23 20:46:24 2006			

```
host1# show ip-subscriber detail
```

```
Subscriber List
```

Id	User Name	Ip Address	Virtual Router	Interface
2835349506	user1@isp1.com	192.168.0.1	default	ip192.168.0.1
Id	Login Time	Mac Address	Profile	Handle
2835349506	WED AUG 23 20:46:24 2006	3000.0001.9365		13631489
Id	Interface Profile	Service Profile	Option 82	

```
-----
2835349506  myProfile  profile22  FastEthernet 3/1
```

Meaning Table 137 on page 637 lists the **show ip-subscriber** command output fields.

Table 137: show ip-subscriber Output Fields

Field Name	Field Description
Id	ID of the subscriber
User Name	Username used to retrieve information from RADIUS for the subscriber interface
Ip Address	IP address of the subscriber interface
Virtual Router	Name of the virtual router on which the subscriber interface is configured
Interface	Name of subscriber interface; ip indicates that subscriber manager created this interface
Login Time	Day, date, and time that the subscriber logged in
Mac Address	MAC address of the subscriber
Profile Handle	AAA profile handle
Interface Profile	Interface profile name used to configure the subscriber interface
Service Profile	IP service profile name used by subscriber management to authorize and configure the subscriber interface with AAA
Option 82	DHCP relay agent information (option 82) circuit identifier that describes the physical interface location associated with the subscriber

Related Topics ■ show ip-subscriber

Part 6

Managing Subscriber Services

- Configuring Service Manager on page 641
- Monitoring Service Manager on page 707

Chapter 27

Configuring Service Manager

This chapter describes how to use the Service Manager application to define, activate, and monitor networking services for your subscribers. This chapter discusses the following topics:

- Service Manager Overview on page 641
- Service Manager Platform Considerations on page 643
- Service Manager References on page 643
- Service Manager Configuration Tasks on page 643
- Service Definitions on page 645
- Referencing Policies in Service Definitions on page 650
- Referencing QoS Configurations in Service Definitions on page 651
- Configuring the Service Manager License on page 659
- Managing and Activating Service Sessions on page 660
- Using RADIUS to Manage Subscriber Service Sessions on page 660
- Using Mutex Groups to Activate and Deactivate Subscriber Services on page 667
- Combined and Independent IPv4 and IPv6 Services in a Dual Stack Overview on page 669
- Activation and Deactivation of IPv4 and IPv6 Services in a Dual Stack on page 670
- Configuring RADIUS Accounting for Service Manager on page 672
- Using the CLI to Manage Subscriber Service Sessions on page 677
- Configuring Service Manager Statistics on page 686
- Service Manager Performance Considerations on page 690
- Service Definition Examples on page 690

Service Manager Overview

The JUNOS Service Manager application provides authentication, service selection, and service activation and deactivation to subscribers. The application also collects accounting information and statistics, and monitors subscriber and service sessions.

Service Manager supports two client types—RADIUS and CLI. Service Manager starts when it receives a request from a RADIUS or CLI client. For RADIUS clients, RADIUS Access-Accept messages and Change-of-Authorization-Request (CoA-Request)

messages can create and delete Service Manager subscriber sessions and activate and deactivate service sessions. For CLI clients, CLI commands create and delete the subscriber sessions and activate and deactivate service sessions.

A subscriber's service is based on a service definition — service definitions can include profiles, policies, and quality of service (QoS) settings that define the scope of a service granted to the subscriber. Service definitions can also specify statistics configurations.

Service Manager provides convenience and flexibility to both service providers and subscribers.

- Providers are able to separate services and access technology and also to eliminate unprofitable flat-rate billing. They gain the ability to efficiently design, manage, and deliver services that subscribers want, and then bill subscribers based on connect time, bandwidth, and the actual service used.
- Subscribers benefit by gaining access to multiple simultaneous services—subscribers can dynamically connect to and disconnect from the services, when they want and for how long they want. They are billed based on the service type and usage, rather than being charged a set rate regardless of usage.

Service Manager Terms and Acronyms

Table 138 on page 642 defines terms and acronyms that are used in this discussion of the Service Manager application.

Table 138: Service Manager Terms and Acronyms

Term	Definition
Guided entrance	A service that creates a controlled Internet browsing environment by transparently directing the subscriber to a specific Web site. At the Web site, the subscriber is presented with a selection of available services. Also called <i>walled gardens</i> or <i>captive portals</i> .
Macro language	The JUNOS macro language that you use for service definitions
Mutex service	A service session that is part of a mutex group—the service definition for the service includes the mutex-group attribute.
RADIUS login method	The method that uses RADIUS VSAs in the Access-Accept packet to create a subscriber session and activate a service session when the subscriber logs in
RADIUS CoA method	The method that uses RADIUS CoA-Request messages and VSAs to create a subscriber session and activate a service session for a subscriber that is already logged in
Service definition	A macro file that defines a named parameterized description of a service; used to create a service instance and the resulting subscriber service session; can include a combination of parameters such as policy lists, rate-limit profiles, QoS profiles, and interface profiles

Table 138: Service Manager Terms and Acronyms *(continued)*

Term	Definition
Service instance	An instance that is created when you specify parameter values for a service definition to create a service session
Service session	A session that is created when a service instance is activated for a subscriber; a subscriber can have multiple active service sessions
Service session profile	A provider-configured profile that applies optional attributes to a service session; CLI only

Service Manager Platform Considerations

Service Manager is supported on all E Series routers. For information about the modules supported on E Series routers:

- See the *ERX Module Guide* for modules supported on ERX7xx models, ERX14xx models, and the ERX310 Broadband Services Router.
- See the *E120 and E320 Module Guide* for modules supported on the E120 and E320 Broadband Services Routers.

Service Manager References

For more information about the topics covered in this chapter, see the following documents:

- Data-Over-Cable Service Interface Specifications (DOCSIS) 2.0 Radio Frequency Interface Specification CM-SP-RF1v2.0-110-051209.
- For information about using the JUNOS software's macro language, see the *Writing CLI Macros* chapter in *JUNOS System Basics Configuration Guide*.
- For information about setting up policy-based routing features for Service Manager, such as rate-limit profiles, classifier control lists, policy lists, and hierarchical and merged policies, see the *JUNOS Policy Management Configuration Guide*.
- For information about creating QoS profiles and QoS parameters, see the *JUNOS Quality of Service Configuration Guide*.
- For information about creating IPv4 interface profiles, see the *Configuring IP* chapter in *JUNOS IP, IPv6, and IGP Configuration Guide*.


Service Manager Configuration Tasks

To use the Service Manager application to create subscriber service sessions, you perform the following tasks:

- Create and manage service definitions

- Use the macro language to define service definitions
- Download service definition macro files to the router's nonvolatile storage (NVS)
- Install service definitions on the router
- Uninstall service definitions
- Configure the Service Manager license
- Configure RADIUS accounting
- Use RADIUS login and RADIUS CoA to manage subscriber service sessions
 - Specify the subscriber
 - Specify optional attributes
 - Enable statistics collection
 - Activate the service session
 - Deactivate service sessions
 - (Optional for RADIUS CoA method) Configure the CoA feature for the RADIUS dynamic-request server
- Use the CLI to manage subscriber service sessions
 - Specify the subscriber
 - Create and apply optional service session profiles
 - Enable statistics collection
 - Activate the service session
 - Deactivate service sessions

Figure 28 on page 645 shows the sequence of operations you use to create and monitor subscriber service sessions.

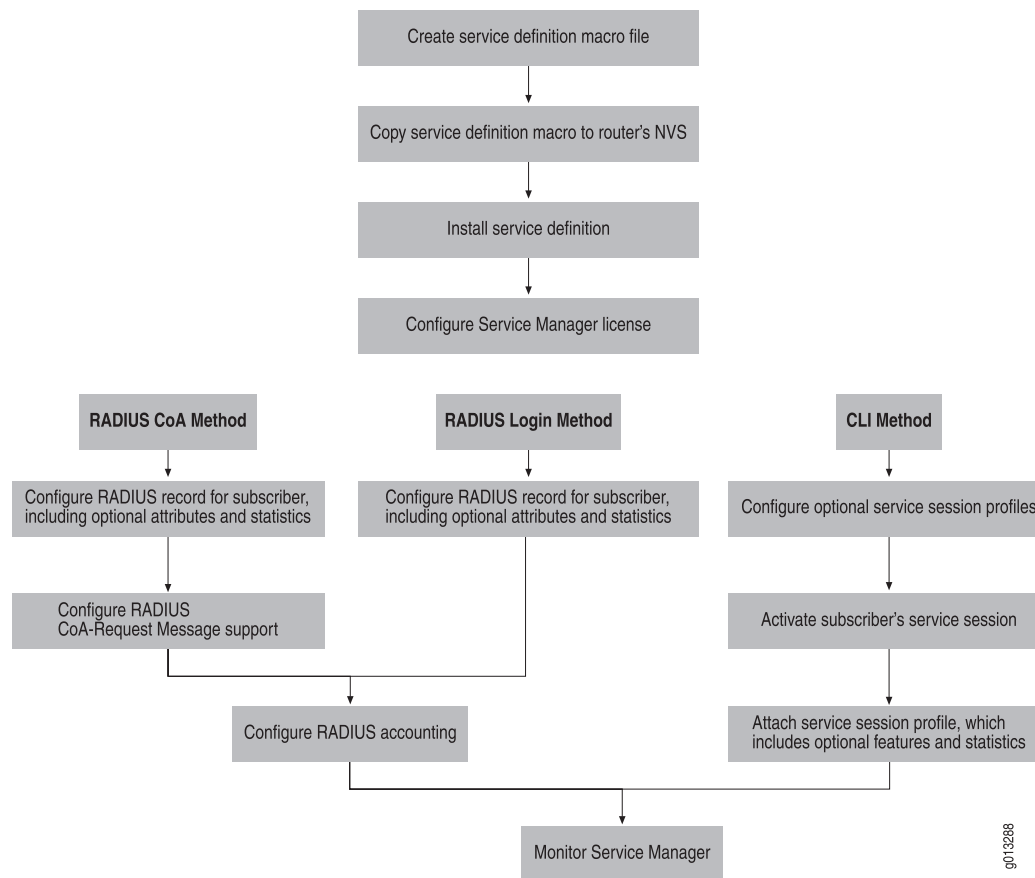Figure 28: Service Manager Configuration Flowchart

Service Definitions

A service definition is a high-level, platform-independent template that defines a service that you want to let your subscribers use. You use the JUNOS software's embedded macro language on your computer to create the macro file that defines the service. You copy and install the macro file on the E Series Broadband Services Routers, and then you can associate the service definition with subscribers to create their service sessions.

Service definitions gives you flexibility by enabling you to use:

- A single service definition to create a service for multiple subscribers.
- Parameterized service definitions to create variations of a service definition.
- Different service definitions to create multiple services for a single subscriber.

A service definition might use the following types of JUNOS objects to define the characteristics and capabilities of the service you want to provide:

- Interface profiles—Specify a set of characteristics that can be dynamically assigned to IP interfaces. A service definition must use at least one interface profile.
- Policy lists—Specify policy actions for traffic traversing an interface.
- Classifier lists—Specify the criteria by which the router defines a packet flow.
- Rate-limit profiles—Specify a set of bandwidth attributes and associated actions that limit a classified packet flow or a source interface to a rate that is less than the physical rate of the port.
- QoS parameters—Specify attributes such as shaping rate, shared-shaping rate, assured rate, and scheduler weight for scheduler nodes and queues.
- QoS profiles—Specify queue, drop statistics gathering, and scheduler configuration for an interface hierarchy.

Creating Service Definitions

To create a service definition, you use the JUNOS software's macro language to specify the parameters that define the desired service. A macro file can define only one service—however, the file can have multiple templates to define characteristics of the desired service. You create service definitions independent of the Service Manager commands and operations, which are performed on the E Series router.

For detailed information about the JUNOS software's macro language, see the *Command Line Interface* chapter in *JUNOS System Basics Configuration Guide*.

Figure 29 on page 648 is an example of a service definition macro file that creates a tiered service. A tiered service typically provides set bandwidths for both inbound and outbound traffic for a subscriber. In this example, the input (inputBW) and output (outputBW) bandwidth values are parameterized. This example assumes that QoS profile triplePlayIP and QoS parameter maxSubscBW are configured. See "Service Definition Examples" on page 690 for additional service definition examples.

Service Manager only tracks JUNOS objects that are passed back in the env.setResult method when a service definition is executed. Table 139 on page 646 describes the supported objects:

Table 139: JUNOS Objects Tracked by Service Manager

Name	Requirement	Description
input-stat-clacl	Optional	<ul style="list-style-type: none"> ■ Collects input statistics from policy manager ■ Can be a list of clacs
secondary-input-stat-clacl	Optional	<ul style="list-style-type: none"> ■ Collects input statistics from policy manager ■ Can be a list of clacs

Table 139: JUNOS Objects Tracked by Service Manager *(continued)*

Name	Requirement	Description
output-stat-clacl	Optional	<ul style="list-style-type: none"> ■ Collects output statistics from policy manager ■ Can be a list of clacIs
activate-profile	Required	<ul style="list-style-type: none"> ■ Specifies the interface profile used on activation of the service ■ Deletion of the profile is Service Manager's responsibility
deactivate-profile	Optional	<ul style="list-style-type: none"> ■ Specifies the interface profile used on deactivation of the service ■ If not specified, is the same as the activation-profile ■ Deletion of the profile is Service Manager's responsibility
command-in-error	Optional	<ul style="list-style-type: none"> ■ Passes the value env.getErrorCommand ■ Service Manager displays the line in the service definition that has the error
command-error-status	Optional	<ul style="list-style-type: none"> ■ Passes the value env.getErrorStatus ■ Service Manager displays the error status for the error
service-interface-type	<ul style="list-style-type: none"> ■ Optional for IPv4 or L2TP services ■ Mandatory for independent IPv6 services or combined IPv4 and IPv6 services in a dual stack 	<ul style="list-style-type: none"> ■ Specifies the type of interface, IPv4, IPv6, combination of IPv4 and IPv6, or L2TP, to which the service session profile must be applied
input-stat-epg	Optional	<ul style="list-style-type: none"> ■ Collects input statistics associated with the external group from policy manager ■ Both the external parent group and the corresponding hierarchical policy parameter must be specified ■ Can be multiple pairs of external parent groups and hierarchical policy parameters

Table 139: JUNOS Objects Tracked by Service Manager *(continued)*

Name	Requirement	Description
output-stat-epg	Optional	<ul style="list-style-type: none"> ■ Collects output statistics associated with the external group from policy manager ■ Both the external parent group and the corresponding hierarchical policy parameter must be specified ■ Can be multiple pairs of external parent groups and hierarchical policy parameters
secondary-input-stat-epg	Optional	<ul style="list-style-type: none"> ■ Collects input statistics associated with the external group that is attached at the secondary input stage from policy manager ■ Both the external parent group and the corresponding hierarchical policy parameter must be specified ■ Can be multiple pairs of external parent groups and hierarchical policy parameters

Figure 29: Sample Service Definition Macro File

```

!parameterizes input and output bandwidth
<# tiered(inputBW, outputBW) #>

<# uid := app.servicemanager.getUniqueId #>
<# name := "SM-tiered-" $ uid #>
<# oname := "SM-O-tiered-" $ uid #>

classifier-list matchAll ip any any
rate-limit-profile <# name #> one-rate
    committed-rate <# inputBW; '\n' #>

policy-list <# name; '\n' #>
    classifier-group matchAll precedence 10000
    rate-limit-profile <# name; '\n' #>
    traffic-class best-effort

policy-list <# oname; '\n' #>
    classifier-group matchAll precedence 10000
    traffic-class best-effort

profile <# name; '\n' #>
    ip policy secondary-input <# name #> statistics enabled merge
    ip policy output <# oname #> statistics enabled merge
    qos-profile triplePlayIP
    qos-parameter maxSubscBW <# outputBW; '\n' #>

<# env.setResult("activate-profile", name) #>
<# env.setResult("secondary-input-stat-clacl", "matchAll") #>
<# env.setResult("output-stat-clacl", "matchAll") #>

<# endtmp1 #>

```


Managing Your Service Definitions

After you have created the macro file for your service definition, you can perform the following operations with the service definition macro file:

1. **Copy**—You must copy the service definition from the local computer that you used to create the macro file to the router's NVS card.
2. **Install**—You must install the service definition before you can use it to create a service session. During installation, Service Manager precompiles the definition and extracts the definition file's timestamp. Precompiling the service definition improves Service Manager performance. The timestamp enables the Service Manager application to track any modifications you might make while the definition is being used.
3. **Uninstall**—You can uninstall a service definition file, for example, if you no longer want to use that definition. When you uninstall a service definition file, any existing service sessions that were activated using the original service definition continue to use the original definition until you deactivate the service session.
4. **Modify**—You can update an existing service definition file at any time. To update a service definition file:
 - a. Use your text editor on your computer to make changes to the original service definition file.
 - b. Copy the updated service definition file back to your router's NVS—this overwrites the original file on the router.
 - c. Install the new service definition file.

All new service sessions will be activated using the new service definition. Any existing service sessions that were activated using the original service definition continue to use the original definition until you deactivate the service session.

copy

- Use to copy a service definition macro file from your computer to the router's NVS.
- Specify the directory containing the macro file you want to copy and the name you want to use for the file in NVS.
- Example


```
host1#copy boston:/serviceDefs/triplePlay/tiered.mac tiered.mac
```
- There is no **no** version.
- See copy

service-management install

- Use to install or uninstall a service definition.
- You must include the .mac extension.

- During installation, Service Manager precompiles the service definition and extracts the definition file's timestamp.
- After you install the service definition, you can use the definition to create service sessions for subscribers.
- To update an existing service definition, you make changes to the original macro file on your computer, copy the updated file to NVS, and install the updated file. All subsequent service sessions use the new service definition file. However, currently active service sessions continue to use the original definition file until the sessions are deactivated, then reactivated.
- Example 1—Installing


```
host1(config)#service-management install tiered.mac
```
- Example 2—Uninstalling


```
host1(config)#no service-management install tiered.mac
```
- Example 3—Updating


```
! update the original macro file on the remote system
! copy the updated macro file to the router
host1#copy boston:/serviceDefs/triplePlay/tiered.mac tiered.mac
host1#configure terminal
! install the updated service definition on the router
host1(config)#service-management install tiered.mac
```
- Use the **no** version to uninstall a service definition.
- See service-management install

Referencing Policies in Service Definitions

In Profile Configuration mode, policy interface commands for IP and L2TP allow attachments to be merged into any existing merge-capable attachment at an attachment point. Merged policies are dynamically created. Service Manager can request that multiple interface profiles be applied or removed at an interface as part of service activation or deactivation. Service Manager also specifies whether or not the attachments created from these interface profiles persist on subsequent reloads.

Service Manager can specify whether a component policy attachment is non-volatile. If the interface where the component policy is attached is volatile, then policy management makes the attachment volatile even when the Service Manager specifies otherwise. A non-volatile interface can have both volatile and non-volatile component policy attachments. The merged policy that is created is the merge of all component policies attached at a given attachment point regardless of their volatility. The merged policy and its attachments are always volatile and reconstructed on each reload operation.

For further details on merging policies, see the *Merging Policies* chapter in *JUNOS Policy Management Configuration Guide*.

Referencing QoS Configurations in Service Definitions

You can use QoS profiles and QoS parameters to define a service for a subscriber. For example, you can configure the shaping rate for traffic in a video service by using a QoS parameter instance.

To transmit the QoS configuration to the subscriber interface (that is, the forwarding interface at the top of the interface column), you must configure the QoS profiles and QoS parameter instances in static profiles.

Specifying QoS Profiles in a Service Definition

You can configure one QoS profile per subscriber interface. We recommend that you specify the QoS profile in the first set of services applied to the subscriber's interface.

You can modify the QoS profile by modifying configurations referenced by the QoS profile, including QoS parameter instances. You can also attach a new QoS profile when activating a service, but make sure that the QoS profile is attached to the subscriber's interface.

For more information about configuring QoS profiles, see the *Configuring and Attaching QoS Profiles to an Interface* chapter in *JUNOS Quality of Service Configuration Guide*.

Configuring a QoS Profile for Service Manager

To configure a QoS profile for Service Manager:

1. Configure the profile.

```
host1(config)#profile videoService
```

2. Configure the QoS profile.

```
host1(config-profile)#qos-profile videoBandwidth1
```

3. (Optional) Complete the QoS profile configuration described in the *Configuring and Attaching QoS Profiles to an Interface* chapter in *JUNOS Quality of Service Configuration Guide*.

profile

- Use to create a profile and enter Profile Configuration mode.
- You specify a profile name with up to 80 alphanumeric characters.
- Example

```
host1(config)#profile iptv  
host1(config-profile)#
```

- Use the **no** version to remove a profile.
- See profile

qos-profile

- Use to add a QoS profile command for use with Service Manager. When the service is activated, the QoS profile is created and attached to the subscriber interface.
- Example


```
host1(config)#profile iptv
host1(config-profile)#qos-profile video
```
- Use the **no** version to remove the QoS profile from the profile.
- See qos-profile

Specifying QoS Profiles in a Service Definition

After you configure a QoS profile for Service Manager, you can reference it in a service definition. For example:

```
profile <# eastcoast ; '\n' #>
qos-profile <# video; '\n' #>
```

In this example, activating the service definition attaches the video QoS profile to the subscriber interface. Service Manager overwrites the existing QoS profile attachment at the subscriber interface.

Deactivating the service detaches the video QoS profile from the subscriber interface.

Specifying QoS Parameter Instances in a Service Definition

You can specify that Service Manager create QoS parameter instances when the subscriber logs in (during service activation) or through RADIUS QoS parameter VSAs.

You can specify up to eight parameter instance commands within a profile. When you activate a service, Service Manager creates or modifies parameter instances for the subscriber interface that matches one of the subscriber-interface types configured in the QoS parameter definition.

Deactivating a service can modify or remove QoS parameter instances.

Using a service definition, you can also configure QoS parameters instances to add value to an existing parameter instance using the **add** keyword or dynamically create new parameter instances with an initial value using the **initial-value** keyword.

For more information about configuring QoS parameters, see *JUNOS Quality of Service Configuration Guide*, QoS Parameter Overview.

Creating a Parameter Instance in a Profile

To create a QoS parameter instance for Service Manager:

1. Configure the QoS parameter definition described in *JUNOS Quality of Service Configuration Guide*, QoS Parameter Overview.

You must configure at least one controlled-interface type and one subscriber-interface type. The range specified in the parameter definition controls the available value of the parameter instance.

2. Configure the QoS profile.

```
host1(config)#profile video
```

3. Configure the QoS parameter instance command in the profile.

```
host1(config-profile)#qos-parameter videoBandwidth1 add 40000
```

qos-parameter

- Use to create a parameter instance command in a profile. When the service is activated, the parameter instances are created for the subscriber interface.
- Use the **add** keyword in Profile Configuration mode to add a value to an existing parameter instance.
- Use the **initial-value** keyword to create a new instance with the specified value.
- Examples

```
host1(config)#profile video
host1(config-profile)#qos-parameter max-subscriber-bandwidth initial-value
15000
```

- In Profile Configuration mode, the **no** version removes the QoS parameter instance command in the profile.
- See qos-parameter

Specifying QoS Parameter Instances in a Service Definition

After you configure a QoS parameter instance for Service Manager, you can reference it in a service definition. For example:

```
<# qoserviceone(bandwidth1, bandwidth2) #>
profile <# profileName ; '\n' #>
qos-parameter <# qosParameterName1 ; ' ' ; bandwidth1 ; '\n' #>
qos-parameter <# qosParameterName2 ; ' ' ; bandwidth2 ; '\n' #>
<# endtmpl #>
```

When you activate a service, Service Manager creates the parameter instance and overwrites previous parameter instances. For example, activating the qoserviceone service definition creates a profile containing two QoS parameter instances. Service Manager creates the qosParameterName1 parameter instance with the value of bandwidth1, and creates qosParameterName2 with a value of bandwidth2.

If you activate the service definition using qoserviceone(2000000,3000000), Service Manager creates qosParameterName1 with a value of 2000000 and qosParameterName2 instance with a value of 3000000.

Specifying the Add and Initial-Value Keywords

You can use the **add** keyword to add value to an existing parameter instance. For example:

```
<# qoserviceone(bandwidth1, bandwidth2) #>
profile <# profileName ; '\n' #>
qos-parameter <# qosParameterName3 ; ' add ' ; bandwidth2 ; '\n' #>
<# endtmpl #>
```

When you specify parameter instances using the **add** keyword, you can also use the **initial-value** keyword to specify an initial value. For example:

```
<# qoserviceone(bandwidth1, bandwidth2) #>
profile <# profileName ; '\n' #>
qos-parameter <# qosParameterName4 ; ' add ' ; bandwidth2 ;
' initial-value 1000000' ; '\n' #>
<# endtmpl #>
```

When you activate the service, Service Manager locates the existing QoS parameter instance in the interface column. If Service Manager does not find a parameter instance, it creates one with a value specified in the **initial-value** keyword (in this case, 100000). The value in the command is then added to the initial value. If an existing parameter instance is found, Service Manager adds the value to the existing interface.

For example, when you activate qosServiceOne as qosServiceOne(2000000,3000000), Service Manager attempts to locate the parameter instance qosParameterName4 for the subscriber's interface. If it finds a parameter instance, it adds bandwidth2 (3,000,000) to the current value. If Service Manager does not find a parameter instance, it creates one with an initial value of 1,000,000 and adds 3,000,000. The final parameter instance value is 4,000,000.

When deactivating the service, Service Manager locates the QoS parameter instance and subtracts the value in the command from the existing instance value. If the parameter is no longer referenced, the parameter instance is removed.

Modifying QoS Configurations with Service Manager

This section describes how to modify QoS configurations with Service Manager.

Modifying Parameter Instances

Service Manager activates services without considering current parameter instance values. For example, when you deactivate a video service, Service Manager can add 5 Mbps to a parameter associated with the shaping rate of a video queue.

Similarly, Service Manager can deactivate services and restore parameter instances to their previous value. For example, when you deactivate a video service, Service Manager can subtract 5 Mbps from a parameter associated with the shaping rate of a video queue.

Table 140 on page 655 lists the results of a series of activations and deactivations of parameters using the **add** and **initial-value** keywords.

Table 140: Sample Modifications Using the Add and Initial-Value Keywords

Action	QoS Parameter Instance	Result
Activate	qos-parameter video-bw add 5000000 initial-value 0	Parameter instance video-bw is created with a value of 5000000
Activate	qos-parameter video-bw add 1000000 initial-value 0	Parameter instance video-bw is increased by 1000000, for a total of 6000000
Deactivate	qos-parameter video-bw add 1000000 initial-value 0	Parameter instance video-bw is decreased by 1000000, for a total of 500000
Deactivate	qos-parameter video-bw add 5000000 initial-value 0	Parameter instance video-bw is removed

Removing a parameter instance using profiles is based on the number of times a parameter instance is modified, not the value added.

Modifying parameter instances in profiles and modifying explicit parameter instances can cause invalid parameter instance values. Table 141 on page 655 lists a series of activations and deactivations using parameter instances in profiles and explicit parameter instances. By the second deactivation, the parameter has a negative value (-4000000).



NOTE: We recommend that you do not configure negative values for Service Manager.

Table 141: Sample Modifications Using Parameter Instances

Action	QoS Parameter Instance	Result
Activate	qos-parameter video-bw add 5000000 initial-value 0	Parameter instance video-bw is created with a value of 5000000
Activate	qos-parameter video-bw add 1000000 initial-value 0	1000000 is added to parameter instance video-bw, for a total of 6000000
Activate	qos-parameter video-bw 2000000	Parameter instance video-bw is set to 2000000
Deactivate	qos-parameter video-bw add 1000000 initial-value 0	1000000 is subtracted from parameter instance video-bw for a total of 1000000

Table 141: Sample Modifications Using Parameter Instances (*continued*)

Action	QoS Parameter Instance	Result
Deactivate	qos-parameter video-bw add 5000000 initial-value 0	5000000 is subtracted from parameter instance video-bw for a total of -4000000
Deactivate	qos-parameter video-bw 2000000	Parameter instance video-bw is removed

Modifying QoS Configurations in a Single Service Manager Event

QoS accepts QoS profile attachments and parameter instances created using multiple sources (profiles, RADIUS, or Service Manager) within a single Service Manager event. Events include:

- Subscriber login
- Subscriber logout
- RADIUS Change of Authority (CoA)

QoS prioritizes the creation of QoS profiles and parameter instances within events. Table 142 on page 656 lists the sources that overwrite QoS profiles and parameter instances created by other sources. Each row represents new QoS profiles and parameter instances; columns represent existing QoS profiles and parameter instances.

Table 142: Configuration Within a Single Service Manager Event

	Profile	RADIUS	Service Manager
Profile	✓	–	–
RADIUS	✓	✓	–
Service Manager	✓	✓	✓

Modifying QoS Configurations Using Other Sources

You can modify QoS configurations with Service Manager by using other QoS sources. For example, you can modify a parameter instance that was created with Service Manager by using the CLI. Similarly, you can use SNMP to detach a QoS profile attached by Service Manager.

Table 143 on page 657 lists the sources that you can use to modify QoS profile attachments and parameter instances.

Table 143: Modifying QoS Configurations with Other Sources

	QoS Profile Attachment	QoS Parameter Instances
Service Manager	✓	✓
RADIUS	✓	✓
SNMP	✓	–
SRC software	✓	–
CLI	✓	✓

The following sections describe the precedence of each source when modifying configurations.

Service Manager

QoS profile attachments and parameter instances created through Service Manager have precedence over all other sources. For example, Service Manager can overwrite a QoS profile attachment modified through RADIUS, SNMP, the SRC software, or the CLI.

Conversely, Service Manager configurations can be overwritten through SNMP, the SRC software, and the CLI, but not by RADIUS.

Service Manager counts references of parameter instances. You can modify parameter instances created by Service Manager using other sources without affecting the reference counts. For more information, see “QoS Statistics” on page 659.

RADIUS

QoS profile attachments and parameter instances configured through RADIUS can overwrite QoS profile attachments and parameter instances configured through the SNMP, the SRC software, and the CLI, but not those created by Service Manager.

Conversely, QoS profiles and parameter instances configured through RADIUS can be overwritten by any source (SNMP, the SRC software, CLI, and Service Manager).

SNMP, the SRC Software, and the CLI

QoS profile attachments and parameter instances configured through the CLI can overwrite QoS profile attachments and parameter instances configured through any source.

QoS profiles attached through SNMP and the SRC software can also overwrite QoS profile attachments configured through any source.


Conversely, QoS profiles and parameter instances configured through the CLI, SNMP, or the SRC software can be overwritten by any source.

Removing QoS Configurations Referenced by Service Manager

When Service Manager no longer references a QoS configuration, it must be removed from the service definition.

Figure 30 on page 658 shows the references for QoS configurations.

Figure 30: QoS Configuration Dependency Chain

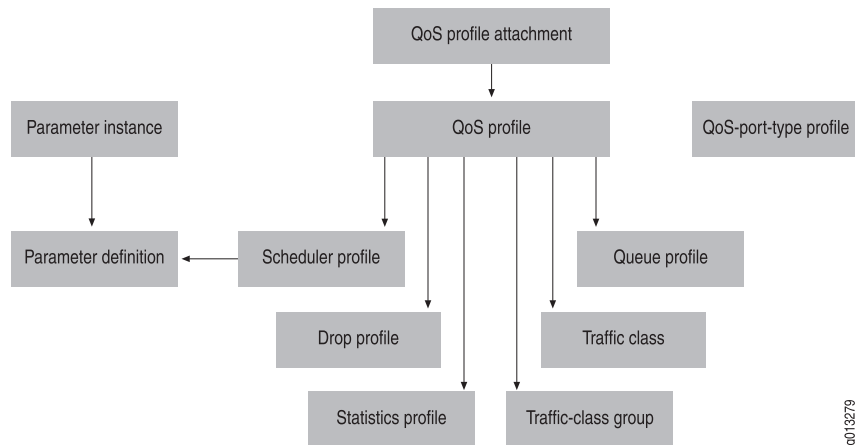

Service Manager automatically removes QoS profiles and parameter instances. After removing the QoS profile and parameter instances, Service Manager automatically removes the following QoS configurations in the following order:

1. QoS profiles
2. Scheduler profiles
3. Queue profiles
4. Drop profiles
5. Statistics profiles

Service Manager does not automatically remove the following QoS configurations:

- Parameter definitions
- Traffic classes
- Traffic-class groups
- QoS-port-type profiles

QoS for Service Manager Considerations

When you specify QoS configurations in Service Manager, the following considerations apply.

RADIUS or Service Manager

We recommend that you choose either RADIUS or Service Manager to create a single parameter instance. If you use both RADIUS and Service Manager, parameter instances activated using Service Manager take precedence.

Interoperability with Other Service Components

Service Manager removes QoS profiles and parameter instances if other components in the service definition (for example, policies) cause an error.

QoS Statistics

Service Manager counts references of parameter instances in profiles. The reference count is incremented each time the parameter is configured through the CLI, RADIUS, or Service Manager. The reference count is decremented each time the parameter is unconfigured, such as through service deactivation. Modifications to parameter instances are also reference counted, using a separate reference count. Parameter instances are removed when both reference counts reach zero.

Service Manager also counts references of modified parameters in profiles using the **add** keyword. The reference count is incremented each time the parameter is modified through service activation with the **add** keyword. The reference count is decremented each time the parameter is modified through service deactivation. References of regular parameter instances are also counted, using a separate reference count. Parameter instances are removed when both reference counts reach zero.

Ranges

You can verify ranges for parameter instances by specifying a range in the parameter definition using the **range** command.

When activating the service or modifying parameters, Service Manager verifies the value of the parameter instance to be within the specified range and generates an informational log message indicating the value is outside the range. Service Manager does not verify ranges when you specify the parameter instances within profiles at the time of configuration.

Configuring the Service Manager License

Use the Service Manager license to enable full Service Manager application support. You can create a maximum of 10 subscriber sessions when the Service Manager license is not enabled. If you disable the Service Manager license and more than 10 subscriber sessions exist, you cannot enable any new sessions—however, all existing active subscriber sessions continue to function.

For information about the maximum number of subscriber sessions supported, see *JUNOS Release Notes, Appendix A, System Maximums*.

license service-management

- Use to specify the Service Manager license and enable full Service Manager application support—if the license is not enabled, you are limited to 10 subscriber sessions.
- The license is a unique string of up to 15 alphanumeric characters.



NOTE: Obtain the license from Juniper Networks Customer Service or your Juniper Networks sales representative.

- Example

```
host1(config)#license service-management 123456789
```

- Use the **no** version to disable the license.
- See `license service-management`

Managing and Activating Service Sessions

You can use either RADIUS or the CLI to manage, activate, and deactivate service sessions. The following list describes some of the differences between using RADIUS and the CLI to manage the Service Manager application.

- RADIUS-based login and RADIUS CoA support:
 - Provides dynamic activation and deactivation based on subscriber service selection
 - Provides greater flexibility and efficient management for a large number of subscribers and services
 - Enables you to use mutual exclusion (mutex) groups to create mutex services (RADIUS CoA only)
- CLI-based support:
 - Provides static activation and deactivation for subscribers who are always logged in
 - Is useful for testing new service definitions
 - Enables you to preprovision services that you can activate later

Using RADIUS to Manage Subscriber Service Sessions

Service Manager supports two RADIUS-based methods for dynamically activating subscriber service sessions. Dynamic service sessions that RADIUS activates are not stored in NVS. Both methods can also apply optional statistics and session threshold (volume and time) configurations. The two methods differ in how Service Manager activates a subscriber service session:

- RADIUS login method—The service session is activated when the subscriber logs in. At login, RADIUS verifies that the `Activate-Service` attribute is configured in


the subscriber's RADIUS record. RADIUS then uses vendor-specific attributes (VSAs) in the Access-Accept packet to activate the service session for the subscriber. This method is useful when your subscribers are not currently logged in.

- **RADIUS CoA method**—Supports dynamic service selection for subscribers. For example, the subscriber might have logged in without a service, or might have used the RADIUS login method to activate a service at login. If no service was activated at login (because of no Activate-Service attribute in the user's RADIUS record), you can later use the CoA method and a separate RADIUS record to create a subscriber session and activate a service session for the subscriber. Or, if the RADIUS login method was used and the subscriber already has an active service session, you can use the CoA method and a new RADIUS record to activate a new service session for the subscriber (and optionally deactivate the existing service session). The RADIUS CoA method is useful when you have a large number of users already logged in through RADIUS and you want to activate new services for them. This method is also used for the guided entrance service described in “Guided Entrance Service Definition Example” on page 694.

The RADIUS CoA method also supports the use of mutex groups to create mutex services. See “Using Mutex Groups to Activate and Deactivate Subscriber Services” on page 667.

Figure 31 on page 661 compares the two RADIUS-based methods.

Figure 31: Comparing RADIUS Login and RADIUS CoA Methods

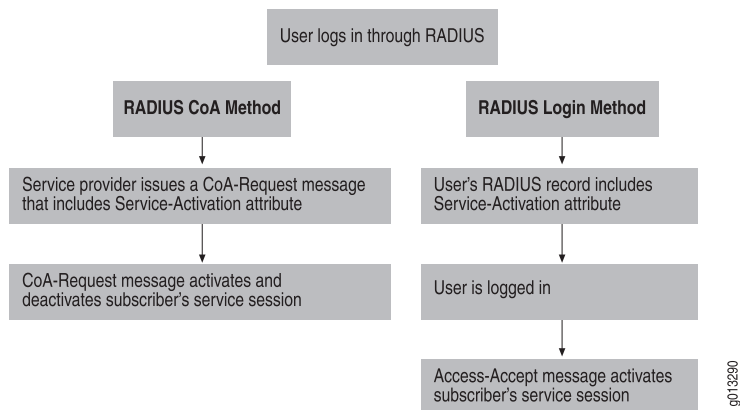

Using RADIUS to Activate Subscriber Service Sessions

To use RADIUS to activate subscriber service sessions, you create a RADIUS record that includes the Activate-Service VSA. For the RADIUS login method, this RADIUS record is used by the Access-Accept message to start Service Manager and activate the service when the subscriber logs in.

For the RADIUS CoA method, the service provider uses a CoA-Request message to activate and deactivate the service for the subscriber who is already logged in.

To configure a service session that will be activated by RADIUS:

1. Create the RADIUS record for the subscriber and service:

- For RADIUS login—Create the RADIUS record for the subscriber and include the Activate-Service VSA in the record. Specify values for the parameters defined in the service template name of the definition macro file.
- For RADIUS CoA—Format the CoA message to create the RADIUS record for the subscriber. Include the Activate-Service VSA in the record. Optionally, include the Deactivate-Service VSA if the subscriber has an active service session that you want to deactivate. Specify values for the parameters defined in the service template name of the definition macro file.



NOTE: You specify the parameter values in the order in which the parameters appear in the template name of the service definition file. For example, in the tiered service that is defined in Figure 29 on page 648, the template name is:

```
<# tiered(inputBW, outputBW) #>
```

For the RADIUS Activate-Service VSA, you specify values for the input and output bandwidth:

```
tiered(1280000, 5120000)
```

2. Specify optional VSAs for the service session as needed:

- Service-Volume
- Service-Timeout
- Service-Statistics

Service Manager RADIUS Attributes

For the RADIUS login method, the RADIUS VSAs for service activation, threshold configuration, statistics configuration, and interim accounting in Access-Accept messages at subscriber login are used by Service Manager to activate the appropriate service session. For the RADIUS CoA method, Service Manager uses the VSAs for service activation and deactivation, threshold configuration, statistics configuration, and interim accounting in CoA-Request messages to activate the service session. The accounting-related VSAs are included in RADIUS accounting messages.

Table 144 on page 663 lists the Service Manager-related attributes and indicates which are tagged VSAs. See “Using Tags with RADIUS Attributes” on page 664 for a discussion about using tagged VSAs to group attributes for a service.

Table 144: Service Manager RADIUS Attributes

Attribute Number	Attribute Name	RADIUS Message Type	VSA Description
[1]	User-Name (used with Virtual-Router, Juniper Networks VSA 26-1)	Access-Accept	Uniquely identifies the subscriber session
[8]	Framed-IP-Address (used with Virtual-Router, Juniper Networks VSA 26-1)	Access-Accept	Uniquely identifies the subscriber session
[26-65]	Activate-Service	Access-Accept and CoA-Request	Name of the service to be activated; includes parameter values; a tagged VSA
[26-66]	Deactivate-Service	Access-Accept and CoA-Request	Name of the service to be deactivated Note: This VSA is only used by CoA.
[26-67]	Service-Volume	Access-Accept and CoA-Request	Number of MB of traffic that the service can consume; the service is terminated when output byte count exceeds this value; a tagged VSA
[26-68]	Service-Timeout	Access-Accept and CoA-Request	Number of seconds that the service is to remain active; the service is terminated when the time expires; a tagged VSA
[26-69]	Service-Statistics	Access-Accept and CoA-Request	Statistics configuration; a tagged VSA: 0 = disable 1 = timestamp only 2 = timestamp and volume
[26-83]	Service-Session	For service sessions only: Acct-Start Acct-Stop Interim-Acct	Name of the service (including parameter values) with which the statistics are associated
[26-140]	Service-Interim-Acct-Interval	Access-Accept and CoA-Request	Number of seconds between accounting updates for a service; a tagged VSA
[31]	Calling-Station-ID	Access-Accept	Uniquely identifies the subscriber session
[44]	Acct-Session-ID	Acct-Start Acct-Stop Interim-Acct	Accounting identifier that makes it easy to match start and stop records in a log file; the format is extended to include a colon-separated value that uniquely identifies the subscriber session



NOTE: Service Manager statistics collection is a three-part procedure. You must configure statistics information in the service definition macro file, enable statistics collection in the RADIUS record, and also enable statistics collection for the policy referenced in the service macro using the **statistics enabled** keyword in the command used for policy attachment in the profile.

The Service-Volume and Service-Timeout VSAs rely on the values captured by the Service Manager statistics feature to determine when a threshold is exceeded. Therefore, you must configure and enable statistics collection to use these attributes. Service-Volume For detailed information about Service Manager statistics see “Configuring Service Manager Statistics” on page 686.

Table 145 on page 664 describes a partial RADIUS Access-Accept packet that activates a service session for subscriber client1 @isp1.com. (Figure 29 on page 648 shows the service definition macro file that creates the tiered service.) The session enables the subscriber to use the tiered service with an input bandwidth of 1280000 and output bandwidth of 5120000. The subscriber can use the service for 5 hours (18000 seconds), and Service Manager captures both timestamp and volume statistics during the session (service-statistics value of 2). Also, accounting for the service is updated every 600 seconds (10 minutes).

Table 145: Sample RADIUS Access-Accept Packet

RADIUS Attribute	Tag	Value
username	none	client1 @isp1.com
class	none	(binary data)
service-activation	6	tiered(1280000, 5120000)
service-timeout	6	18000
service-statistics	6	2
service-interim-acct-interval	6	600

Using Tags with RADIUS Attributes

Service Manager uses tagged RADIUS VSAs to enable a single RADIUS record to activate multiple service sessions for a subscriber, with each session having unique attributes. A particular tag identifies a specific Activate-Service attribute and all other RADIUS attributes that are associated with that Activate-Service attribute.

You can specify a maximum of 8 tags (1–8), which enables you to activate up to eight unique service sessions for a subscriber in a single RADIUS record. The following are tagged VSAs—they must always have a tag in their RADIUS entry:

- Activate-Service
- Service-Statistics

- Service-Timeout
- Service-Volume
- Service-Interim-Acct-Interval

Table 146 on page 665 describes an Access-Accept packet that activates the two services, tiered and voice, for subscriber client1@isp1.com. Each service has its own unique tag, enabling you to assign attributes for one service, but not the other. For example, the two services have different timeout settings and different interim accounting intervals, and statistics are enabled only for the tiered service.

Table 146: Using Tags

RADIUS Attribute	Tag	Value
username	none	client1@isp1.com
class	none	(binary data)
service-activation	2	tiered(1280000, 5120000)
service-timeout	2	18000
service-statistics	2	1
service-interim-acct-interval	2	600
service-activation	6	voice(100000)
service-timeout	6	1440
service-interim-acct-interval	6	1200

Using RADIUS to Deactivate Service Sessions

A service session can be deactivated by a CoA-Request message or when a subscriber logs out of a RADIUS-activated service session. If the subscriber logs off the router, Service Manager deactivates that subscriber session and all associated service sessions.

RADIUS also supports attributes that you can use to manage deactivation of service sessions. You can:

- Set time or volume thresholds for the service
- Use the Deactivate-Service RADIUS attribute

Setting Thresholds

You can set a threshold for the session by including one or both of the following attributes in the RADIUS record:



NOTE: The Service-Timeout and Service-Volume attributes use values captured by the Service Manager statistics feature to determine when a threshold is exceeded. Therefore, you must configure and enable statistics collection to use these attributes. See “Configuring Service Manager Statistics” on page 686.

- **Service-Timeout**—The number of seconds that the service session is active. You can specify a number in the range 0–16777215. Values greater than 16777215 are recycled, starting from the initial value of 0. For example, if you specify the value for Service-Timeout VSA as 16777218, this value is equivalent to 2 for this VSA. A value of 0 indicates that the session never times out. A particular Service-Timeout VSA can be used by a maximum of 2000 services.

The service-timeout threshold accuracy is within 30 seconds of the specified value.

- **Service-Volume**—The total number of MB of traffic that can use the service session. You can specify a number in the range 0–16777215 MB. Values greater than 16777215 are recycled, starting from the initial value of 0. A value of 0 indicates that there is no limit to the amount of traffic for the session. For example, if you specify the value for Service-Timeout and Service-Volume VSAs as 16777216 and 16777217, these values are equivalent to 0 and 1 respectively for these VSAs. A particular Service-Volume VSA can be used by a maximum of 1000 services.



NOTE: Service Manager terminates a session when the *output* byte count exceeds the configured service-volume threshold. The output byte count is captured by the **output-stat-clacl** string in the classifier list variable that you configure to collect statistics. See “Configuring Service Manager Statistics” on page 686.

The service-volume threshold accuracy is based on a 10-second period. Service Manager does not immediately deactivate a service session when the output byte count reaches the service-volume threshold. Instead, Service Manager checks the volume in 10-second intervals and deactivates a service session at the end of the 10-second period in which the output byte count reaches the volume threshold. For example, if a threshold is reached 4 seconds into the 10-second interval, the session continues for the remaining 6 seconds in the measuring period and is then terminated. Therefore, the total volume equals the threshold plus the volume during the additional 6 seconds.

When the output byte count reaches the threshold, RADIUS deactivates the service session. You must use tags to associate threshold attributes with the Activate-Service attribute for the service session.

Using the Deactivate-Service Attribute

You can also include the Deactivate-Service attribute in the subscriber’s RADIUS record. The format for this attribute is the same as the format of the Activate-Service attribute—the name of the service, including parameters. The Deactivate-Service

attribute is used by RADIUS CoA messages, such as in a guided entrance service. See “Guided Entrance Service Example” on page 693 for more information.

Using Mutex Groups to Activate and Deactivate Subscriber Services

Service Manager supports two methods that use RADIUS CoA-Request messages to activate and deactivate subscriber services and that can also dynamically change a service that is currently provided to a subscriber.

In the first method, you use a CoA message with the Activate-Service VSA to activate the new service; you can optionally include the Deactivate-Service VSA to deactivate the subscriber’s existing service. This method is described in “Using RADIUS to Activate Subscriber Service Sessions” on page 661.

The second method uses mutual exclusion (mutex) groups to create mutex services. With this method, you group services together in a mutex group. When you use a CoA message to activate a service that is in a mutex group, Service Manager activates the new service and implicitly deactivates any existing service that it is a member of the same mutex group as the newly activated service. Service Manager does not deactivate an existing service that is a member of a different mutex group or is not a member of a mutex group.

Using mutex services results in an more reliable activation and deactivation process than the original CoA-Request method. With mutex services, Service Manager always activates the new service before deactivating the existing service. This ensures that the subscriber is never without an active service. In the original CoA-Request method, the order of activation and deactivation is random—in some cases the existing service might be deactivated before the new service is activated, or the new activation might fail. In these cases, the subscriber might be without an active service.

If statistics are enabled when you activate a mutex service, Service Manager sends a RADIUS Acct-Stop message for the deactivated service.

Activating and Deactivating Multiple Services

The Service Manager mutex service feature enables you to activate and deactivate multiple services with a single CoA-Request message. A CoA-Request message can have more than one service activation request—the multiple service requests might be from the same mutex group or from different groups. The following examples describe how you might use mutex groups to activate and deactivate multiple services.

- **Example 1—Multiple mutex services of the same mutex group**

Service Manager activates the multiple mutex services, which are in the same group, then deactivates all previously existing services that are also members of that mutex group. Active services that are members of different mutex groups are unaffected.

- **Example 2—Multiple mutex services of different mutex groups**

Service Manager activates the mutex services, which are members of different mutex groups. Service Manager then deactivates all previously existing services that are members of the same mutex groups as any of the newly activated

services. Active services that are members of different mutex groups are unaffected.

Configuring a Mutex Service

To configure and enable a mutex service, you complete the following steps:

1. Create the new service definition and configure the service as a member of a mutex group.

When you create the service definition, include the following service attribute in the service definition, where `groupIndex` identifies the mutex group for this service. The `groupIndex` can be a number in the range -1 to -2147483647 or 1 to 2147483646. If the `groupIndex` is outside of the acceptable ranges, or if you do not include the `mutex-group` statement, the service is not included in a mutex group.

```
<# env.setResult("mutex-group", "groupIndex" ) #>
```

For example (the mutex group attribute is highlighted in bold text):

```
!parameterizes input and output bandwidth
<# tiered(inputBW, outputBW) #>

<# uid := app.servicemanager.getUniqueId #>
<# name := "SM-tiered-" $ uid #>
<# oname := "SM-O-tiered-" $ uid #>

classifier-list matchAll ip any any
rate-limit-profile <# name #> one-rate
committed-rate <# inputBW; '\n' #>

policy-list <# name; '\n' #>
classifier-group matchAll precedence 10000
rate-limit-profile <# name; '\n' #>
traffic-class best-effort

policy-list <# oname; '\n' #>
classifier-group matchAll precedence 10000
traffic-class best-effort

profile <# name; '\n' #>
ip policy secondary-input <# name #> statistics enabled merge
ip policy output <# oname #> statistics enabled merge
qos-profile triplePlayIP
qos-parameter maxSubscBW <# outputBW; '\n' #>

<# env.setResult("mutex-group", "12" ) #>
<# env.setResult("activate-profile", name) #>
<# env.setResult("secondary-input-stat-clacl", "matchAll") #>
<# env.setResult("output-stat-clacl", "matchAll") #>

<# endtmpl #>
```

2. Activate the mutex service

Use a RADIUS CoA-Request message and the new service definition to create the mutex service. The new service is considered a mutex service because it belongs to a mutex group.

Service Manager activates the new service and deactivates any existing active service that is a member of the same mutex group as the new service.

3. (Optional) Verify the status of the new service.

```
host1# show service-management subscriber-session client1@isp.com interface
ip 192.168.0.1
User Name: CLIENT1@ISP.COM, Interface: ip 192.168.0.1
Id: 1
Owner: AAA 4194326
Non-volatile: False
State: Active
ServiceSessions:
      Name                mutex  Owner/Id      State                Operation
-----
tiered(2000000,3000000)  12    AAA 4194326  ConfigApplySuccess  Activate
      Name                Non-volatile
-----
tiered(2000000,3000000)  False
```

Combined and Independent IPv4 and IPv6 Services in a Dual Stack Overview

Internet Protocol version 6 (IPv6) is designed to enhance IP addressing and maintain other IPv4 functions that work well. Organizations worldwide are developing new applications to take advantage of the many feature enhancements within IPv6 to help bring back end-to-end controlled communications across a transparent network infrastructure. To ensure optimum performance, such applications implement a dual-stack architecture in which IPv4 and IPv6 protocols share a common transport and framing layer.

A dual-stack implementation supports both IPv4 and IPv6 hosts to help provide a smooth transition to all parts of a enterprise network. With this flexible method of implementation, providers can carry IPv6 traffic over their existing core networks and customers can roll out IPv6 to more sites.

The PPP link between the customer premises equipment (CPE) and the provider edge (PE) device or E Series router equipment might require both IPv4 and IPv6 protocols for transmission of data. Such networks require that PE devices run a dual stack of IPv4 and IPv6 services. In this release, the Service Manager application on the E Series router supports authentication, service selection, and service activation and deactivation to subscribers for both IPv4 and IPv6 protocols in a dual stack configuration.

You can configure services in a dual stack for IPv4 and IPv6 either independently or as a single entity. Service Manager only tracks JUNOSE objects that are passed back in the `env.setResult` method when a service definition is executed. In an IPv6 environment, you must modify the service definition macro file to include the objects that the Service Manager requires to categorize a service as IPv4, IPv6, or a combination of both IPv4 and IPv6.

You can use the **service-interface-type** object in the service definition macro file to specify whether a service must be defined for IPv4 or IPv6. Configuring the service-interface-type object is not mandatory if a service is required only for IPv4 or L2TP subscribers. However, you must specify the service-interface-type object when a service is required for IPv6 subscribers or IPv4 and IPv6 subscribers in a dual stack. After you create a new service definition file with the service-interface-type object and install it on the router, the Service Manager determines whether a service must be tagged as IPv4, IPv6, or a combination of the two by parsing the objects passed using the macro environment command, **env.setResult**. The service-interface-type object can be configured with one of the following values:

- **ipv4**—Specifies that the service session profile must be applied to IPv4 interfaces only. This object is optional only when IPv4 or L2TP subscribers are in a network.
- **l2tp**—Specifies that the service session profile must be applied to L2TP interfaces. This object is optional only when IPv4 or L2TP subscribers are in a network.
- **ipv4-ipv6**—Specifies that the service session profile must be applied to both IPv4 and IPv6 interfaces in a dual stack. You must configure this object when IPv6 subscribers or IPv4/IPv6 subscribers in a dual stack are in a network.
- **ipv6**—Specifies that the service session profile must be applied to IPv6 interfaces only. You must configure this object when IPv6 subscribers or IPv4 and IPv6 subscribers in a dual stack are in a network.

When you create the service definition, include the following service attribute in the service definition if you want the service to be defined for IPv4 interfaces only. The profile identifier returned from the activate-profile object is applied to IPv4 interfaces.

```
<# env.setResult("service-interface-type", ipv4 ) #>
```

To configure a service macro to be used for IPv6 interfaces only, specify the following object in the macro definition file. The profile identifier returned from the activate-profile object is applied to IPv6 interfaces.

```
<# env.setResult("service-interface-type", ipv6 ) #>
```

To configure a service macro to be used for IPv4 and IPv6 interfaces in a dual stack, specify the following object in the macro definition file. The profile identifier returned from the activate-profile object is applied to both IPv4 and IPv6 interfaces.

```
<# env.setResult("service-interface-type", ipv4-ipv6 ) #>
```

Activation and Deactivation of IPv4 and IPv6 Services in a Dual Stack

You can configure IPv4 and IPv6 services in a dual stack either as independent services or as a combined service. The following sections describe the two types of configurations and their behavior when they are activated and deactivated.

Independent IPv4 and IPv6 Services in a Dual Stack

To configure separate services for IPv4 and IPv6 interfaces you must create and install separate service definitions on the router. For example, you can create a service definition called **iponeV4** to be used for IPv4 traffic and service definition

called `iponeV6` to be used for IPv6 traffic. Both the services defined for IPv4 and IPv6 must be configured for the subscriber on the RADIUS server. When the subscriber is authenticated using RADIUS authentication, two services, one each for IPv4 and IPv6, are created. The subscriber service sessions are created and activated when the subscriber logs in using the RADIUS Access-Accept messages, Change-of-Authorization-Request (CoA-Request) messages, or CLI commands. After the subscriber service session is activated, the policies defined in the interface profile specified by the `activate-profile` object in the service macro file are applied to the IPv4 and IPv6 interfaces. Service session profiles provide additional flexibility to the Service Manager application by enabling you to assign one or more supported attributes to a particular activation of a service.

Deactivation of service sessions is also performed for each individual service. If an interface is deleted, all the services associated with that interface are also deleted. For example, if you delete an IPv6 interface, all the services associated with IPv6 are deleted. However, IPv4 subscriber service sessions are not disrupted. When a user logs out of a session, all services associated with the subscriber session are also removed along with the subscriber session. If the subscriber has two services and one of them was not successfully applied to an interface, then that service is removed. For example, if a subscriber has two services, `iponev4` and `iponev6`, configured on the RADIUS server and only one service was successfully configured on an interface, then the failed service is deleted when the service is deactivated.

Combined IPv4 and IPv6 Service in a Dual Stack

To configure a single service for IPv4 and IPv6 interfaces, you can create and install one service definition on the router that handles the traffic for both these protocols. For example, you can create a service definition called `iponeV4V6` to be used for both IPv4 and IPv6 traffic. This service must be configured for the subscriber on the RADIUS server. When the subscriber is authenticated using RADIUS authentication, a single service is created and activated using the RADIUS or CLI client type that Service Manager supports. After the subscriber service session is activated, the policies defined in the interface profile specified by the `activate-profile` object in the service macro file are applied to both IPv4 and IPv6 interfaces. The elements in the profile to be attached to the interfaces are determined by the type of the interface. The combined service session is active if either of the two conditions is satisfied:

- Both the IPv4 and IPv6 interfaces are up
- Either the IPv4 or IPv6 interface is up

Deactivation of service sessions results in disconnection of services for both IPv4 and IPv6 subscribers.

Performance Impact on the Router and Compatibility with Previous Releases for an IPv4 and IPv6 Dual Stack

In an environment where only IPv4 subscribers exist, the memory usage on the E Series router is the same as the usage in previous releases. If IPv4 and IPv6 are configured as independent services, memory usage increases because each IPv6 service is counted as a separate service and uses all the system resources than an IPv4 service requires. Memory impact in such a case is proportional to the total

number of services configured. You can view the number of service sessions currently active for a subscriber by viewing the Service Sessions field from the output of the **show service-management** command.

If you configured a combined IP4 and IPv6 service, the memory usage is the same as that required for one subscriber service session. The number of subscribers that are supported by the line modules depends on the number of available resources, such as external parent groups. If you configure services that are to be used in an IPv4 or L2TP network, you need not change the previously defined service macros. However, if a subscriber requires the service macro applied to IPv6 interfaces or wants to apply a combined policy for both IPv4 and IPv6 interfaces, you must modify the macro file for the appropriate service interface type.

Configuring RADIUS Accounting for Service Manager

The Service Manager application supports RADIUS accounting and interim accounting for subscriber service sessions that are activated by the RADIUS login and RADIUS CoA methods. When RADIUS accounting is enabled, RADIUS generates:

- An Acct-Start message when a service session is activated
- An Acct-Stop message when a service session is deactivated
- Interim-Acct messages

RADIUS accounting messages always include Service Manager time statistics. You must enable Service Manager volume statistics for a service session.

When you terminate a subscriber session, Service Manager first sends RADIUS Acct-Stop messages for any active services associated with the subscriber session, and then sends the Acct-Stop message for the subscriber session.



NOTE: Service Manager statistics collection is a three-part procedure. You must configure statistics information in the service definition macro file, enable statistics collection by either RADIUS or the CLI, and also enable statistics collection for the policy referenced in the service macro using the **statistics enabled** keyword in the command for policy assignment to a profile at the time of attachment of the policy to an interface. For detailed information about Service Manager statistics, see “Configuring Service Manager Statistics” on page 686.

To support RADIUS accounting for Service Manager, the RADIUS Acct-Session-ID attribute [44] has been extended to include a colon-separated identifier, which uniquely identifies a service for a subscriber. For example:

```
erx FastEthernet 12/0:0001048580:002478
```

The Service-Session attribute (VSA 26-83) identifies the name of the service. This attribute is the value of the Activate-Service or Deactivate-Service attribute (including parameter values) that was used in the RADIUS Access-Accept message to activate or deactivate the service session. For example:

```
tiered(1280000, 5120000)
```


Table 147 on page 673 lists the RADIUS accounting attributes used by the Service Manager application.

Table 147: Service Manager RADIUS Accounting Attributes

Attribute Number	Attribute Name	RADIUS Message Type	VSA Description
[26-83]	Service-Session	For service sessions only: Acct-Start Acct-Stop Interim-Acct	Name of the service (including parameter values) with which the statistics are associated
[26-140]	Service-Interim-Acct-Interval	Access-Accept and CoA-Request	Number of seconds between accounting updates for a service; a tagged VSA
[44]	Acct-Session-ID	Acct-Start Acct-Stop Interim-Acct	Accounting identifier that makes it easy to match start and stop records in a log file; the format is extended to include a colon-separated value that uniquely identifies the subscriber session

Configuring Service Interim Accounting

Interim accounting determines how often accounting information is updated and sent to an accounting server. In addition to the user-based interim accounting supported on the router, Service Manager supports service-related interim accounting—you can configure an interim accounting interval for services that are created during a user RADIUS-based login and services that are activated by a CoA operation.

The service interim accounting interval is specified by the RADIUS Service-Interim-Acct-Interval attribute (VSA 26-140) that is included in the RADIUS Access-Accept message or CoA-Request message that activates a service session. Because the Service-Interim-Acct-Interval attribute is a tagged attribute, you can configure different interim accounting intervals for a particular user's various services.

You can use the **aaa service accounting interval** command to specify the default service interim accounting interval. Service Manager uses this interval value for service accounting when the Service-Interim-Acct-Interval attribute is not configured.



NOTE: You can also configure interim accounting for users. A user interim accounting interval is configured in the Acct-Interim-Interval RADIUS attribute (RADIUS attribute 85). You use the **aaa user accounting interval** command to specify the default user interim accounting interval, which is used when RADIUS attribute 85 is not configured. See “Configuring Remote Access” on page 3 for information about configuring user interim accounting.

When the Service-Interim-Acct-Interval attribute is configured for a service, Service Manager uses the guidelines shown in Table 148 on page 674 to determine the correct interim accounting interval to use for the service.

Table 148: Determining the Service Interim Accounting Interval

Service-Interim-Acct-Interval Value	Service Manager Action
0	Disables interim accounting for the service
1–599	Uses 600
600–86400	Uses the specified value
86401 or greater	Uses 86400
The tag for the service-interim-acct-interval attribute does not match the tag for any service-activate attribute (VSA 26-65)	Discards the service-interim-acct-interval attribute

Table 149 on page 674 describes a sample Acct-Start message for a service session. In the table, the three fields used by Service Manager are shown in bold characters. An Acct-Start message for a subscriber session without any active services does not include the Service-Session attribute.

Table 149: Sample Acct-Start Message for a Service Session

RADIUS Attribute	Sample Value
acct-status-type	1
username	client1@isp1.com
event-timestamp	1112191723
acct-delay-time	0
nas-identifier	ERX-01-00-06
acct-session-id	erx FastEthernet 12/0:0001048580:002478
nas-ip-address	10.6.128.45
class	(binary data)
framed-protocol	0
framed-compression	0
framed-ip-address	100.20.0.1
framed-ip-netmask	0.0.0.0

Table 149: Sample Acct-Start Message for a Service Session (continued)

RADIUS Attribute	Sample Value
ingress-policy-name (vsa)	forwardAll
egress-policy-name (vsa)	forwardAll
calling-station-id	#ERX-01-00-06#E12#0
acct-input-gigawords	0
acct-input-octets	4032
acct-output-gigawords	0
acct-output-octets	2163
acct-input-gigapackets (vsa)	0
acct-input-packets	7
acct-output-gigapackets (vsa)	0
acct-output-packets	7
nas-port-type	15
nas-port	3221225472
nas-port-id	FastEthernet 12/0
acct-authentic	1
acct-session-time	0
acct-service-session	tiered(1280000, 5120000)
service-interim-acct-interval	1200
1	

aaa service accounting interval

- Use to specify the default interval between service accounting updates. Service manager uses the default interval when no value is specified in the Service-Interim-Acct-Interval attribute (Juniper VSA 26-140).
- This command and the **aaa user accounting interval** command replace the **aaa accounting interval** command, which is deprecated and might be removed in a future release.
- The default interval is applied on a virtual router basis—this setting is used for services associated with all users who attach to the corresponding virtual router.
- Specify the service accounting interval, in the range 10–1440 minutes. The default setting is 0, which disables the feature.



NOTE: To enable interim service accounting, the service accounting interval must be set to a non-zero value and the service statistics type must *not* be set to *none*.

- Example

```
host1(config)#aaa service accounting interval 60
```

- Use the **no** version to reset the accounting interval to 0, which turns off interim service accounting when no value is specified in the Service-Interim-Acct-Interval attribute (Juniper VSA 26-140).
- See aaa service accounting interval

aaa user accounting interval

- Use to specify the default interval between user accounting updates. The router uses the default interval when no value is specified in the RADIUS Acct-Interim-Interval attribute (RADIUS attribute 85).
- This command and the **aaa service accounting interval** command replace the **aaa accounting interval** command, which is deprecated and might be removed in a future release.
- The default interval is applied on a virtual router basis—this setting is used for all users who attach to the corresponding virtual router.
- Specify the user accounting interval, in the range 10–1440 minutes. The default setting is 0, which disables the feature.
- Example

```
host1(config)#aaa user accounting interval 20
```

- Use the **no** version to reset the accounting interval to 0, which turns off interim user accounting when no value is specified in the RADIUS Acct-Interim-Interval attribute.
- See aaa user accounting interval

Service Interim Accounting for IPv4 and IPv6 Services in a Dual Stack Overview

You can query the external parent group statistics similar to the statistics retrieved for classifier lists. You must specify the correct external parent group name and its corresponding hierarchical policy parameter for each of the input, output, and secondary-input statistics. You can specify a list of external parent groups along with hierarchical policy parameter for which statistics must be collected and sent to Service Manager for display in the Acct-Stop and Interim-Acct messages. The statistics for packets arriving at an interface attached at the input stage and the statistics for packets arriving at an interface attached at the secondary input stage are added and displayed in the Input Bytes field of the **show service-management** command. The statistics for packets leaving an interface at which the hierarchical policy is defined are displayed in the Output Bytes field of the **show service-management** command. The external parent group statistics are not limited to combined IPv4 and IPv6 services

in a dual stack. You can also obtain external parent group statistics for IPv4 and IPv6 services configured independently in a dual stack.

You can retrieve either external parent group statistics or classifier statistics from policy manager. However, you cannot retrieve both the statistics for a single service definition. When a combined service is configured, you cannot retrieve classifier list-based statistics. In such a scenario, you can only retrieve external parent group-based statistics from policy manager.

Service interim accounting and accounting based on service deactivation are supported for IPv6 services. For the combined IPv4 and IPv6 service, the statistics are a sum of the values in the external parent group and hierarchical policy parameter pair lists (defined as input-stat-epg, secondary-input-stat-epg, and output-stat-epg in the service definition macro).

If an interface fails, service-related interim accounting does not calculate the packets that are transmitted through this failed interface. For statistics reporting, only those packets that exist for interfaces when the subscriber service session is deactivated are counted.

Using the CLI to Manage Subscriber Service Sessions

The CLI-based Service Manager creates static subscriber sessions and service sessions. You can also use CLI commands to immediately deactivate subscriber service sessions. The CLI-based support is particularly useful for:

- Testing your service definitions—for example, you might use the CLI commands to verify that a newly created service definition is correct. When you are satisfied with the service definition, you can then use RADIUS to activate the service for your subscribers.
- Preprovisioning Service Manager services—preprovisioning improves performance and efficiency by freeing Service Manager from having to repeatedly create and remove a service that you activate and deactivate for multiple subscribers. See “Preprovisioning Services” on page 680 for more information about service preprovisioning.

Using the CLI to Activate Subscriber Service Sessions

A subscriber session represents a specific subscriber—the session consists of the subscriber’s name, the interface used for the session, and any active services for the subscriber. A subscriber can have one subscriber session active at any given time.

You create a subscriber’s service session when you assign a service definition to a subscriber session. Like an AAA-created service, a single subscriber session can have multiple simultaneous service sessions. You can use one method to create the subscriber session, and then a different method to activate the subscriber’s service session. For example, you might use RADIUS to create the AAA subscriber session, then use the CLI to activate the service session for the subscriber. You can optionally specify a service session profile that you want to attach to the service session.

You can use the CLI to activate a service session based on subscriber information or owner information:

- Subscriber name and interface method—Activates the service session based on the subscriber name and the interface that the subscriber is using for this subscriber session.

```
host1(config)#service-management subscriber-session client1@isp1.com  
interface atm 4/0.1 service-session " tiered(1280000, 5120000)"
```

- Owner name and ID method—Activates the service session based on the owner that created the subscriber session and the ID that was generated by the owner. For example, if RADIUS is used to create the subscriber session, the owner name is AAA and the owner ID is the Acct-Session-ID that was generated by RADIUS during subscriber creation.

```
host1(config)#service-management owner-session AAA 537446 service-session  
" tiered(1280000, 5120000)"
```



NOTE: You must specify the parameter values in the order in which the parameters appear in the template name of the service definition file. Enclose the service definition name in double quotation marks, with the service's parameter values in parentheses. For example, for the tiered service that is defined in Figure 29 on page 648, the template name is:

```
<# tiered(inputBW, outputBW) #>
```

Use the following format with the **service-session** keyword:

```
" tiered(1280000, 5120000)"
```

service-management owner-session

- Use to activate a service for an existing subscriber by identifying the owner used to create the subscriber session and specifying the service session to use.
- The subscriber session must exist before you use this command.
- Use this command in Privileged Exec mode to create a dynamic subscriber session—dynamic sessions are deleted after a router reboot.
- Use this command in Global Configuration mode to create persistent subscriber sessions that are retained across reboots.
- Specify the name of the owner (the method originally used to create the subscriber session), and the ID generated by the of the owner. For example, if RADIUS was used to create the subscriber session, the owner name is AAA and the owner ID is the Acct-Session-ID generated by RADIUS when the subscriber session was created.
- Include the optional **service-session-profile** keyword to assign a profile to the service session. The service session profile includes additional attributes, such as the type of statistics to be captured for the service session.
- You can activate one subscriber session for a subscriber—and multiple service sessions for a particular subscriber session. If you create a second subscriber

session for the same subscriber, only the newest subscriber session, with its services, is used.

- Example 1—Activate a service session for an existing subscriber

```
host1(config)#service-management owner-session aaa 573498 service-session  
"video(4500000, 192.168.10.3)"
```

- Example 2—Activate multiple service sessions for an existing subscriber

```
host1(config)#service-management owner-session aaa 573498 service-session  
"video(4500000, 192.168.10.3)"  
host1(config)#service-management owner-session aaa 573498 service-session  
"tiered(1000000, 2000000)"  
host1(config)#service-management owner-session aaa 573498 service-session  
"voice(1000000, 10.10.10.1)"
```

- Example 3—Include a service session profile when you activate a subscriber's service session

```
host1(config)#service-management owner-session aaa 426777 service-session  
"video(4500000, 192.168.10.3)" service-session-profile vodISP1
```

- Use the **no** version to deactivate service sessions based on owner information. See "Using the CLI to Deactivate Subscriber Service Sessions" on page 683 for more information about deactivating subscriber service sessions.
- See service-management owner-session

service-management subscriber-session service-session

- Use to activate a service for a subscriber by creating a subscriber session and a service session.



NOTE: Always activate at least one service session for a subscriber session. The ability to create a subscriber session without a service session (by omitting the **service-session** keyword) is not currently supported.

- Use this command in Privileged Exec mode to create a dynamic subscriber session—dynamic sessions are deleted after a router reboot.
- Use this command in Global Configuration mode to create persistent subscriber sessions that are retained across reboots.
- Include the optional **service-session-profile** keyword to assign a profile to the service session. The service session profile includes additional attributes, such as the type of statistics to be captured for the service session.
- You can create one subscriber session for a subscriber—and multiple service sessions for a particular subscriber session. If you create a second subscriber session for the same subscriber, only the newest subscriber session, with its services, is used.
- Example 1—Activate a subscriber session with a single service session

```
host1(config)#service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session "video(4500000, 192.168.10.3)"
```

- Example 2—Activate a single subscriber session with multiple service sessions

```
host1(config)#service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session "video(4500000, 192.168.10.3)"
host1(config)#service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session "tiered(1000000, 2000000)"
host1(config)#service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session "voice(1000000, 10.10.10.1)"
```

- Example 3—Include a service session profile when you activate a subscriber's service session

```
host1(config)#service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session "video(4500000, 192.168.10.3)"
service-session-profile vodISP1
```

- Use the **no** version to deactivate service sessions. See "Using the CLI to Deactivate Subscriber Service Sessions" on page 683 for more information about deactivating subscriber service sessions.
- See service-management subscriber-session service-session

Preprovisioning Services

Preprovisioning service sessions is a technique you can use to improve Service Manager's performance. Typically, when you use a service definition to activate a subscriber's service session, Service Manager uses resources to build that service. However, if you later use the same service definition to activate a service session for a second subscriber, Service Manager does not have to rebuild the service—it bases the new service on the service that it built for the first service session. After you deactivate the first session, Service Manager must build a new service for any subsequent subscribers.

Preprovisioning entails activating a service for a dummy user on the null interface. You can then use the preprovisioned service session to activate service sessions for actual subscribers. This technique improves performance because you only require Service Manager to build the service one time, then reuse the original service when you activate future subscriber service sessions.

To preprovision a service you use a command similar to the following example:

```
host1(config)#service-management subscriber-session dummy interface null
service-session "tiered(1000000, 2000000)"
```

Using Service Session Profiles

Service session profiles provide additional flexibility to the Service Manager application by enabling you to assign one or more supported attributes to a particular activation of a service.

For example, you might assign the same video service to two subscribers, but use different service session profiles to set different time limits for each subscriber's service. One subscriber uses the video service for 5 hours (18000 seconds) while the other subscriber's video service is for 10 hours (36000 seconds). Or, you might enable statistics on a subscriber's voice service and disable statistics on the same subscriber's video service.

You can create multiple service session profiles independent of the service activation process. Then, when you activate a service session, you specify the profile that you want to use with that particular service session—you can apply one profile to a service session.

You can configure the following attributes in service session profiles:

- **statistics**—Enables statistics and specifies the type of statistics you want to capture for the service. See “Configuring Service Manager Statistics” on page 686 for additional information about capturing Service Manager statistics. You can specify the following types of statistics:
 - **time**—The service's duration
 - **volume-time**—The service's duration and traffic volume
- **volume**—Specifies that the service is automatically deactivated when the indicated traffic volume is exceeded.
- **time**—Specifies that the service is automatically deactivated when the indicated time period is exceeded.



NOTE: The **volume** and **time** attributes use values captured by the Service Manager statistics feature to determine when the threshold is exceeded. Service Manager collects time statistics by default—you must configure and enable volume statistics collection. See “Configuring Service Manager Statistics” on page 686.

To create or modify a service session profile:

1. Specify the name of the service session profile; doing this enters Service Session Profile Configuration mode.

```
host1(config)#service-management service-session-profile vodISP1
host1(config-service-session-profile)#
```

2. Specify the attributes you want to include in the profile.

```
host1(config-service-session-profile)#statistics volume-time
host1(config-service-session-profile)#time 6000
```

3. (Optional) To modify an existing profile, you can add new attributes or use the **no** version of a command to remove an attribute.

```
host1(config-service-session-profile)#no time
```

service-management service-session-profile

- Use to create a new service session profile or to specify the name of an existing profile you want to modify, and to enter Service Session Profile Configuration mode.
- In Service Session Profile Configuration mode, you specify the attributes used in the service session profile, such as the maximum volume limit for the session and the maximum time the session can be used. You can also specify that Service Manager collect statistics for time, or volume, or both.
- Example

```
host1(config)#service-management service-session-profile vodISP1
host1(config-service-session-profile)#
```

- Use the **no** version to delete the service session profile.
- See service-management service-session-profile

statistics

- Use to enable statistics collection and to specify the type of statistics to collect.
 - Use the **time** keyword to collect statistics about the duration of the service session.
 - Use the **volume-time** keyword to collect statistics about both the volume of traffic and the duration of the service session.
- Example

```
host1(config)#service-management service-session-profile vodISP1
host1(config-service-session-profile)#statistics volume-time
```

- Use the **no** version to disable statistics collection.



NOTE: Service Manager statistics collection is a three-part procedure. You must configure statistics information in the service definition macro file, enable statistics collection by either RADIUS or the CLI, and also enable statistics collection for the policy referenced in the service macro using the **statistics enabled** keyword in the command used for policy attachment in the profile. See “Configuring Service Manager Statistics” on page 686.

- See statistics

time

- Use to specify the maximum amount of time that the service session can be active for the subscriber.
- The router immediately terminates the subscriber’s service session when the specified time is exceeded.
- The range is 0–16777251 seconds.
- Example

```
host1(config)#service-management service-session-profile vodISP1
host1(config-service-session-profile)#time 6000
```

- Use the **no** version to delete the time attribute from the service session profile.
- See time

volume

- Use to specify the maximum amount of bandwidth that can use the service.
- The router immediately terminates the subscriber's service session when the specified traffic volume is exceeded.



NOTE: The **volume** attribute uses values captured by the Service Manager statistics feature to determine when the threshold is exceeded. Therefore, you must configure and enable statistics collection to use this attribute. See “Configuring Service Manager Statistics” on page 686.

- The range is 0–16777251MB.
- Example

```
host1(config)#service-management service-session-profile vodISP1
host1(config-service-session-profile)#volume 1000000
```

- Use the **no** version to delete the volume attribute from the service session profile.
- See volume

Using the CLI to Deactivate Subscriber Service Sessions

The CLI supports several methods that enable you to manually deactivate service sessions. You can:

- Gracefully terminate all services or a specific service for a particular subscriber
- Gracefully terminate all service or a specific service associated with a particular owner
- Force the immediate termination of all of a subscriber's sessions
- Use service session profiles to create time or volume thresholds for the service and deactivate the service when the threshold is reached. See “Using Service Session Profiles” on page 680.



NOTE: You can use the CLI commands described in this section to delete subscriber and service sessions that are created by either RADIUS or the CLI.

The Service Manager CLI commands enable you to use variations of the **no service-management subscriber-session** command to terminate service sessions.

Gracefully Deactivating Subscriber Service Sessions

Use the following commands to gracefully deactivate subscriber's services—you can deactivate a specific service for a subscriber, or you can delete a subscriber session, which deactivates all of the subscriber's service sessions. We recommend you use this command to deactivate subscriber service sessions.

no service-management owner-session

- Use to gracefully deactivate service sessions for a subscriber based on owner information.
- Specify the owner name and owner ID of the service session you want to deactivate.
- Use the **no** version with the **service-session** keyword to deactivate the specified service session.
- Use the **no** version *without* the **service-session** keyword to delete the subscriber's session and deactivate all of the subscriber's service sessions.
- Example

```
host1(config)#no service-management owner-session aaa 426777
service-session "video(4500000, 192.168.10.3)"
```

- This is the **no** version of the **service-management owner-session** command.
- See service-management owner-session

no service-management subscriber-session service-session

- Use to gracefully deactivate service sessions for a subscriber.
- Use the subscriber's username and interface, not the subscriber session ID, for graceful deactivation.
- Use the **no** version without the **service-session** keyword to delete the subscriber's session and deactivate all of the subscriber's service sessions.
- Use the **no** version with the **service-session** keyword to deactivate the specified service session.
- Example

```
host1(config)#no service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session "tiered(1000000, 2000000)"
```

- This is the **no** version of the **service-management subscriber-session** command.
- See service-management subscriber-session service-session

Forcing Immediate Deactivation of Subscriber Service Sessions

Use the following command to force the immediate deactivation of the specified subscriber session—doing this deletes all active service sessions for the subscriber.

We recommend this method if you encounter difficulty when you used the graceful deactivation method. Always use the graceful method first.

no service-management subscriber-session force

- Use to force the immediate termination of a subscriber session and to deactivate all services for the specified subscriber session.
- You must specify the subscriber session ID to use the **force** keyword to terminate the subscriber session.



NOTE: To determine the subscriber session ID of a session you want to deactivate, use the **show service-management subscriber-session brief** command. The display lists the IDs of all active subscriber sessions and the owner that created the session, such as AAA (RADIUS) or CLI.

- Example

```
host1(config)#no service-management subscriber-session 8 force
```

- There is no affirmative version of this command; there is only a **no** version.
- See no service-management subscriber-session force

Using Service Session Profiles to Deactivate Service Sessions

To terminate a subscriber service session when a threshold is reached, you create a service session profile that includes a time threshold, or a volume threshold, or both. Then, you attach the service session profile when you activate the service session. When the specified threshold is reached, the service session is terminated.



NOTE: This feature is not supported by the **service-management owner-session** command. The **service-management owner-session** command only supports service session profiles when activating service sessions.

The following example shows the commands you might use to create a time threshold for deactivating a service session. See “Using Service Session Profiles” on page 680 for information about using the **time** and **volume** keywords in service session profiles.

To create or modify a service session profile:

1. Specify the name of the service session profile and configure the threshold:

```
host1(config)#service-management service-session-profile vodISP1
host1(config-service-session-profile)#time 6000
host1(config-service-session-profile)#exit
```

2. Include the service session profile when you activate the subscriber service session:

```
host1(config)#service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session "video(4500000, 192.168.10.3)"
service-session-profile vodISP1
```

Configuring Service Manager Statistics

The Service Manager application provides a flexible and efficient process for identifying and capturing statistics related to subscriber service sessions. Configuring Service Manager to collect statistics is a three- part process. First, you design the service definition macro file to identify the statistics that you want to collect. Second, you configure Service Manager to enable statistics collection when a service session is activated by either RADIUS or the CLI. Third, before you reference a policy in the service definition macro to enable Service Manager collect statistics, you must enable statistics collection for this policy using the **statistics enabled** keyword in the command used for policy attachment in the profile.

The following section describes how to configure the service definition macro file. For information about configuring Service Manager to enable statistics, see “Enabling Statistics Collection with RADIUS” on page 687 if you are using RADIUS to activate services, or see “Enabling Statistics Collection with the CLI” on page 688 if you are using the CLI.

Setting Up the Service Definition File for Statistics Collection

Service Manager statistics are based on classifier lists—the classifier lists are referenced by policy lists that you define in your service definition macro file.

When you configure your service definition for statistics, you include the macro environment command **env.setResult** to indicate the type of statistics to track and to identify the classifier lists to use when generating statistics. The format of the environment command is:

```
<# env.setResult("string" , "classifier-list-name" ) #>
```

The *string* variable specifies the type of statistics to track—Service Manager supports the following strings:

- **input-stat-clacl**—track input statistics
- **output-stat-clacl**—track output statistics
- **secondary-input-stat-clacl**—track input statistics for a policy attached at the secondary input stage

The *classifier-list-name* variable is the name of the classifier list that is associated with the policy list that is defined in the service definition. You can specify multiple classifier lists in the command.

Example 1 This example is a portion of the service definition macro file in Figure 29 on page 648. The two highlighted commands specify the statistics used by the Service Manager application.

```
profile <# name; '\n' #>
```

```

ip policy secondary-input <# name #> statistics enabled merge
ip policy output <# oname #> statistics enabled merge
qos-profile triplePlayIP
qos-parameter maxSubscBW <# outputBW; '\n' #>
<# env.setResult("activate-profile", name) #> <#
env.setResult("secondary-input-stat-clacl", "matchAll") #> <#
env.setResult("output-stat-clacl", "matchAll") #>
<# endtmpl #>

```

The `<# env.setResult("secondary-input-stat-clacl", "matchAll") #>` command specifies that Service Manager track statistics associated with the classifier list named `matchAll`, and that this classifier list is associated with the policy that is attached at the secondary input stage.

The `<# env.setResult("output-stat-clacl", "matchAll") #>` command specifies that Service Manager track the output statistics associated with the `matchAll` classifier list, which is associated with the policy attached at the output stage.



NOTE: Before you reference as policy in the service definition macro to enable Service Manager collect statistics, you must enable statistics collection for this policy using the **statistics enabled** keyword in the command used for policy attachment in the profile.

Example 2 This example shows how you can also configure your service definition to collect total statistics from multiple classifier lists. The following command specifies that three classifier lists are used to generate output statistics for a service created by the service definition. Each time statistics are reported for this service, Service Manager uses the total of the statistics for `clacl1`, `clacl2`, and `clacl3`.

```
<# env.setResult("output-stat-clacl", "clacl1 clacl2 clacl3" ) #>
```

Enabling Statistics Collection with RADIUS

You use the Service-Statistics RADIUS VSA [26-69] with either the RADIUS login or CoA-Request method to enable statistics for RADIUS-activated service sessions. To enable statistics, configure the Service-Statistics VSA with a value of either 1 (timestamp only) or 2 (volume and timestamp).

Table 150 on page 687 describes a partial RADIUS message in which the Service-Statistics attribute has a value of 2—this enables volume and timestamp statistics for the tiered service assigned to subscriber `client1@isp1.com`.

Table 150: RADIUS-Enabled Statistics

RADIUS Attribute	Tag	Value
username	none	client1@isp1.com
activate-service	6	tiered(1280000, 5120000)

Table 150: RADIUS-Enabled Statistics (continued)

RADIUS Attribute	Tag	Value
service-statistics	6	2

When you enable statistics for a RADIUS-activated service, RADIUS accounting reports can use the statistics.

Enabling Statistics Collection with the CLI

You use service session profiles to enable statistics when you activate a service session with the CLI. See “Using Service Session Profiles” on page 680 for detailed information about creating and using service session profiles.

For example, you can use the following procedure to capture statistics that are defined in the service definition macro file for the tiered service:

1. Configure the service session profile to enable statistics. Specify the type of statistics you want to capture (either time or both volume and time).

```
host1(config)#service-management service-session-profile isp1_tiered3
host1(config-service-session-profile)#statistics volume-time
host1(config-service-session-profile)#
```

2. Apply the service session when you activate the subscriber service session.

```
host1(config)#service-management subscriber-session client1@isp1.com
interface atm 4/0.1 service-session “ tiered(1000000, 2000000)”
service-session-profile isp1_tiered3
```

The captured statistics are now used when you use the Service Manager **show service-management** commands. For example:

```
host1# show service-management subscriber-session client1@isp1.com interface atm
4/0.1 service-session
User Name: client1@isp1.com, Interface: atm 4/0.1
Service : tiered(1000000,2000000)
Non-volatile : False
Owner : CLI
State : Config ApplySuccess
Activate : True
Statistics Type : time-based and volume-based
Statistics Complete : False
Poll Interval : 0
Poll Expire : 0
Activate Time : THU MAR 01 21:09:12 2006
Time : 0
Time Expire : 0
Volume MBytes: 2
Volume Expire MBytes: 1
Input Bytes : 594
Output Bytes : 1196
```


Input Packets : 1
Output Packets : 2

External Parent Group Statistics Collection Setup

Policies for interface groups include external parent groups that are implicitly instantiated during policy attachment based on each unique interface group encountered. You can use external parent groups and policy parameters for sharing aggregate nodes across policy attachments. Each external parent group reference in a policy is accompanied by a parameter that is resolved during the attachment of the policy to an interface.

You can retrieve either external parent group statistics or classifier statistics from policy manager. However, you cannot retrieve both statistics for a single service definition. When a combined service is configured, you cannot retrieve classifier list-based based statistics. In such a scenario, you can only retrieve external parent group-based statistics from policy manager.

Only hierarchical policy parameters can have external parent group references. Each parameter has a single value, depending on the type of parameter. The hierarchical policy parameter can have a single numeric value or a keyword. When you configure your service definition for statistics, you include the macro environment command `env.setResult` to indicate the type of statistics to track and to identify the external parent groups to use when generating statistics. The format of the environment command is:

```
<# env.setResult("string" , "external-parent-grp-name policy-parameter-name") #>
```

The *string* variable specifies the type of statistics to track. Service Manager supports the following strings:

- **input-stat-epg**—Track input statistics for an external parent group in a hierarchical policy
- **output-stat-epg**—Track output statistics for an external parent group in a hierarchical policy
- **secondary-input-stat-epg**—Track input statistics for an external parent group in a hierarchical policy attached at the secondary input stage

The *external-parent-grp-name* variable is the name of the external parent group that a classifier group refers to in the policy list that is defined in the service definition. You must specify the external parent group and the hierarchical policy in the `env.setResult` command as a pair. You can specify multiple pairs of external parent groups and hierarchical policies in the command. The *policy-parameter-name* variable is the name of the hierarchical policy that allows classifier groups and parent groups within a policy to point to line module global parent groups. Each reference to a policy parameter in a policy is substituted with its value for all attachments of this policy at the interface.

For example, if *v4v6* is the name of the hierarchical policy parameter and the external parent group names are *vc-v4v6-in* and *vc-v4v6-out*, you must configure both the external parent group names and the corresponding hierarchical policy parameter in the `env.setResult` method for the external parent group statistics to be calculated.

```
<# env.setResult("input-stat-epg", "vc-v4v6-in v4v6" ) #>
<# env.setResult("output-stat-epg", "vc-v4v6-out v4v6" ) #>
```

The `<# env.setResult("secondary-input-stat-epg", "vc-v4v6-in v4v6") #>` command specifies that Service Manager track statistics associated with the external parent group named `vc-v4v6-in` and the corresponding hierarchical policy named `v4v6`, and that this external parent group is associated with the policy that is attached at the input stage.

The `<# env.setResult("output-stat-epg", "vc-v4v6-out v4v6") #>` command specifies that Service Manager track the output statistics associated with the external parent group named `vc-v4v6-out` and the corresponding hierarchical policy named `v4v6`, which is associated with the policy attached at the output stage.

The input and output statistics associated with the external parent group are collected and forwarded to the Service Manager to be displayed in the `Acct-Stop` and `Interim-Acct` messages.

Service Manager Performance Considerations

Like any application, Service Manager requires a certain amount of system resources. Consider the following guidelines to maximize the performance of Service Manager when delivering subscriber services:

- Minimize service definitions—Use the minimum number of JUNOS commands in a service definition to specify a service.
- Reference objects in service definitions—Referencing commonly used objects is more resource-efficient than using unique objects for each subscriber (for example, using a subscriber's IP address as a match criteria in a classifier list).
- Preprovision frequently used services—Preprovisioning saves resources by requiring Service Manager to build a popular service only once. You then reuse the original service when you activate future subscriber service sessions. See "Preprovisioning Services" on page 680 for details.
- Capture volume statistics when needed—Repeatedly capturing volume statistics can waste resources.

Service Definition Examples

This section provides examples of service definition macro files. Commented text explains the parameterized values in the examples. Each example is followed by examples of RADIUS information and the CLI command that you might use to activate a subscriber service session.

Tiered Service Example

This example creates a tiered service. A tiered service typically provides set bandwidths for both inbound and outbound traffic for a subscriber. In this example, the bandwidth values are parameterized. Also, this example assumes that QoS profile `triplePlayIP` and QoS parameter `maxSubscBW` are configured.

```

!parameterizes input and output bandwidth
<# tiered(inputBW, outputBW) #>

<# uid := app.servicemanager.getUniqueId #>
<# name := "SM-tiered-" $ uid #>
<# oname := "SM-O-tiered-" $ uid #>
classifier-list matchAll ip any any
rate-limit-profile <# name #> one-rate
    committed-rate <# inputBW; '\n' #>

policy-list <# name; '\n' #>
    classifier-group matchAll precedence 10000
    rate-limit-profile <# name; '\n' #>
    traffic-class best-effort

policy-list <# oname; '\n' #>
    classifier-group matchAll precedence 10000
    traffic-class best-effort

profile <# name; '\n' #>
    ip policy secondary-input <# name #> statistics enabled merge
    ip policy output <# oname #> statistics enabled merge
    qos-profile triplePlayIP
    qos-parameter maxSubscBW <# outputBW; '\n' #>

<# env.setResult("activate-profile", name) #>
<# env.setResult("secondary-input-stat-clac1", "matchAll") #>
<# env.setResult("output-stat-clac1", "matchAll") #>

<# endtmpl #>

```

Sample RADIUS Attributes

RADIUS Attribute	Tag	Value
username	none	client1@isp1.com
activate-service	1	tiered(1280000, 5120000)

Sample CLI Command

```

host1(config)#service-management subscriber-session client1@isp1.com interface atm 4/0.1 service-session "tiered(1280000, 5120000)"

```

Video-on-Demand Service Definition Example

The following example shows a sample service definition macro file that creates a video-on-demand service—the service provides bandwidth that meets the needs of video streams. The definition creates the bandwidth towards the subscriber and parameterizes the source of the video feed.

The sample CLI command shows an example of the **service-management owner-session** command that you can use to activate the service session.

```

!parameterizes download bandwidth and server address
<# videoMin(downloadBW, serverAddress) #>

```

```

<# uid := app.servicemanager.getUniqueId #>
<# name := "SM-video-" $ uid #>

classifier-list <# name #> ip any <# serverAddress #> 0.0.0.0

policy-list <# name; '\n' #>
  classifier-group <# name #> precedence 5000
    traffic-class video

profile <# name; '\n' #>
  ip policy output <# name #> statistics enabled merge
  qos-parameter maxVideoBW add <# downloadBW; '\n' #>
  exit

<# env.setResult("activate-profile", name) #>
<# env.setResult("output-stat-clac1", name) #>

<# endtmpl #>

```

	Owner	Owner ID	Value
Sample Owner ID	AAA (RADIUS)	Acct-Session-ID (RADIUS attribute 44)	573498

Sample CLI Command `host1(config)#service-management owner-session aaa 573498 service-session "videoMin(4500000, 192.168.23.58)"`

Voice-over-IP Service Definition Example

This example provides a voice-over-IP service. The service is a session border controller (SBC) media gateway (MG)-based service that has upstream and downstream components.

The IP address and port for both the subscriber and the opposite end of the phone call were originally negotiated with the SBC. The VoIP service learns the IP addresses and ports for both ends of the call, and then specifies that any traffic to either end is put in the voice traffic class.

```

!parameterizes source address and port, destination address and port, and protocol type
<# mgFlow(upDA, upDPort, downDA, downDPort, protType) #>

<# uid := app.servicemanager.getUniqueId #>
<# name := "SM-mgFlow-" $ uid #>
<# oname := "SM-O-mgFlow-" $ uid #>

classifier-list <# name #> <# protType #> any <#upDA #> 0.0.0.0 eq <# upDPort; '\n' #>
policy-list <# name; '\n' #>
  classifier-group <# name #> precedence 2000
    traffic-class voice
    forward

classifier-list <# oname #> <# protType #> any <#downDA #> 0.0.0.0 eq <# downDPort; '\n' #>
policy-list <# oname; '\n' #>
  classifier-group <# oname #> precedence 2000
    traffic-class voice

```

```

forward

profile <# name ; '\n' #>
  ip policy input <# name #> statistics enabled merge
  ip policy output <# oname #> statistics enabled merge

<# env.setResult("activate-profile", name) #>

<# endtmpl #>

```

Sample RADIUS Attributes

RADIUS Attribute	Tag	Value
username	none	client1@isp1.com
activate-service	1	mgFlow(10.10.10.10, 1234, 192.168.45.54, 1234, udp)

Sample CLI Command

```

host1(config)#service-management subscriber-session client1@isp1.com interface
atm 4/0.1 service-session "mgFlow(10.10.10.10, 1234, 192.168.45.54, 1234,
udp)"


```

Guided Entrance Service Example

The guided entrance service enables you to create a controlled Internet browsing environment. Guided entrance-based services, which are sometimes called *walled gardens* or *captive portals*, are becoming increasingly important offerings for service providers. When a subscriber logs in and opens a Web browser, the Service Manager guided entrance service transparently directs the subscriber to a specific Web site—at that Web site, the subscriber is presented with a selection of possible services to use. For example, a subscriber might be shown a Web site that offers services such as:

- **Predefined services**—A group of user-selectable services that meets a variety of needs of a single subscriber. The subscriber might select the high-priced highest access speed to perform critical financial transactions but select a lower speed (and lower cost) service for e-mail. For viewing a real-time sports event, the subscriber can select the video-on-demand service. The subscribers have control over the choice and cost of the services they need and use.
- **Prepaid services**—A group of specific services that have been prepaid by the subscriber. For example, a subscriber who has purchased the sports package service is presented with a Web page that lists the currently available sporting events. Or, a subscriber might prepay a VoIP service for a set amount of time.
- **Controlled-service**—An educational service that enables students at a school to access authorized research sites. Or, a limited service for young children that restricts access to safe, closely monitored, age-appropriate Web sites.

Figure 32 on page 694 shows the sequence of actions that take place during a guided entrance service.

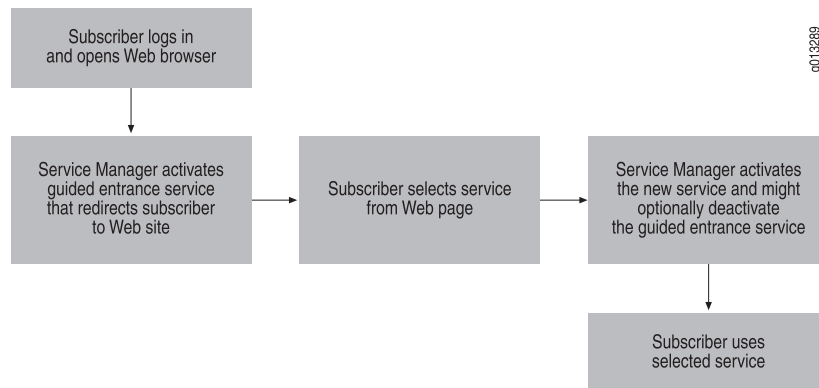Figure 32: Guided Entrance

Service Manager requires additional configuration considerations for the guided entrance service.

- The `<# redirectUrlName := "http://" $ serverIp $ ":" $ serverPort #>` command in the service definition—Specifies the HTTP local service to which the subscriber is redirected after login. See “Guided Entrance Service Definition Example” on page 694 for a sample guided entrance service definition.



NOTE: You must also configure a policy that redirects packets. See *Creating an Exception Rule within a Policy Classifier Group in JUNOS Policy Management Configuration Guide* for information on creating redirect policies.

- HTTP local server application—Used by the policy in the activated service to direct a subscriber to a specific Web site when the subscriber logs in. See “Configuring the HTTP Local Server to Support Guided Entrance” on page 696 for information about the HTTP local server.
- RADIUS Dynamic Request Server and CoA messages—Enables RADIUS to dynamically activate the new service that the subscriber selects at the Web site. Can also optionally deactivate the original guided entrance service session that is used when the subscriber logs in. See “Configuring RADIUS Dynamic-Request Server” on page 241.

Guided Entrance Service Definition Example

This example shows a guided entrance service. Upon login, the subscriber is redirected to a specific uniform resource locator (URL) at which the subscriber can choose from a list of available services.

```

!parameterizes server address and port
<# http(serverIp, serverPort) #>

<# serviceTag := "http-" #>
<# uid := app.servicemanager.getUniqueId #>
<# genericName := "SM-X-" $ serviceTag $ uid #>
<# genericInputName := "SM-I-" $ serviceTag $ uid #>
<# genericOutputName := "SM-O-" $ serviceTag $ uid #>

```

```

<# clacName := genericName #>

<# profileName := genericName #>
<# inputPolicyName := genericInputName #>
<# inputRateLimitName := genericInputName #>
<# outputPolicyName := genericOutputName #>
<# outputRateLimitName := genericOutputName #>

<# exceptionClacName := "exceptionClacPort" $ serverPort #>
<# serverClacName := "serverClacIp" $ serverIp #>
<# redirectUrlName := "http://" $ serverIp $ ":" $ serverPort #>

configure terminal

classifier-list <# serverClacName #> ip any host <# serverIp; '\n' #>

classifier-list <# exceptionClacName #> tcp any any eq <# serverPort; '\n' #>

ip policy-list <# inputPolicyName; '\n' #>
classifier-group <# serverClacName; '\n' #>
    forward
        classifier-group <# exceptionClacName; '\n' #>
            exception http-redirect
        classifier-group *
            filter

profile <# profileName #>
    ip http redirectUrl <# redirectUrlName; '\n' #>
    ip policy input <# inputPolicyName #> statistics enabled merge

<# env.setResult("activate-profile", "" $ profileName) #>

<# endtmp1 #>

```

Sample RADIUS Attributes

RADIUS Attribute	Tag	Value
username	none	client5@isp1.com
activate-service	1	http(192.168.25.2, 80)

Sample CLI Command

```

host1(config)#service-management subscriber-session client5@isp1.com interface
atm 5/0.1 service-session " http(192.168.25.2, 80)"

```

Using CoA Messages with Guided Entrance Services

Typically, a guided entrance service directs a subscriber to a Web site, where the subscriber can select from a group of available services. When the subscriber selects a new service to use, Service Manager uses a RADIUS CoA message to activate the new service—you can also configure RADIUS to deactivate the original guided entrance service. To inform Service Manager to deactivate the original guided entry service, you must include the Deactivate-Service attribute in the RADIUS records of the services that can be selected from the Web site.

If you configure a guided entrance service, you must also ensure that the router's RADIUS dynamic-request server is enabled and supports CoA messages. See “Configuring RADIUS Dynamic-Request Server” on page 241, for information about the RADIUS dynamic-request server and CoA messages.

Table 151 on page 696 describes a partial RADIUS Access-Accept message for a guided entrance service and the CoA-Request message for the tiered service that the subscriber subsequently selects from the Web site. The CoA message for the tiered service includes the Deactivate-Service attribute that deactivates the guided entrance service.

Table 151: Deactivating a Guided Entrance Service

Guided Entrance Service Activated at Login		
RADIUS Attribute	Tag	Value
username	none	client5@isp1.com
activate-service	1	http(192.168.25.2, 80)

Tiered Service Selected at Web Site

RADIUS Attribute	Tag	Value
username	none	client5@isp1.com
activate-service	2	tiered(1280000, 5120000)
deactivate-service		http(192.168.25.2, 80)
service-timeout	2	720
service-statistics	2	2

Configuring the HTTP Local Server to Support Guided Entrance

JUNOS software supports an embedded Web server, known as the HTTP local server, which is used to support the Service Manager application's guided entrance service. With guided entrance, subscribers are directed to a specific Web site when they log in. At the Web site, the subscribers can then select the service they want to use. You can configure one HTTP local server per virtual router. The HTTP local server is disabled by default.

In lower-numbered releases, the HTTP server listened for and processed only IPv4 exception packets. You can now configure the HTTP local server to listen for and process both IPv4 and IPv6 packets.



NOTE: Currently, the HTTP local server does not support two different ports for IPv4 and IPv6 packets. However, the HTTP local server can listen for both IPv4 and IPv6 exception packets on the same port, simultaneously.

To configure the HTTP local server to support guided entrance for IPv4:

1. Access the virtual router context.

```
host1(config)#virtual-router west400
host1:west400(config)#
```

2. Create the HTTP local server.

```
host1:west400(config)#ip http
```

3. (Optional) Specify a standard IP access list that defines which subscribers can connect to the HTTP local server.

```
host1:west400(config)#ip http access-class chicagoList
```

4. (Optional) Specify the port on which the HTTP local server receives connection attempts.

```
host1:west400(config)#ip http port 8080
```

5. (Optional) Specify the maximum number of connections that can exist between one IP address and the HTTP local server.

```
host1:west400(config)#ip http same-host-limit 20
```

6. Specify the maximum time that HTTP local servers maintain connections.

```
host1:west400(config)#ip http max-connection-time 1000
```

7. Enable the HTTP local server to listen for and process IPv4 exception packets

```
host1:west400(config)#ip http server
```

8. Configure the HTTP redirect feature for the profile, interface, or subinterface that will be referenced in the guided entrance service definition.

```
host1:west400(config)#profile guidEnt6
host1:west400(config-profile)#ip http redirectUrl http://ispsite.redirect.com
```

To configure the HTTP local server to support guided entrance for IPv6:

1. Access the virtual router context.

```
host1(config)#virtual-router west400
host1:west400(config)#
```

2. Create the HTTP local server.

```
host1:west400(config)#ipv6 http
```

3. (Optional) Specify a standard IP access list that defines which subscribers can connect to the HTTP local server.

```
host1:west40(config)#ip http access-class chicagoList
```

4. (Optional) Specify the port on which the HTTP local server receives connection attempts.

```
host1:west40(config)#ipv6 http port 8080
```



NOTE: You can modify the port on which the HTTP local server receives connection attempts. However, you must first disable the HTTP local server and then modify the port.

5. (Optional) Specify the maximum number of connections that can exist between one IP address and the HTTP local server.

```
host1:west40(config)#ip http same-host-limit 20
```

6. Specify the maximum time that HTTP local servers maintain connections.

```
host1:west40(config)#ip http max-connection-time 1000
```

7. Enable the HTTP local server to listen for and process IPv6 exception packets.

```
host1:west40(config)#ipv6 http server
```

8. Configure the HTTP redirect feature for the IPv6 profile, interface or subinterface to be referenced in the guided entrance service definition.

```
host1:west40(config)#interface gigabitEthernet 6/0
host1:west40(config-if)#ipv6 http redirectUrl http://ispsite.redirect.com
```

HTTP Local Server Commands

This section describes the commands used to configure the HTTP local server application for IPv4 and IPv6 on the E Series router.

ip http

- Use to create the HTTP local server for IPv4.
- Example

```
host1(config)#ip http
```

- Use the **no** version to delete the HTTP local server.
- See `ip http`

ip http access-class

- Use to allow only subscribers on the specified standard IP access list to connect to the HTTP local server.

- Example

```
host1(config)#ip http access-class chicagoList
```

- Use the **no** version to remove the association between the access list and the HTTP local server.
- See ip http access-class

ip http max-connection-time

- Use to specify the maximum time that the HTTP local server maintains an inactive connection.
- Specify a time in the range 3–7200 seconds, or 0. A value of 0 causes the server to maintain an inactive connection indefinitely.
- Example

```
host1(config)#ip http max-connection-time 1000
```

- Use the **no** version to restore the default time, 30 seconds.
- See ip http max-connection-time

ip http port

- Use to specify the port on which the HTTP local server receives connection attempts for IPv4 exception packets.
- Specify a port number in the range 1–65535.
- Example

```
host1(config)#ip http port 8080
```

- Use the **no** version to restore the default port number, 80.
- See ip http port

ip http redirectUrl

- Use to specify the URL to which a subscriber's HTTP access session is redirected.
- The first access session is typically used by the Service Manager application to provide initial provisioning and service selection for the subscriber.
- HTTP redirect is per-interface; use the command in Profile Configuration mode for dynamic interfaces; use the command in Interface Configuration mode or Subinterface Configuration mode for static interfaces.
- The redirect URL can be a maximum of 64 characters.



NOTE: The HTTP local server must be configured and enabled in the virtual router for the interface on which you use the **ip http redirectUrl** command. Otherwise, the URL redirect operation will fail.

- Example

```
host1(config-if)#ip http redirectUrl http://ispsite.redirect.com
```

- Use the **no** version to restore the default, which disables the HTTP redirect feature.
- See ip http redirectUrl

ip http same-host-limit

- Use to specify the maximum number of connections that can exist between one IP address and the HTTP local server.
- Specify a number in the range 0–1000.
- Example

```
host1(config)#ip http same-host-limit 20
```

- Use the **no** version to restore the default number of allowed connections, 3.
- See ip http same-host-limit

ip http server

- Use to enable the HTTP local server to listen for and process IPv4 exception packets.
- Example

```
host1(config)#ip http server
```

- Use the **no** version to disable the HTTP local server.
- See ip http server

ipv6 http

- Use to create the HTTP local server to listen and process for IPv6 exception packets.
- Example

```
host1(config)#ipv6 http
```

- Use the **no** version to delete the HTTP local server.
- See ipv6 http.

ipv6 http port

- Use to specify the port on which the HTTP local server receives connection attempts for IPv6 exception packets.



NOTE: You can modify the port on which the HTTP local server receives connection attempts. However, you must first disable the HTTP local server and then modify the port.

- Specify a port number in the range 1–65535.
- Example

host1(config)#**ipv6 http port 8080**

- Use the **no** version to restore the default port number, 80.
- See `ipv6 http port`.

ipv6 http redirectUrl

- Use to specify the URL to which a subscriber's HTTP access session is redirected.
- The first access session is typically used by the Service Manager application to provide initial provisioning and service selection for the subscriber.
- HTTP redirect is per-interface; use the command in Interface Configuration mode or Subinterface Configuration mode for static interfaces and use the command in Profile Configuration mode for dynamic interfaces.
- The redirect URL can be a maximum of 64 characters.



NOTE: The HTTP local server must be configured and enabled in the virtual router for the interface on which you use the **ipv6 http redirectUrl** command. Otherwise, the URL redirect operation will fail.

- Example

host1(config-if)#**ipv6 http redirectUrl http://ispsite.redirect.com**

- Use the **no** version to restore the default, which disables the HTTP redirect feature.
- See `ipv6 http redirectUrl`.

ipv6 http server

- Use to enable the HTTP local server to listen for and process IPv6 exception packets.
- Example

host1(config)#**ipv6 http server**


- Use the **no** version to disable the HTTP local server.
- See `ipv6 http server`.

Combined IPv4 and IPv6 Service in a Dual Stack Example

When you configure a combined IPv4 and IPv6 service in a dual stack, the policies defined in the interface profile are attached to the appropriate interfaces based on the type of the interface. For example, all IPv4 policies are attached to the IPv4 interface and all IPv6 policies are attached to the IPv6 interface.


Figure 33 on page 702 shows a topology in which the C-VLAN interface on the customer edge device is connected to the ingress IPv4 and IPv6 interfaces on the provider edge or E Series router. A combined IPv4/IPv6 service, which contains a hierarchical policy and an external parent group with a rate-limit profile that is associated with the hierarchical policy, is applied at the secondary input stage on the router. The incoming voice-over-IP classified traffic flows for IPv4 and IPv6 subscribers are allocated a total of 64 Kbps. The common rate limit cannot drop voice-over-IP packets, but must limit the total flow (for IPv4 and IPv6 interfaces) to 64 Kbps.

Figure 33: Input Traffic Flow with Rate-Limit Profile on an External Parent Group for a Combined IPv4/IPv6 Service

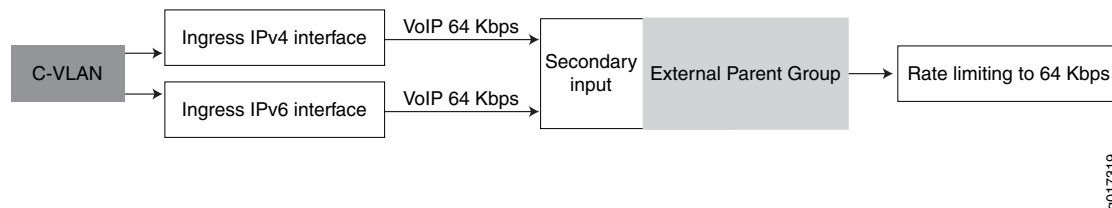

Similarly, for traffic flowing from the provider edge device to the C-VLAN interface for voice-over-IP packets, Figure 34 on page 702 shows how the rate-limit profile in the external parent group associated with a hierarchical policy parameter applied to the egress IPv4 and IPv6 interfaces limits the voice-over-IP traffic flowing to the C-VLAN interface on the customer edge device.

Figure 34: Output Traffic Flow with Rate-Limit Profile on an External Parent Group for a Combined IPv4/IPv6 Service

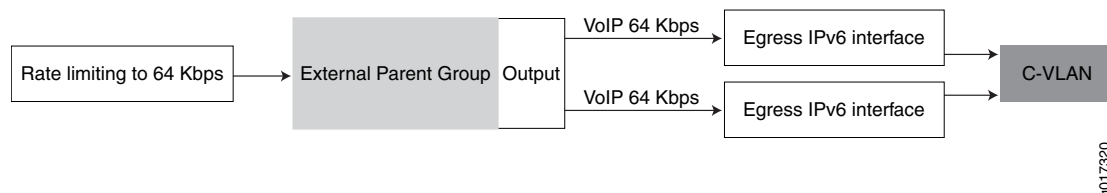

The following example shows the service macro definition file that creates a voice-over-IP service for the topology described above.

```
<# combined_service(inBw, outBw, VBG1, VB6G1, NODE) #>
```

```

<# uid := app.servicemanager.getUniqueId #>
<# genericName := "combined-service-" $ uid #>
<# SACLac1Name := genericName $ "SA" #>
<# profileName := genericName #>

policy-parameter v4v6-<# uid #> hierarchical
  aggregation-node <# NODE #><# '\n' #>

rate-limit-profile rlpv4v6-<# genericName #>-vb-out one-rate hier
  committed-rate <# outBw #><# '\n' #>
  committed-action transmit unconditional
  conformed-action transmit unconditional

rate-limit-profile rlpv4v6-<# genericName #>-vb-in one-rate hier
  committed-rate <# inBw #><# '\n' #>
  committed-action transmit unconditional
  conformed-action transmit unconditional

parent-group vb-v4v6-<# uid #>-in
  rate-limit-profile rlpv4v6-<# genericName #>-vb-in

parent-group vb-v4v6-<# uid #>-out
  rate-limit-profile rlpv4v6-<# genericName #>-vb-out

classifier-list cl46-4-<# genericName #>-vb-in ip any host <# VBG1 #> <# '\n' #>
classifier-list cl46-4-<# genericName #>-vb-out ip host <# VBG1 #> any

ipv6 classifier-list cl46-6-<# genericName #>-vb-in destination-host <# VB6G1 #><# '\n' #>
ipv6 classifier-list cl46-6-<# genericName #>-vb-out source-host <# VB6G1 #><# '\n' #>

ip policy-list pl-v4v6-<# genericName #>-in
  classifier-group cl46-4-<# genericName #>-vb-in external parent-group vb-v4v6-<# uid #>-in parameter
  v4v6-<# uid #><# '\n' #>
  forward

ip policy-list pl-v4v6-<# genericName #>-out
  classifier-group cl46-4-<# genericName #>-vb-out external parent-group vb-v4v6-<# uid #>-out parameter
  v4v6-<# uid #><# '\n' #>
  forward

ipv6 policy-list pl6-v4v6-<# genericName #>-in
  classifier-group cl46-6-<# genericName #>-vb-in external parent-group vb-v4v6-<# uid #>-in parameter
  v4v6-<# uid #><# '\n' #>
  forward

ipv6 policy-list pl6-v4v6-<# genericName #>-out
  classifier-group cl46-6-<# genericName #>-vb-out external parent-group vb-v4v6-<# uid #>-out parameter
  v4v6-<# uid #><# '\n' #>
  forward

profile <# profileName #><# '\n' #>
  ip policy output pl-v4v6-<# genericName #>-out statistics enabled merge
  ip policy secondary-input pl-v4v6-<# genericName #>-in statistics enabled merge
  ipv6 policy output pl6-v4v6-<# genericName #>-out statistics enabled merge

```

```

ipv6 policy secondary-input pl6-v4v6-<# genericName #>-in statistics enabled merge

<# env.setResult("activate-profile", profileName) #>
<# env.setResult("service-interface-type", "ipv4-ipv6") #>
<# env.setResult("secondary-input-stat-epg", "vb-v4v6-"$ uid $"-in v4v6-"$ uid "$") #>
<# env.setResult("output-stat-epg", "vb-v4v6-"$ uid $"-out v4v6-"$ uid "$") #>
<# endtmpl #>

```

In the service definition macro, a hierarchical policy parameter for the rate limit is created with an aggregation node value. The aggregation node stores a single rate-limit instance and statistics for this rate-limit. An external rate-limit aggregation node can be defined by the 4-tuple (slot, direction, external parent group name, parameter value). Each reference to a policy parameter in a policy is substituted with its value for all attachments of this policy at the interface.

Two rate-limit profiles are created, one each for the ingress and egress interfaces. Rate limiters are implemented using a dual token bucket scheme: a token bucket for conformed (yellow) packets and a token bucket for committed (green) packets. The following are the attributes configured in the rate-limit profile applied to ingress and egress interfaces:

- The committed rate for the rate-limit profile is entered as a specified value.
- The committed action, which specifies the action for packets conforming to the committed rate and committed burst size and conforming to the exceed rate and exceed burst size for a rate-limit profile is set to receive transmit unconditional.
- The conformed action, which sets the action for packets not conforming to the committed rate and committed burst size, but conforming to the peak rate and peak burst size for a rate-limit profile is set to receive transmit unconditional.

Two external parent groups, one each for the ingress and egress interfaces, that reference the rate-limit profiles created for incoming and outgoing traffic, are created and specified in the service definition.

Classifier control lists for ingress IPv4 and IPv6 traffic, and for egress IPv4 and IPv6 traffic, are also created. These classifiers classify traffic based on source and destination addresses.

The input and output classifier lists for IPv4 traffic are used in IP policy lists that are attached to the ingress and egress IPv4 interfaces respectively. The input and output classifier lists for IPv6 traffic are used in IPv6 policy lists that are attached to the ingress and egress IPv6 interfaces respectively. The **external parent-group** keyword creates an external parent group in a rate-limit hierarchy for IPv4 and IPv6. All packets matching the classifier are sent to the parent group for further processing.

The policy lists for voice-over-IP traffic are configured in the service definition macro file that creates a combined IPv4/IPv6 service to be applied to the ingress IPv4 and IPv6 interfaces.

A profile is created that you want to attach to the service session. The IPv4 and IPv6 policies for voice-over-IP traffic arriving at the IPv4 and IPv6 interfaces respectively

are applied to the secondary input stage. The IPv4 and IPv6 policies for voice-over-IP traffic leaving the IPv4 and IPv6 interfaces respectively are applied to the output stage. Statistics collection is enabled for the policies referenced in the service macro using the **statistics enabled** keyword in the command used for policy attachment in the profile. The **merge** keyword enables merging of multiple policies to form a single policy.

The `< # env.setResult("activate-profile", profileName) # >` command specifies the interface profile to be used on activation of the interface. After the subscriber service session is activated, the policies defined in the interface profile are applied to both IPv4 and IPv6 interfaces. The elements in the profile to be attached to the interfaces are determined by the type of the interface.

The `< # env.setResult("service-interface-type", "ipv4-ipv6") # >` command configures the service macro to be used for IPv4 and IPv6 interfaces in a dual stack. The profile identifier returned from the activate-profile object will be applied to both IPv4 and IPv6 interfaces.

The service definition macro is configured to collect input and output statistics associated with external parent groups in a hierarchical policy for IPv4 and IPv6 subscribers as follows:

```
<# env.setResult("secondary-input-stat-epg", "vb-v4v6-"$ uid $"-in v4v6-"$ uid "$")
#>
<# env.setResult("output-stat-epg", "vb-v4v6-"$ uid $"-out v4v6-"$ uid "$") #>
```

The `< # env.setResult("secondary-input-stat-epg", "vb-v4v6-"$ uid $"-in v4v6-"$ uid "$") # >` command specifies that Service Manager track statistics associated with the external parent group named vb-v4v6-in and the corresponding hierarchical policy named v4v6, and that this external parent group is associated with the policy that is attached at the input stage.

The `< # env.setResult("output-stat-epg", "vb-v4v6-"$ uid $"-out v4v6-"$ uid "$") # >` command specifies that Service Manager track the output statistics associated with the external parent group named vb-v4v6-out and the corresponding hierarchical policy named v4v6, which is associated with the policy attached at the output stage.

The input and output statistics associated with the external parent group are collected and forwarded to the Service Manager to be displayed in the Acct-Stop and Interim-Acct messages.

If you use the **secondary-input-stat-clacl** and **output-stat-clacl** objects in the service macro to track Service Manager statistics, the values returned in the output of the **show service-management** command do not accurately reflect the packets that are rate-limited. In this case, although some of the packets that were classified by the classifier lists are dropped by the rate-limiter on the external parent group, the Service Manager statistics collection application counts all the packets that were classified without excluding those that were dropped by the rate limiter. As a result, the values returned by the **output-stat-clacl** and **secondary-input-stat-clacl** objects represent more packets than those sent to the subscriber and core interfaces respectively.

Using the macro that has been described here, you can configure the following combined service, for example:

combined_service(64000, 64000, 10.0.0.1, 2001::1, vlan)

where

- 64000—Bandwidth for outbound traffic, denoted as *outBw* in the macro
- 64000—Bandwidth for inbound traffic, denoted as *inBw* in the macro
- 10.0.0.1—Host IP address for IPv4 subscribers, denoted as *VBG1* in the macro
- 2001::1—Host IP address for IPv6 subscribers, denoted as *VB6G1* in the macro
- vlan—Interface on which the service is configured, denoted as *NODE* in the macro

Chapter 28

Monitoring Service Manager

This chapter describes how to monitor the Service Manager application. This chapter discusses the following topics:

- Setting a Baseline for HTTP Local Server Statistics on page 707
- Monitoring the Connections to the HTTP Local Server on page 708
- Monitoring the Configuration of the HTTP Local Server on page 708
- Monitoring Statistics for Connections to the HTTP Local Server on page 709
- Monitoring Profiles for the HTTP Local Server on page 710
- Monitoring the Default Interval for Interim Accounting of Services on page 711
- Monitoring the Status of the Service Manager License on page 712
- Monitoring Profiles for Service Manager on page 712
- Monitoring IPv4 and IPv6 Interfaces for Service Manager on page 713
- Monitoring Service Definitions on page 723
- Monitoring Service Session Profiles on page 724
- Monitoring Active Owner Sessions with Service Manager on page 725
- Monitoring Active Subscriber Sessions with Service Manager on page 727
- Monitoring the Number of Active Subscriber and Service Sessions with Service Manager on page 730

Setting a Baseline for HTTP Local Server Statistics

You can set a baseline for HTTP server statistics.

The system implements the baseline by reading and storing the statistics at the time the baseline is set and then subtracting this baseline whenever baseline-relative statistics are retrieved.

To set a baseline:

- Include the **baseline ip http** command at the User Exec or Privilege Exec level:

 host1#**baseline ip http**

There is no **no** version.

- Related Topics**
- Monitoring Statistics for Connections to the HTTP Local Server on page 709
 - baseline ip http

Monitoring the Connections to the HTTP Local Server

Purpose Display information about the connections to the HTTP local server.

Action To display information about the HTTP local server:

```
host1#show ip http scalar
Maximum connection length: 1000 seconds
Current number of http servers: 5
Number of enabled http servers: 2
Current number of http connections: 15
Peak number of http connections: 125
Maximum number of http connections: 1000
```

Meaning Table 152 on page 708 lists the **show ip http scalar** command output fields.

Table 152: show ip http scalar Output Fields

Field Name	Field Description
Maximum connection length	Maximum time that the HTTP local server maintains an inactive connection, in seconds
Current number of http servers	Number of configured Web servers
Number of enabled http servers	Number of Web servers enabled
Current number of http connections	Number of connections from subscribers to HTTP local servers
Peak number of http connections	Highest number of connections from subscribers to HTTP local servers
Maximum number of http connections	Maximum number of connections allowed from subscribers to HTTP local servers

- Related Topics**
- show ip http scalar

Monitoring the Configuration of the HTTP Local Server

Purpose Display information about the configuration of the HTTP local server.

Action To display information about the HTTP local server:

```

host1#show ip http server
  Admin status: enabled
  Access class: not defined
  Listening port: 80
  Same host limit: 3
  Protocol: IPv6

```

Meaning Table 153 on page 709 lists the **show ip http server** command output fields.

Table 153: show ip http server Output Fields

Field Name	Field Description
Admin status	Status of the HTTP local server in the software: enabled or disabled. Enabled implies that the HTTP local server can listen for IPv4 , IPv6, or both IPv4 and IPv6 exception packets.
Access class	Name of a standard IP access list that determines which hosts can log on to the HTTP local server
Listening port	Port that the HTTP local server uses to track requests for connection
Same host limit	Maximum number of connections allowed between one IP address and the HTTP local server
Protocol	Protocols that the HTTP local server is listening for: IPv4, IPv6, or IPv4 and IPv6.

Related Topics ■ show ip http server

Monitoring Statistics for Connections to the HTTP Local Server

Purpose Display statistics about the connections to the HTTP local server.

Action To display statistics about HTTP local server with the baseline values subtracted:

```

host1#show ip http statistics delta
  Server enable count: 1
  Server disable count: 0
  Same host enforced: 0
  Access class denies: 0
  No resource failures: 0
  Http connections created: 2
  Http connections terminated: 2
  Http connections aged out: 1
  Urls successfully served: 0

```

```
Malformed http requests: 0
Urls not found: 0
```

Meaning Table 154 on page 710 lists the **show ip http statistics** command output fields.

Table 154: show ip http statistics Output Fields

Field Name	Field Description
Server enable count	Total number of enabled HTTP local servers
Server disable count	Total number of disabled HTTP local servers
Same host enforced	Number of connections dropped because the limit for connections from one IP address to the HTTP local server was exceeded
Access class denies	Number of connections dropped because of a problem with the standard IP access list that defines the hosts that can access the HTTP local server
No resource failures	Number of connections dropped because of system memory limitations
Http connections created	Total number of HTTP connections established
Http connections terminated	Total number of HTTP connections ended
Http connections aged out	Total number of HTTP connections that expired because they exceeded the maximum allowed connection time
Urls successfully served	Total number of Web pages displayed
Malformed http requests	Number of HTTP requests that failed because the format was incorrect
Urls not found	Number of Web pages not found

Related Topics ■ [show ip http statistics](#)

Monitoring Profiles for the HTTP Local Server

Purpose Display information about the redirect URL used for guided entrance services.

Action To display information about the redirect URL used by the HTTP local server:

```
host1#show profile name guidedProfile2
Profile                : guidedProfile2
.
```

```

Auto Detect           : Disabled
Auto Configure        : Disabled
IP FlowStats          : Disabled
Ip http redirect Url  : myredirect.html
Ipv6 http redirect Url: myredirect.html

```

Meaning Table 155 on page 711 lists the **show profile** command output fields.

Table 155: show profile Output Fields

Field Name	Field Description
Ip http redirect Url	URL of the Web page used for Service Manager guided entrance services for IPv4
Ipv6 http redirect Url	URL of the Web page used for Service Manager guided entrance services for IPv6

Related Topics ■ show profile

Monitoring the Default Interval for Interim Accounting of Services

Purpose Display the default interval used for interim accounting for services associated with users on the virtual router. An entry of 0 indicates that the feature is disabled.

Action To display the default interval used for interim accounting:

```

host1:vrXyz7#show aaa service accounting interval
service-acct-interval 60

```

Meaning Table 156 on page 711 lists the **show aaa service accounting interval** command output fields.

Table 156: show aaa service accounting interval Output Fields

Field Name	Field Description
service-acct-interval	Value of the default interval

Related Topics ■ [show aaa service accounting interval](#)

Monitoring the Status of the Service Manager License

Purpose Display the status of the Service Manager license.

Action To display the status of the Service Manager license:

```
host1#show license service-management
service management license is set
```

Meaning Table 157 on page 712 lists the **show license service-management** command output fields.

Table 157: show license service-management Output Fields

Field Name	Field Description
service management license	Status of the license: set (enabled) or not set (disabled)

Related Topics ■ [show license service-management](#)

Monitoring Profiles for Service Manager

Purpose Display information about the policies and QoS configurations referenced in profiles.

Action To display information about a specific profile:

```
host1#show profile name video
IP Output Policy          : video statistics disabled
IP Secondary Input Policy  : video statistics disabled
qos-parameter vidburst 1000
qos-parameter vidrate 500000
qos-profile vid512k
host1#show profile name foo
IP Policy Parameter foo : 100000 increase, reference rate
IP Input Policy          : p1 statistics disabled
ERX-00-16-c2#show profile name p2
IP Policy Parameter foo : 100000, reference rate
IP Input Policy          : p1 statistics disabled
```

To display a list of profiles configured on the router:

```
host1#show profile brief
```


Meaning Table 158 on page 713 lists the **show profile** command output fields.

Table 158: show profile Output Fields

Field Name	Field Description
Input Policy	Name of input policy and whether statistics are enabled or disabled
Output Policy	Name of output policy and whether statistics are enabled or disabled
qos-parameter	Name and value of the QoS parameter assigned to the profile
qos-profile	Name of the QoS profile assigned to the profile

Related Topics ■ show profile

Monitoring IPv4 and IPv6 Interfaces for Service Manager

Purpose Display status information about the IP and IPv6 interfaces.

Action To display information about a specific IP interface.

```

host1#show ip interface gigabitEthernet 1/1.200
GigabitEthernet1/1 line protocol Ethernet is up, ip is not present
  Network Protocols: IP
  Multipath mode = hashed
  Auto Configure = disabled
  Auto Detect = disabled
  Inactivity Timer = disabled
  Use Framed Routes = disabled
  ARP spoof checking = disabled
  Warm-restart initial-sequence-preference: Operational = 0 Administrative = 0

  In Received Packets 0, Bytes 0
    Unicast Packets 0, Bytes 0
    Multicast Packets 0, Bytes 0
  In Policed Packets 0, Bytes 0
  In Error Packets 0
  In Invalid Source Address Packets 0
  In Discarded Packets 0
  Out Forwarded Packets 0, Bytes 0
    Unicast Packets 0, Bytes 0
    Multicast Routed Packets 0, Bytes 0
  Out Scheduler Dropped Packets 0, Bytes 0
  Out Policed Packets 0, Bytes 0
  Out Discarded Packets 0

  queue 0: traffic class best-effort, bound to ip GigabitEthernet1/1
    Queue length 0 bytes

```

```

Forwarded packets 0, bytes 0
Dropped committed packets 0, bytes 0
Dropped conformed packets 0, bytes 0
Dropped exceeded packets 0, bytes 0

```

Http Redirect Url: <http://www.juniper.net>

To display information about a specific IPv6 interface.

```

host1#show ipv6 interface FastEthernet 9/0.6
FastEthernet9/0.6 line protocol VlanSub is up, ipv6 is up
  Description: IPv6 interface in Virtual Router Hop6
  Network Protocols: IPv6
  Link local address: fe80::90:1a00:740:31cd
  Internet address: 6:1:1::1/64
  Operational MTU 1500 Administrative MTU 0
  Operational speed 100000000 Administrative speed 0
  Creation type Static
  ND reachable time is 3600000 milliseconds
  ND duplicate address detection attempts is 100
  ND neighbor solicitation retransmission interval is 1000 milliseconds
  ND proxy is enabled
ND RA source link layer is advertised
  ND RA interval is 200 seconds, lifetime is 1800 seconds
  ND RA managed flag is disabled, other config flag is disabled
  ND RA advertising prefixes configured on interface
In Received Packets 0, Bytes 0
  Unicast Packets 0, Bytes 0
  Multicast Packets 0, Bytes 0
In Total Dropped Packets 0, Bytes 0
  In Policed Packets 0
  In Invalid Source Address Packets 0
  In Error Packets 0
  In Discarded Packets 0
Out Forwarded Packets 8, Bytes 768
  Unicast Packets 8, Bytes 768
  Multicast Routed Packets 0, Bytes 0
Out Total Dropped Packets 5, Bytes 0
  Out Scheduler Dropped Packets 0, Bytes 0
  Out Policed Packets 0
  Out Discarded Packets 5
queue 0: traffic class best-effort, bound to ipv6 FastEthernet9/0.6
  Queue length 0 bytes
  Forwarded packets 0, bytes 0
  Dropped committed packets 0, bytes 0
  Dropped conformed packets 0, bytes 0
  Dropped exceeded packets 0, bytes 0
IPv6 policy input ipv6InPol25
  rate-limit-profile Rlp2Mb classifier-group clgA entry 1
    Committed: 0 packets, 0 bytes
    Conformed: 0 packets, 0 bytes
    Exceeded: 0 packets, 0 bytes
  rate-limit-profile Rlp8Mb
    Committed: 0 packets, 0 bytes
    Conformed: 0 packets, 0 bytes
    Exceeded: 0 packets, 0 bytes
IPv6 policy output ipv6PolOut2
  rate-limit-profile RlpOutA classifier-group clgB entry 1
    Committed: 0 packets, 0 bytes
    Conformed: 0 packets, 0 bytes
    Exceeded: 0 packets, 0 bytes

```

```

rate-limit-profile RlpOutB
  Committed: 0 packets, 0 bytes
  Conformed: 0 packets, 0 bytes
  Exceeded: 0 packets, 0 bytes
IPv6 policy local-input ipv6PolLocIn5
  rate-limit-profile Rlp1Mb classifier-group clgC entry 1
    Committed: 0 packets, 0 bytes
    Conformed: 0 packets, 0 bytes
    Exceeded: 0 packets, 0 bytes
  rate-limit-profile Rlp5Mb
    Committed: 0 packets, 0 bytes
    Conformed: 0 packets, 0 bytes
    Exceeded: 0 packets, 0 bytes
queue 0: traffic class best-effort, bound to ipv6 FastEthernet9/0.6
  Queue length 0 bytes
  Forwarded packets 0, bytes 0
  Dropped committed packets 0, bytes 0
  Dropped conformed packets 0, bytes 0
  Dropped exceeded packets 0, bytes 0
Http Redirect Url: http://www.juniper.net

```

Meaning Table 159 on page 715 lists the **show ip interface** command output fields.

Table 159: show ip interface Output Fields

Field Name	Field Description
interface	Interface type and specifier.
interface status	Status of the interface.
HTTP Redirect Url	Url to which a subscriber's initial web browser session is redirected
line protocol	Status of the line protocol.
Description	Text description or alias if configured for the interface
Link up/down trap	Status of SNMP link up/down traps on the interface
Internet Address	IP address of the interface
IP Statistics Rcvd	
local destination	Frames with this router as destination
hdr errors	Number of packets containing header errors
addr errors	Number of packets containing addressing errors
unkn proto	Number of packets received containing unknown protocols
discards	Number of discarded packets
IP Statistics Frags	
reasmb ok	Number of reassembled packets

Table 159: show ip interface Output Fields (continued)

Field Name	Field Description
reasm req	Number of requests for reassembly
reasm fails	Number of reassembly failures
frag ok	Number of packets fragmented successfully
frag req	Number of frames requiring fragmentation
frag fails	Number of packets unsuccessfully fragmented
IP Statistics Sent	
generated	Number of packets generated
no routes	Number of packets that could not be routed
discards	Number of packets that could not be routed and were discarded
ICMP Statistics Rcvd	
errors	Error packets received
dst unreachable	Packets received with destination unreachable
time excd	Packets sent with time-to-live exceeded
param probs	Packets sent with parameter errors
src quench	Source quench packets sent
redirect	Send packets redirect
timestamp req	Requests for a timestamp
timestamp rpy	Replies to timestamp requests
addr mask req	Address mask requests
addr mask rpy	Address mask replies
ICMP Statistics Sent	
errors	Error packets received
dst unreachable	Packets received with destination unreachable
time excd	Packets sent with time-to-live exceeded
param probs	Packets sent with parameter errors
src quench	Source quench packets sent
redirect	Send packets redirect

Table 159: show ip interface Output Fields (continued)

Field Name	Field Description
timestamp req	Requests for a timestamp
timestamp rpy	Replies to timestamp requests
addr mask req	Address mask requests
addr mask rpy	Address mask replies
ARP spoof checking	Status of the check for spoofed ARP packets received on an IP interface. Possible states: enabled or disabled. NOTE: This field is not displayed when you use the detail keyword.
In Received Packets, Bytes	Total number of packets and bytes received on the IP interface.
Unicast Packets, Bytes	Unicast packets and bytes received on the IP interface; link-local received multi-cast packets (non-multicast-routed frames) are counted as unicast packets.
Multicast Packets, Bytes	Multicast packets and bytes received on the IP interface which are then multicast-routed are counted as multicast packets.
In Forwarded Packets, Bytes	Packets and bytes forwarded into an output IP interface
In Total Dropped Packets, Bytes	Total number of packets and bytes that were dropped on the interface
In Policed Packets	Packets discarded on a receive IP interface for any of the following reasons: exceeding the token bucket limit, exceeding the rate limit, a drop action in a policy, discarded MAC validation packets, a destination address lookup failure or when the destination address is an IP interface that has a route configured to the null interface.
In Invalid Source Address Packets	Packets discarded on a receive IP interface because of invalid IP source address
In Error Packets	Packets discarded on a receive IP interface because of IP header errors
In Discarded Packets	Packets discarded on the ingress interface because of a configuration problem rather than a problem with the packet itself
In Fabric Dropped Packets	Packets discarded on a receive IP interface because of internal fabric congestion

Table 159: show ip interface Output Fields (continued)

Field Name	Field Description
Out Forwarded Packets, Bytes	Total number of packets and bytes forwarded out of the IP interface
Unicast Packets, Bytes	Unicast packets and bytes forwarded out of the IP interface
Multicast Routed Packets, Bytes	Multicast packets and bytes forwarded out of the IP interface
Out Requested Packets, Bytes	Packets and bytes requested to be forwarded out an IP interface
Out Total Dropped Packets, Bytes	Total number of packets and bytes that were discarded on the egress interface
Out Scheduler Drops Committed Packets, Bytes	Packets and bytes dropped by the scheduler even though they had a committed traffic contract
Out Scheduler Drops Conformed Packets, Bytes	Packets and bytes dropped by the scheduler even though they conformed to the traffic contract
Out Scheduler Drops Exceeded Packets, Bytes	Packets and bytes dropped by the scheduler because they exceeded the contract
Out Policed Packets	Packets discarded on the egress interface because of rate limiting
Out Discarded Packets	Packets discarded on the egress interface because of a configuration problem rather than a problem with the packet itself
Out Fabric Dropped Packets	Packets dropped because of internal fabric congestion

Table 160 on page 718 lists the **show ipv6 interface** command output fields.

Table 160: show ipv6 interface Output Fields

Field Name	Field Description
Description	Text description or alias if configured for the interface
HTTP Redirect Url	Url to which a subscriber's initial web browser session is redirected
Internet Address	IP address of the interface
Link local address	Local IPv6 address of this interface
Network Protocols	Network protocols configured on this interface
IPv6 Statistics Rcvd	

Table 160: show ipv6 interface Output Fields *(continued)*

Field Name	Field Description
local destination	Frames with this router as destination
hdr errors	Number of packets containing header errors
addr errors	Number of packets containing addressing errors
unkn proto	Number of packets received containing unknown protocols
discards	Number of discarded packets
IP Statistics Sent	
generated	Number of packets generated
no routes	Number of packets that could not be routed
discards	Number of packets that could not be routed and were discarded
ICMPv6 Statistics Rcvd	
total	Total number of received packets
errors	Error packets received
destination unreach	Packets received with destination unreachable
admin unreach	Packets received because the destination was administratively unreachable (for example, the packet encountered a firewall filter)
param probs	Packets sent with parameter errors
time excd	Packets sent with time-to-live exceeded
pkt too big	Number of packet-too-big messages received that indicate a packet was too large to forward because of the allowed MTU size
redirects	Received packet redirects
echo requests	Echo request (ping) packets
echo replies	Echo replies received
rtr solicits	Number of received router solicitations
rtr advertisements	Number of received router advertisements
neighbor solicits	Number of received neighbor solicitations
neighbor advertisements	Number of received neighbor advertisements

Table 160: show ipv6 interface Output Fields *(continued)*

Field Name	Field Description
Group membership (queries, responses, reductions)	Number of queries, responses, and reduction requests received from within a group to which the interface is assigned
ICMPv6 Statistics Sent	
total	Total number of received packets
errors	Error packets received
destination unreachable	Packets received with destination unreachable
admin unreachable	Packets received because the destination was administratively unreachable (for example, the packet encountered a firewall filter)
param probs	Packets sent with parameter errors
time excd	Packets sent with time-to-live exceeded
pkt too big	Number of packet-too-big messages received that indicate a packet was too large to forward because of the allowed MTU size
redirects	Received packet redirects
echo requests	Echo request (ping) packets
echo replies	Echo replies received
rtr solicits	Number of received router solicitations
rtr advertisements	Number of received router advertisements
neighbor solicits	Number of received neighbor solicitations
neighbor advertisements	Number of received neighbor advertisements
Group membership (queries, responses, reductions)	Number of queries, responses, and reduction requests received from within a group to which the interface is assigned
Operational MTU	Value of the MTU
Administrative MTU	Value of the MTU if it has been administratively overridden using the configuration
Operational speed	Speed of the interface
Administrative speed	Value of the speed if it has been administratively overridden using the configuration
Creation type	Method by which the interface was created (static or dynamic)

Table 160: show ipv6 interface Output Fields (continued)

Field Name	Field Description
ND reachable time	Amount of time (in milliseconds) that the neighbor is expected to remain reachable
ND duplicate address detection attempts	Number of times that the router attempts to determine a duplicate address
ND neighbor solicitation retransmission interval	Interval in which the router retransmits neighbor solicitations
ND proxy	Indicates whether the router will reply to solicitations on behalf of a known neighbor
ND RA source link layer	Indicates whether the RA includes the link layer
ND RA interval	Interval (in seconds) of the neighbor discovery router advertisement
ND RA lifetime	Lifetime (in seconds) of the neighbor discovery router advertisement
ND RA managed flag	State of the neighbor discovery router advertisement managed flag
ND RA other config flag	State of the neighbor discovery router advertisement other config flag
ND RA advertising prefixes	Configured advertisement prefixes for neighbor discovery router advertisement
In Received Packets, Bytes	Total number of packets and bytes received on the IP interface.
Unicast Packets, Bytes	Unicast packets and bytes received on the IP interface; link-local received multi-cast packets (non-multicast-routed frames) are counted as unicast packets.
Multicast Packets, Bytes	Multicast packets and bytes received on the IP interface which are then multicast-routed are counted as multicast packets.
In Total Dropped Packets, Bytes	Total number of packets and bytes that were dropped on the interface
In Policed Packets	Packets discarded on a receive IP interface for any of the following reasons: exceeding the token bucket limit, exceeding the rate limit, a drop action in a policy, discarded MAC validation packets, a destination address lookup failure or when the destination address is an IP interface that has a route configured to the null interface.
In Invalid Source Address Packets	Packets discarded on a receive IP interface because of invalid IP source address

Table 160: show ipv6 interface Output Fields (*continued*)

Field Name	Field Description
In Error Packets	Packets discarded on a receive IP interface because of IP header errors
In Discarded Packets	Packets discarded on the ingress interface because of a configuration problem rather than a problem with the packet itself
Out Forwarded Packets, Bytes	Total number of packets and bytes forwarded out of the IP interface
Unicast Packets, Bytes	Unicast packets and bytes forwarded out of the IP interface
Multicast Routed Packets, Bytes	Multicast packets and bytes forwarded out of the IP interface
Out Total Dropped Packets, Bytes	Total number of packets and bytes that were discarded on the egress interface
Out Scheduler Dropped Packets, Bytes	Number of outbound packets and bytes dropped by the scheduler
Out Policed Packets	Packets discarded on the egress interface because of rate limiting
Out Discarded Packets	Packets discarded on the egress interface because of a configuration problem rather than a problem with the packet itself
IPv6 policy	Type (input, output, local-input) and name of policy
rate-limit-profile	Name of profile
classifier-group entry	Entry index
Committed	Number of packets and bytes conforming to the committed access rate
Conformed	Number of packets and bytes that exceed the committed access rate but conform to the peak access rate
Exceeded	Number of packets and bytes exceeding the peak access rate
queue, traffic class, bound to ipv6	Queue and traffic class bound to the specified IPv6 interface
Queue length	Number of bytes in queue
Dropped committed packets, bytes	Total number of committed packets and bytes dropped by this interface
Dropped conformed packets, bytes	Total number of conformed packets and bytes dropped by this interface

Table 160: show ipv6 interface Output Fields (continued)

Field Name	Field Description
Dropped exceeded packets, bytes	Total number of exceeded packets and bytes dropped by this interface

- Related Topics**
- show ip interface
 - show ipv6 interface

Monitoring Service Definitions

Purpose Display information about the service definitions configured on your router.

Action To display information for the particular service definition, specify the name of a service definition macro file, including the .mac extension:

```
host1#show service-management service-definition tiered.mac
tiered.mac - WED DEC 14 14:41:20 2005
Installed: True
Service: tiered(inputbw, outputbw)
Reference Count: 0
```

To display summary information for all service definitions:

```
host1#show service-management service-definition brief
Service Definitions
-----
```

Filename	Service	Installed	Reference Count
video.mac	video(inputbw, outputbw)	True	0
tiered.mac	tiered(inputbw, outputbw)	True	0

```
-----
Filename      Timestamp
-----
video.mac     TUE NOV 15 15:22:00 2005
tiered.mac    WED DEC 14 14:41:20 2005
```

Meaning Table 161 on page 723 lists the **show service-management service-definition** command output fields.

Table 161: show service-management service-definition Output Fields

Field Name	Field Description
Filename	Name of the service definition macro file
Service	Name of the service, with the parameter specifications in parentheses

Table 161: show service-management service-definition Output Fields *(continued)*

Field Name	Field Description
Installed	Status of definition: <ul style="list-style-type: none"> ■ True—installed ■ False—not installed
Reference Count	Number of times the service definition has been used to instantiate a unique service instance (which identifies the policy, QoS, and profile objects for a service). For example, if one service session—such as, tiered(40000,40000)—is activated by multiple subscribers, the reference count is 1. However, if one subscriber activates tiered(40000,40000) and another subscriber activates tiered(75000,75000)—the reference count is 2.
Timestamp	Day, date, and time the service definition was copied to NVS.

Related Topics ■ show service-management service-definition

Monitoring Service Session Profiles

Purpose Display information about service session profiles configured on your router.

Action To display summary information for all service session profiles:

```
host1#show service-management service-session-profile brief
Service Session Profiles
```

```
-----
Name      Volume  Time  Statistics
-----
tiered1   20000   1000  Volume-Time
tiered2   20000   1000  Time
video1    15000   1000  Volume-Time
video4     0       0     Disabled
```

To display information for a particular service session profile:

```
host1#show service-management service-session-profile tiered1
tiered1
Time      : 1000
Volume    : 20000
Statistics : Time and Volume
```

Meaning Table 162 on page 725 lists the **show service-management service-session-profile** command output fields.

Table 162: show service-management service-session-profile Output Fields

Field Name	Field Description
Name	Name of the service session profile
Volume	Volume threshold, in MB, for the service session
Time	Time threshold, in seconds, for the service session
Statistics	Type of statistics that are captured: <ul style="list-style-type: none"> ■ Disabled (none) ■ Time ■ Volume–Time ■ Time and Volume

Related Topics ■ show service-management service-session-profile

Monitoring Active Owner Sessions with Service Manager

Purpose Display information about active subscriber sessions, by owner.

Action To display summary information for all active owner sessions:

```
host1# show service-management owner-session brief
Subscriber Sessions
```

Name	Interface	Id	Owner/Id	State	Non-volatile	Service Sessions
CLIENT1@ISP.COM	ip192.168.0.3	1	AAA 4194326	Active	False	1
CLIENT2@ISP.COM	ip192.168.0.7	2	AAA 4194327	Active	False	1
CLIENT3@ISP.COM	ip192.168.0.4	3	AAA 4194328	Active	False	1
CLIENT4@ISP.COM	ip192.168.0.5	4	AAA 4194329	Active	False	1
CLIENT5@ISP.COM	ip192.168.0.6	5	AAA 4194330	Active	False	1
CLIENT6@ISP.COM	ip192.168.0.8	6	AAA 4194331	Active	False	1
CLIENT7@ISP.COM	ip192.168.0.1	7	AAA 4194332	Active	False	1
CLIENT8@ISP.COM	ip192.168.0.9	8	AAA 4194333	Active	False	1

To display information for a particular owner:

```
host1# show service-management owner-session aaa 4194326
```

```
User Name: CLIENT1@ISP.COM, Interface: ip 192.168.0.1
```

```
Owner/Id: AAA/4194326
```

```
Non-volatile: False
```

```
State: Active
```

```
ServiceSessions:
```

Name	Owner/ID	State	Operation
tiered(2000000,3000000)	AAA 4194326	Config ApplySuccess	Activate
Name	Non-volatile		

```
-----
tiered(2000000,3000000)  False
```

To display information for a particular owner with service session information:

```
host1# show service-management owner-session aaa 4194326 service-session
User Name: client1@isp.COM, Interface: ip192.168.0.1
Service : tiered(2000000,3000000)
Non-volatile : False
Owner : AAA 4194326
State : Config ApplySuccess
Activate : True
Statistics Type : time-based and volume-based
Statistics Complete : False
Poll Interval : 0
Poll Expire : 0
Activate Time : THU MAR 02 01:21:26 2006
Time : 0
Time Expire : 0
Volume MBytes: 2
Volume Expire MBytes : 1
Input Bytes : 594
Output Bytes : 1196
Input Packets : 1
Output Packets : 2
```

Meaning Table 163 on page 726 lists the **show service-management owner-session** command output fields.

Table 163: show service-management owner-session Output Fields

Field Name	Field Description
Name	Name of the subscriber or name of the service session
Interface	Type and IP address of the subscriber's interface
Owner/Id	Method used to activate the subscriber session (CLI, AAA) and ID number generated by the owner
State	Status of the subscriber session (active or inactive), or status of the service session
Non-volatile	Indicates whether the service session is stored in NVS; RADIUS-based service sessions are not stored in NVS
Service Sessions	Number of service sessions currently active for this subscriber
Operation	Last operation that Service Manager performed
Service	Name of the service, with parameter values in parentheses
Activate	Indicates whether the last operation was activate (True) or deactivate (False)

Table 163: show service-management owner-session Output Fields *(continued)*

Field Name	Field Description
Statistics Type	Type of statistics collected; none, time, or volume-time
Statistics Complete	Whether statistics have been successfully collected; True or False
Poll Interval	Interval, in seconds, that interim statistics reports are sent
Poll Expire	Number of seconds until the next statistics report is sent
Activate Time	Day, date, and time when the service session was activated
Time	Time threshold value set by service session profile or RADIUS VSA
Time Expire	Time left until the threshold expires; this value starts as the time threshold value and is decremented as time passes
Volume	Volume threshold value set by service session profile or RADIUS VSA
Volume Expire	Volume left until the threshold is exceeded; this value starts as the volume threshold value and is decremented as the service statistics measure volume
Input Bytes	Current value of input bytes that the statistics configuration is measuring
Output Bytes	Current value of output bytes that the statistics configuration is measuring
Input Packets	Current value of input packets that the statistics configuration is measuring
Output Packets	Current value of output packets that the statistics configuration is measuring

Related Topics ■ show service-management owner-session

Monitoring Active Subscriber Sessions with Service Manager

Purpose Display information about active subscriber sessions on your router.

Action To display summary information for all active subscriber sessions:

```
host1# show service-management subscriber-session brief
```

Subscriber Sessions

Name	Interface	Id	Owner/Id	State	Non-volatile	Service Sessions
CLIENT1@ISP.COM	ip192.168.0.3	1	AAA 4194326	Active	False	1
CLIENT2@ISP.COM	ip192.168.0.7	2	AAA 4194327	Active	False	1
CLIENT3@ISP.COM	ip192.168.0.4	3	AAA 4194328	Active	False	1
CLIENT4@ISP.COM	ip192.168.0.5	4	AAA 4194329	Active	False	1
CLIENT5@ISP.COM	ip192.168.0.6	5	AAA 4194330	Active	False	1
CLIENT6@ISP.COM	ip192.168.0.8	6	AAA 4194331	Active	False	1
CLIENT7@ISP.COM	ip192.168.0.1	7	AAA 4194332	Active	False	1
CLIENT8@ISP.COM	ip192.168.0.9	8	AAA 4194333	Active	False	1
CLIENT9@ISP.COM	ip192.168.0.2	9	AAA 4194334	Active	False	1
CLIENT10@ISP.COM	ip192.168.0.10	10	AAA 4194335	Active	False	1

To display information for that particular subscriber with the subscriber name:

```
host1# show service-management subscriber-session client1@isp.com interface ip 192.168.0.1
```

User Name: CLIENT1@ISP.COM, Interface: ip 192.168.0.1

Id: 1

Owner: AAA 4194326

Non-volatile: False

State: Active

ServiceSessions:

Name	mutex	Owner/Id	State	Operation
tiered(2000000,3000000)		AAA 4194326	ConfigApplySuccess	Activate
Name	Non-volatile			
tiered(2000000,3000000)	False			

To display information for that particular subscriber with the service session:

```
host1# show service-management subscriber-session client1@isp.COM interface ip 192.168.0.1 service-session tiered
```

User Name: client1@isp.COM, Interface: ip192.168.0.1

Service : tiered(2000000,3000000)

Non-volatile : False

Owner : AAA 4194326

State : Config ApplySuccess

Activate : True

Statistics Type : time-based and volume-based

Statistics Complete : False

Poll Interval : 0

Poll Expire : 0

Activate Time : THU MAR 02 01:21:26 2006

Time : 0

Time Expire : 0

Volume MBytes: 2

Volume Expire MBytes : 1

Input Bytes : 594

Output Bytes : 1196

Input Packets : 1

Output Packets : 2

To display information for a particular subscriber using the subscriber ID:


```

host1#show service-management subscriber-session 20
User Name: CLIENT50@ISP.COM, Interface: ip192.168.100.33
Id: 20
Owner/Id: CLI
Non-volatile: True
State: Active
ServiceSessions:
  Name          mutex  Owner  State          Operation
  -----
internet(5000,8000)  12    CLI    Config ApplySuccess  Activate
  Name          Non-volatile
  -----
internet(5000,8000)  True

```

Meaning Table 164 on page 729 lists the **show service-management subscriber-session** command output fields.

Table 164: show service-management subscriber-session Output Fields

Field Name	Field Description
Name	Name of the subscriber or name of the service session
Interface	Type and IP address of the subscriber's interface
Id	ID number of the subscriber session
mutex	Index number of the mutex group to which the service session belongs
Owner/Id	Method used to activate the subscriber session (CLI, AAA) and ID number generated by the owner (Acct-Session-ID for AAA)
State	Status of the subscriber session (active or inactive), or status of the service session
Non-volatile	Indicates whether the service session is stored in NVS; RADIUS-based service sessions are not stored in NVS
Service Sessions	Number of service sessions currently active for this subscriber
Operation	Last operation that Service Manager performed
Service	Name of the service, with parameter values in parentheses
Activate	Indicates whether the last operation was activate (True) or deactivate (False)
Statistics Type	Type of statistics collected; none, time, or volume-time
Statistics Complete	Whether statistics have been successfully collected; True or False

Table 164: show service-management subscriber-session Output Fields *(continued)*

Field Name	Field Description
Poll Interval	Interval, in seconds, that interim statistics reports are sent
Poll Expire	Number of seconds until the next statistics report is sent
Activate Time	Day, date, and time when the service session was activated
Time	Time threshold value set by service session profile or RADIUS VSA
Time Expire	Time left until the threshold expires; this value starts as the time threshold value and is decremented as time passes
Volume	Volume threshold value set by service session profile or RADIUS VSA
Volume Expire	Volume left until the threshold is exceeded; this value starts as the volume threshold value and is decremented as the service statistics measure volume
Input Bytes	Current value of input bytes that the statistics configuration is measuring
Output Bytes	Current value of output bytes that the statistics configuration is measuring
Input Packets	Current value of input packets that the statistics configuration is measuring
Output Packets	Current value of output packets that the statistics configuration is measuring

Related Topics ■ [show service-management subscriber-session](#)

Monitoring the Number of Active Subscriber and Service Sessions with Service Manager

Purpose Display the total number of active subscriber and service sessions configured on your router.

Action To display the total number of active subscriber and service sessions:

```
host1#show service-management summary
Total Subscriber Sessions : 10
```

Total Service Sessions : 10

Meaning Table 165 on page 731 lists the **show service-management summary** command output fields.

Table 165: show service-management summary Output Fields

Field Name	Field Description
Total Subscriber Sessions	Number of active subscriber sessions on the router
Total Service Sessions	Number of active service sessions on the router

Related Topics ■ show service-management summary

Part 7

Index

- Index on page 735

Index

Symbols

10-Gigabit Ethernet interfaces
specifying an interface.....627

A

AAA (authentication, authorization, accounting)
DSL Forum VSAs.....188, 237
EAP authentication.....18
failure, notifying RADIUS of.....90
L2TP tunnel switch profiles, applying.....397, 398
overview.....5, 317
services
accounting.....317
and TACACS+317
authentication.....317
authorization.....317
overview.....318
aaa commands.....23
aaa accounting acct-stop on-aaa-failure.....90
aaa accounting acct-stop on-access-deny.....90
aaa accounting broadcast.....23
aaa accounting commands.....322
aaa accounting default.....23
aaa accounting duplication.....23
aaa accounting exec.....322
aaa accounting immediate-update.....23
aaa accounting interval.....23
aaa accounting statistics.....23
aaa accounting suppress null-username.....322
aaa accounting tacacs+325
aaa accounting vr-group.....23
aaa authentication default.....28, 41
aaa authentication enable default.....317, 322
aaa authentication login.....325
aaa delimiter.....12
aaa dhcpv6-delegated-prefix
delegated-ipv6-prefix.....90
aaa dns primary.....51
aaa dns secondary.....51
aaa domain-map.....8, 9, 16, 359
aaa duplicate-address-check.....28
aaa intf-desc-format include.....209
aaa ipv6-nd-ra-prefix framed-ipv6-prefix.....90

aaa local database.....41
aaa local select database.....41
aaa local username41
aaa new-model.....317, 325
aaa parse-direction.....12
aaa parse-order.....12
aaa profile.....63, 68, 76
aaa route-download.....71
aaa route-download now.....71
aaa route-download suspend.....71
aaa service accounting interval.....674
aaa subscriber limit per-port.....89
aaa subscriber limit per-vr.....89
aaa timeout.....88
aaa tunnel assignment-id-format.....359
aaa tunnel calling-number-format.....349
aaa tunnel calling-number-format fallback.....349
aaa tunnel client-name.....359
aaa tunnel ignore.....359
aaa tunnel password.....359
aaa tunnel switch-profile.....399
aaa tunnel tx-connect-speed-method407
aaa tunnel-group.....363
aaa user accounting interval.....28, 674
aaa virtual-router.....28
aaa wins primary.....51
aaa wins secondary.....51
See also show aaa commands
AAA default tunnel parameters
L2TP transmit connect speed.....406
AAA domain maps
configuring
IPv6 local address pools.....60
IPv6 local address pools
and Prefix Delegation.....60
overridden by pools in Access-Accept
message.....60
L2TP transmit connect speed.....404
preference order
for determining local address pools.....106
tunnel subscribers.....50
AAA LLID (logical line identifier).....76
configuration steps.....76
how it works.....76
monitoring.....123, 130
preauthentication considerations.....76

- RADIUS attributes in preauthentication
 - request.....76, 77
 - troubleshooting.....76
 - using to track subscribers.....76
- AAA logical line identifier (LLID). *See* AAA LLID
- AAA profile commands
 - aaa profile.....68
 - allow.....63
 - deny.....63
 - nas-port-type atm.....68
 - nas-port-type ethernet.....68
 - ppp aaa-profile.....68, 76
 - service-description.....68
 - translate.....68
- AAA profiles.....63
 - allowing or denying domain names.....63
 - configuring.....63
 - creating domain name aliases.....63
 - manually setting NAS-Port-Type.....68
 - setting Service-Description.....68
- AAA tunnel groups
 - L2TP transmit connect speed.....405
- Access-Accept messages.....173
 - pool or prefix name
 - not available in.....60
 - preference order
 - in allocation of IPv6 prefixes.....106
 - RADIUS attribute used in
 - Prefix Delegation.....60
 - with Framed-IPv6-Prefix attribute
 - for Prefix Delegation.....90
 - with IPv6-NdRa-Prefix attribute
 - for IPv6 Neighbor Discovery.....90
- Access-Challenge messages.....173, 190
- Access-Reject messages.....173, 190
- Access-Request messages.....173
 - ANCP (L2C)-related VSAs.....235
 - DSL Forum VSAs.....188, 237
- accounting
 - broadcast.....18
 - configuring servers.....18
 - configuring TACACS+317
 - description.....5
 - duplicate.....18
 - server access.....18
 - server request processing limit.....18
 - SNMP traps.....33
 - specifying methods.....18
 - TACACS+317
- accounting statistics
 - tunneled PPP session.....408
- Acct-Authentic (RADIUS attribute 45).....206
- Acct-Delay-Time (RADIUS attribute 41).....205
- Acct-Input-Gigapackets (RADIUS attribute 26-35).....224
- Acct-Input-Gigawords (RADIUS attribute 52).....208
- Acct-Link-Count (RADIUS attribute 51).....207
- Acct-Multi-Session-Id (RADIUS attribute 50).....207
- Acct-Off messages.....181
- Acct-On messages.....181
- Acct-Output-Gigapackets (RADIUS attribute 26-36).....224
- Acct-Session-Id (RADIUS attribute 44).....205, 663, 672
- Acct-Start messages.....181
 - ANCP (L2C)-related VSAs.....235
 - DSL Forum VSAs.....188, 237
- Acct-Stop messages.....181
 - ANCP (L2C)-related VSAs.....235
 - DSL Forum VSAs.....188, 237
- Acct-Terminate-Cause (RADIUS attribute 49).....207
- Acct-Tunnel-Connection (RADIUS attribute 68).....212
- Activate-Service (RADIUS attribute 26-65).....663
- address command, L2TP.....359, 363
- address pool
 - mapping to domain name.....57
 - ranges.....54
- address-pool-name command.....57
- agent circuit ID (suboption 1).....507
- agent remote ID (suboption 2).....507
- agent-circuit-id
 - including in Calling Number AVP.....349
 - including in PPPoE remote circuit ID format.....501
- agent-remote-id
 - including in Calling Number AVP.....349
 - including in PPPoE remote circuit ID format.....501
- allow command.....63
- Ascend-Num-In-Multilink (RADIUS attribute 188).....219
- ATM (Asynchronous Transfer Mode)
 - E120 and E320 routers.....609
- atm atm1483 advisory-rx-speed command
 - and L2TP.....365
- atm commands
 - atm.....82
 - atm pvc627
- ATM subinterface
 - configuring multiple clients.....62
 - configuring single clients.....61
- attribute value pair. *See* AVP
- authentication
 - AAA overview.....317
 - configuring servers.....18
 - configuring TACACS+317
 - description.....5
 - EAP.....18
 - preauthenticating users.....9
 - redirected authentication.....9
 - server access.....18
 - server request processing limit.....18
 - SNMP traps.....33
 - specifying methods.....18
- authentication and accounting servers
 - configuring.....18
- authentication login, TACACS+317

authentication, authorization, accounting. *See* AAA

authorization

- AAA overview.....317
- description.....5
- TACACS +317

authorization change command.....248

AVP (attribute value pair).....336

- Bearer Type (AVP 18)
 - relaying in L2TP tunnel-switched
 - network.....394
 - relaying in L2TP
 - tunnel-switchednetwork.....396
- Calling Number (AVP 22)
 - formatting and preventing in ICRQ
 - packets.....349
 - relaying in L2TP tunnel-switched
 - network.....394
 - relaying in L2TP
 - tunnel-switchednetwork.....396
- Cisco NAS Port Info (AVP 100)
 - relaying in L2TP tunnel-switched
 - network.....394
 - relaying in L2TP
 - tunnel-switchednetwork.....396
- Transmit (TX) Speed (AVP 24)
 - reporting transmit connect speed in.....400

avp command.....400

B

B-RAS applications

- AAA profiles.....63
- allowing or denying domain names.....63
- client to server interaction.....18
- configuring
 - authentication and accounting servers.....18
 - B-RAS license.....7
 - DHCP external server application.....523
 - DHCP features.....461
 - IP addresses for remote clients.....4
 - local address servers.....54
 - name server addresses.....51
 - SRC client.....94
 - timeout.....88
 - UDP checksums.....23
- creating an IP interface.....61
- creating domain name aliases.....63
- DHCP (Dynamic Host Configuration Protocol)
 - proxy client and server.....4
- IP hinting.....9
- limiting active subscribers.....89
- local address server.....4
- manually setting NAS-Port-Type.....68
- mapping address pool to domain.....57
- mapping backup address pool to domain.....58
- mapping IPv6 local address pool to domain.....60

- mapping user domain names to a virtual
 - router.....8
- mapping user requests
 - without a valid domain name.....8
 - without configured domain name.....9
- monitoring.....113
- multiple clients per ATM subinterface.....62
- overview.....4
- preauthenticating users.....9
- protocol support.....5
- redirected authentication.....9
- references.....173, 278
- setting Service-Description.....68
- single clients per ATM subinterface.....61
- SNMP traps.....33
- specifying a single name for a domain.....16
- SRC client. *See* SRC software
- system log messages.....33
- virtual router.....8

B-RAS licenses

- configuring.....7

backoff algorithm.....35

backup address pool

- mapping to domain name.....58

backup local address pool

- and dependency on primary address pool.....58

backup-address-pool-name command.....58

baseline commands

- baseline aaa.....114
- baseline aaa route-download.....114
- baseline cops.....114
- baseline dhcp relay.....540
- baseline dhcp server.....540
- baseline dhcp-local.....541
- baseline dhcpv6-local.....541
- baseline ip dhcp-external.....541
- baseline ip http.....707
- baseline ip local pool.....114
- baseline radius.....114
- baseline radius dynamic-request.....310
- baseline radius relay.....313
- baseline ssc.....114

Bearer Type AVP

- relaying in L2TP tunnel-switched
 - network.....394, 396

BOOTP (bootstrap protocol).....495

bootstrap protocol. *See* BOOTP

bridged Ethernet and dynamic subscriber

- interfaces.....624

Broadband Remote Access Server. *See* B-RAS

applications

broadcast AAA accounting.....18

- configuring.....18

broadcast flag, DHCP	
controlling transmission of DHCP reply	
packets.....	498
interaction with layer 2 unicast transmission	
method.....	499
bundled session commands	
bundled-group-id.....	376, 382
bundled-group-id-overrides-mlppp-ed.....	376, 382
bundled sessions.....	382

C

cable modem DHCP relay.....	506
cable modem networks.....	608
Called-Station-Id (RADIUS attribute 30).....	197
Calling Number AVP	
descriptive formats.....	349
fixed format.....	349
fixed format configuration.....	349
formatting in L2TP ICRQ packets.....	349
including agent-circuit-id and	
agent-remote-id.....	349
preventing in L2TP ICRQ packets.....	349
relaying in L2TP tunnel-switched	
network.....	394, 396
Calling-Station-Id (RADIUS attribute 31).....	197
including IOA number in format.....	191
captive portal. <i>See</i> guided entrance	
Change-of-Authorization-Request messages.....	173
Cisco NAS Port Info AVP	
relaying in L2TP tunnel-switched	
network.....	394, 396
Class (RADIUS attribute 25).....	197
clear ip commands	
clear ip dhcp-local binding	483
clear ip routes download.....	71
CLI (command-line interface)	
authorization and authentication messages.....	190
commands used to modify RADIUS	
attributes.....	191
client-name command.....	362, 365
CoA-Request messages.....	173
guided entrance.....	694
Service Manager.....	694
combined IPv4 and IPv6 services	
example	
with input traffic flow.....	702
with output traffic flow.....	702
example scenario	
for rate limiting VoIP traffic.....	702
external parent groups and	
example.....	702
in a dual stack	
activating.....	671
backward compatibility.....	671
deactivating.....	671

example.....	702
performance impact.....	671
rate limiting and	
example.....	702
service interim accounting.....	676
statistics collection and	
external parent groups.....	689
command-line interface. <i>See</i> CLI	
Common Open Policy Service. <i>See</i> COPS	
compatibility with previous releases	
for IPv4 and IPv6 services	
in a dual stack, combined.....	671
in a dual stack, independent.....	671
configuring. <i>See</i> specific feature, product, or protocol	
Connect-Info (RADIUS attribute 77).....	212
conventions	
notice icons.....	xxxvii
text and syntax.....	xxxviii
COPS (Common Open Policy Service).....	94, 136, 138
COPS(Common Open Policy Service).....	101, 136, 138
COPS-PR (COPS usage for policy provisioning).....	94
customer support.....	xxxix
contacting JTAC.....	xxxix

D

Deactivate-Service (RADIUS attribute	
26-66).....	663, 666, 696
deadtime command.....	30
default domain name.....	8
default-router command.....	627
default-upper-type mlppp command.....	378
Delegated-Ipv6-Prefix (RADIUS attribute 123).....	218
delegating routers	
allocation of IPv6 prefixes	
to requesting routers.....	103
as E-Series routers	
for allocation of prefixes.....	103
assigning prefixes	
to DHCPv6 clients.....	107
deny command.....	63
descriptive formats	
Calling Number AVP.....	349
destination	
changing.....	337
DHCP (Dynamic Host Configuration Protocol)	
access model.....	463
configuring BOOTP Relay.....	495
configuring DHCP relay.....	495
configuring DHCP relay proxy.....	518, 520
configuring proxy client and server.....	464
features.....	60
giaddr.....	471, 495
giaddr:giaddr.....	474
option	
82.487, 489, 495, 497, 498, 501, 506, 507, 511, 514, 516	

- overview.....60, 461, 495
- per-interface logging.....465
- source IP address.....495
- trust-all.....495
- DHCP access model
 - configuring.....461
- DHCP broadcast flag
 - interaction with layer 2 unicast transmission
 - method.....499
- DHCP client bindings
 - deleting.....466
 - managing.....466
 - viewing.....466
- DHCP commands.....592
 - dhcp-external duplicate-mac-address.....526, 536
 - ip auto-detect ip-subscriber.....627
 - ip dhcp-capture.....465
 - ip dhcp-external
 - re-authenticate-subscriber-interface.....537
 - ip dhcp-external
 - recreate-subscriber-interface.....525, 532
 - ip inactivity-timer.....627
 - set ip interface-profile.....592
 - set ip source-prefix.....592
 - show dhcp-external.....555
 - See also* show dhcp commands
- dhcp delete-binding command.....468
- DHCP external server
 - and DHCP relay proxy.....524
 - configuring.....524, 528, 586
 - dynamic subscriber interfaces
 - interoperating with DHCP relay and DHCP
 - relay proxy533
 - identifying clients with duplicate MAC
 - addresses.....526, 536
 - monitoring.....550
 - preserving dynamic subscriber
 - interfaces.....525, 532
 - re-authenticating auto-detected dynamic
 - subscriber interfaces.....537
- DHCP local address pools
 - configuring.....484
 - grace periods.....486
 - linking.....486
- DHCP local server.....480
 - configuring.....477, 489
 - configuring authentication.....487
 - duplicate clients.....480
 - equal-access mode.....470
 - address allocation.....470
 - configuring.....475
 - connection process.....470
 - local pool selection.....470
 - overview.....470
 - SRC (Session and Resource Control
 - software).....461
 - local address pool group.....486, 557
 - local pool selection, equal-access.....470
 - using domain name.....471
 - using framed IP address.....471
 - using giaddr.....471
 - using pool name.....471
 - local pool selection, standalone.....472
 - using giaddr.....472
 - using received interface IP address.....472
 - logging information.....483
 - modes.....469
 - monitoring.....552, 577
 - overview.....469
 - RADIUS accounting support for.....469
 - RADIUS accounting support for standalone
 - mode.....92
 - standalone mode
 - address allocation.....472, 487
 - authentication.....487
 - configuring.....475
 - local pool selection.....472
 - overview.....472
 - unique client IDs.....480
- DHCP local server traps
 - logging.....482
- DHCP local server:local pool selection, equal-access
 - using received interface IP address.....471
- DHCP local server:local pool selection, standalone with
 - AAA
 - using domain name.....473
 - using framed IP address.....473
 - using giaddr.....474
 - using pool name.....473
 - using received IP address.....474
- DHCP local server:local pool selection, standalone
 - without AAA
 - using giaddr.....473
 - using received interface IP address.....473
- DHCP logging.....565
- DHCP option 60 cable modem DHCP relay.....506
- DHCP option 60 strings.....503
- DHCP Option 82 (RADIUS attribute 26-159).....235
- DHCP options and RADIUS
 - configuring.....461
- DHCP packets
 - logging.....565
- DHCP per-interface information
 - logging.....465
- DHCP pool commands
 - default-router.....486, 627
 - dns-server.....486
 - domain-name.....486
 - grace-period.....486
 - ip dhcp-local pool.....627
 - lease.....486
 - link.....486

netbios-name-server.....	486		
netbios-node-type.....	486		
network.....	486		
reserve.....	486		
server-address.....	486		
snmpTrap.....	486		
use-release-grace-period.....	486		
warning.....	486		
DHCP proxy client			
configuring.....	464		
DHCP relay			
configuring.....	495		
creating.....	495		
in same VR as dynamic subscriber			
interfaces.....	610		
interoperating with DHCP external server.....	533		
logging information.....	502		
preventing host route installation.....	500		
removing.....	495		
spoofed giaddr.....	497		
spoofed relay agent option.....	497		
DHCP relay agent information option			
agent circuit ID (suboption 1).....	507		
agent remote ID (suboption 2)	507		
vendor-specific (suboption 9).....	507		
DHCP relay and BOOTP relay			
configuring.....	495		
DHCP relay proxy			
best offer.....	520		
configuring.....	518		
first offer.....	520		
interoperating with DHCP external server.....	533		
DHCP server			
dynamic subscriber interfaces.....	610		
DHCP vendor class identifier option.....	503		
dhcp-external commands			
dhcp-external duplicate-mac-address.....	526, 536		
show dhcp-external.....	555		
DHCP-GI-Address (RADIUS attribute 26-57).....	229		
dhcp-local-server-configuration-overview.....	475		
DHCP-MAC-Address (RADIUS attribute 26-56).....	228		
DHCP-Options (RADIUS attribute 26-55).....	228		
DHCPv6 client bindings			
deleting.....	491		
DHCPv6 clients			
assigning prefixes to			
using local address pools.....	107		
dhcpv6 delete-binding command.....	492		
DHCPv6 local address pools <i>See</i> IPv6 local address			
pools			
DHCPv6 local server			
IPv6.....	489		
		DHCPv6 Prefix Delegation	
		and IPv6 Neighbor Discovery	
		without configuring	
		Delegated-IPv6-Prefix.....	90
		assigned prefix length of /128	
		in local address pools.....	105
		enabling	
		IPv6 local address pool feature.....	107
		example for non-PPP client requests.....	110
		example scenario.....	105
		for client requests	
		over non-PPP links.....	104
		over PPP links.....	104
		for IPv6 clients	
		overview.....	103
		Framed-IPv6-Prefix	
		in Access-Accept messages.....	90
		guidelines for configuring	
		IPv6 local address pools.....	104
		interface level configuration	
		versus router level configuration.....	106
		IPv6 local address pool	
		mapping to a domain name	60
		limitation on	
		prefixes assigned to clients.....	109
		standard RADIUS attributes	
		configuring	90
		verifying.....	153
		using IPv6 local address pools	
		monitoring a single pool.....	165
		monitoring all configured pools.....	164
		monitoring statistics for a pool.....	166
		dial number identification service. <i>See</i> DNIS	
		digital subscriber line access multiplexers. <i>See</i>	
		DSLAMs	
		digital subscriber lines. <i>See</i> DSLs	
		disable proxy lcp command.....	378
		Disconnect-Cause (RADIUS attribute 26-51).....	227
		Disconnect-Request messages.....	173
		DNIS (dial number identification service).....	9, 378
		DNS (Domain Name System)	
		assigning IP addresses.....	122
		overview.....	51
		DNS addresses	
		order of preference	
		in allocation to clients.....	106
		DNS domain names	
		list of	
		configured in IPv6 local address pools.....	106
		order of preference	
		in responses to clients.....	106

- DNS domains
 - configuring more than one
 - using the CLI interface.....108
 - in IPv6 local address pools
 - processing client requests for
 - resolution.....108
 - in responses to clients
 - Domain Search List option and.....108
 - maximum number
 - in IPv6 local address pools.....108
- DNS Recursive Name Search option
 - DHCPv6 server responses
 - and DNS servers in local pools.....108
- DNS servers
 - addresses in responses to clients
 - DNS Recursive Name Search option
 - and.....108
 - configuring in
 - IPv6 local address pools.....108
 - list of
 - configured in IPv6 address pools.....106
 - order of preference
 - in responses to clients.....106
 - order of use
 - for delegating prefixes.....108
 - primary and secondary
 - for domain resolution requests from
 - clients.....108
 - responding with IPv6 addresses
 - for client requests.....108
- documentation set
 - comments on.....xxxix
- domain command.....588
- Domain Name System. *See* DNS
- domain names
 - allowing or denying.....63
 - configuring.....12
 - default.....8
 - mapping to virtual routers.....8, 119, 129, 428
 - mapping user requests without domain
 - name.....8, 9
 - none.....9
 - specifying single name for users.....16
 - stripping domain name.....12
 - using aliases.....63
 - using delimiters other than @.....12
 - using either domain or realm as domain
 - name.....12
 - using realm name as domain name.....12
- Downstream-Calculated-QoS-Rate (RADIUS attribute
 26-141).....232
- DSL Forum VSAs
 - controlling inclusion of.....237
 - descriptions.....276
 - in AAA access and accounting messages.....188
- DSLAMs (digital subscriber line access
 multiplexers).....4
- DSLs (digital subscriber lines).....4
- dual stack
 - combined IPv4 and IPv6 services
 - example of702
 - IPv4 and IPv6 services
 - combined, activating and deactivating.....670
 - combined, overview.....669
 - independent, activating and
 - deactivating.....670
 - independent, overview.....669
 - service interim accounting, overview.....676
 - Service manager support, activating and
 - deactivating.....670
 - Service manager support, overview.....669
 - statistics collection
 - external parent groups.....689
- duplicate AAA accounting.....18
 - configuring.....18
- duplicate clients.....480
- duplicate MAC addresses
 - identifying DHCP clients with.....526, 536
 - monitoring.....555
- Dynamic Host Configuration Protocol. *See* DHCP
- DHCP
 - dynamic IP interfaces.....82
 - dynamic subscriber interfaces
 - commands.....627
 - configuring.....610, 622
 - configuring DHCP external server to interoperate
 - with DHCP relay and DHCP relay proxy533
 - configuring DHCP external server to
 - preserve.....525, 532
 - configuring DHCP external server to
 - re-authenticate.....537
 - DHCP server.....610
 - framed routes.....613
 - GRE tunnel configuration.....625
 - in same VR as DHCP relay.....610
 - inheriting MAC validation state.....613
 - IP over bridged Ethernet configuration.....624
 - IP over Ethernet configuration.....622
 - IP over VLAN over Ethernet configuration.....623
 - monitoring.....635
 - overview.....610
 - packet detection.....612

E

- E120 and E320 routers
 - ATM interfaces.....609
- EAP (Extensible Authentication Protocol)
 - external RADIUS server.....18
 - local authentication server.....18
 - RADIUS attributes.....18

RADIUS authentication.....	18
TACACS+ server.....	18
EAP-Message (RADIUS attribute 79).....	21
Egress-Policy-Name (RADIUS attribute 26-11).....	221
enable proxy authenticate command.....	378
encapsulation commands	
encapsulation bridge1483.....	627
encapsulation vlan.....	627
endpoint discriminator.....	382
equal-access DHCP local server.....	470
Ethernet	
configuring dynamic subscriber interfaces.....	622
Ethernet interfaces	
commands	
interface tenGigabitEthernet.....	627
Ethernet links	
between CPE and PE routers	
pool section for Prefix Delegation.....	110
Event-Timestamp (RADIUS attribute 55).....	209
exclusion ranges	
configuring	
for delegation of prefixes.....	108
example for non-PPP client requests.....	110
for DHCPv6 prefixes	
delegated to clients.....	108
Extensible Authentication Protocol. <i>See</i> EAP	
external parent groups	
combined IPv4 and IPv6 services with	
example.....	702
statistics collection for	
setting up.....	689

F

fixed format	
Calling Number AVP.....	349
fragmentation	
and reassembly.....	339
packet.....	337
framed routes dynamic subscriber interfaces.....	613
Framed-Compression (RADIUS attribute 13).....	196
Framed-Interface-Id (RADIUS attribute 96).....	217
Framed-Ip-Address (RADIUS attribute 8).....	195
Framed-Ip-Netmask (RADIUS attribute 9).....	195
Framed-Ipv6-Pool (RADIUS attribute 100).....	218
Framed-Ipv6-Prefix (RADIUS attribute 97).....	217
Framed-IPv6-Prefix attribute	
used for DHCPv6 Prefix Delegation	
from Access-Accept messages.....	90
Framed-Ipv6-Route (RADIUS attribute 99).....	217
Framed-MTU (RADIUS attribute 12).....	21

G

giaddr.....	471, 495
-------------	----------

GRE (Generic Routing Encapsulation) tunnels dynamic	
subscriber interfaces.....	612, 625
guided entrance.....	642, 693
CoA-Request messages.....	694

H

HTTP local server.....	694, 696
guided entrance service.....	696
Service Manager.....	696

I

I/O adapters. <i>See</i> IOAs	
ICR partition accounting	
viewing the status, enabled or disabled.....	316
identification command.....	362, 365
idle timeout for B-RAS	
configuring.....	88
idle timeout, range for.....	88
include commands	
include circuit-id.....	587
include dhcp-option 82.....	587
include hostname.....	587
include ip-address.....	587
include mac-address.....	587
include virtual-router-name.....	587
independent IPv4 and IPv6 services	
in a dual stack	
activating.....	670
backward compatibility.....	670
deactivating.....	670
performance impact.....	670
service interim accounting.....	676
statistics collection and	
external parent groups.....	689
Ingress-Policy-Name (RADIUS attribute 26-10).....	221
inheriting MAC address validation state.....	613
interface commands	
interface atm.....	627
interface fastEthernet.....	627
interface gigabitEthernet.....	627
interface ip.....	618
interface loopback.....	627
interface tenGigabitEthernet.....	627
Interface-Desc (RADIUS attribute 26-63).....	230
interfaces	
configuring for DHCP local server.....	474
moving.....	607
Interim-Acct messages.....	181
ANCP (L2C)-related VSAs.....	235
DSL Forum VSAs.....	188, 237
Internet Protocol. <i>See</i> IP	
IOAs	
including in RADIUS Calling-Station-Id	
format.....	191

- IP
 - hinting.....9
- IP addresses
 - assigning to name servers.....51, 122
 - configuring for remote client.....4
- ip commands
 - clear ip demux.....587
 - ip address.....627
 - ip address-pool dhcp.....464
 - ip auto-configure ip-subscriber.....587, 612, 627
 - ip auto-detect ip-subscriber.....587
 - ip demux-type.....618
 - ip destination-prefix.....590, 618, 620
 - ip dhcp-local pool.....627
 - ip inactivity-timer.....590
 - ip local alias.....58
 - ip local pool.....59
 - ip local pool snmpTrap.....59
 - ip local pool warning.....59
 - ip local shared-pool.....59
 - ip route-map ip-subscriber.....590
 - ip service-profile.....590
 - ip share-interface.....620
 - ip share-nexthop.....620
 - ip source-prefix.....592, 621, 627
 - ip unnumbered.....627
 - ip use-framed-routes ip-subscriber.....592, 627
 - ip-hint.....9
- ip dhcp-external commands.....530
 - ip dhcp-external auto-configure.....530
 - ip dhcp-external disregard-giaddr-next-hop.....529
 - ip dhcp-external
 - recreate-subscriber-interface.....525, 532
 - ip dhcp-external server-address.....529
 - ip dhcp-external server-sync.....529
 - ip re-authenticate-auto-detect ip-subscriber.....537
 - See also* show ip dhcp-external commands
- ip dhcp-local auth domain command.....489, 490
- ip dhcp-local auth include command.....489
- ip dhcp-local auth password.....489
- ip dhcp-local auth user-prefix command.....489
- ip dhcp-local commands
 - ip dhcp-local auto-configure
 - agent-circuit-identifier.....483
 - ip dhcp-local excluded-address.....483
 - ip dhcp-local limit.....483
 - ip dhcp-local pool.....486
 - ip dhcp-local unique-client-ids.....483
- ip dhcp-server commands
 - ip dhcp-server.....464
- ip http commands
 - ip http.....696
 - ip http access-class.....696
 - ip http max-connection-time.....696
 - ip http port.....696
 - ip http redirecturl.....696
 - ip http same-host-limit.....696
 - ip http server.....696
- IP interfaces
 - creating.....618
- IP interfaces that support PPP clients
 - configuring.....61
- IP spoofing
 - preventing.....613
- IPv4 and IPv6 services.....671
 - combined services in a dual stack
 - example.....702
 - in a dual stack
 - and Service Manager support.....671
 - See also* combined IPv4 and IPv6 services
 - See also* independent IPv4 and IPv6 services
- IPv4 services
 - in a dual stack
 - activating.....670
 - combined and independent
 - configuration.....669
 - deactivating.....670
 - with IPv6 services.....669
- ipv6 commands
 - ipv6 virtual-router.....9
 - ipv6-local-interface.....9
 - ipv6-prefix-pool-name.....60
- IPv6 DHCP local server.....489
 - monitoring.....573, 575
- ipv6 dhcpv6-local commands
 - ipv6 dhcpv6-local delegated-prefix.....489
 - ipv6 dhcpv6-local dns-domain-search.....489
 - ipv6 dhcpv6-local dns-server.....489
 - ipv6 dhcpv6-local prefix-lifetime.....489
- IPv6 local address pools
 - and overriding using the RADIUS attribute from
 - AAA server.....60
 - assigned prefix length of /128
 - Prefix Delegation and.....105
 - configuring
 - for Prefix Delegation.....107
 - DNS servers in
 - to return to clients.....108
 - enabling.....107
 - example for non-PPP client requests.....110
 - for delegation of prefixes
 - overview.....103
 - for DHCPv6 Prefix Delegation
 - single pool details, viewing.....165
 - statistics for a single pool, viewing.....166
 - summary of all configured pools,
 - viewing.....164
 - guidelines for configuration.....104
 - limitation on
 - number of allocated prefixes.....109
 - mapping to a domain name
 - for Prefix Delegation.....60

multiple configuration	
on virtual router, preference order.....	106
name length.....	60
not configured in domain map	
method for determining prefix to be	
delegated.....	106
order of preference	
in selection for delegation of prefixes.....	106
Prefix Delegation	
example scenario.....	105
prerequisite for configuring.....	107
procedure	
for configuring on a virtual router.....	107
removing from	
domain map.....	60
specifying	
domain name for DNS resolution.....	107
exclusion range for prefixes.....	107
IPv6 address of DNS server.....	107
preferred lifetime.....	107
prefix range.....	107
starting and ending prefixes of a range.....	107
valid lifetime.....	107
used for Prefix Delegation from	
AAA domain map.....	106
interface address.....	106
RADIUS server.....	106
IPv6 Neighbor Discovery	
and DHCPv6 Prefix Delegation	
without configuring Delegated-IPv6-Prefix	
.....	90
IPv6-NdRa-Prefix	
in Access-Accept messages.....	90
standard RADIUS attributes	
configuring	90
verifying.....	152
IPv6 prefix ranges	
configuring	
with the starting and ending prefixes.....	107
with the starting prefix and length.....	107
IPv6 services	
in a dual stack	
activating.....	670
combined and independent	
configuration.....	669
deactivating.....	670
with IPv4 services.....	669
IPv6-Acct-Input-Gigawords [26-155]	234
IPv6-Acct-Input-Octets [26-151]	234
IPv6-Acct-Input-Packets [26-153].....	234
IPv6-Acct-Output-Gigawords [26-156].....	234
IPv6-Acct-Output-Octets [26-152].....	234
IPv6-Acct-Output-Packets [26-154]	234
Ipv6-Local-Interface (RADIUS attribute 26-46).....	226
Ipv6-NdRa-Prefix (RADIUS attribute 26-46).....	231

IPv6-NdRa-Prefix attribute	
used for IPv6 Neighbor Discovery	
from Access-Accept messages.....	90
IPv6-Primary-DNS (RADIUS attribute 26-47).....	226
Ipv6-Secondary-DNS (RADIUS attribute 26-46).....	227
IPv6-Virtual-Router (RADIUS attribute 26-45).....	225

K

key command.....	30, 80, 248, 256
------------------	------------------

L

L2C-Down-Stream-Data (RADIUS attribute	
26-93).....	231
L2C-Information (RADIUS attribute 26-81).....	230
L2C-Up-Stream-Data (RADIUS attribute 26-92).....	230
L2TP (Layer 2 Tunneling Protocol)	
defining.....	335
high availability considerations.....	342
implementation.....	337
license.....	342
modifying LAC default settings.....	344, 385
monitoring.....	427
peer resynchronization.....	391
rx speed	365
sessions supported.....	341
silent failover.....	391
tunnel selection.....	370
tunnel switch profiles.....	394
L2TP access concentrator. <i>See</i> LAC	
l2tp commands.....	386
disconnect-cause.....	386
failover-resync	394
l2tp checksum.....	345
l2tp destination lockout-test.....	369
l2tp destination lockout-timeout.....	369
l2tp destination profile.....	376, 379
l2tp destruct-timeout.....	345
l2tp disable calling-number avp.....	349
l2tp disable challenge.....	359
l2tp disconnect-cause.....	386
l2tp drain.....	346
l2tp drain destination.....	346
l2tp drain tunnel.....	346
l2tp fail-over-within-preference.....	370
l2tp failover-resync	391, 394
l2tp ignore-receive-data-sequencing.....	359
l2tp ignore-transmit-address-change.....	369
l2tp reject-transmit-address-change.....	369
l2tp retransmission.....	349
l2tp short-drain-timeout.....	346
l2tp shutdown.....	348
l2tp shutdown destination.....	348
l2tp shutdown session.....	348
l2tp shutdown tunnel.....	348

- l2tp switch-profile.....399
- l2tp tunnel default-receive-window.....388
- l2tp tunnel idle-timeout.....385
- l2tp tunnel test.....385
- l2tp tunnel-switching.....384, 399
- l2tp unlock destination.....369
- l2tp unlock-test destination.....369
- l2tp weighted-load-balancing command.....370
- max-sessions command.....376, 380
- See also* show l2tp commands
- L2TP dial-out
 - before configuring.....419
 - configuring.....419
 - dial-out process.....413
 - network model.....412
 - operational states.....413
 - outgoing call setup details.....413
 - Access-Accept message.....413
 - Access-Request message.....413
 - mutual authentication.....413
 - outgoing call successful.....413
 - route installation.....413
 - overview.....411
 - references.....418
 - route.....412
 - session.....412
 - target.....412
 - trigger.....412
- l2tp dial-out commands.....419
 - l2tp dial-out connecting-timer-value.....419
 - l2tp dial-out dormant-timer-value.....419
 - l2tp dial-out max-buffered-triggers.....419
 - l2tp dial-out session delete.....419
 - l2tp dial-out session reset.....419
 - l2tp dial-out target.....419
- See also* show l2tp dial-out commands
- L2TP network server. *See* LNS
- L2TP RWS (receive window size)
 - configuring global default.....388
 - configuring on LAC.....388
 - configuring on LNS.....388
 - l2tp tunnel default-receive-window
 - command.....388
 - overview.....388
 - receive-window command (for LAC).....388
 - receive-window command (for LNS).....388
 - show l2tp command.....121, 429, 431, 434
 - show l2tp destination profile command.....437
- l2tp rx-connect-speed-when-equal command.....366
- L2TP transmit connect speed
 - and Transmit (TX) Speed AVP 24.....400
 - calculation methods
 - how to configure.....400
 - monitoring.....428, 430
- L2TP transmit connect speed and Transmit (TX) Speed
 - AVP 24
 - calculation methods
 - actual.....402
 - dynamic layer 2.....402
 - examples.....402
 - QoS.....402
 - static layer 2.....401
 - configuring
 - AAA default tunnel parameters.....406
 - AAA domain maps.....404
 - AAA tunnel groups.....405
 - RADIUS.....407
 - reporting considerations.....404
- L2TP tunnel switch profiles
 - applying default profile.....399
 - applying through AAA domain maps.....397
 - applying through AAA tunnel groups.....398
 - applying through RADIUS.....399
 - AVP relay, configuring.....394, 396
 - configuration guidelines.....394
 - configuring.....396
 - how to apply.....394
 - monitoring.....444
- LAC (L2TP access concentrator).....336
 - before configuring.....343, 375
 - configuring receive window size (RWS).....388
 - function.....335, 343
 - sequence of events.....337
- Layer 2 Tunneling Protocol. *See* L2TP
- license commands.....7
 - license b-ras.....7
 - license l2tp-session.....341
 - license service-manager.....659
- See also* show license commands
- licenses
 - B-RAS.....7
 - L2TP.....342
 - Service Manager.....659
- lifetime
 - guideline
 - for preferred lifetime.....108
 - preferred
 - configuring for Prefix Delegation.....108
 - restriction
 - in configuration for delegated prefixes.....108
 - specifying
 - as infinite.....108
 - valid
 - configuring for Prefix Delegation.....108
- limitation
 - on number of IPv6 prefixes
 - delegated to clients.....109
- line command.....326

LLID (logical line identifier)	
configuration steps.....	76
how it works.....	76
monitoring.....	123, 130
preauthentication considerations.....	76
RADIUS attributes in preauthentication	
request.....	76
troubleshooting.....	76
using to track subscribers.....	76
LNS (L2TP network server).....	337, 376
before configuring.....	343, 375
configuring.....	376
configuring receive window size (RWS).....	388
installing multiple service modules.....	382
modules supported.....	384
out-of-resource result codes.....	381
overriding out-of-resource result codes.....	381
sequence of events.....	337
local address pool	
alias names.....	55
mapping to domain name.....	57
ranges.....	54
local address server.....	54
alias names.....	55
configuring.....	54
pool ranges.....	54
shared local address pools.....	55
SNMP thresholds.....	55
local authentication commands	
aaa authentication default.....	41
aaa local database.....	41
aaa local select database.....	41
aaa local username.....	41
ip-address.....	41
ip-address-pool	41
operational-virtual-router.....	41
password.....	41
secret.....	41
username.....	41
local host command.....	378
local ip address command.....	378
local-interface command.....	11
logging. <i>See</i> specific feature, product, or protocol	
logical line identifier, AAA. <i>See</i> LLID	
login authentication command.....	327
logout subscribers command.....	31, 484

M

MAC (media access control) addresses	
duplicate.....	482, 483
inheriting validation state.....	613
preventing IP spoofing.....	613
macros	
service definitions.....	642
Service Manager statistics.....	686

manuals	
comments on.....	xxxix
max-sessions command.....	31
MBS (RADIUS attribute 26-17).....	223
media access control addresses. <i>See</i> MAC addresses	
medium ipv4 command.....	362, 365
merging policies	
naming conventions.....	650
Message-Authenticator (RADIUS attribute 80).....	21
MLPPP Bundle Name (RADIUS attribute 26-62).....	229
monitoring. <i>See</i> specific feature, product, or protocol	
mutex service.....	642, 667

N

name server addresses	
configuring.....	51, 122
naming conventions	
merged policies.....	650
NAS (network access server).....	317, 318
NAS-Identifier (RADIUS attribute 32).....	203
NAS-IP-Address (RADIUS attribute 4).....	191
NAS-Port (RADIUS attribute 5).....	192
NAS-Port-Id (RADIUS attribute 87).....	214
NAS-Port-Type (RADIUS attribute 61).....	209
nas-port-type atm command.....	68
NAS-Port-Type attribute, manually setting.....	68
nas-port-type ethernet command.....	68
network access server. <i>See</i> NAS	
network commands	
network.....	627
no radius client command.....	31
non-PPP clients	
pool section for Prefix Delegation.....	110
non-PPP equal access	
configuration example.....	492
requirements.....	470
none domain name.....	9
notice icons.....	xxxvii

O

operational states, L2TP.....	413
chassis.....	413
sessions.....	413
targets.....	413
virtual router.....	413
option	
82.....	487, 489, 495, 497, 498, 506, 507, 511, 516
out-of-resource result codes, LNS.....	381
Output-Gigawords (RADIUS attribute 53).....	208
override-user command.....	17

P

packet detection dynamic subscriber interfaces.....	612
---	-----

packet fragmentation.....337
 packet mirroring.....245
 packets
 demultiplexing.....603
 transmitting.....335
 Partition-Accounting-Off messages.....181
 Partition-Accounting-On messages.....181
 password command.....362, 365, 593
 PCR (RADIUS attribute 26-15).....222
 peer.....337
 peer resynchronization.....391
 performance impact
 IPv4 and IPv6 services
 in a dual stack, combined.....671
 in a dual stack, independent.....671
 persistent tunnels, creating.....385
 PIB (Policy Information Base).....94
 platform considerations
 PPP.....321
 Point-to-Point Protocol. *See* PPP
 Policy Information Base. *See* PIB
 policy management on subscriber interfaces.....607
 PPP (Point-to-Point Protocol)
 accounting statistics for tunneled sessions.....408
 B-RAS service support.....5
 platform considerations.....321
 ppp commands
 ppp aaa-profile.....68, 76
 PPPoE remote circuit ID.....501
 Pppoe-Description (RADIUS attribute 26-24).....224
 pre-authenticate command.....81
 preauthentication
 AAA LLID.....76
 B-RAS users.....9
 preference.....370
 preference command.....362, 365
 preference order
 in allocation of prefixes
 to IPv6 clients.....106
 in assignment of DNS addresses
 to IPv6 clients.....106
 in determining local address pool
 for allocation of IPv6 prefixes.....106
 preferred lifetime
 for delegated prefixes
 configuring.....108
 default.....108
 setting
 without expiration.....108
 Prefix Delegation *See* DHCPv6 Prefix Delegation

prefixes
 allocated to clients from
 interface configuration.....106
 IPv6 local address pools.....106
 RADIUS Access-Accept message.....106
 assigned length of /128
 in IPv6 local address pools.....105
 assigning to
 DHCPv6 clients.....107
 configuring ranges
 for delegation to clients.....107
 delegating by
 DHCPv6 local server.....107
 delegating to clients
 over non-PPP links.....104
 over PPP links.....104
 excluded from
 delegation to clients.....108
 excluding
 range and individual ones108
 in Access-Accept messages
 applicable RADIUS attributes.....60
 for DHCPv6 Prefix Delegation.....60
 priority over prefix in local address pool.....60
 limitation on
 number assigned to clients.....109
 order of preference
 in allocation to clients.....106
 preferred and valid lifetimes
 configuring for delegated ones.....108
 prerequisite
 for configuring IPv6 local address pools
 for Prefix Delegation.....107
 primary authentication/accounting RADIUS
 server.....23, 73
 primary IP interface.....606
 privilege authentication, TACACS +317
 profile commands
 profile.....651

Q

QoS (quality of service)
 calculation method for L2TP transmit connect
 speed.....402
 on subscriber interfaces.....607
 QoS commands
 qos-parameter.....653
 qos-profile.....651

R

RADIUS
 LAG subscribers information.....92

RADIUS (Remote Authentication Dial-In User Service)	
AAA failure.....	90
accounting methods.....	18
attribute descriptions.....	18, 171, 259
attributes supported.....	259
authentication and accounting servers.....	18
authentication methods.....	18
Calling-Station-Id formats supported.....	191
change of authority messages.....	241
CLI AAA messages.....	190
client to server interaction.....	18
configuring servers.....	18
description.....	171
direct server access.....	18
disconnect messages.....	241
EAP authentication.....	18
IETF attributes supported.....	259
Juniper Networks VSAs supported.....	265
L2TP transmit connect speed.....	407
L2TP tunnel switch profiles, applying.....	399
message types supported.....	173
RADIUS dynamic-request server.....	241
round-robin server access.....	18
server access.....	18
server request processing limit.....	18
Service Manager attributes.....	663
Service Manager tags.....	664
services.....	171
SNMP traps.....	33
system log messages.....	33
traffic shaping for PPP over ATM interfaces.....	82
VSAs (vendor-specific attributes)	
for dynamic IP interfaces.....	82
formats.....	265
RADIUS attributes	
preference order and	
allocation of prefixes to IPv6 clients.....	106
radius commands.....	18
radius acct-session-id-format.....	204, 261
radius algorithm.....	18, 28
radius calling-station-delimiter.....	191, 261
radius calling-station-format.....	191, 261, 349
radius client.....	28
radius connect-info-format.....	209
radius connect-info-format command.....	376, 380
radius disconnect client.....	248
radius dsl-port-type.....	204, 209, 263
radius dynamic-request server.....	248
radius ethernet-port-type.....	209, 263
radius ignore atm-mbs.....	209
radius ignore atm-pcr.....	209
radius ignore atm-scr.....	209
radius ignore atm-service-category.....	209
radius ignore egress-policy-name.....	209
radius ignore framed-ip-netmask.....	191
radius ignore ingress-policy-name.....	209
radius ignore virtual-router.....	209
radius include	
ANCP (L2C)-related Juniper Networks	
VSAs.....	235
radius include access-loop-parameters.....	209
radius include acct-authentic.....	204
radius include acct-delay-time.....	204
radius include acct-link-count.....	204
radius include acct-multi-session-id.....	204
radius include acct-session-id.....	204
access-request.....	261
radius include acct-terminate-cause.....	84, 204
radius include acct-tunnel-connection.....	209
radius include ascend-num-in-multilink.....	209
radius include called-station-id.....	191
radius include calling-station-id.....	191
radius include class.....	191
radius include connect-info.....	209
radius include delegated-ipv6-prefix.....	191
radius include dhcp-gi-address.....	209
radius include dhcp-mac-address.....	209
radius include dhcp-options.....	209
radius include	
downstream-calculated-qos-rate.....	231
radius include dsl-forum-attributes.....	238
radius include egress-policy-name.....	209
radius include event-timestamp.....	204
radius include framed-compression.....	191
radius include framed-interface-id.....	209
radius include framed-ip-add acct-start.....	260
radius include framed-ip-addr.....	191
radius include framed-ip-netmask.....	84, 191, 204
radius include framed-ipv6-pool.....	191
radius include framed-ipv6-prefix.....	209
radius include framed-ipv6-route.....	191
radius include icr-partition-id.....	234
radius include ingress-policy-name.....	209
radius include input-gigapkts.....	209
radius include input-gigawords.....	204
radius include interface-description.....	209
radius include ipv6-local-interface.....	191
radius include ipv6-nd-ra-prefix.....	191
radius include ipv6-primary-dns.....	191
radius include ipv6-secondary-dns.....	191
radius include ipv6-virtual-router.....	191
radius include l2c-downstream-data.....	231
radius include l2c-upstream-data.....	209
radius include l2tp-ppp-disconnect-cause.....	386
radius include mlppp-bundle-name.....	209
radius include nas-identifier.....	203
radius include nas-port.....	191
radius include nas-port-id.....	209
radius include nas-port-type.....	209
radius include output-gigapkts.....	209
radius include output-gigawords.....	204

- radius include pppoe-description.....209
- radius include profile-service-description.....209
- radius include tunnel-assignment-id.....209
- radius include tunnel-client-auth-id.....209
- radius include tunnel-client-endpoint.....209
- radius include tunnel-interface-id.....209
- radius include tunnel-medium-type.....209
- radius include tunnel-preference.....209
- radius include tunnel-server-attributes.....209
- radius include tunnel-server-auth-id.....209
- radius include tunnel-server-endpoint.....209
- radius include tunnel-type.....209
- radius include upstream-calculated-qos-rate.....231
- radius include framed-ip-netmask.....204
- radius nas-identifier.....203
- radius nas-port-format.....191, 260
- radius nas-port-format extended atm.....191
- radius nas-port-format extended ethernet.....191
- radius override calling-station-id
 - remote-circuit-id.....191
- radius override nas-info.....28, 191, 203
- radius override nas-ip-addr
 - tunnel-client-endpoint.....191
- radius override nas-port-id remote-circuit-id.....209
- radius pppoe nas-port-format unique.....191, 260
- radius pre-authentication server.....76
- radius relay server.....255
- radius relay udp-checksum.....255
- radius remote-circuit-id-delimiter.....204
- radius remote-circuit-id-format.....204
- radius rollover-on-reject.....33
- radius route-download server.....71
- radius server.....33
- radius trap acct-server-not-responding.....37
- radius trap acct-server-responding.....37
- radius trap auth-server-not-responding.....37
- radius trap auth-server-responding.....37
- radius trap no-acct-server-responding.....37
- radius trap no-auth-server-responding.....37
- radius tunnel-accounting.....33
- radius udp-checksum.....33
- radius update-source-addr.....33, 171, 259
- radius vlan nas-port-format stacked.....260
- See also* show radius commands
- RADIUS dynamic-request server
 - change of authorization messages.....245
 - disconnect messages.....243
 - how it works.....243
 - message exchange.....243, 245
 - monitoring.....250
 - overview.....241
 - qualifications for disconnect.....243
 - security and authentication.....243
 - Service Manager.....694
- RADIUS IPv6 attributes
 - configuring
 - for DHCPv6 Prefix Delegation.....90
 - for IPv6 Neighbor Discovery.....90
 - verifying
 - for DHCPv6 Prefix Delegation.....153
 - for IPv6 Neighbor Discovery.....152
- RADIUS relay server
 - configuring.....255
 - monitoring.....257
- radius remote-circuit-id-format command.....518
- RADIUS route-download server.....71
 - configuring.....71
 - format of routes.....71
 - how it works.....71
 - per chassis.....71
 - supported attributes.....71
- RADIUS servers
 - attributes in Access-Accept
 - overriding configured local pool.....60
 - attributes used for
 - DHCPv6 Prefix Delegation.....60
 - Prefix Delegation and
 - pool name not returned in
 - Access-Accept.....106
 - pool name returned in Access-Accept.....106
- radius-attributes-override-monitoring.....303
- RADIUS-initiated change of authorization
 - qualifications for change of authorization.....245
- RADIUS-initiated disconnect
 - configuring.....245, 247
 - L2TP LAC users.....244
 - references.....242
 - sample network.....242
 - security and authentication.....245
- realm names
 - configuring.....12
 - usage.....12
- Receive speed AVP.....434
- receive window size (RWS). *See* L2TP RWS
- redirected authentication.....9
- remote access (B-RAS). *See* B-RAS applications
- Remote Authentication Dial-In User Service. *See* RADIUS
- remote clients, IP addresses for.....4
- remote host command.....378, 379
- remote system.....337
- requesting routers
 - as customer edge device
 - in obtaining IPv6 prefixes.....103
 - assigning prefixes to
 - using IPv6 local address pools.....107
 - receipt of IPv6 prefixes
 - from delegating routers.....103
- retransmit command.....34
- router-name command.....11, 362, 365

RX speed AVP.....365

S

S-VLAN links

between CPE and PE routers

pool section for Prefix Delegation.....110

SCR (RADIUS attribute 26-16).....223

SDX (Service Deployment System) software.....137

See also SRC software

server-name command.....363, 365

service commands

service dhcp-external528

service dhcp-local.....483, 627

service dhcp-local authenticate.....487

service dhcpv6-local489

service-description.....68

service definitions.....641, 642, 645

copying.....648

creating.....645

installing.....648

modifying.....648

modifying QoS configurations.....653

specifying parameter instances.....651

specifying QoS profiles.....651

uninstalling.....648

service instance.....643

service interim accounting

in a dual stack

of IPv4 and IPv6 services.....676

IPv4 and IPv6 services

overview.....676

Service Manager

CLI support.....660

CoA-Request messages.....694

combined IP4 and IPv6 service

example.....702

configuring

Service Manager license.....659

deactivating.....664

setting thresholds.....664

guided entrance.....642, 693, 694

IPv4 and IPv6 services

combined, activating.....670

combined, deactivating.....670

combined, overview.....669

in a dual stack, activating.....670

in a dual stack, overview.....669

independent, activating.....670

independent, deactivating.....670

independent, overview.....669

overview.....669, 670

license sessions.....659

macros.....642

multiple services.....667

mutex service.....642, 667

overview.....641

parameter values.....664

preprovisioning services.....677, 680

QoS

considerations.....658

modifying configurations of653

referencing configurations of.....651

removing references of.....653

RADIUS dynamic-request server.....694

RADIUS support.....660

RADIUS tags.....664

service definition.....641, 642, 645

parameters.....678

service instance.....643

service session.....643

forcing deactivation.....683

profiles.....680

service session profiles.....643

session thresholds.....685

statistics.....664, 680, 686

macro command.....686

using RADIUS.....687

using the CLI.....688

statistics collection

for external parent groups, setting up.....689

subscriber session ID.....685

subscriber sessions.....677

supported platforms.....643

tasks.....643

testing services.....677

Service Manager commands

no service-management owner-session

force.....683

no service-management subscriber-session

force.....683, 685

service-management install.....648

service-management owner-session.....677

service-management service-session-profile.....680

service-management subscriber-session

service-session.....677

statistics.....680

time.....680

volume.....680

Service Manager license

configuring.....659

service modules

installing multiple for LNS sessions.....382

service session.....643

Service-Category (RADIUS attribute 26-14).....222

Service-Description (RADIUS attribute 26-53).....228

setting.....68

Service-Interim-Acct-Interval (RADIUS attribute

26-140).....663, 673

Service-Session (RADIUS attribute 26-83).....663, 672

Service-Statistics (RADIUS attribute 26-69).....663

Service-Stats (RADIUS attribute 26-69).....687

- Service-Timeout (RADIUS attribute 26-68).....663, 666
- Service-Volume (RADIUS attribute 26-67).....663, 666
- session.....337
- Session and Resource Control. *See* SRC software
- session timeout
 - configuring.....88
 - interpreting default value.....88
 - range for.....88
- session-out-of-resource-result-code-override
 - command.....382
- Session-Timeout (RADIUS attribute 27).....21
- sessions, L2TP.....341
- set dhcp commands
 - set dhcp vendor-option.....518
- set dhcp relay commands
 - set dhcp relay.....495
 - set dhcp relay agent.....518
 - set dhcp relay agent sub-option518
 - set dhcp relay assign-giaddr-source-ip.....518
 - set dhcp relay broadcast-flag-replies.....498, 518
 - set dhcp relay giaddr-selects-interface.....627
 - set dhcp relay layer2-unicast-replies.....502, 518
 - set dhcp relay options.....518
 - set dhcp relay override.....518
 - set dhcp relay preserve-trusted-client-option.....518
 - set dhcp relay proxy.....520
 - set dhcp relay trust-all.....518
- set dhcp relay proxy commands
 - set dhcp relay proxy.....520
 - set dhcp relay proxy send-first-offer.....520
 - set dhcp relay proxy timeout.....520
- set dhcp vendor-option command.....504
- shared IP interfaces.....605
- shared local address pools.....55
- shared tunnel-server ports.....340, 382
 - using with L2TP.....344, 376
- show aaa commands
 - show aaa accounting.....116
 - show aaa accounting default.....117
 - show aaa accounting interval.....118
 - show aaa accounting vr-group.....118
 - show aaa authentication default.....119
 - show aaa delimiters.....119
 - show aaa dhcpv6-delegated-prefix.....153
 - show aaa domain-map.....119, 121, 428
 - show aaa duplicate-address-check.....122
 - show aaa intf-desc-format.....307
 - show aaa ipv6-nd-ra-prefix.....152
 - show aaa model.....122
 - show aaa name-servers.....122
 - show aaa profile.....124
 - show aaa route-download routes.....126
 - show aaa route-download routes global.....127
 - show aaa service accounting interval.....711
 - show aaa statistics.....129
 - show aaa subscriber per-port-limit.....131
- show aaa subscriber per-vr-limit.....131
- show aaa timeout.....131
- show aaa tunnel-group.....428, 430
- show aaa tunnel-parameters.....430, 432
- show aaa user accounting interval.....132
- show radius route-download.....124
- show configuration commands
 - show configuration category aaa
 - global-attributes.....132
 - show configuration category aaa
 - local-authentication.....133
 - show configuration category aaa server-attributes
 - include-defaults.....134
 - show configuration category
 - aaaglobal-attributes.....132
 - show configuration category
 - aalocal-authentication.....133
 - show configuration category aaaserver-attributes
 - include-defaults.....134
- show cops info command.....136
- show cops statistics command.....138
- show dhcp commands
 - show dhcp binding.....543
 - show dhcp count.....546
 - show dhcp host.....548
 - show dhcp relay.....566
 - show dhcp relay proxy statistics.....567
 - show dhcp relay statistics.....569
 - show dhcp server.....572
 - show dhcp server statistics.....571
- show dhcp summary command.....580
- show dhcp vendor-option command.....564
- show dhcp-external command.....555
- show ip commands
 - show ip demux interface.....635
 - show ip local alias.....140
 - show ip local pool.....140
 - show ip local-pool statistics command.....142
 - show ip service-profile.....599
 - show ip-subscriber.....600, 636
- show ip dhcp-capture command.....565
- show ip dhcp-external commands
 - show ip dhcp-external binding.....550
 - show ip dhcp-external client-id.....551
 - show ip dhcp-external configuration.....553
 - show ip dhcp-external statistics.....554
- show ip dhcp-local commands
 - show ip dhcp-local.....559
 - show ip dhcp-local auth.....558
 - show ip dhcp-local binding.....552
 - show ip dhcp-local duplicate-clients.....577
 - show ip dhcp-local excluded.....541
 - show ip dhcp-local limits.....578
 - show ip dhcp-local pool.....556
 - show ip dhcp-local reserved.....579
 - show ip dhcp-local statistics.....560, 561

show ip dhcpv6-local commands	
show ip dhcpv6-local binding.....	573
show ip dhcpv6-local dns-domain-searchlist.....	574
show ip dhcpv6-local dns-servers.....	575
show ip dhcpv6-local prefix-lifetime.....	575
show ip dhcpv6-local statistics.....	576
show ip http commands	
show ip http scalar.....	708
show ip http server.....	708
show ip http statistics.....	709
show ip interface commands	
show ip interface.....	713
show ip local shared-local command.....	142
show ipv6 interface commands	
show ipv6 interface.....	713
show ipv6 local pool commands	
for a single pool.....	165
for all configured pools.....	164
statistics for a single pool.....	166
show l2tp commands	
show l2tp.....	433
show l2tp destination.....	435
show l2tp destination lockout.....	437
show l2tp destination summary.....	440
show l2tp session.....	442
show l2tp session summary.....	443
show l2tp tunnel.....	445
show l2tp tunnel summary.....	448
show l2tp dial-out commands	
show l2tp dial-out.....	448
show l2tp dial-out target.....	454
show license commands	
show license b-ras.....	144
show license service-management.....	712
show profile commands	
show profile	712
show profile name.....	710
show radius commands	
show radius accounting servers.....	145
show radius accounting statistics.....	147
show radius acct-session-id-format.....	204
show radius algorithm.....	144
show radius attributes-included.....	310
show radius authentication servers.....	145
show radius authentication statistics.....	147
show radius calling-station-delimiter.....	305
show radius calling-station-format.....	191, 305
show radius connect-info-format.....	307
show radius dsl-port-type.....	209, 307
show radius dynamic-request servers.....	312
show radius dynamic-request statistics.....	311
show radius ethernet-port-type.....	307
show radius icr-partition-accounting.....	316
show radius nas-identifier.....	305
show radius nas-port-format.....	304
show radius override.....	303
show radius pppoe nas-port-format.....	304
show radius remote-circuit-id-delimiter.....	306
show radius remote-circuit-id-format.....	306
show radius rollover-on-reject.....	145
show radius route-download statistics.....	145
show radius servers.....	145, 312
show radius statistics.....	145, 147, 311
show radius trap.....	151
show radius tunnel-accounting.....	151, 152
show radius update-source-address.....	152
show radius vlan nas-port-format.....	304
show radius override.....	192, 303
show radius relay commands	
show radius relay servers.....	315
show radius relay statistics.....	313
show radius relay udp-checksum.....	316
show service-management commands	
show service-management owner-session.....	725
show service-management	
service-definition.....	723
show service-management	
service-session-profile.....	724
show service-management	
subscriber-session.....	727
show service-management summary.....	730
show ssc commands	
show ssc info.....	153
show ssc statistics.....	155
show ssc version.....	157
show subscribers command.....	157
show terminate-code command.....	162
SNMP traps	
configuring for DHCP local servers.....	482
configuring for RADIUS servers.....	37
overview.....	33
source-address command.....	363, 365
spoofing, IP	
preventing.....	613
SRC (Session and Resource Control)	
software.....	136, 138, 461, 492
configuring the client.....	94
monitoring the client.....	153, 155
SRC (Session and Resource Control)software.....	136
sscc commands.....	94
sscc address.....	94
sscc enable.....	94
sscc protocol ipv6.....	94
sscc protocol lac.....	94
sscc retryTimer.....	94
sscc sourceAddress.....	94
sscc transportRouter.....	94
<i>See also</i> show ssc commands	
standalone DHCP local server.....	472

standard RADIUS attributes	
configuring	
for DHCPv6 Prefix Delegation.....	90
for IPv6 Neighbor Discovery.....	90
IPv6 Neighbor Discovery and	
configuring logging severity.....	90
warning message.....	90
using the same values	
for Neighbor Discovery and Prefix	
Delegation.....	90
verifying	
for DHCPv6 Prefix Delegation.....	153
for IPv6 Neighbor Discovery.....	152
State (RADIUS attribute 24).....	21
statistics.....	682
for DHCPv6 Prefix Delegation	
viewing.....	166
statistics collection	
for external parent groups	
setting up.....	689
strip-domain command.....	15
subscriber disconnect command.....	249
subscriber interface commands	
set dhcp relay giaddr-selects-interface.....	627
subscriber interfaces	
applications.....	607
commands	
configuring dynamic.....	627
configuring static.....	615
configuring.....	610
multicast routing protocols.....	607
policies and Qo.....	607
routing protocols.....	607
dynamic.....	622
inheriting MAC validation state.....	613
GRE tunnel configuration.....	625
IP over bridged Ethernet configuration.....	624
IP over Ethernet configuration.....	622
IP over VLAN over Ethernet configuration.....	623
monitoring.....	635
overview	
dynamic.....	610
static.....	606
static.....	615
subscribers	
accounting messages.....	181
authorization and authentication messages.....	173
E Series Broadband Services Routers.....	157
limiting active subscribers.....	89
preauthentication and AAA LLID.....	76
support, technical <i>See</i> technical support	
system log messages.....	33

T

TACACS +	
AAA services.....	317
accounting.....	317
authentication login process.....	317
authorization.....	317
configuring.....	322
daemon.....	317, 318
host.....	318
NAS (network access server).....	317, 318
privilege authentication.....	317
TACACS+ commands	
aaa accounting commands.....	322
aaa accounting exec.....	322
aaa accounting suppress null-username.....	322
aaa accounting tacacs +	325
aaa authentication enable default.....	317, 322
aaa authentication login.....	325
aaa new-model.....	317, 325
tacacs-server key.....	327
tacacs-server source-address.....	328
tacacs-server timeout.....	328
tacacs-sever host.....	327
TCP and TACACS +	317
technical support	
contacting JTAC.....	xxxix
Terminal Access Controller Access Control System + .	
<i>See</i> TACACS +	
terminate-code command.....	87
test aaa command.....	34
text and syntax conventions.....	xxxviii
timeout command.....	35
timeout, configuring for B-RAS applications.....	88
traffic shaping for PPP over ATM.....	83
translate command.....	68
transmit connect speed, L2TP. <i>See</i> L2TP transmit	
connect speed	
tunnel	
defined.....	335, 337
selection, L2TP.....	370
switching.....	384
tunnel commands, L2TP	
tunnel.....	359, 363
tunnel group.....	359
tunnel password.....	376
tunnel group mode, mapping to L2TP tunnel.....	363
tunnel selection, L2TP.....	370
failover between preference levels.....	370
failover within preference levels.....	370
maximum sessions per tunnel.....	370
weighted load balancing.....	370
tunnel subscribers, enabling authentication for.....	50
tunnel switch profiles, L2TP	
applying default profile.....	399
applying through AAA domain maps.....	397
applying through AAA tunnel groups.....	398

applying through RADIUS.....	399
AVP relay, configuring.....	394, 396
configuration guidelines.....	394
configuring.....	396
how to apply.....	394
monitoring.....	444
Tunnel-Assignment-Id (RADIUS attribute 82).....	214
Tunnel-Client-Auth-Id (RADIUS attribute 90).....	216
Tunnel-Client-Endpoint (RADIUS attribute 66).....	211
Tunnel-Interface-Id (RADIUS attribute 26-44).....	225
Tunnel-Medium-Type (RADIUS attribute 65).....	211
Tunnel-Preference (RADIUS attribute 83).....	214
tunnel-server command.....	376
tunnel-server ports	
shared.....	340
Tunnel-Server-Auth-Id (RADIUS attribute 91).....	216
Tunnel-Server-Endpoint (RADIUS attribute 67).....	212
tunnel-subscriber authentication command.....	50
Tunnel-Type (RADIUS attribute 64).....	210
tunneled PPP session accounting statistics.....	408
tunnels, IP	
shared tunnel-server ports.....	340
tx-connect-speed-method command.....	408
type command, L2TP.....	359, 363

U

UDP (User Datagram Protocol)	
checksums.....	23, 33, 152
udp-port command.....	35, 249, 256
Upstream-Calculated-QoS-Rate (RADIUS attribute 26-142).....	232
user domain, mapping to L2TP tunnel.....	359
User-Name (RADIUS attribute 1).....	10
user-name command.....	594
user-prefix command.....	594
usernames and passwords from a domain	
configuring.....	16
using shared tunnel-server ports.....	376

V

valid lifetime	
for delegated prefixes	
configuring.....	108
default.....	108
setting	
without expiration.....	108
validation state, inheriting for MAC addresses	613
vendor class identifier option.....	503
vendor-specific (suboption 9).....	507
vendor-specific attributes. <i>See</i> VSAs	
virtual routers	
mapping user domain names.....	8, 119, 129, 428
redirected authentication.....	9
Virtual-Router (RADIUS attribute 26-1).....	220

vlan commands	
vlan id.....	627
VLAN links	
between CPE and PE routers	
pool section for Prefix Delegation.....	110
VLANs (virtual local area networks)	
configuring dynamic subscriber interfaces.....	623
VPNs (virtual private networks)	
connecting subscribers	608
VSAs (vendor-specific attributes)	
DSL Forum	
controlling inclusion of.....	237
descriptions.....	276
in AAA access and accounting	
messages.....	188
for dynamic IP interfaces.....	82
formats.....	265

W

walled garden. <i>See</i> guided entrance	
Web access to E Series router.....	461
Windows Internet Name Service. <i>See</i> WINS	
WINS, assigning IP addresses.....	51, 122