

Junos Space Network Management Platform Release 21.1R1 Release Notes

21.1R1
10 January 2022
Revision 3

Contents	Introduction 3
	Junos Space Network Management Platform Release Notes 3
	New and Changed Features 4
	Installation Instructions 4
	Upgrade Instructions 5
	Supported Upgrade Path 5
	Upgrade Notes 7
	Instructions for Validating the Junos Space Network Management Platform OVA Image 9
	Application Compatibility 12
	Supported Hardware 12
	Supported Devices 13
	Changes in Default Behavior 14
	Known Behavior 16
	Known Issues 22
	Resolved Issues 24
	Hot Patch Releases 24
	Installation Instructions 25
	Resolved Issues in Junos Space Network Management Platform Release 21.1R1 Hot Patches 26
	Documentation Updates 27
	Finding More Information 27

Documentation Feedback | 28

Requesting Technical Support | 28

Self-Help Online Tools and Resources | 29

Creating a Service Request with JTAC | 29

Revision History | 30

Introduction

Junos Space is a comprehensive network management solution that simplifies and automates management of Juniper Networks switching, routing, and security devices.

Junos Space Management Applications optimize network management by extending the breadth of the Junos Space solution for various domains in service provider and enterprise environments.

Junos Space Network Management Platform Release Notes

IN THIS SECTION

- [New and Changed Features | 4](#)
- [Installation Instructions | 4](#)
- [Upgrade Instructions | 5](#)
- [Application Compatibility | 12](#)
- [Supported Hardware | 12](#)
- [Supported Devices | 13](#)
- [Changes in Default Behavior | 14](#)
- [Known Behavior | 16](#)
- [Known Issues | 22](#)
- [Resolved Issues | 24](#)
- [Hot Patch Releases | 24](#)
- [Documentation Updates | 27](#)

These release notes accompany Junos Space Network Management Platform Release 21.1R1.

NOTE: The terms Junos Space Network Management Platform and Junos Space Platform are used interchangeably in this document.

New and Changed Features

Junos Space Network Management Platform Release 21.1R1 includes the following enhancements:

- **CentOS upgrade from 6.8 to 7.4**— In Junos Space Network Platform Release 21.1R1, the CentOS is upgraded from version 6.8 to 7.4.
- **OpenNMS upgrade to the latest version**— In Junos Space Network Platform Release 21.1R1, the OpenNMS is upgraded from version 1.13.1 to 25.0.0, powered by 2019 (v25.0.0). In the previous version, whenever the OpenNMS is restarted, the system displays **Network monitoring is loading for the user. Please wait for sometime** message. With the new version, whenever OpenNMS is restarted, the system displays a window asking for your login credentials. You must either refresh the page or logout from the user interface and login again.
- **Selection of next best schema available**— Starting in Junos Space Network Management Platform Release 21.1R1, when a device is discovered in the Junos Space Network Management Platform with the latest schema and if that particular schema is not available in the Junos Space Network Management Platform, the server searches for the next best match of the previously released schemas for the device instead of assigning a default schema to the device. Devices are always upgraded with the latest schema version rather than using the old schema version. A new **Allow Best Match Schema** option is added under **Aministration>Applications>Modify Application Settings** to enable assigning of the best matching schema to devices.
- **FIPS Cluster support** — Starting in Junos Space Network Management Platform Release 21.1R1, Cluster node support for FIPS mode is available.

Installation Instructions

Junos Space Network Management Platform Release 21.1R1 can be installed on a Junos Space Appliance or a Junos Space Virtual Appliance.



CAUTION: During the Junos Space Network Management Platform installation process, do not modify the filename of the software image that you download from the Juniper Networks support site. If you modify the filename, the installation fails.

- For installation instructions for a JA2500 Junos Space Appliance, see the [Installation and Configuration](#) section of the [JA2500 Junos Space Appliance Hardware Guide](#).
- For installation instructions for a Junos Space Virtual Appliance, see the [Deploying the Junos Space Virtual Appliance](#) section of the [Junos Space Virtual Appliance Installation and Configuration Guide](#).

NOTE: Starting from Junos Space Network Management Platform release 21.1R1, ethernet interface order is changed. For more details refer https://www.juniper.net/documentation/en_US/release-independent/junos-space/topics/concept/junos-space-appliance

See “Supported Hardware” on page 12 for more information about the hardware supported.

Upgrade Instructions

IN THIS SECTION

- Supported Upgrade Path | 5
- Upgrade Notes | 7
- Instructions for Validating the Junos Space Network Management Platform OVA Image | 9

This section provides information about upgrading the Junos Space Network Management Platform installations running versions earlier than Release 21.1R1.

Supported Upgrade Path

Table 1 on page 5 provides information about the supported upgrade path across Junos Space Network Management Platform releases.

Table 1: Supported Upgrade Path

Upgrade from Junos Space Release	Upgrade to Junos Space Release														
Junos Space Release	Release 16.1	Release 16.2	Release 17.1	Release 17.2	Release 18.1	Release 18.2	Release 18.3	Release 18.4	Release 19.1	Release 19.2	Release 19.3	Release 19.4	Release 20.1	Release 20.3	Release 21.1

Table 1: Supported Upgrade Path (continued)

Upgrade from Junos Space Release	Upgrade to Junos Space Release													
Release 20.1														Yes
Release 20.3														Yes

Related Information

- [Junos Space Network Management Platform Overview](#)
- [Juniper Networks Devices Supported by Junos Space Network Management Platform](#)
- [Upgrading Junos Space Network Management Platform](#)

NOTE: Before you upgrade Junos Space Platform to Release 21.1, ensure that the time on all Junos Space nodes is synchronized. For information about synchronizing time on Junos Space nodes, see [Synchronizing Time Across Junos Space Nodes](#).

You can upgrade to Junos Space Network Management Platform 21.1R1 from the following earlier release:

- Junos Space Network Management Platform Release 20.3R1

To upgrade to Junos Space Network Management Platform Release 21.1R1, follow [Upgrading to Junos Space Network Management Platform Release 21.1R1](#).



CAUTION: During the Junos Space Network Management Platform upgrade process, do not modify the filename of the software image that you download from the Juniper Networks support site. If you modify the filename, the upgrade fails.

Upgrade Notes

- Before the upgrade, ensure that the latest backups are available in a location other than the Junos Space server. For more information about backups, see [Backing Up the Junos Space Network Management Platform Database](#).

To upgrade to Junos Space network Management Platform Release 21.1R1, follow the procedure outlined in [Upgrading to Junos Space Network Management Platform Release 21.1R1](#).

- During the upgrade process, do not manually reboot the nodes if the Junos Space user interface does not come up for an extended period of time. Contact the Juniper Networks Support team for help in resolving this issue.
- After you upgrade Junos Space Platform to Release 21.1R1, all previously installed applications are disabled until the applications are upgraded to a version compatible with Junos Space Platform 21.1R1. You must upgrade the applications to releases that are compatible with Junos Space Platform Release 21.1R1, by using the Junos Space Platform UI. For information about application versions compatible with Junos Space Platform 21.1R1, see [“Application Compatibility” on page 12](#).

NOTE: Starting from Junos Space Network Management Platform release 21.1R1, ethernet interface order is changed.

See

https://www.juniper.net/documentation/en_US/release-independent/junos-space/topics/concept/junos-space-appliance for more details.

Instructions for Validating the Junos Space Network Management Platform OVA Image

From Junos Space Network Management Platform Release 14.1R1 onward, the Junos Space Platform open virtual appliance (OVA) image is securely signed.

NOTE:

- Validating the OVA image is optional; you can install or upgrade Junos Space Network Management Platform without validating the OVA image.
- Before you validate the OVA image, ensure that the PC on which you are performing the validation has the following utilities available: tar, openssl, and ovftool (VMWare Open Virtualization Format (OVF) Tool). You can download VMWare OVF Tool from the following location: <https://my.vmware.com/web/vmware/details?productId=353&downloadGroup=OVFTOOL351>.

To validate the Junos Space Network Management Platform OVA image:

1. Download the Junos Space Platform OVA image and the Juniper Networks Root CA certificate chain file (**JuniperRootRSACA.pem**) from the Junos Space Network Management Platform - Download Software page at <https://www.juniper.net/support/downloads/space.html>.

NOTE: You need to download the Juniper Networks Root CA certificate chain file only once; you can use the same file to validate OVA images for future releases of Junos Space Network Management Platform.

2. (Optional) If you downloaded the OVA image and the Root CA certificate chain file to a PC running Windows, copy the two files to a temporary directory on a PC running Linux or Unix. You can also copy the OVA image and the Root CA certificate chain file to a temporary directory (**/var/tmp** or **/tmp**) on a Junos Space node.

NOTE: Ensure that the OVA image file and the Juniper Networks Root CA certificate chain file are not modified during the validation procedure. You can do this by providing write access to these files only to the user performing the validation procedure. This is especially important if you use a generally accessible temporary directory, such as **/tmp** or **/var/tmp**, because such directories can be accessed by several users.

3. Navigate to the directory containing the OVA image.

4. Unpack the OVA image by executing the following command:

```
tar xf ova-filename
```

where *ova-filename* is the filename of the downloaded OVA image.

5. Verify that the unpacked OVA image contains a certificate chain file (**junos-space-certchain.pem**) and a signature file (**.cert** extension).
6. Validate the signature in the unpacked OVF file (extension **.ovf**) by executing the following command:

```
ovftool ovf-filename
```

where *ovf-filename* is the filename of the unpacked OVF file.

7. Validate the signing certificate with the Juniper Networks Root CA certificate chain file by executing the following command:

```
openssl verify -CAfile JuniperRootRSACA.pem -untrusted Certificate-Chain-File Signature-file
```

where **JuniperRootRSACA.pem** is the Juniper Networks Root CA certificate chain file, **Certificate-Chain-File** is the filename of the unpacked certificate chain file (extension **.pem**), and **Signature-file** is the filename of the unpacked signature file (extension **.cert**).

If the validation is successful, a message indicating that the validation is successful is displayed.

A sample of the validation procedure is as follows:

```
-bash-4.1$ ls
JuniperRootRSACA.pem space-16.1R1.3.ova
-bash-4.1$ mkdir tmp
-bash-4.1$ cd tmp
-bash-4.1$ tar xf ../space-16.1R1.3.ova
-bash-4.1$ ls
junos-space-certchain.pem space-16.1R1.3.cert
space-16.1R1.3-disk1.vmdk.gz space-16.1R1.3.mf
space-16.1R1.3.ovf
-bash-4.1$ ovftool space-16.1R1.3.ovf
OVF version: 1.0
VirtualApp: false
Name: viso-space-16.1R1.3

Download Size: 1.76 GB

Deployment Sizes:
Flat disks: 250.00 GB
```

```

Sparse disks: 4.68 GB

Networks:
  Name:          VM Network
  Description:   The VM Network network

Virtual Machines:
  Name:          viso-space-16.1R1.3
  Operating System:  rhel5_64guest
  Virtual Hardware:
    Families:      vmx-04
    Number of CPUs:  4
    Cores per socket: 1
    Memory:         8.00 GB

  Disks:
    Index:          0
    Instance ID:    7
    Capacity:       250.00 GB
    Disk Types:     SCSI-lsilogic

  NICs:
    Adapter Type:   E1000
    Connection:     VM Network

    Adapter Type:   E1000
    Connection:     VM Network

    Adapter Type:   E1000
    Connection:     VM Network

    Adapter Type:   E1000
    Connection:     VM Network

-bash-4.1$ openssl verify -CAfile JuniperRootRSACA.pem -untrusted
junos-space-certchain.pem space-16.1R1.3.cert
space-16.1R1.3.cert: OK
-bash-4.1$

```

8. (Optional) If the validation is not successful, perform the following tasks:
 - a. Determine whether the contents of the OVA image are modified. If the contents are modified, download the OVA image from the Junos Space Network Management Platform - Download Software page.

- b. Determine whether the Juniper Networks Root CA certificate chain file is corrupted or modified. If it is corrupted or modified, download the Root CA certificate chain file from the Junos Space Network Management Platform - Download Software page.
- c. Retry the preceding validation steps by using one or both of the new files.

Application Compatibility



WARNING: Before you upgrade to Junos Space Network Management Platform Release 21.1R1, ensure that compatible versions of Junos Space applications are available for upgrade by referring to the [Junos Space Application Compatibility](#) knowledge base article. If you upgrade to Junos Space Platform Release 21.1R1 and the compatible version of a Junos Space application is not available, the current version of the Junos Space application is deactivated and cannot be used until Juniper Networks releases a compatible version of the Junos Space application.

This release of Junos Space Network Management Platform supports Worldwide (ww) Junos OS Adapter adapter and the following applications.

- Network Director 5.1R1
- Cross Provisioning Platform 21.1R1
- Security Director 21.1R1
- Intelligent Customer Extendable authentication, authorization, and accounting (ICE-AAA) Framework 21.1R1

Supported Hardware

Junos Space Network Management Platform Release 21.1R1 can be installed on the following hardware:

- JA2500 Junos Space Appliance
- VMware ESXi server 6.7 and 7.0

NOTE: Adobe Flash is no longer supported and VMware ESXi server 6.0 and 6.5 are removed.

- Kernel-based virtual machine (KVM) (Release 1.5.3-141.el7_4.4 or later)

For detailed information about hardware requirements, see the *Hardware Documentation* section of the [Junos Space and Applications](#) page.

NOTE: For information about whether a Junos Space application can be installed on a particular Junos Space Appliance (JA2500) or Junos Space Virtual Appliance, see the release notes of the specific Junos Space application release.

NOTE: For detailed information about hardware requirements, see [Junos Space Virtual Appliance Deployment Overview](#) .

Supported Devices

Junos Space Network Management Platform Release 21.1R1 supports the following additional Juniper Networks device and components running Junos OS:

- QFX5120-48YM-8C
- EX4400-24T
- EX4400-48F
- EX4400-48P
- EX4400-48T
- EX4400-24P

For a list of supported devices up to and including Junos Space Platform Release 21.1R1, see [Juniper Networks Devices Supported by Junos Space Network Management Platform](#).

[Table 2 on page 13](#) shows the supported Juniper Networks line cards in Junos Space Network Management Platform Release 21.1R1.

Table 2: Supported Line Cards

Device	Line Cards
QFX5120-48YM-8C	48x25G + 8x100G Mac Sec

NOTE: When Junos Space Platform discovers EX Series switches running Layer 2 next generation software, the device family for these devices is displayed (on the Device Management page) as junos and not as junos-ex. This behavior is currently observed on EX4300 and EX9200 switches running Layer 2 next-generation software.

NOTE: Previous versions of Junos OS releases are also supported. If you are using previous versions of Junos OS releases, you can continue to use the same versions. For a complete list of Junos OS compatibility and support information, see [Junos OS Releases Supported in Junos Space Network Management Platform](#)

Changes in Default Behavior

- From Release 17.2R1 onward, Junos Space Platform does not sort configurations while comparing templates. In releases earlier than 17.2R1, Junos Space Platform sorts configurations while comparing templates, and this causes Junos Space Platform to trigger incorrect deviation reports because of a change in the order of configuration statements caused by the sorting.
- From Release 17.2R1 onward, Junos Space Platform does not support the click action in the Top 10 Active Users in 24 Hours chart. In releases earlier than 17.2R1, you can click within the chart to view details of the selected item on the corresponding page.
- From Junos Space Platform Release 17.1R1 onward, the VLAN field in reports supports both integer and string values. In releases earlier than 17.1R1, the VLAN field in reports supports only integer values, whereas the **VLAN** field for logical interfaces accepts both integer and string values. This mismatch causes issues in displaying VLAN information for logical interfaces in reports.

From Release 17.1R1 onward, the VLAN option in the Add Filter Criteria section of the Create Report Definition page and the filter support for the VLAN column on the View Logical Interface page are removed.

- From Junos Space Platform Release 16.1R2 onward, the upgrade-related logs at `/var/jmp_upgrade` are added to the troubleshooting logs.
- From Release 17.1R1 onward, Junos Space Platform boot menu accepts text inputs, such as reinstall, when you install the Junos Space Platform software from USB drives. In versions earlier than Release 17.1R1, the boot menu supports only numerical values. From Release 17.1R1 onward, when you do a

reinstall, the software restarts and a local reboot occurs by default. Previously, you had to connect to the console and manually trigger a reboot.

- From Junos Space Platform Release 16.1R2 onward, validation messages are provided for tasks where CSV files are used for device selection, and all devices that are listed in the CSV file are not selected when the task is performed. Validation messages are provided when devices are selected using CSV files from the following pages and dialog boxes:
 - Deploy Device Image dialog box
 - Deploy Satellite Device Image dialog box
 - Stage Image on Device page
 - Stage Image on Satellite Device page
 - Remove Image from Staged Device dialog box
 - Undeploy JAM Package from Device dialog box
 - Verifying checksum of image on device(s) dialog box
 - Stage Scripts on Device(s) page
 - Enable Scripts on Device(s) page
 - Disable Scripts on Device(s) page
 - Execute Script on Device(s) page
 - Remove Scripts from Device(s) dialog box
 - Verify Checksum of Scripts on Device(s) dialog box

From Release 17.1R1 onward, validation messages are provided for the following pages and dialog boxes, too:

- Run Operation page
- Stage Script Bundle on Devices dialog box
- Enable Script Bundle on Devices page
- Disable Script Bundle on Devices page
- Execute Script Bundle on Devices dialog box

Known Behavior



CAUTION: To avoid a BEAST TLS 1.0 attack, whenever you log in to Junos Space through a browser tab or window, make sure that the tab or window was not previously used to access a non-HTTPS website. The best practice is to close your browser and relaunch it before logging in to Junos Space.

- Starting from Junos Space Network Management Platform Release 18.1R1 onwards, to view and edit firewall policies, users must have permissions or roles corresponding to all the attributes present under the Firewall Policies and Shared Objects predefined roles. Go to **Network Management Platform>Role Based Access Control>Roles** to view and assign the relevant roles.
- Tag names can be alphanumeric strings. The tag name can also contain underscores, hyphens, and spaces. However, a tag name must not:
 - Exceed 255 characters
 - Start with a space
 - Contain special characters such as commas, double quotation marks, or parentheses.

NOTE: “Untagged” is a reserved term and, therefore, you cannot create a tag with this name.

- The right-click menu is not available on the Import Licenses (Administration > Licenses > Import License) page. You can use either the browser menu options or the keyboard shortcuts to copy and paste onto the page.
- Device-initiated connections to Junos Space can have different IP addresses from those listed in Junos Space. For example, if you use a loopback address to discover a device, you can source the SSH session of the device from its interface address (Junos OS default behavior is to select the default address) instead. This can lead to firewall conflicts.
- When a remote user with the FMPM Manager role uses the API to access Junos Space Platform, the user details are not updated in the `/opt/opennms/etc/users.xml` file.
- You might observe the following limitations on the Topology page:
 - The tooltip on the node displays the status as Active/Managed even when the node is down.
 - For an SRX Series cluster, topology links are displayed only for the primary member of the cluster and not for the secondary member.
- When unified in-service software upgrade (ISSU) is performed from the Manage Operations workflow, the Routing Engines are not rebooted. The Routing Engines must be manually rebooted for the image to be loaded.

- For LSYS (logical, nonroot) devices, when there are pending out-of-band changes on the root device, the Resolve out-of-band changes menu option is disabled for those child LSYS devices, even though Device Managed Status displays Device Changed. This is by design.
- RMA is not supported on devices running ww Junos OS, and devices that are not running Junos OS.
- Script Manager supports only Junos OS Release 10.x and later.
- A stage device script or image supports only devices running Junos OS Release 10.x and later.
- For unified ISSU support for both device-initiated and Junos Space-initiated dual Routing Engine connections, we strongly recommend that you configure the virtual IP (VIP) on the dual Routing Engine device. Dual Routing Engine devices without VIP configuration are not fully supported on Junos Space.
- In a single node or multiple nodes, changes to the user (for example, password, roles, and disable or enable user) take effect only at the next login.
- Looking Glass functionality is not supported on logical systems.
- For devices running Junos OS Release 12.1 or later, the following parameters do not display any data in the Network Monitoring workspace because the corresponding MIB objects have been deprecated:
 - jnxJsSPUMonitoringFlowSessIPv4
 - jnxJsSPUMonitoringFlowSessIPv6
 - jnxJsSPUMonitoringCPSessIPv4
 - jnxJsSPUMonitoringCPSessIPv6
 - jnxJsNodeSessCreationPerSecIPv4
 - jnxJsNodeSessCreationPerSecIPv6
 - jnxJsNodeCurrentTotalSessIPv4
 - jnxJsNodeCurrentTotalSessIPv6
- For SNMPv3 traps, if more than one trap setting is configured in the `/opt/opennms/etc/trapd-configuration.xml` file, then the **security-name** attribute for the **snmpv3-user** element must be unique for each configuration entry. If a unique **security-name** attribute is not provided, then SNMP traps are not received by Network Monitoring.

The following is a sample snippet of the `/opt/opennms/etc/trapd-configuration.xml` file with two configuration entries:

```
<?xml version="1.0"?>
<trapd-configuration snmp-trap-port="162" new-suspect-on-trap="false">
  <snmpv3-user security-name="Space-SNMP-1" auth-passphrase="abcD123!"
auth-protocol="MD5" />
  <snmpv3-user security-name="Space-SNMP-2" auth-passphrase="abcD123!"
auth-protocol="MD5"
```

```
privacy-passphrase="zyxW321!" privacy-protocol="DES" />
</trapd-configuration>
```

- On the Network Monitoring > Node List > *Node* page, the *ifIndex* parameter is not displayed for IPv6 interfaces if the version of Junos OS running on the device is Release 13.1 or earlier. This is because IPv6 MIBs are supported only on Junos OS Release 13.2 and later.
- When you modify the IP address of a Fault Monitoring and Performance Monitoring (FMPM) node using the Junos Space CLI, the FMPM node is displayed on the Fabric page but cannot be monitored by Junos Space Platform because of a mismatch in the certificate.

Workaround: After modifying the IP address of the FMPM node using the Junos Space CLI, generate a new certificate on the Junos Space VIP node and copy the certificate to the FMPM node by executing the following scripts on the Junos Space VIP node:

- a. `curl -k https://127.0.0.1:8002/cgi-bin/createCertSignReq.pl?ip='fmpm-node-ip'&user='admin'&password='password'`
- b. `curl -k https://127.0.0.1:8002/cgi-bin/authenticateCertification.pl?ip='fmpm-node-ip'&user='admin'&password='password'&mvCertToDestn='Y'`

where *fmpm-node-ip* is the IP address of the FMPM node and *password* is the administrator's password.

- When you execute a script and click the View Results link on the Script Management Job Status page, the details of the script execution results are displayed up to a maximum of 16,777,215 characters; the rest of the results are truncated.

This might affect users who execute the **show configuration** command on devices with large configurations or if the output of a Junos OS operational command (executed on a device) is large.

- When you configure a Junos Space fabric with dedicated database nodes, the Junos Space Platform database is moved from the Junos Space nodes to the database nodes. You cannot move the database back to the Junos Space nodes.
- For a purging policy triggered by a **cron** job:
 - If the Junos Space fabric is configured with MySQL on one or two dedicated database nodes, the database backup files and log files (mainly in the `/var/log/` directory with the filenames `*.log.*`, `messages.*`, or `SystemStatusLog.*`) are not purged from the dedicated database nodes.
 - If the Junos Space fabric is configured with one or two FMPM nodes, the log files (mainly in the `/var/log/` directory with the filenames `*.log.*`, `messages.*`, or `SystemStatusLog.*`) are not purged from the FMPM nodes.
- If Network Monitoring receives two traps within the same second—that is, one for a trigger alarm and another for a clear alarm—then the triggered alarm is not cleared because the clear alarm is not processed by Network Monitoring.

- If you use Internet Explorer versions 8.0 or 9.0 to access the Junos Space Platform GUI, you cannot import multiple scripts or CLI Configlets at the same time.

Workaround: Use Internet Explorer Version 10.0 or later, or use a different supported browser (Mozilla Firefox or Google Chrome) to import multiple scripts or CLI Configlets at the same time.

- If you access the Junos Space Platform UI in two tabs of the same browser with two different domains selected and access the same page in both tabs, the information displayed on the page is based on the latest domain selected. To view pages that are accessible only in the Global domain, ensure that you are in the Global domain in the most recent tab in which you are accessing the UI.
- If you select the Add SNMP configuration to device check box on the Administration > Applications > Modify Network Management Platform Settings page and discover a device whose trap target is updated, clicking Resync Node from the Network Monitoring workspace does not reset the trap target for the device.
- If you clear the Add SNMP configuration to device check box on the Administration > Applications > Modify Network Management Platform Settings page, the trap target is not set for the device during device discovery and resynchronizing node operations.
- If you want to perform a global search by using partial keywords, append "*" to the search keywords.
- To perform a partial keyword search on tags on the Tags page (Administration > Tags) or the Apply Tags dialog box (right-click a device on the Device Management page and select Tag It), append * to the search keyword.
- Internet Explorer slows down because some scripts can take an excessive amount of time to run. The browser prompts you to decide whether to continue running the slow script. see <http://support.microsoft.com/kb/175500> for instructions on how to fix this issue.
- When you switch from Space as system of record mode to Network as system of record mode, devices with the Managed Status Device Changed or Space & Device Changed are automatically synchronized after 900 seconds. To reduce this time period, modify the Polling time period secs setting for Network Management Platform (Administration > Applications > Modify Application Settings) to a lower value such as 150 seconds.
- In Space as System of Record (SSoR) mode on Junos Space, when a new authentication key is generated, devices discovered and managed using RSA keys whose management status is Device Changed move to the Key Conflict Authentication status. To resolve the conflict on the devices and bring them back to a key-based state, upload the RSA keys manually (Devices > Upload Keys to Devices).
- The EnterpriseDefault (uei.opennms.org/generic/trap/EnterpriseDefault) event appears on the Events page in the Network Monitoring workspace only if there is no associated event definition for a received event. To create the required event definition, compile the MIB corresponding to the object ID (OID). You can find the OID by reviewing the details of the EnterpriseDefault event.

For more information about compiling SNMP MIBs, see [Compiling SNMP MIBs](#).

- When a physical hard drive is removed from a Junos Space hardware appliance (JA2500) or a logical hard drive is degraded, the corresponding SNMP traps (jnxSpaceHardDiskPhysicalDriveRemoved and

jnxSpaceHardDiskLogicalDeviceDegraded respectively) are generated and displayed as events in the Network Monitoring workspace. Later, when the physical hard drive is reinserted, the corresponding events (jnxSpaceHardDiskPhysicalDriveAdded and jnxSpaceHardDiskLogicalDeviceRebuilding) are generated and displayed in the Network Monitoring workspace; however, the alarms previously raised for the removal of the physical hard drive are not cleared automatically. You can clear these alarms manually, if required. The alarms for the reinsertion of the physical hard drive are automatically cleared after a few minutes because they are of the Normal type.

- If the administrator password for a Fault Monitoring and Performance Monitoring (FMPM) node is modified using the Junos Space CLI, the disaster recovery with the FMPM node fails and new users added in Junos Space (after the password is modified) are not synchronized to the FMPM node. This is because the modified administrator password is not automatically updated in the Junos Space MySQL database.

To ensure that the synchronization to the FMPM node takes place, you must run the `/var/www/cgi-bin/changeSpecialNodepassword.pl` script so that the modified FMPM node password is updated in the Junos Space MySQL database. The syntax for the script is as follows:
`/var/www/cgi-bin/changeSpecialNodePassword.pl fmpm-node-ip fmpm-node-password`, where *fmpm-node-ip* is the IP address of the FMPM node, and *fmpm-node-password* is the modified password for the FMPM node.

- If you clear the **Add SNMP configuration to device** check box (on the Modify Network Management Platform Settings page under Administration > Applications > Network Management Platform > Modify Application Settings) and discover devices, and subsequently select the Add SNMP configuration to device check box and resynchronize nodes (Network Monitoring > Node List > Resync Nodes), the SNMPv2 trap target is updated on the devices.
- If you discover devices with the SNMP probing enabled, the correct version of the SNMP trap target is updated on the devices for the following cases:
 - When you modify the virtual IP (VIP) address or the device management interface IP address
 - When a separate interface for device management is configured and there is a failover of the VIP node
 - When you add or delete a Fault Monitoring and Performance Monitoring (FMPM) node
 - When you discover devices when the Network Monitoring service is stopped and subsequently start the Network Monitoring service and resynchronize nodes (Network Monitoring > Node List > Resync Nodes)

In all other cases, the default SNMP trap target (SNMPv2) is updated on the devices. If needed, you can use the predefined SNMPv3 Configlets (CLI Configlets > CLI Configlets) to update the trap settings on the device.

- In Junos Space Platform Release 16.1R1, Network Monitoring supports only a single set of SNMPv3 trap parameters.
- In Junos Space Platform Release 16.1R1, you cannot modify the trap settings for the SNMPv3 manager on the Network Monitoring GUI. You can modify the trap settings manually in the

`/opt/opennms/etc/trapd-configuration.xml` file. After modifying the trap settings manually, restart the Network Monitoring service.

- With default SNMPv3 trap settings, the discovery of devices running worldwide Junos OS (wwJunos OS devices) fails as the default SNMPv3 trap settings cannot be updated to wwJunos OS devices because wwJunos OS devices do not support privacy settings.
- The setting to manage objects from all assigned domains can be enabled globally for all users by selecting the **Enable users to manage objects from all allowed domains in aggregated view** check box in the Domains section of the Modify Application Settings page (Administration > Applications > Network Management Platform > Modify Application Settings). Alternatively, you can enable the setting to manage objects from all assigned domains at the user level by selecting the **Manage objects from all assigned domains** check box on the Object Visibility tab of the Change User Settings dialog box, which appears when you click the User Settings (gear) icon on the Junos Space banner.
- The Juniper Networks Device Management Interface (DMI) schema repository (<https://xml.juniper.net/>) does not currently support IPv6. If you are running Junos Space on an IPv6 network, you can do one of the following:
 - Configure Junos Space to use both IPv4 and IPv6 addresses and download the DMI schema by using the Junos Space Platform Web GUI.
 - Download the DMI schema by using an IPv4 client and update or install the DMI schema by using the Junos Space Web GUI.
- If you are planning on expanding the disk space for nodes in a Junos Space fabric (cluster) comprising of virtual appliances, you must first expand the disk space on the VIP node and ensure that the VIP node has come up (the status of the JBoss and MySQL services must be “Up”) before initiating the disk expansion on the other nodes in the fabric. If you fail to do this, it might cause fabric instability and you might be unable to access to the Junos Space GUI.
- In a Junos Space fabric with two or more nodes configured with both IPv4 and IPv6 addresses (dual stack), the communications between all nodes in the fabric must be enabled for both IPv4 and IPv6 addresses.
- The Network Monitoring Topology feature is not supported on Internet Explorer.
- If the network connectivity at the active disaster recovery site is down and the active site cannot connect to sufficient arbiter devices after resuming network connectivity, both sites become standby disaster recovery sites. Execute the **jmp-dr manualFailover -a** command at the VIP node of the active disaster recovery site to convert the original site to the active site and start the disaster recovery process.
- When you are discovering devices running the worldwide Junos OS (ww Junos OS devices), ensure that you wait at least 10 minutes after the Add Adapter job for the device worldwide Junos adapter has completed successfully *before* triggering the device discovery.
- A new pattern (**requested 'commit synchronize' operation**) is added to the syslog pattern in Junos Space Release 16.1R2. During the syslog registration after a device is discovered or connects back to Junos Space following a Junos Space upgrade from Release 16.1R1 to 16.1R2, the (**requested 'commit**

synchronize' operation) pattern is added to the syslog patterns on the device. When you issue the **commit synchronize** command, Junos Space automatically resynchronizes only those devices that have the **(requested 'commit synchronize' operation)** pattern added to the syslog patterns.

- If you are using Internet Explorer to access the Junos Space Network Platform UI and need to copy the job ID value from the Job ID field of the Job Management page, you must click outside the job ID text to start the selection.
- After you upgrade Junos Space Platform from Release 16.1R1 to 17.1R1, the Last Reboot Reason field on the Administration > Fabric > View Node Detail > Reboot Detail page shows the value as **Reboot from Shell/Other** instead of Space reboot after Software Upgrade.
- If the device IP could not be verified, the Add Unmanaged Devices action fails.

Known Issues

The following issues are still outstanding in Junos Space Network Management Platform Release 21.1R1.

For the most complete and latest information about known defects, use the Juniper Networks online Junos Problem Report Search application.

- The EX2300 Series and SRX320 Series devices do not appear in the Junos Space Network Management Platform user interface. [\[PR1586822\]](#)
- After upgrading the ISSU Software to 18.2R2-S5.1 without EMS, the device resynchronisation is taking longer time in Junos Space Network Management Platform. [\[PR1581956\]](#)
- The discovering of a cluster node fails after discovering one member from the cluster. [\[PR1581090\]](#)
- When Security Director pushes out VPN configuration to SRX Series cluster device in Junos OS Release 18.4R2, it fails without any error message. [\[PR1579779\]](#)
- The Job ID is not assigned properly to the node. [\[PR1573357\]](#)
- JMS Syslog queue is completely filled after a Syslog storm, hence affecting the system performance. [\[PR1582082\]](#)
- When the image staging or image deployment is executed within an operation workflow, the device list is not displayed and the system hangs. [\[PR1583956\]](#)
- Junos Space Network Management Platform has High CPU process in database node. [\[PR1583171\]](#)
- Remedy for all the vulnerabilities reported in the Vulnerability Assessment and Penetration test report. [\[PR1582691\]](#)
- Devices appear to be in down state in Junos Space Network Management Platform even when they are in UP state. [\[PR1580143\]](#)

- The topology takes much longer time than usual to load in Junos Space Network Management Platform and shows a lot of false RED links. [\[PR1573482\]](#)
- Junos Space Network Management Platform enters into a lot of unwanted maintenance sessions more frequently. [\[PR1565864\]](#)
- When the MyCard is pulled out during an active Web UI session, an error message is displayed and GUI access is further disabled. Access is allowed only when the card is re-inserted in to the card reader. [\[PR1563729\]](#)
- Unable to download the applications from Junos Space Store in Junos Space Network Management Releases 19.4R1 and 20.1R1. [\[PR1573304\]](#)
- While trying to apply a configlet on the BNG via Space NBI, the BNG shows **Please see attachment "Space_NetConf.txt"** error message on the netconf interface. [\[PR1575810\]](#)
- After restoring the Junos Space Network Management Platform 21.1R1 database backup from one Junos Space Server to another Junos Space Network Management Platform 21.1R1 server, you cannot perform user deletion.

Workaround:

1. Go to the Junos Space Network Management CLI.
2. Execute the below MySQL command to take the backup of the triggers:

```
mysqldump -u<username> -p<password> --triggers --add-drop-trigger --no-create-info --no-data --no-create-db --skip-opt build_db > <filename>
```

Sample command: `mysqldump -ujboss -pMMtmPD6EBfmYsNW46kGxbWGpXiNWW6l0 --triggers --add-drop-trigger --no-create-info --no-data --no-create-db --skip-opt build_db > /tmp/triggers.sql.`

3. Open the SQL file that we got from the above command and take the hostname from the DEFINER.
4. Replace the old hostname with **jmp-CLUSTER** using the sed command as below.

```
sed -i 's/<old hostname>/jmp-CLUSTER/g' <filename>
```

Sample command: `sed -i 's/space-000c29d74288/jmp-CLUSTER/g' /tmp/triggers.sql.`

5. Remove line with **SET @@GLOBAL.GTID_PURGED='sample ids';** in /tmp/triggers.sql file.
6. Restore the triggers again to MySQL using the below command:

```
mysql -ujboss -p<password> build_db < <filename>
```

Sample command: `mysql -ujboss -pMMtmPD6EBfmYsNW46kGxbWGpXiNWW6l0 build_db < /tmp/triggers.sql>.`

[\[PR1588186\]](#).

- VIP binding fails with the IP address provided during the installation of primary node in the Junos Space cluster.

Workaround: Run the below commands to set the PCS property and refresh.

1. `pcs property set stonith-enabled=false`
2. `pcs property`
3. `pcs resource refresh`

[\[PR1589533\]](#).

- Local script execution fails on devices in Junos space Network Management Platform. [\[PR1625374\]](#)

Resolved Issues

This section lists the resolved issues in Junos Space Network Management Platform Release 21.1R1.

For the most complete and latest information about resolved defects, use the Juniper Networks online Junos Problem Report Search application.

- The process of fetching hardware inventory from Junos Space Network Management Platform release 19.1R1 is very slow. [\[PR1551854\]](#)
- The configuration of the SRX Series devices is truncated when you try to download it from the Configuration File Management page. [\[PR1564830\]](#)
- When you upgrade Junos Space Network Management Platform Release 19.4 to Junos Space Network Management Platform Release 20.3, the Intrusion Prevention System (IPS) signature download job fails with a **Failed to check current download job, so cancel it** error message. [\[PR1569507\]](#)
- After upgrading to Junos Space Network Management Platform Release 20.3R1, the user is unable to discover a device when ssh hmac-sha2-512 and hmac-sha2-256 are configured on Junos Space Network Management Platform. [\[PR1576495\]](#)
- Username is missing in the Audit Log. [\[PR1577665\]](#)
- Configuration jobs on vSRX Series devices, that are performed in Junos Space Network Management Platform are taking longer time than usual. [\[PR1580388\]](#)

Hot Patch Releases

This section describes the installation procedure and resolved issues in Junos Space Network Management Platform Release 21.1R1 hot patches.

During hot patch installation, the script performs the following operations:

- Blocks the device communication.
- Stops JBoss, JBoss-dc, and watchdog services.
- Backs up existing configuration files and Enterprise Application Archive (EAR) files.
- Updates the Red Hat Package Manager (RPM) files.
- Restarts the watchdog process, which restarts JBoss and JBoss-dc services.
- Unblocks device communication after restarting the watchdog process for device load balancing.

NOTE: You must install the hot patch on Junos Space Network Management Platform Release 21.1R1 or on any previously installed hot patch. The hot patch installer backs up all the files which are modified or replaced during hot patch installation.

Installation Instructions

Perform the following steps in the CLI of the JBoss-VIP node only:

1. Download the Junos Space Platform 21.1R1 Patch vX from the [download site](#).
Here, X is the hot patch version. For example, v1, v2, and so on.
2. Copy the **Space-21.1R1-Hotpatch-vX.tgz** file to the **/home/admin** location of the VIP node.
3. Verify the checksum of the hot patch for data integrity:
md5sum Space-21.1R1-Hotpatch-vX.tgz.
4. Extract the **Space-21.1R1-Hotpatch-vX.tgz** file:
tar -zxvf Space-21.1R1-hotpatch-vX.tgz
5. Change the directory to **Space-21.1R1-Hotpatch-vX**.
cd Space-21.1R1-Hotpatch-vX
6. Execute the **patchme.sh** script from the **Space-21.1R1-Hotpatch-vX** folder:
sh patchme.sh

The script detects whether the deployment is a standalone deployment or a cluster deployment and installs the patch accordingly.

A marker file, `/etc/.Space-21.1R1-Hotpatch-vX`, is created with the list of Red-hat Package Manager (RPM) details in the hot patch.

NOTE:

- We recommend that you install the latest available hot-patch version, which is the cumulative patch.
- Set the SSH option “ServerAliveInterval” to a minimum value of 300, when connecting to the Applogic VIP via SSH to apply the hotpatch.

Sample command: `ssh admin@x.x.x.x -o ServerAliveInterval=300.`

Resolved Issues in Junos Space Network Management Platform Release 21.1R1 Hot Patches

Table 3 on page 26 lists the resolved issues in Junos Space Platform Release 21.1R1 hot patches.

Table 3: Resolved Issues in Junos Space Platform Release 21.1R1 Hot Patches

PR	Description	Hot Patch Version
PR1588865	When the FMPM master node is rebooted, the VIP bind issue comes up.	v1
PR1591705	When you try to upgrade the SRX series cluster from 18.4R3-S3 to 18.4R3-S7.2. from Junos Space Platform using ICU method, it shows Job Fails with error: The device has the same version of the image, and please note that ISSU does not support software downgrades error.	v1
PR1591782	Pre upgrade check window shows false warning - mysql service is down when you upgrade from Junos Space Platform release 21.1R1 to Junos Space Platform release 21.2R1 image.	v1
PR1594765	The server shows error when you try to change time zone from cli menu.	v1
PR1599327	After installing Junos Space Network Management Platform 21.1R1.4 QCOW2 image for KVM, server throws grep: /etc/sysconfig/networking/profiles/default/ifcfg-eth2: Permission denied error message.	v1
PR1598746	Upgrade from Junos Space Network Management Platform 21.1R1.4 to Junos Space Network Management Platform 21.2R1 fails.	v2
PR1600731	Upgrade from Junos Space Network Management Platform 21.1R1.4 to Junos Space Network Management Platform 21.2R1 gets stuck at 42%.	v2

Table 3: Resolved Issues in Junos Space Platform Release 21.1R1 Hot Patches (*continued*)

PR	Description	Hot Patch Version
PR1613697	When you configure eth1 interface for administration with jmp-configuration, the database backup jobs fail with Failed to backup configuration files. Machine IP: 172.22.111.213. error.	v3
PR1600114	All scheduled jobs are removed from the Junos Space Network Management Platform UI, after carrying out a cleanup job using cleanUpJobs.sh command.	v3
PR1638525	Image upload fails with Software validation failure, check certificate keys message in Network Director.	v5

NOTE: Log4j vulnerabilities are addressed in Junos Space Network Management Platform Release 21.1R1 hot patch v4.

Documentation Updates

This section lists the errata and changes in Junos Space Network Management Platform Release 21.1R1 documentation:

- From Junos Space Platform Release 16.1, the *Frequently Asked Questions* are migrated to [FAQ: Junos Space Network Management Platform](#) on the [Juniper Networks TechWiki](#) and are not available on the [TechLibrary](#).

The *Complete Software Guide* no longer contains the *Frequently Asked Questions*.

Finding More Information

For the latest, most complete information about known and resolved issues with Junos Space Network Management Platform and Junos Space Management Applications, see the Juniper Networks Problem Report Search application at: <http://prsearch.juniper.net>.

Juniper Networks Feature Explorer is a Web-based application that helps you to explore and compare Junos Space Network Management Platform and Junos Space Management Applications feature information


to find the correct software release and hardware platform for your network. Find Feature Explorer at: <http://pathfinder.juniper.net/feature-explorer/>.

Juniper Networks Content Explorer is a Web-based application that helps you explore Juniper Networks technical documentation by product, task, and software release, and download documentation in PDF format. Find Content Explorer at: <http://www.juniper.net/techpubs/content-applications/content-explorer/>.

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback system—Click TechLibrary Feedback, on the lower right of any page on the [Juniper Networks TechLibrary](#) site, and do one of the following:

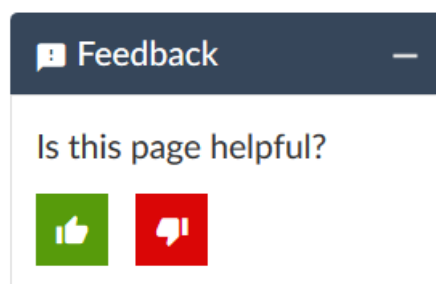

- Click the thumbs-up icon if the information on the page was helpful to you.
- Click the thumbs-down icon if the information on the page was not helpful to you or if you have suggestions for improvement, and use the pop-up form to provide feedback.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <https://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <https://www.juniper.net/customers/support/>
- Search for known bugs: <https://prsearch.juniper.net/>
- Find product documentation: <https://www.juniper.net/documentation/>
- Find solutions and answer questions using our Knowledge Base: <https://kb.juniper.net/>
- Download the latest versions of software and review release notes: <https://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum: <https://www.juniper.net/company/communities/>
- Create a service request online: <https://myjuniper.juniper.net>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://entitlementsearch.juniper.net/entitlementsearch/>

Creating a Service Request with JTAC

You can create a service request with JTAC on the Web or by telephone.

- Visit <https://myjuniper.juniper.net>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <https://support.juniper.net/support/requesting-support/>.

Revision History

12 April, 2021—Revision 1-Junos Space Network Management Platform 21.1R1.

Copyright © 2022 Juniper Networks, Inc. All rights reserved.

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. and/or its affiliates in the United States and other countries. All other trademarks may be property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.